


450-900W Multiple Output Modular Power Supply

Features

- ◆ Up to 11 Outputs
- ◆ Forward/Reverse/Low Noise/System Air Cooling
- ◆ Output Voltages From 0.5V - 62V
- ◆ 48VDC Input Option
- ◆ Medical Approval Options
- ◆ MIL-STD-810 Shock and Vibration
- ◆ PFC compliant to EN61000-3-2
- ◆ Safety Agency Approvals EN, cULus, BSI, CE

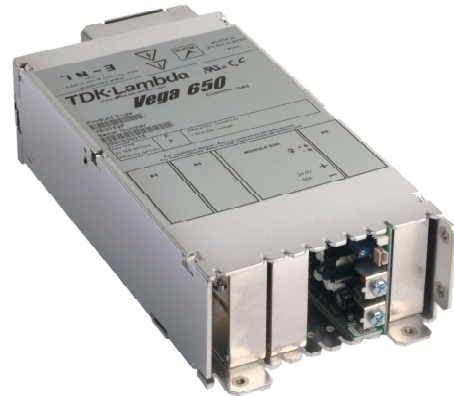

Key Market Segments & Applications



Specifications		VEGA 450	VEGA 650	VEGA 900
Input Voltage Range (47-440Hz with reduced PFC)	-	90 - 264VAC 47-63Hz ⁽¹⁾ or 34-75VDC	90-264VAC 47-63Hz ⁽¹⁾	150-264VAC 47-63Hz
Input Current (Typ. at 90VAC)	A	7.7A	11A	9.2A at 150VAC
Efficiency (Typ.)	%	75% at 230VAC (or 48VDC) and full load, configuration dependent		
Nominal Output Voltages	VDC	0.5 - 62 (See configuration guide)		
Output Voltage Adjustment	-	Wide range, via potentiometer or remote adjust pin, module dependent		
Minimum Load	A	0A		
Max Output Power	W	450 ⁽²⁾	650	900
Max Ripple & Noise (pk-pk)	mV	<1% (or 50mV which ever is greater) using EIAJ test method & 20MHz bandwidth		
Regulation (load, line, cross)	%	Less than 0.5%		
Hold Up Time	ms	16ms min at 90VAC (150VAC for 900W, 10ms for 450WDC input)		
Over Voltage Protection	%	120 - 150% (See website for more details)		
Overload/Short Circuit	%	105-125%, constant current characteristic, 150% max short circuit current.		
Remote ON/OFF Control	-	A TTL compatible signal will turn ON/OFF all output modules (optional)		
Remote Sense	V	Compensates for total of 0.75V total line drop (optional on dual output modules)		
Isolation (3)	-	Input-Output 4.3kVDC ⁽³⁾ ; (2 x MOPPs (3rd edition 60601)), Input-Ground 2.3kVDC; Output-Ground 200VDC		
Conducted EMI	-	EN55022 Class B, (as per CISPR .22), Class A for 48V input		
Radiated EMI	-	EN55022 Class B, (as per CISPR .22)		
Operating Temperature	°C	0°C to 50°C, derate ea. output @ 2.5%/°C from 50°C to 65°C. ⁽⁴⁾ Consult factory for 70°C operation. -20°C startup requires a 30 min. warm-up period.		
Cooling	-	Forced Air Cooled		
Dynamic Load Response	-	<6% or 300mV of set voltage for 50% load change (above 25% load), recovery to within 1% of nominal within 500 μs		
Safety Agency Approvals (601-1 not available on 48V input)	-	UL/CSA/IEC/EN 60950-1, UL/CSA/IEC/EN62368-1, UL/CSA/IEC/EN 60601-1, ANSI/AAMI ES60601-1, IEC/EN 61010-1, CE Mark		
Vibration	G	MIL-STD-810E, Method 514.4, Pro I, Cat 1, 9 2G, 10-200Hz sweep for 1hr to search for resonant. 6G random, 6-Axis to IEC68-2-64		
Shock	G	MIL-STD-810F, Method 516.5, Pro I, IV, VI; 20G per IEC68-2-27		
Switching Frequency	kHz	200		
Weight (Typ.)	lbs	3.0 lbs. + 0.25 lbs. / used slot; maximum # of slots =5		
Size (L×W×H)	in(mm)	10.6" x 5" x 2.5" (270.65mm x 126.5mm x 62.8mm)		
Warranty	yrs	3 Years		

Consult datasheet and application notes for detailed specifications and test methods.

(1) Will operate with 130-330VDC, CE Mark safety approval only applies.

(2) DC Input <44V input 370W

(3) 4kVAC Type tested (non-production test). Refer to CB Report

(4) 450WDC 1.5%/°C

Configuring Guide

Choose your options for boxes A through E. Select output voltage, single or dual output module code from the tables below, and options (if required) A maximum of 5 module slots may be used. List actual output voltages required to have them pre-set by the factory.

V A B C D E

Choose the following power supply options.

Primary Options
(Leave empty if not required)

F AC Fail, Global/fan Inhibit, 5V/100mA standby
 FV AC Fail, Global/fan Inhibit, 5V/300mA standby
 xFW^{5,7} AC Fail, Global/fan Inhibit, 5-15V/1A standby
 E AC Fail, Global/fan Enable, 5V/100mA standby
 EV AC Fail, Global/fan Enable, 5V/300mA standby
 xEW^{5,7} AC Fail, Global/fan Enable, 5-15V/1A standby
 (5) Specify value of x from 5-15V.
 (Increase leakage current by 90µA.).

Input Filter Choice*

	120VAC, 60Hz	240VAC, 60Hz	264VAC, 63Hz (9)
S	564µA	1270µA	1.5mA
M	244µA	550µA	650µA
L	109µA	246µA	290µA
R	66µA	148µA	175µA
T	23µA	51µA	60µA

Input Connection

F Fast on terminals (7)
 S Screw terminals
 I Switched IEC 320 Connector (7)

Cooling

F Standard forward air fan
 Q Quiet fan, forward air (7)
 R Standard reverse air fan (6)
 P Quiet fan, reverse air (6) (7)
 C** Customer air (30 CFM req'd)

Output Power

0 450W DC Input
 4 450W
 6 650W
 9 900W

* Max Leakage calculated at 264VAC, 63Hz. Note: Contact Lambda Technical Support for non-standard leakage options emissions compliance.
 ** Thermocoupled evaluation unit recommended. Consult sales office.
 (6) Not available on 900W Model (7) Not available on 450WDC Model
 (8) Only available on 900W Model (9) Type testing result

Single Output Module Selection †

Output Options

(Leave empty if not required)
 Inhibit, module good,
 and current share

N

Output Connection

F Fast on terminals
 S Screw terminals

Vout Module Conn. Opt.

Example

12B3SN: 12V @ 12A single output module, screw terminal outputs, inhibit option

† Remote sense is standard on single output modules, optional on duals.

Dual Output Module Selection

V1 / V2 Module Conn. Opt.

Output Connection

F Fast on terminals
 S Screw terminals

Output Options

Inhibit, module good,
 and remote sense
 Remote sense

N
 R

(Leave empty if not required)

Example

3.3/12H1L/3FR: 3.3V @ 12A and 12V @ 6A output, fast on output terminals and remote sense option.

Full Description Example:

V4FSSFV 5L1S 3.3E1SN 15/15H3/3SR

450W power supply with standard forward air fan, screw terminal input connections, 1.5mA leakage input filter, AC fail with Global/fan inhibit & 5V @ 300mA aux. supply option with the following outputs:

5V @ 35A Screw terminal connections with remote sense standard

3.3V @ 60A Screw terminal connection with output inhibit, module good, and current share options, remote sense standard

15V @ 10A Screw terminal connection with remote sense option (1st half of dual)

15V @ 6A Screw terminal connection with remote sense option (2nd half of dual)

Note the module descriptions are to be used as listed in the module tables.

Model Selector

Module	V Range	Amp	Slots	Module	V Range	Amp	Slots
Single Output							
B1L	1.8-3.8V	20A	1	E4	14-19.9V	30A	2
C1	1.8-4.1V	35A	1	E3H	14-15V	36A	2
C1Y	1.8-4.1V	40A	1	C4	16.2-21.5V	14A	1
D1L	1.8-3.8V	50A	1.5	CC3	18.2-32.4V	18A	2
E1	1.8-3.8V	60A	2	E5L	20-24V	27A	2
F1 ⁽⁶⁾	1.8-3.8V	80A	2	B5	21.6-31V	6A	1
Z2	1.8-3.8V	95A	3	C5	21.6-31V	10A	1
Z3	1.8-3.8V	114A	4	D5	21-28V	15A	1.5
B1H	3.9-5.5V	20A	1	E5H	24-28V	25A	2
L1	4.2-5.5V	35A	1	Z19 ⁽⁸⁾	24-28V	36A	3.5
D2	3.8-9V	45A	1.5	HH5/3	25.3-44.2V	5A	1
D1H	3.9-5.5V	50A	1.5	DD4	28-43V	18A	3
E2	3.8-8V	60A	2	EE4 ⁽⁶⁾	28-38	22.5	4
Z18	4.2-5.5V	66A	2	HH5/4	32.5-53V	4.5A	1
F2 ⁽⁶⁾	3.8-8V	75A	2	BB4	32.6-43V	10A	2
Z4	3.9-5.5V	95A	3	EE5L ⁽⁶⁾	40-48	18	4
Z6	3.9-5.5V	104A	3.5	C5B4	43-48V	10A	2
B2	5-9V	25A	1	EE5H ⁽⁶⁾	48-56	18	4
B3	9.1-16.2V	12A	1	CC5	48.1-62V	10A	2
C3	9.1-16.2V	18A	1	DD5	42-56V	15A	3
D3	8-16.5V	24A	1.5	Wide Range Programmable*			
E3L	8-13.9V	40A	2	W2 ⁽⁶⁾	1-7.5V	30A	1
Z7	8-16.5V	45A	3	W5	0.5-32V	8.5A	1
EE2	7.6-16V	45A	4	* Refer to Vega Datasheet			
D4	14-21.5V	18A	1.5				

Quick Product Finder link:
<https://config.emea.tdk-lambda.com/nv/>



Model Selector

Module	V1 Min - V1 Max	V1 Amp	V2 Min - V2 Max	V2 Amp	Slots
Dual Output					
H1L/1L	1.8V - 3.8V	12A	1.8V - 3.8V	8A	1
H1L/1H	1.8V - 3.8V	12A	3.9V - 5.5V	8A	1
H1L/2	1.8V - 3.8V	12A	5.6V - 9V	6A	1
H1L/3	1.8V - 3.8V	12A	9.1V - 16.2V	6A	1
H1L/4	1.8V - 3.8V	12A	16.3V - 25V	4.5A	1
H1H/1L	3.9V - 5.5V	12A	1.8V - 3.8V	8A	1
H1H/1H	3.9V - 5.5V	12A	3.9V - 5.5V	8A	1
H1H/2	3.9V - 5.5V	12A	5.6V - 9V	6A	1
H1H/3	3.9V - 5.5V	12A	9.1V - 16.2V	6A	1
H1H/4	3.9V - 5.5V	12A	16.3V - 25V	4.5A	1
H2/1L	5.6V - 9V	10A	1.8V - 3.8V	8A	1
H2/1H	5.6V - 9V	10A	3.9V - 5.5V	8A	1
H2/2	5.6V - 9V	10A	5.6V - 9V	6A	1
H2/3	5.6V - 9V	10A	9.1V - 16.2V	6A	1
H2/4	5.6V - 9V	10A	16.3V - 25V	4.5A	1
H3/1L	9.1V - 16.2V	10A	1.8V - 3.8V	8A	1
H3/1H	9.1V - 16.2V	10A	3.9V - 5.5V	8A	1
H3/2	9.1V - 16.2V	10A	5.6V - 9V	6A	1
H3/3	9.1V - 16.2V	10A	9.1V - 16.2V	6A	1
H3/4	9.1V - 16.2V	10A	16.3V - 25V	4.5A	1
H5/1L	16.2V - 28V	5A	1.8V - 3.8V	8A	1
H5/1H	16.2V - 28V	5A	3.9V - 5.5V	8A	1
H5/2	16.2V - 28V	5A	5.6V - 9V	6A	1
H5/3	16.2V - 28V	5A	9.1V - 16.2V	6A	1
H5/4	16.2V - 28V	5A	16.3V - 25V	4.5A	1

For Additional Information, please visit
<https://product.tdk.com/en/power/>





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.