

## PCB terminal block - PT 2,5/ 3-5,0-H BK - 1700404

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)


PCB terminal block, nominal current: 32 A, nom. voltage: 400 V, pitch: 5 mm, number of positions: 3, connection method: Screw connection with wire protector, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: black



The figure shows a 10-position version of the product

### Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ High terminal block capacity thanks to rectangular terminal block space
- ✓ Allows connection of two conductors
- ✓ The latching on the side enables various numbers of positions to be combined

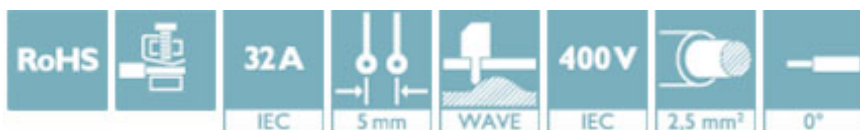

### Key Commercial Data

|              |               |
|--------------|---------------|
| Packing unit | 250 pc        |
| GTIN         |               |
| GTIN         | 4046356483896 |

### Technical data

#### Dimensions

|                  |         |
|------------------|---------|
| Length [ l ]     | 9 mm    |
| Pitch            | 5 mm    |
| Dimension a      | 10 mm   |
| Height           | 13.5 mm |
| Height [ h ]     | 13.5 mm |
| Solder pin [ P ] | 4.1 mm  |
| Pin spacing      | 5 mm    |
| Hole diameter    | 1.3 mm  |

#### General

|                   |             |
|-------------------|-------------|
| Range of articles | PT 2,5/..-H |
|-------------------|-------------|

# PCB terminal block - PT 2,5/ 3-5,0-H BK - 1700404

## Technical data

### General

|                                        |                     |
|----------------------------------------|---------------------|
| Insulating material group              | I                   |
| Rated surge voltage (III/3)            | 4 kV                |
| Rated surge voltage (III/2)            | 4 kV                |
| Rated surge voltage (II/2)             | 4 kV                |
| Rated voltage (III/3)                  | 250 V               |
| Rated voltage (III/2)                  | 400 V               |
| Rated voltage (II/2)                   | 630 V               |
| Connection in acc. with standard       | EN-VDE              |
| Nominal current $I_N$                  | 32 A                |
| Nominal cross section                  | 2.5 mm <sup>2</sup> |
| Maximum load current                   | 32 A                |
| Insulating material                    | PA                  |
| Flammability rating according to UL 94 | V0                  |
| Internal cylindrical gage              | A3 / B3             |
| Stripping length                       | 6.5 mm              |
| Number of positions                    | 3                   |
| Screw thread                           | M3                  |
| Tightening torque, min                 | 0.45 Nm             |
| Tightening torque max                  | 0.5 Nm              |

### Connection data

|                                                                                         |                      |
|-----------------------------------------------------------------------------------------|----------------------|
| Conductor cross section AWG min.                                                        | 20                   |
| Conductor cross section AWG max.                                                        | 10                   |
| 2 conductors with same cross section, solid min.                                        | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, solid max.                                        | 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded min.                                     | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded max.                                     | 1.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min.   | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max.   | 0.75 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, min. | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, TWIN ferrules with plastic sleeve, max. | 1.5 mm <sup>2</sup>  |

### Standards and Regulations

|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
| Flammability rating according to UL 94 | V0     |

### Environmental Product Compliance

|            |                                          |
|------------|------------------------------------------|
| REACH SVHC | Lead 7439-92-1                           |
| China RoHS | Environmentally Friendly Use Period = 50 |

# PCB terminal block - PT 2,5/ 3-5,0-H BK - 1700404

## Technical data

### Environmental Product Compliance

|  |                                                                                                     |
|--|-----------------------------------------------------------------------------------------------------|
|  | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |
|--|-----------------------------------------------------------------------------------------------------|

## Approvals

### Approvals

#### Approvals

CCA / IEC EE CB Scheme / VDE Gutachten mit Fertigungsüberwachung / EAC / cULus Recognized

#### Ex Approvals

### Approval details

|                    |           |
|--------------------|-----------|
| CCA                | DE1 34001 |
| Nominal voltage UN | 250 V     |
| Nominal current IN | 32 A      |
| mm²/AWG/kcmil      | 0.5-4     |

|                    |  |                                                                                     |                                                           |           |
|--------------------|--|-------------------------------------------------------------------------------------|-----------------------------------------------------------|-----------|
| IECEE CB Scheme    |  |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-58861 |
|                    |  |                                                                                     |                                                           |           |
| Nominal voltage UN |  | 250 V                                                                               |                                                           |           |
| Nominal current IN |  | 32 A                                                                                |                                                           |           |
| mm²/AWG/kcmil      |  | 0.5-4                                                                               |                                                           |           |

|                                            |                                                                                     |                                                                                                                                                                                                                |          |
|--------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| VDE Gutachten mit<br>Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/<br/>VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40029839 |
|                                            |                                                                                     |                                                                                                                                                                                                                |          |
| Nominal voltage UN                         | 250 V                                                                               |                                                                                                                                                                                                                |          |
| Nominal current IN                         | 32 A                                                                                |                                                                                                                                                                                                                |          |
| mm²/AWG/kcmil                              | 0.5-4                                                                               |                                                                                                                                                                                                                |          |

|     |                                                                                     |         |
|-----|-------------------------------------------------------------------------------------|---------|
| EAC |  | B.01742 |
|-----|-------------------------------------------------------------------------------------|---------|

## PCB terminal block - PT 2,5/ 3-5,0-H BK - 1700404

### Approvals

|                                                                                                                                                                                                                                                                          |       |       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|
| cULus Recognized  <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> E60425-20030211 |       |       |
|                                                                                                                                                                                                                                                                          | D     | B     |
| Nominal voltage UN                                                                                                                                                                                                                                                       | 300 V | 300 V |
| Nominal current IN                                                                                                                                                                                                                                                       | 10 A  | 20 A  |
| mm²/AWG/kcmil                                                                                                                                                                                                                                                            | 20-12 | 20-12 |

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.