

### Description

The [XR5P920](#) is a single chip solution that converts four channels of analog video to YCbCr digital component video. The power of the XR5P920 lies in its ability to accept a wide range of input formats including the new high-definition (HD) analog standard, HDCVI, as well as the standard-definition (SD) formats of NTSC, PAL and widescreen 960H. The four-output channels of the XR5P920 conform to the SMPTE and ITU-R digital HD standards up to 1080p30 or 720p60 in addition to the digital SD standards. Each video channel offers independent brightness, contrast, sharpness, gain, white-peak control, hue and saturation adjustment.

The XR5P920 effectively decodes video from over 500-m of coaxial cable with the aid of an internal equalizer which compensates for high-frequency signal attenuation. Following equalization, the video from each channel is processed through an analog front end (AFE) that provides clamping, programmable gain amplification and analog-to-digital conversion (ADC). Each video output supports time division multiplexing (TDM) two channels of HD video or up to four channels of SD video. The XR5P920 also has the flexibility to provide a mixed mode output that multiplexes both HD and SD video onto one or all four channels.

Additional features include an I<sup>2</sup>S interface that allows for audio record and playback, a simple communication protocol enabling two-way control and a 400 kHz I<sup>2</sup>C interface for CPU or MCU interconnect. Audio is processed with 16-bit pulse code modulation (PCM) that enables up to five channels of high quality audio input.

### FEATURES

- Four independent analog video inputs
  - High-definition HDCVI 1080p30/25
  - High-definition HDCVI 720p60/50/30/25
  - Standard-definition NTSC, PAL or 960H
- Four independent digital video 4:2:2 YCbCr outputs
  - HD (BT.1120): 1080p30/25 (SMPTE274)
  - HD (BT.1120): 720p60/50/30/25 (SMPTE296)
  - SD (BT.656): D1 or 960H
  - Each output offers 2X or 4X TDM
- Audio
  - Coaxial or line-in inputs
  - 16-bit precision
  - 16-bit DAC for talkback
  - I<sup>2</sup>S interface for audio record and playback
- I<sup>2</sup>C slave interface for external control
- 220-pin 11mm x 11mm LFBGA package


### BENEFITS

- HD video over 500m on coax
- Independent HD and SD channel control
- Seamless integration with existing equipment
- Video, audio and control signals over coax


### APPLICATIONS

- Affordable HD video surveillance
- High-definition DVR upgrade

### Typical Application

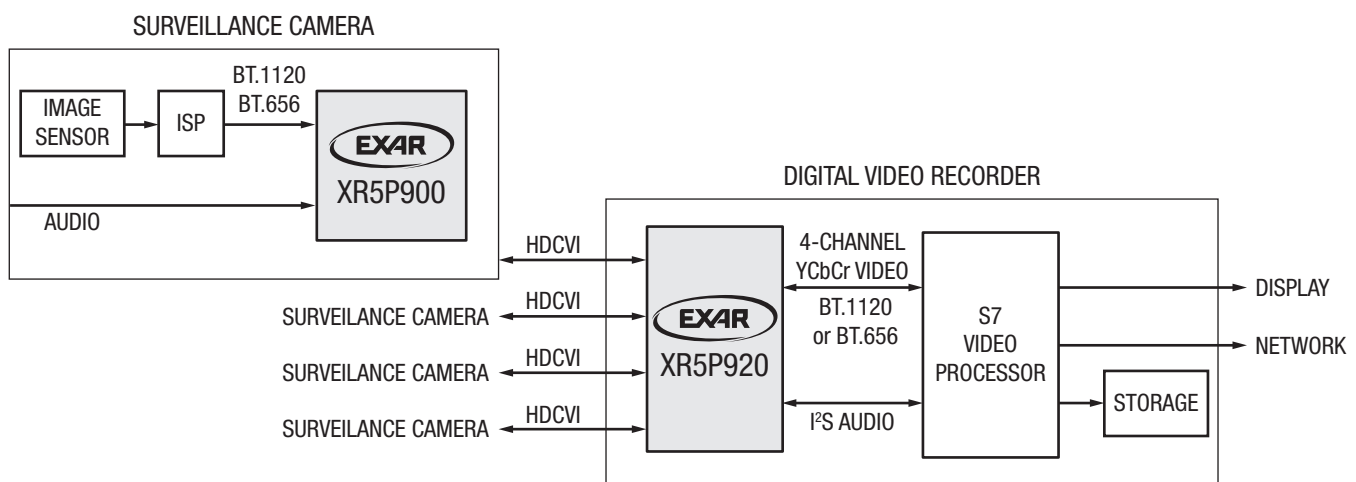

Functional Block Diagram

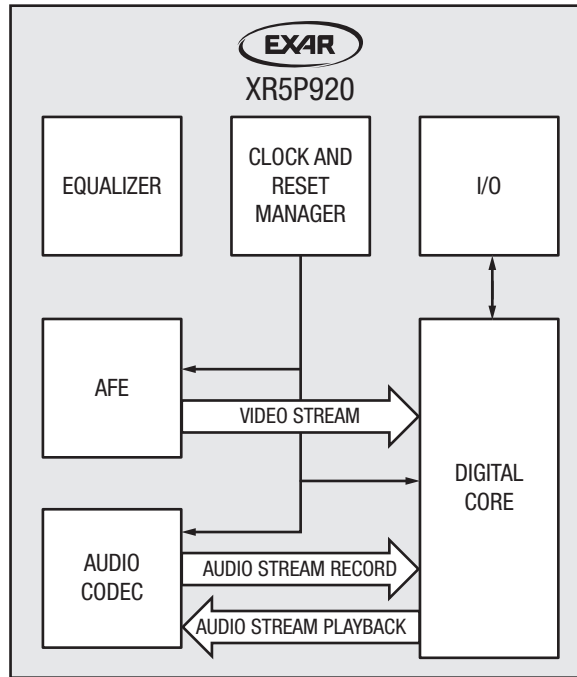

Ordering Information

Part Number	Operating Temperature Range	Environmental Rating	Package
XR5P920-F	0°C to 70°C	RoHS compliant and Green <sup>(1)</sup>	220-pin 11mm x 11mm LFBGA
EVK-XR5R921	Evaluation Kit, HDCVI PCIe card with XR5P920		

**NOTE:**  
 1. Visit [www.exar.com](http://www.exar.com) for more information.

Please contact [videotechsupport@exar.com](mailto:videotechsupport@exar.com) to request a complete datasheet.



[www.exar.com](http://www.exar.com)

48760 Kato Road  
 Fremont, CA 94538  
 USA

Tel.: +1 (510) 668-7000  
 Fax: +1 (510) 668-7001  
 Email: [videotechsupport@exar.com](mailto:videotechsupport@exar.com)

Exar Corporation reserves the right to make changes to the products contained in this publication in order to improve design, performance or reliability. Exar Corporation conveys no license under any patent or other right and makes no representation that the circuits are free of patent infringement. While the information in this publication has been carefully checked, no responsibility, however, is assumed for inaccuracies.

Exar Corporation does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of the life support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications unless Exar Corporation receives, in writing, assurances to its satisfaction that: (a) the risk of injury or damage has been minimized; (b) the user assumes all such risks; (c) potential liability of Exar Corporation is adequately protected under the circumstances.

Reproduction, in part or whole, without the prior written consent of Exar Corporation is prohibited. Exar, XR and the XR logo are registered trademarks of Exar Corporation. All other trademarks are the property of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.