






PRODUCT NUMBER	PLATING PERFORMANCE LEVEL	FOR REAR PLUG-UP APPLICATIONS USE SHROUD
63779-1ZZZ	TELCORDIA CO	84818-104
63779-1ZZZLF	TELCORDIA CO	84818-104LF
63779-5ZZZ	TELCORDIA UE	84818-504
63779-5ZZZLF	TELCORDIA UE	84818-504LF



SEE DETAIL A

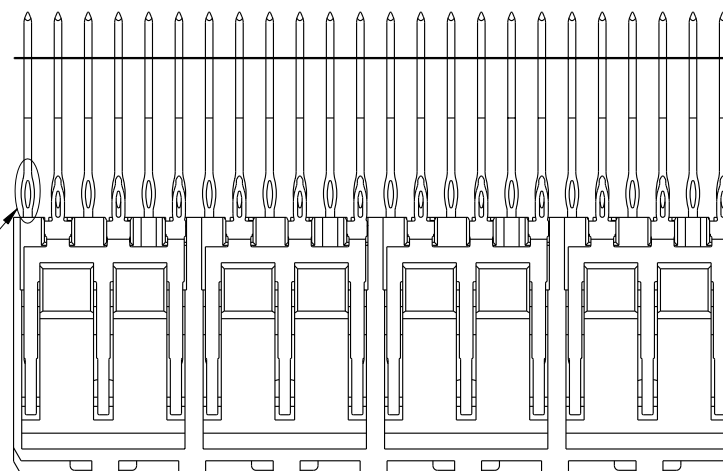

DETAIL A
SCALE 4:1
SEE NOTE 17

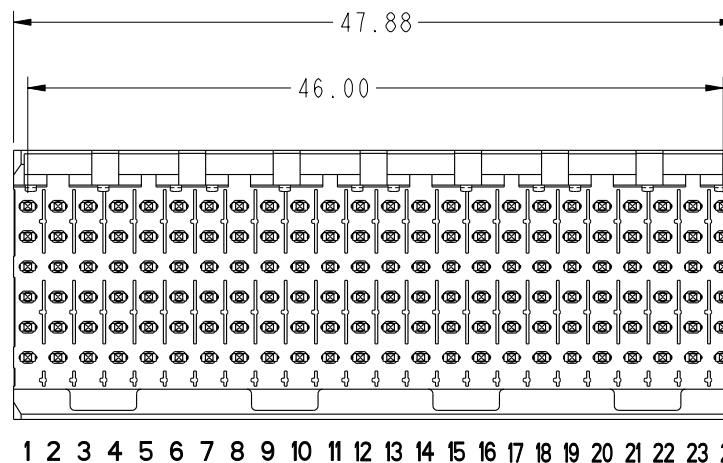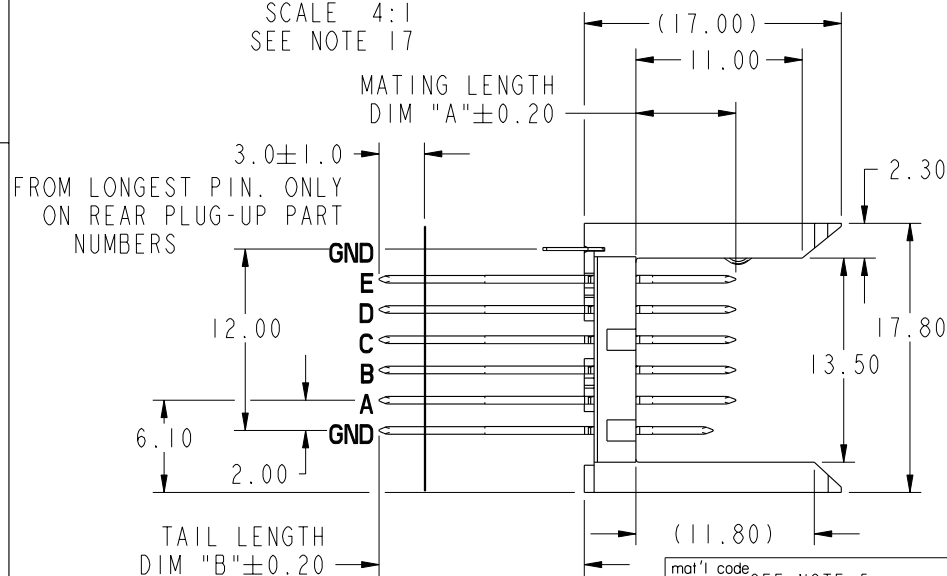

mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		FCi www.fciconnect.com		
ltr	ecn no.	dr	date	linear	0.X $\pm$ 0.3				projection 	title VERTICAL SIGNAL HDR 5 ROW P.F. 120 POS. SELECT LOAD STD	product family METRAL 1000	code 213
M	V06-0498	DCH	2006-05-31		0.XX $\pm$ 0.13							
N	V07-0172	DCH	2007-03-29		.XXX $\pm$.051							
P	V08-0003	HTB	2008-01-03	angles	0° $\pm$ 2°				MM scale 1:1	size A	dwg no 63779	sheet 1 of 7
R	V08-0016	HTB	2008-01-14	dr	E. KROPER.	2001-09-24						
S	V08-0051	LP	2008-02-18	enrg	J. VOLSTORF	2001-09-24						
T	V08-0141	LP	2008-03-28	chr	J. VOLSTORF	2001-09-24		scale 1:1	A	63779	code 213	
-	-	-	-	appd	J. VOLSTORF	2001-09-24						
sheet index	revision sheet	T	T	T	T	T	T	T				
		1	2	3	4	5	6	7				

Pro/E

3

cage code
22526

4

PDM: Rev:T

STATUS: Released

Printed: May 13, 2011



PIN NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN'S TAIL LENGTH				
			WHEN MATING TO A 73981 OR 84688 SERIES RECEPTACLE		WHEN MATING TO A 52057 SERIES METRAL 4000 RECEPTACLE		
			ROWS A,B,C,D,E	GROUND ROW	ROWS:A,B,D,E	ROW C	GROUND ROW **
01*	5.00	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
22		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
30		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
05		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
35		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
48		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
40		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
65		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
09		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
02*	5.75	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
44		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
31		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
06		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
36		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
49		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
25		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
66		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
10		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
03*	6.50	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
45		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
32		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
07		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
37		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
50		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
41		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
24		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
11		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10

* STUB PINS - NO REAR PLUG-UP

** THE GREATEST RANGE OCCURS WHEN THE B DIMENSION OF
PIN 'GND' IS ONE SIZE SHORTER THAN THE OTHER PINS.

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com		
ltr	ecr no.	dr	date	linear	0.X ±0.3	COPY		projection 	title VERTICAL SIGNAL HDR 5 ROW P.F. 120 POS. SELECT LOAD STD	
T					0.XX ±0.13					
					.XXX ±.051					
				angles	0° ±2°			MM ←→ scale 1:1	product family METRAL 1000	
				dr	E. KROPER.	2001-09-24	size A			dwg no 63779
				enrg	J. VOLSTORF	2001-09-24				
				chr	J. VOLSTORF	2001-09-24				
				appd	J. VOLSTORF	2001-09-24				
sheet index	revision sheet								code 213 sheet 2	





PIN NO.	DIM A MATING LENGTH	DIM B TAIL LENGTH	PCB THICKNESS RANGE ACCOMMODATED BY PIN LENGTH				
			WHEN MATING TO A 73981 OR 84688 SERIES RECEPTACLE		WHEN MATING TO A 52057 SERIES METRAL 4000 RECEPTACLE		
			ROWS A,B,C,D,E	GROUND ROW	ROWS:A,B,D,E	ROW C	GROUND ROW **
04*	7.25	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
46		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
33		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
08		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
38		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
51		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
42		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
67		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
12		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10
19*	8.00	4.30	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN	1.60 MIN
47		12.20	2.95 - 3.80	2.95 - 4.20	2.95 - 3.80	2.95 - 3.80	2.95 - 4.20
34		12.95	2.95 - 4.55	3.25 - 4.95	2.95 - 4.55	2.95 - 4.55	3.25 - 4.95
20		13.70	2.95 - 5.30	4.00 - 5.70	3.30 - 5.30	2.95 - 5.30	4.00 - 5.70
39		14.45	3.05 - 6.05	4.75 - 6.45	4.05 - 6.05	3.05 - 6.05	4.75 - 6.45
52		15.20	3.80 - 6.80	5.50 - 7.20	4.80 - 6.80	3.80 - 6.80	5.50 - 7.20
43		15.70	4.30 - 7.30	6.00 - 7.70	5.30 - 7.30	4.30 - 7.30	6.00 - 7.70
68		16.40	5.00 - 8.00	6.70 - 8.40	6.00 - 8.00	5.00 - 8.00	6.70 - 8.40
21		17.10	5.70 - 8.70	7.40 - 9.10	6.70 - 8.70	5.70 - 8.70	7.40 - 9.10

* STUB PINS - NO REAR PLUG-UP
** THE GREATEST RANGE OCCURS WHEN THE B DIMENSION OF
PIN 'GND' IS ONE SIZE SHORTER THAN THE OTHER PINS.

mat'l code SEE NOTE 5				tolerances unless otherwise specified			CUSTOMER		FCI www.fciconnect.com	
ltr	ecr no.	dr	date	linear	0.X ±0.3		COPY			
T					0.XX ±0.13		projection			
					.XXX ±.051					
				angles	0° ±2°					
				dr	E. KROPER.	2001-09-24	MM		product family METRAL 1000	
				enrg	J. VOLSTROF	2001-09-24			code 213	
				chr	J. VOLSTORF	2001-09-24	1:1		sheet 3	
				appd	J. VOLSTORF	2001-09-24				
sheet index	revision sheet									




PRODUCT NUMBER
SEE SHEET 1

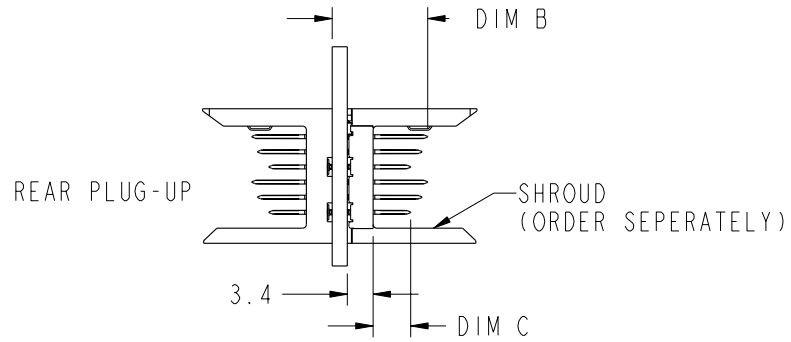

PRESS-FIT HOLES	OPTION 1
HOLE DIAMETER AFTER PLATING	0.65-0.80
DRILLED HOLE	0.81-0.86 (0.85 DRILL)
COPPER PLATING	0.025 MIN
SnPb PLATING	0.005-0.015

SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION.

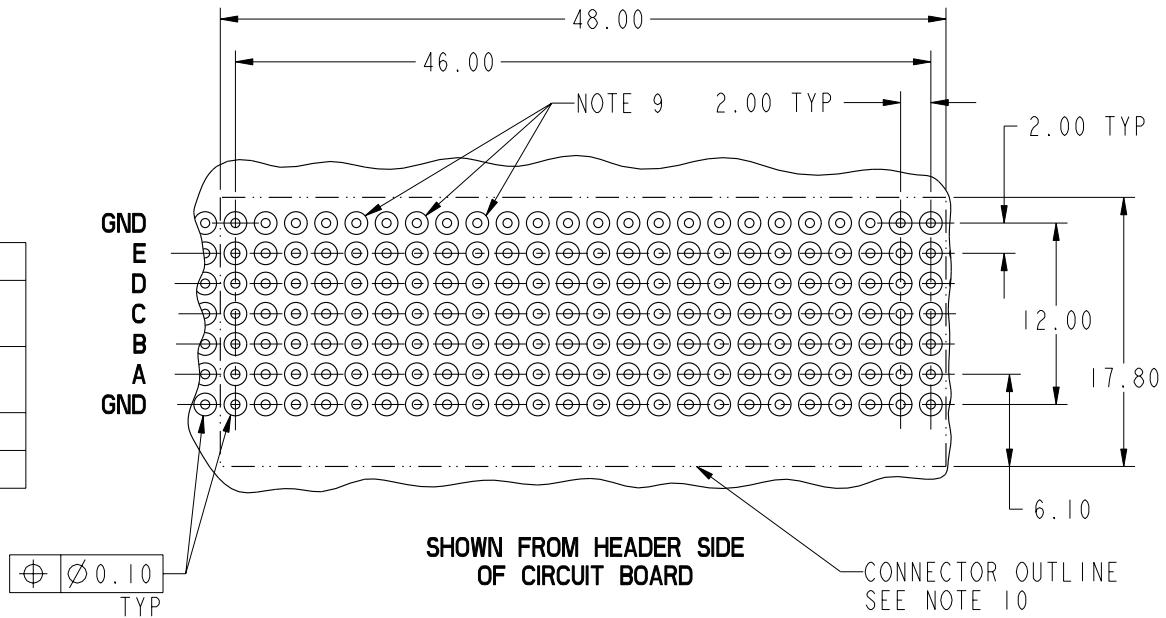

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecr no.	dr	date	linear	0.X ±0.3	projection	COPY	title VERTICAL SIGNAL HDR 5 ROW P.F. 120 POS. SELECT LOAD STD	product family METRAL 1000
T					0.XX ±0.13				
					.XXX ±.051				
				angles	0° ±2°	MM 1:1	scale	size A	code 213
				dr	E. KROPER. 2001-09-24				
				enr	J. VOLSTROF 2001-09-24				
				chr	J. VOLSTORF 2001-09-24	A	63779	sheet 4	
				appd	J. VOLSTORF 2001-09-24				
sheet index	revision sheet								

cage code
22526

Pro/E

3

4

PDM: Rev:T

STATUS: Released

Printed: May 13, 2011



1 | 2

3 |

4

SELECT LOAD PATTERNS

PRODUCT #	ROW	COLUMN																							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
63779-X001 SEE NOTE 16 LEAD FREE OPTION	E	03	02	02	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	02	02	03
	D	03	02	02	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	02	02	03
	C	03	02	02	03	03	03	03	03	03	03	03	03	03	03	03	03	03	03	03	03	03	02	02	03
	B	03	02	02	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	02	02	03
	A	03	02	02	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	02	02	03
	GND	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01
PRODUCT #	ROW	COLUMN																							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
63779-X002 SEE NOTE 14 *RPU** SEE NOTE 16 LEAD FREE OPTION	E	55	02	02	02	02	55	55	55	02	02	02	02	55	55	55	55	55	55	02	02	02	02	55	55
	D	55	02	02	02	02	55	55	55	02	02	02	02	55	55	55	55	55	55	02	02	02	02	55	55
	C	55	02	02	02	02	55	55	55	02	02	02	02	55	55	55	55	55	55	02	02	02	02	55	55
	B	55	02	02	02	02	55	55	55	02	02	02	02	55	55	55	55	55	55	02	02	02	02	55	55
	A	55	02	02	02	02	55	55	55	02	02	02	02	55	55	55	55	55	55	02	02	02	02	55	55
	GND	55	02	02	02	02	55	55	55	02	02	02	02	55	55	55	55	55	55	02	02	02	02	55	55
PRODUCT #	ROW	COLUMN																							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
63779-X003 SEE NOTE 14 *RPU** SEE NOTE 16 LEAD FREE OPTION	E	55	55	02	02	02	02	55	55	55	55	55	55	55	55	55	55	55	55	02	02	02	02	55	55
	D	55	55	02	02	02	02	55	55	55	55	55	55	55	55	55	55	55	55	02	02	02	02	55	55
	C	55	55	02	02	02	02	55	55	55	55	55	55	55	55	55	55	55	55	02	02	02	02	55	55
	B	55	55	02	02	02	02	55	55	55	55	55	55	55	55	55	55	55	55	02	02	02	02	55	55
	A	55	55	02	02	02	02	55	55	55	55	55	55	55	55	55	55	55	55	02	02	02	02	55	55
	GND	55	55	02	02	02	02	55	55	55	55	55	55	55	55	55	55	55	55	02	02	02	02	55	55

** NOT A POSSIBLE METRAL
1000 OR 4000 REAR PLUG-UP
PART NUMBER,
SPECIAL APPLICATION.

** NOT A POSSIBLE METRAL
1000 OR 4000 REAR PLUG-UP
PART NUMBER,
SPECIAL APPLICATION.

*REAR PLUG-UP PART NUMBER

mat'l code SEE NOTE 5				tolerances unless otherwise specified				CUSTOMER		FCI www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0. X ±0.3			COPY			
T					0. XX ±0.13			projection			
					. XXX ±.051						
				angles	0° ±2°					title VERTICAL SIGNAL HDR 5 ROW P.F. 120 POS. SELECT LOAD STD	
				dr	E. KROPER.	2001-09-24	MM		product family		METRAL 1000
				enrg	J. VOLSTROF	2001-09-24			size		dwg no
				chr	J. VOLSTROF	2001-09-24	1:1		A		63779
				appd	J. VOLSTROF	2001-09-24					code
sheet index		revision sheet									213 sheet 5

1 | 2

Pro/E

3 |

cage code 22526

4



1 | 2


3 |

4

SELECT LOAD PATTERNS

PRODUCT #	ROW	COLUMN																							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
63779-X004 SEE NOTE 16 LEAD FREE OPTION	E	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
	C	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	04	04	04
	B	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
	GND	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
PRODUCT #	ROW	COLUMN																							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
63779-X005 SEE NOTE 16 LEAD FREE OPTION	E	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
	D	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
	C	04	02	02	02	02	02	04	02	02	02	02	02	01	02	02	02	02	04	02	02	02	02	02	02
	B	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
	A	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02	02
	GND	-	02	02	02	02	-	-	02	02	02	02	-	-	02	02	02	02	-	-	02	02	02	02	-
PRODUCT #	ROW	COLUMN																							
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
63779-X006 *RPU SEE NOTE 16 LEAD FREE OPTION	E	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	01	01	01	01
	D	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	01	01	01	01
	C	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	01	01	01	01
	B	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01
	A	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01	01
	GND	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22	22

*REAR PLUG-UP PART NUMBER

mat'l code SEE NOTE 5				tolerances unless otherwise specified			CUSTOMER		 www.fciconnect.com		
ltr	ecr no.	dr	date	linear	0.X ±0.3			projection 	title VERTICAL SIGNAL HDR 5 ROW P.F. 120 POS. SELECT LOAD STD		
T					0.XX ±0.13						
					.XXX ±.051						
				angles	0° ±2°			MM 	product family METRAL 1000 code 213 size dwg no 63779 sheet 6		
				dr	E. KROPER.	2001-09-24					
				enrg	J. VOLSTROF	2001-09-24					
				chr	J. VOLSTROF	2001-09-24	scale 1:1	A			
				appd	J. VOLSTROF	2001-09-24					
sheet index	revision sheet										

1 | 2

Pro/E

3 |

cage code 22526

4

PRODUCT NUMBER

SEE SHEET 1

NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
2. SEE FCI PUBLICATION 950511-028 FOR "ELECTRICAL PERFORMANCE DATA FOR DIFFERENTIAL APPLICATIONS."
3. SEE FCI PUBLICATION 950511-029 FOR "ELECTRICAL PERFORMANCE DATA FOR SINGLE-ENDED APPLICATION."
4. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5, 1994
5. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0.
PIN MATERIAL: PHOSPHOR BRONZE
GROUND SPRING MATERIAL: PHOSPHOR BRONZE
6. PLATING ON CONTACT TO MEET PERFORMANCE LEVEL AS SPECIFIED IN TABLE ON SHEET 1. PLATING ON "LF" TAILS IS Sn. PLATING ON ALL OTHER TAILS IS SnPb.
7. DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.
FOR MATING WITH METRAL 1000 RECEPTACLES
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROWS A-E
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND NEXT TO ROW A
DIM C : 5.00mm MIN, 8.00mm MAX FOR ROWS A-E
DIM C : 4.60mm MIN, 6.30mm MAX FOR ROW GND NEXT TO ROW A
FOR MATING WITH METRAL 4000 RECEPTACLES
DIM A : 5.00mm MIN, 6.50mm MAX FOR ROWS A, B, D & E
DIM A : 5.00mm MIN, 8.00mm MAX FOR ROW C
DIM A : 5.00mm MIN, 5.75mm MAX FOR ROW GND NEXT TO ROW A
DIM C : 5.00mm MIN, 7.00mm MAX FOR ROWS A, B, D & E
DIM C : 5.00mm MIN, 8.00mm MAX FOR ROW C
DIM C : 4.60mm MIN, 6.30mm MAX FOR ROW GND NEXT TO ROW A
8. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 2.9mm SINCE THE COMPLIANT SECTIONS OF THE GROUND SPRING OF THE HEADER DIRECTLY OPPOSE THE GROUND SPRING OF THE SHROUD. THE MIN PCB THICKNESS FOR FRONT PLUG-UP ONLY APPLICATIONS IS 1.6mm.

9. THESE HOLES ARE NEEDED FOR REAR PLUG-UP DESIGNS USING A SHROUD AND MAY BE OMITTED FOR FRONT PLUG-UP ONLY DESIGNS.
10. THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.
11. CURRENT RATING: 1 AMP PER PIN
12. TEMPERATURE RANGE: -55 C TO +105 C
13. P/N 63779-XZZZLF

14. PIN CODE 55 CANNOT BE USED WITH METRAL 1000 SHROUDS. PIN CODE 55 HAS A DIM A=5.75mm, DIM B=11.55mm.
15. PRODUCTS WHERE THE PART NUMBERS ENDS IN LF MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN
16. FOR LEAD FREE PART NUMBERS ADD 'LF' SUFFIX.
EXAMPLE: 63779-XXXXLF
17. PIN TYPE IS AT THE MANUFACTURERS OPTION AND CAN BE EITHER BABY-H OR EYE OF THE NEEDLE STYLE

mat'l code SEE NOTE 5				tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com					
ltr	ecr no.	dr	date	linear	0. X ±0.3		COPY		title VERTICAL SIGNAL HDR 5 ROW P.F. 120 POS. SELECT LOAD STD				
T					0. XX ±0.13		projection						
					.XXX ±.051								
				angles	0° ±2°				product family METRAL 1000 size dwg no A 63779				
				dr	E. KROPER.	2001-09-24							
				enrg	J. VOLSTROF	2001-09-24							
				chr	J. VOLSTORF	2001-09-24							
				appd	J. VOLSTORF	2001-09-24							
sheet index		revision sheet										code 213 sheet 7	

This document is the property of and embodies
 CONFIDENTIAL and PROPRIETARY information of FCI.
 No part of the information shown on this
 document may be used in any way or disclosed
 to others without the written consent of FCI.
 Copyright FCI.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.