

# NPP-301 Series

## NovaSensor Surface Mount Pressure Sensor



### Features

- Low-cost surface mount package: SO-8
- Wide operating temperature range: -40°F to 257°F (-40°C to 125°C)
- Static accuracy <0.20% FSO maximum
- Suitable for automated component assembly
- Four element Wheatstone bridge configuration for circuit design flexibility
- Solid-state reliability
- 100, 200 and 700 kPa absolute pressure ranges available

### Applications


- Automotive tire pressure
- Pneumatic controls
- Pressure switches and controllers
- Altimeters and barometers
- Cable leak detection
- Consumer appliances
- Portable gauges and manometers

# NPP-301 Series Specifications


## Description

The NPP-301 Series features silicon pressure sensors in surface mount packages. An ultra-small Silicon Fusion Bonded (SFB), ultra-high stability SenStable<sup>®</sup> piezoresistive chip from NovaSensor is placed in a plastic package that exploits high volume, leadframe package technology to bring forth a low-cost sensor alternative to the OEM user.

The NPP-301 Series produces a voltage output that is linearly proportional to the input pressure. The user can provide NPP Series products with signal conditioning circuitry to amplify the output signal or to maximize OEM value added. The NPP-301 Series is compatible with most non-corrosive gases and dry air.

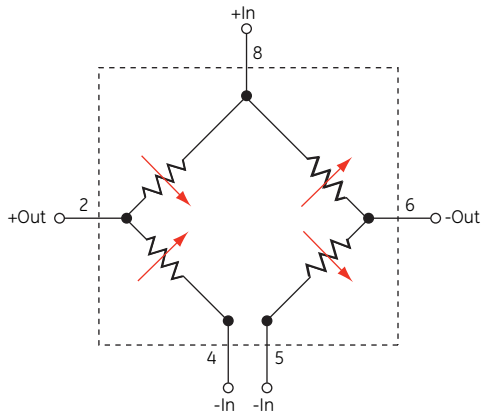

NPP-301 Series schematic diagram

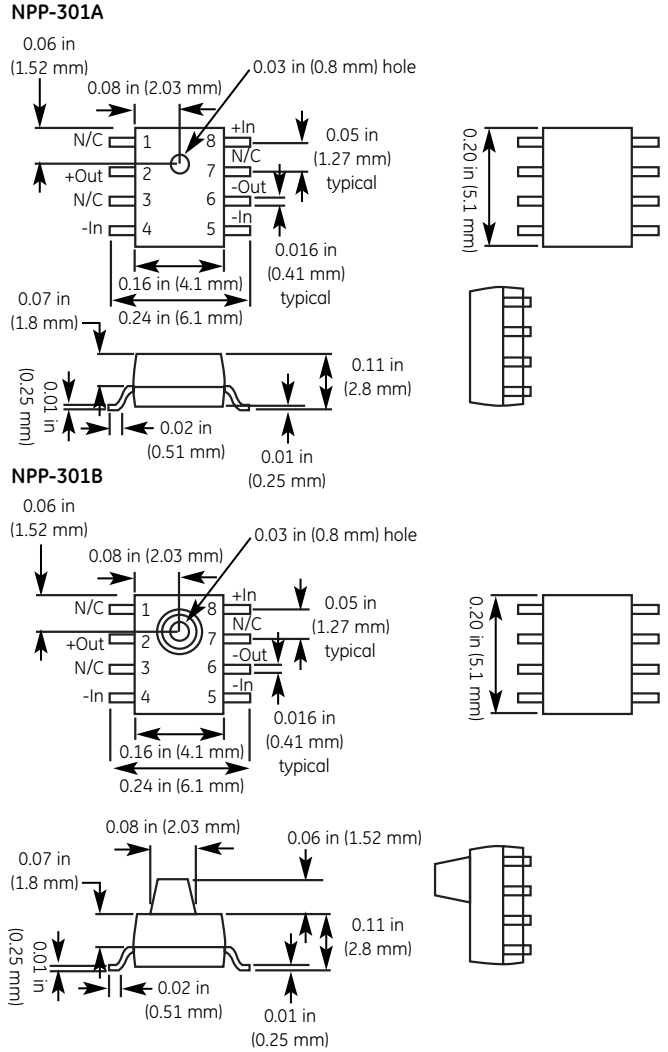

NPP-301 Series package diagram

# NPP-301 Series Specifications

Parameter	Value	Units	Notes
<b>General</b>			
Pressure Range	100	kPa	≈15 psi
	200	kPa	≈30 psi
	700	kPa	≈100 psi
Maximum Pressure	3x		rated pressure
<b>Electrical @ 77°F (25°C) unless otherwise stated</b>			
Excitation	3.0	V	10 VDC maximum
Input Impedance	5,000 ±20%	Ω	
Output Impedance	5,000 ±20%	Ω	
<b>Environmental</b>			
Electrostatic Damage (ESD)	Class 1		
Operating Temperature Range	-40°F to 257°F		(-40°C to 125°C)
<b>Mechanical <sup>(1)</sup></b>			
Weight ≈	0.0002	lb	(0.10 g)
Media Compatibility	Clean, dry air and non-corrosive gases		

Parameter	Units	Minimum	Type	Maximum	Notes
<b>Performance Parameters (Note 2)</b>					
Offset	mV/V		±10		
Full Scale Output	mV		60 ±20		
Linearity	%FSO		±0.20		3
Hysteresis and Repeatability	%FSO		0.1		
Thermal Coefficient of Zero	%FSO/°C		0.04		4
Thermal Coefficient of Resistance	%/°C		0.3		4
Thermal Coefficient of Sensitivity	%FSO/°C		-0.2		4
Thermal Hysteresis of Zero	%FSO		0.1		5
Long-Term Stability of FSO	%FSO		0.2		6

1. Standard IC industry bake operations should be used prior to surface mount operations. Consult NovaSensor for further information.

2. Values measured at 3 VDC and 77°F (25°C), unless otherwise noted.

3. Best fit straight line.

4. Typical coefficients, between 32°F to 158°F (0° to 70°C).

5. 32°F to 158°F (0° to 70°C).

6. Typical value over one year.

## Ordering Information

The code number to be ordered may be specified as follows:

NPP	Code	Description	Shipping
↓	301A-100A	15 psia (1.03 bar), non-ported	IC tubes
	301A-200A	30 psia (2.06 bar), non-ported	IC tubes
	301A-700A	100 psia (6.89 bar), non-ported	IC tubes
	301A-100AT	15 psia (1.03 bar), non-ported	Tape and reel
	301A-200AT	30 psia (2.06 bar), non-ported	Tape and reel
	301A-700AT	100 psia (6.89 bar), non-ported	Tape and reel
	301B-100A	15 psia (1.03 bar), ported	IC tubes
	301B-200A	30 psia (2.06 bar), ported	IC tubes
	301B-700A	100 psia (6.89 bar), ported	IC tubes
	301B-100AT	15 psia (1.03 bar), ported	Tape and reel
	301B-200AT	30 psia (2.06 bar), ported	Tape and reel
	301B-700AT	100 psia (6.89 bar), ported	Tape and reel

NPP - \_\_\_\_\_ Typical model number

# Amphenol

**Advanced Sensors**

[www.amphenol-sensors.com](http://www.amphenol-sensors.com)

© 2014 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## [Amphenol:](#)

[NPP-301A-100A](#) [NPP-301A-100AT](#) [NPP-301A-200A](#) [NPP-301A-200AT](#) [NPP-301A-700A](#) [NPP-301A-700AT](#) [NPP-301B-100A](#) [NPP-301B-100AT](#) [NPP-301B-200A](#) [NPP-301B-200AT](#) [NPP-301B-700A](#) [NPP-301B-700AT](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.