



Standard RF Shields

PROTOTYPE KIT



Now we offer two kits to choose from! Kits are in stock and are ready-to-ship!

PRODUCT FEATURES

- Variable shield heights of 0.25" (6.35mm), 0.50" (12.7mm) or 0.75" (19.05mm)
- Quick & easy shielding solution; Shields are ready to order; no tooling needed
- Brass material with tin plating offer excellent shielding and solderability characteristics
- No pre-set through-pins to interfere with custom boards
- Easy form-by-hand bend lines assist creating formed shield --No tooling required!

MATERIAL SPECS

- 0.015" (0.381mm) brass CDA 26000 ½ hard
- Finish: Bright tin plate (per Mil-T-10727, Type I Bright)
- Dimensions are outside (formed) dimensions
- Fotofab standard shields are RoHS compliant
- Made in the USA with materials produced in the USA

PRODUCT NOTES

- Parts are designed to be formed by hand without the use of tools.
- To create a wall height of 0.50" or 0.25" simply break away each 0.25" section by bending wall back and forth at the bend line
- Create 90° bend by forming shield wall into the lid so that bend line remains on the inside of shield



For current pricing, or to order by credit card, please visit www.fotofab.com/standard-order.php
To order by fax or email, please send PO to (773) 463-3387 or orders@fotofab.com
Contact sales@fotofab.com with any additional questions

Information furnished by Fotofab is believed to be accurate and reliable. However, no responsibility is assumed by Fotofab for its use, nor any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice.

Fotofab
3758 Belmont Ave
Chicago, IL 60618

p. 773-463-6211
f. 773-463-33787
www.fotofab.com





Standard RF Shields

PROTOTYPE KIT


Prototype Kit: Standard Size Shields

P/N: Prototype Kit, Standard

Prototype Kit, Standard				
Dimensions: in (mm)				
Quantity per kit	A	B	C	
2	0.500 (12.70)	0.500 (12.70)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
2	0.500 (12.70)	0.750 (19.05)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
2	0.500 (12.70)	1.000 (25.40)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
2	0.750 (19.05)	0.750 (19.05)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
2	0.750 (19.05)	1.125 (28.58)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
4	0.750 (19.05)	1.500 (38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
2	1.000 (25.40)	1.000 (25.40)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
2	1.000 (25.40)	1.500 (38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
2	1.000 (25.40)	2.000 (50.80)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	1.500 (38.10)	1.500 (38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	1.500 (38.10)	2.250 (57.15)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	1.500 (38.10)	3.000 (76.20)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	2.000 (50.80)	2.000 (50.80)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	2.000 (50.80)	3.000 (76.20)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	2.000 (50.80)	4.000 (101.60)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	2.500 (63.50)	2.500 (63.50)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	2.500 (63.50)	3.750 (95.25)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	
1	2.500 (63.50)	5.000 (127.00)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)	

Kit includes 29 shields total

For more information, visit www.fotofab.com

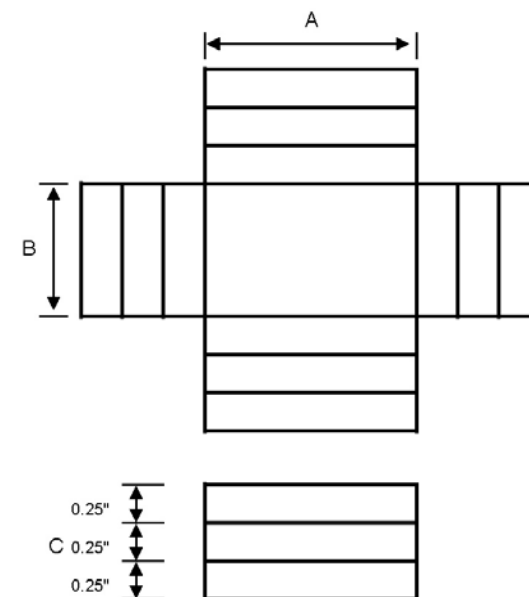

Each 0.025" section can be easily broken away to create shield heights of 0.25", 0.50" or 0.75"

Information furnished by Fotofab is believed to be accurate and reliable. However, no responsibility is assumed by Fotofab for its use, nor any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice.

Fotofab
3758 Belmont Ave
Chicago, IL 60618

p. 773-463-6211
f. 773-463-33787
www.fotofab.com

© 2006 Fotofab / All rights reserved.





Standard RF Shields

PROTOTYPE KIT


Prototype Kit: Small Size Shields

P/N: Prototype Kit, Small

Prototype Kit, Small			
Dimensions: in (mm)			
Quantity per kit	A	B	C
3	0.500 (12.70)	0.500 (12.70)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
3	0.500 (12.70)	0.750 (19.05)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
3	0.500 (12.70)	1.000 (25.40)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	0.750 (19.05)	0.750 (19.05)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
3	0.750 (19.05)	1.125 (28.58)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	0.750 (19.05)	1.500 (38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.000 (25.40)	1.000 (25.40)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.000 (25.40)	1.500 (38.10)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
2	1.500 (38.10)	3.000 (76.20)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	1.000 (25.40)	1.333 (33.86)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.600 (15.24)	0.900 (22.86)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.400 (10.16)	0.400 (10.16)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.600 (15.24)	0.600 (15.24)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.500 (12.70)	1.333 (33.86)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)
4	0.750 (19.05)	1.333 (33.86)	Select from: 0.25 (6.35), 0.50 (12.70) or 0.75 (19.05)

Kit includes 46 shields total

For more information, visit www.fotofab.com

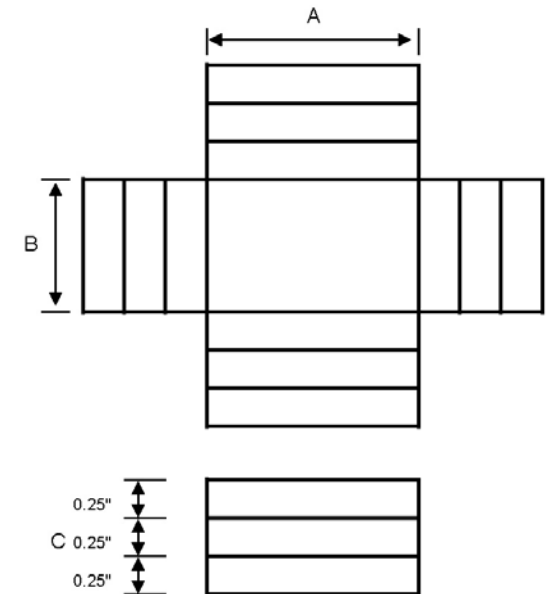

Each 0.025" section can be easily broken away to create shield heights of 0.25", 0.50" or 0.75"

Information furnished by Fotofab is believed to be accurate and reliable. However, no responsibility is assumed by Fotofab for its use, nor any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice.

Fotofab
3758 Belmont Ave
Chicago, IL 60618

p. 773-463-6211
f. 773-463-33787
www.fotofab.com

© 2006 Fotofab / All rights reserved.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.