


DC/DC Converter

TRN 1SM Series, 1 Watt

- Compact SMD package
11,9 × 11,3 × 8,0 mm
- Fully regulated outputs
- Input Voltage range
4.5-13.2, 9-18, 18-36, 36-75 VDC
- I/O-isolation 1'600 VDC
- Operating temperature range
-40°C to +90°C without derating
- Short circuit protection
- 3-year product warranty
- Designed to meet UL 62368-1
(UL 60950-1)



The TRN 1SM Series comprises 1 Watt fully regulated, high performance DC/DC converters. They come in a compact cubical package of only 1.07 cm³. Full load operation is reliable up to 90°C environment temperature. With 1'600 VDC I/O-isolation voltage, and short current protection they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (2:1) and minimum load is not required. The functional I/O-isolation system is designed to meet IEC/EN 62368-1 with a test voltage (60 s) of 1600 VDC.

| Models | | | | |
|--------------|-----------------------------------|----------------|---------------------|-----------------|
| Order code | Input voltage | Output voltage | Output current max. | Efficiency typ. |
| TRN 1-0510SM | 4.5 – 13.2 VDC (9 VDC nominal) | 3.3 VDC | 300 mA | 77 % |
| TRN 1-0511SM | | 5.0 VDC | 200 mA | 79 % |
| TRN 1-0512SM | | 12 VDC | 90 mA | 81 % |
| TRN 1-0513SM | | 15 VDC | 70 mA | 82 % |
| TRN 1-0515SM | | 24 VDC | 45 mA | 83 % |
| TRN 1-0521SM | | ± 5.0 VDC | ±100 mA | 79 % |
| TRN 1-0522SM | | ±12 VDC | ±45 mA | 83 % |
| TRN 1-0523SM | | ±15 VDC | ±35 mA | 80 % |
| TRN 1-1210SM | 9 – 18 VDC (12 VDC nominal) | 3.3 VDC | 300 mA | 77 % |
| TRN 1-1211SM | | 5.0 VDC | 200 mA | 80 % |
| TRN 1-1212SM | | 12 VDC | 90 mA | 81 % |
| TRN 1-1213SM | | 15 VDC | 70 mA | 83 % |
| TRN 1-1215SM | | 24 VDC | 45 mA | 83 % |
| TRN 1-1221SM | | ± 5.0 VDC | ±100 mA | 79 % |
| TRN 1-1222SM | | ±12 VDC | ±45 mA | 83 % |
| TRN 1-1223SM | | ±15 VDC | ±35 mA | 80 % |
| TRN 1-2410SM | 18 – 36 VDC (24 VDC nominal) | 3.3 VDC | 300 mA | 77 % |
| TRN 1-2411SM | | 5.0 VDC | 200 mA | 81 % |
| TRN 1-2412SM | | 12 VDC | 90 mA | 82 % |
| TRN 1-2413SM | | 15 VDC | 70 mA | 83 % |
| TRN 1-2415SM | | 24 VDC | 45 mA | 82 % |
| TRN 1-2421SM | | ± 5.0 VDC | ±100 mA | 79 % |
| TRN 1-2422SM | | ±12 VDC | ±45 mA | 82 % |
| TRN 1-2423SM | | ±15 VDC | ±35 mA | 80 % |
| TRN 1-4810SM | 36 – 75 VDC (48 VDC nominal) | 3.3 VDC | 300 mA | 77 % |
| TRN 1-4811SM | | 5.0 VDC | 200 mA | 78 % |
| TRN 1-4812SM | | 12 VDC | 90 mA | 80 % |
| TRN 1-4813SM | | 15 VDC | 70 mA | 81 % |
| TRN 1-4815SM | | 24 VDC | 45 mA | 81 % |
| TRN 1-4821SM | | ± 5.0 VDC | ±100 mA | 78 % |
| TRN 1-4822SM | | ±12 VDC | ±45 mA | 81 % |
| TRN 1-4823SM | | ±15 VDC | ±35 mA | 79 % |

Input Specifications

| | | |
|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input current no load | | 9 Vin models: 35 mA typ 12 Vin models: 20 mA typ. 24 Vin models: 10 mA typ. 48 Vin models: 5 mA typ. |
| Surge voltage (1 s max.) | | 9 Vin models: 15 V max. 12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max. |
| Reflected ripple current | | 30 mA _{p-p} typ. |
| Conducted noise | – conducted input emission | EN 55032 class A or B with external components |
| EMC immunity | – ESD (electrostatic discharge) – Radiated immunity – Fast transient / surge (with external input capacitor) – Conducted immunity – Magnetic field immunity | EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±1 kV perf. criteria A Nippon chemi-con KY 220 µF/ 100 V EN 61000-4-6, 10 V _{rms} , perf. criteria A EN 61000-4-8 100 A/m, continuous, perf. criteria A 1000 A/m, 1 sec., perf. criteria A |
| Input filter | | capacitor type |

Output Specifications

| | | |
|-------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage set accuracy | | ±1 % max. |
| Regulation | – Input variation – Load variation 0 – 100 % – Cross regulation - dual output: | 0.2 % max. 1 % max. 5 % max. (asymmetrical load 25 % / 100 %) |
| Temperature coefficient | | ±0.02 %/K typ. |
| Ripple and noise (20 MHz Bandwidth) | | 50 mV _{p-p} typ. |
| Start-up time | | 15 ms max. (5 ms typ.) |
| Transient response (25% load step change) | | 500 µs typ. |
| Short circuit protection | | continuous, automatic recovery |
| Capacitive load | – Single output – Dual output | 3.3 VDC models: 1680 µF max. 5.0 VDC models: 820 µF max. 12 VDC models: 470 µF max. 15 VDC models: 330 µF max. 24 VDC models: 160 µF max. ±5.0 VDC models: 470 µF max. (each output) ±12 VDC models: 330 µF max. (each output) +15 VDC models: 220 µF max. (each output) |

General Specifications

| | | |
|----------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|
| Temperature ranges | – Operating (convection cooling 20 LFM, 0.1m/s) – Case temperature – Storage temperature | –40°C to +90°C (without derating) +95°C max. –55°C to +125°C |
| Derating | | 6.7%/K above 90°C |
| Humidity (non condensing) | | 5 – 95 % rel H max. |
| Moisture sensitivity level (MSL) | | IPC J-STD-033C Level 2 |
| Isolation voltage | – I/O isolation voltage (60 s) | 1'600 VDC |
| Isolation capacitance | | 75 pF max. |
| Isolation resistance (@ 500 VDC) | | >1 GOhm |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications



| | |
|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign) | 7'400'000 h |
| Switching frequency | 100 kHz min. Pulse frequency modulation. |
| Thermal shock & vibration | MIL-STD-810F |
| Safety standards | - Designed to meet (no certification) IEC/EN 62368-1, UL 60950-1 |
| Environmental compliance | - Reach - RoHS www.tracopower.com/products/reach-declaration.pdf RoHS directive 2011/65/EU |

Physical Specifications

| | |
|---------------------------------|------------------------------|
| Casing material | non-conductive black plastic |
| Potting material | Epoxy (UL 94V-0 rated) |
| Package weight | 2.0 g (0.07 oz) |
| Lead-free reflow solder process | IPC J-STD-020E |

Supporting Documents: www.tracopower.com/overview/trn1sm

Outline Dimensions

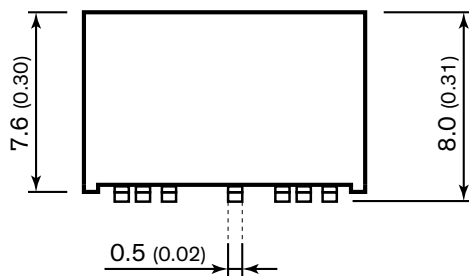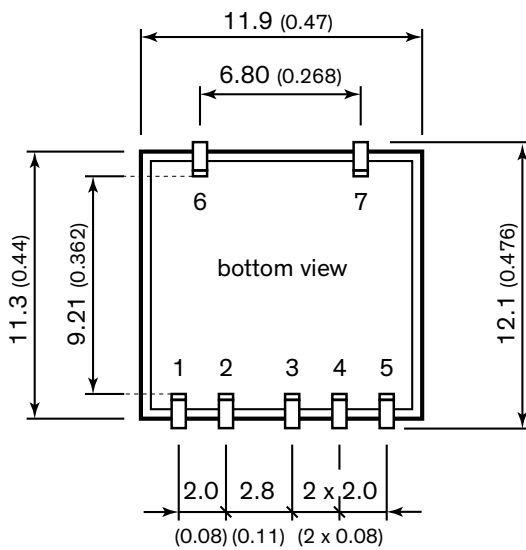

| Pin-Out | | |
|---------|------------|------------|
| Pin | Single | Dual |
| 1 | -Vin (GND) | -Vin (GND) |
| 2 | +Vin (Vcc) | +Vin (Vcc) |
| 3 | +Vout | +Vout |
| 4 | no pin | common |
| 5 | -Vout | -Vout |
| 6 | NC | NC |
| 7 | NC | NC |

Dimensions in [mm], () = Inch

Tolerances: x.x ±0.5 (±0.02)

x.xx ±0.25 (±0.01)

Pin pitch tolerances ±0.25 (±0.01)

Pin dimension tolerance ±0.1 (±0.004)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.