

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
7	CD1275	UPDATE DRAWING	Apr.25,2018	

D

C

B




A

D

C

B

A

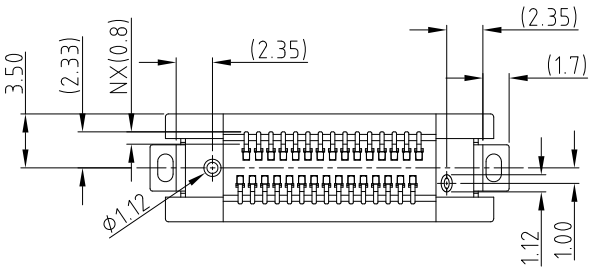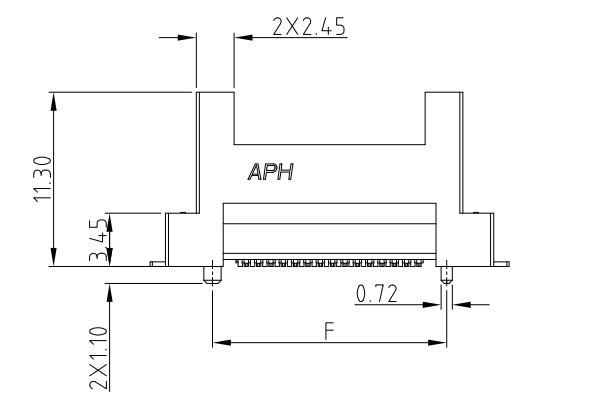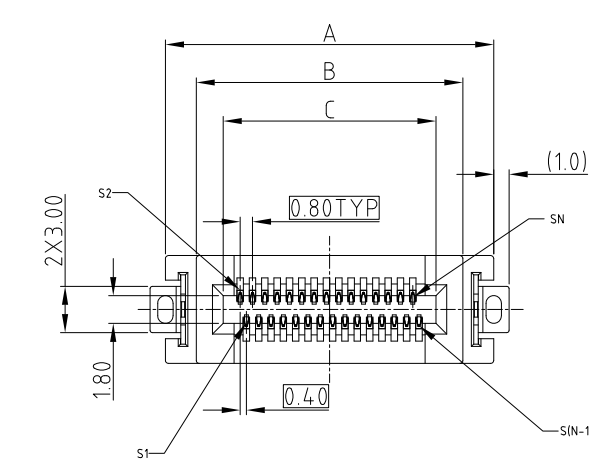

SIGNAL SPEED/IMPEDANCE
1: BELOW 16Gbps
2: 16~32Gbps WITH 85 ohm

POWER PIN COUNT
0: WITHOUT POWER PIN
2: 2PIN
4: 4PIN
6: 6PIN




PART NUMBER SYSTEM
CEXXXXXX011011X

CARD THICKNESS
0: 1.60MM

GUIDE HOLE
0: WITHOUT GUIDE HOLE
G: WITH GUIDE HOLE

SIGNAL PIN COUNT
000: 0 PIN ; 080: 80PIN
020: 20PIN ; 100: 100PIN
026: 26PIN ; 120: 120PIN
040: 40PIN ; 140: 140PIN
050: 50PIN ; 160: 160PIN
060: 60PIN ; 180: 180PIN
200: 200PIN

PLATING SPEC
1: 0.76um Au
2: 0.38um Au
3: GOLD FLASH
4: 0.76umPdNi +GF

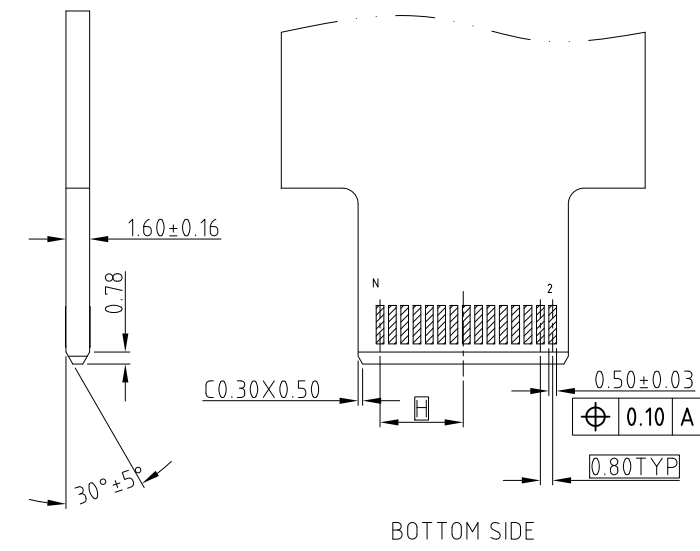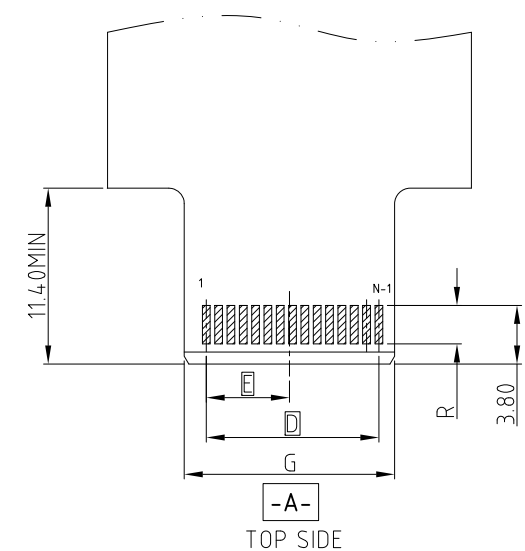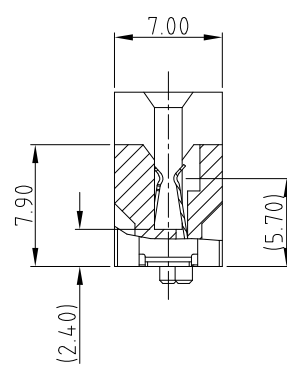

RECOMMEND MATING CARD, THICKNESS=1.60±0.16MM
GENERAL TOLERANCE ±0.05MM



SYSTEM	DIM R
IMPEDANCE	(GOLD FINGER LENGTH)
85 ohm	2.50






- NOTE:
- MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC BLACK UL94-V0
CONTACT: COPPER ALLOY
BOARDLOCK: SPCC
 - PLATING:
CONTACT: MATING AREA: SEE PLATING SEPC OVER 1.27-2.54 UM NICKEL UNDERPLATED
SOLDER AREA: 1.27 MIN TIN OVER 1.27-2.54 UM NICKEL UNDERPLATED
BOARDLOCK: 1.27 MIN TIN OVER 1.27-2.54UM NICKEL UNDERPLATED
 - ELECTRICAL PERFORMANCE:
RATED CURRENT FOR POWER PIN: REFER PRODUCT APPLICATION SPEC
RATED CURRENT FOR SIGNAL PIN: REFER PRODUCT APPLICATION SPEC
 - PRODUCT SHALL MEET ALL DIMENSIONS BEFORE EXPOSURE TO 260°C MAX. FOR 10S AND SHALL MEET ALL SELECTED FUNCTIONAL DIMENSION AFTER EXPOSURE TO 260°C MAX. FOR 10S.
 - MATERIAL SHOULD BE FULFILLED AMPHENOL SPEC # SSN002
 - ORDERING PN: REFER TO THE PN SYSTEM

PIN COUNT	DIMENSION							
N (SIGNAL)	A	B	C	D	E	F	G	H
20	17.30	13.30	9.80	7.20	3.40	11.20	9.65	3.40
26	19.70	15.70	12.20	9.60	4.60	13.60	12.05	4.60
40	25.30	21.30	17.80	15.20	7.40	19.20	17.65	7.40
50	29.30	25.30	21.80	19.20	9.40	23.20	21.65	9.40

UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.25 .XX +/- 0.20 .XXX +/- 0.15 FRACTIONS +/- ANGLES +/- 5° FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS —U.S.— INCHES (METRIC) (mm)		APPROVAL	DATE	Amphenol	
		DRAWN	Apr.25,2018		
		CHECKED			
		APPROVED		TITLE	
DRAWING FILE : INTERNAL\DRAWING\CE\C CEXXXXXX011011X		ANGLE OF PROJECTION		COOL EDGE CONNECTOR 0.80MM PITCH	
				SIZE A3	DRAWING NO. C CEXXXXXX011011X
				SCALE	REV. 7
				SHEET 1 OF 8	


CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

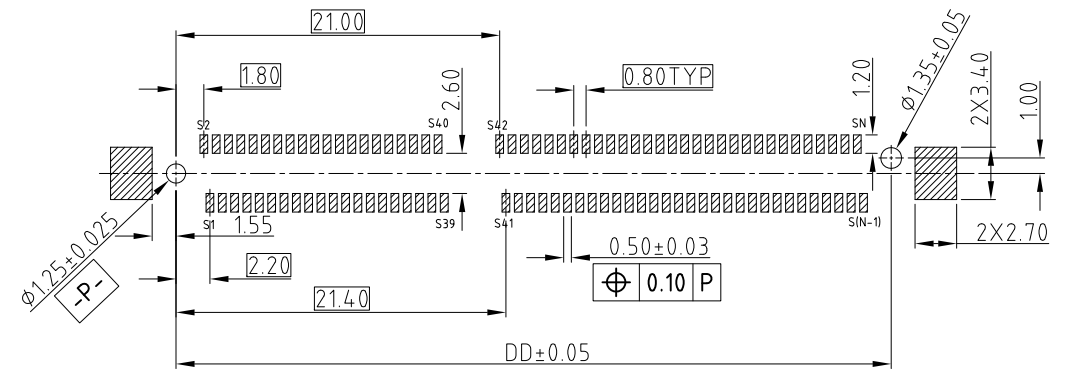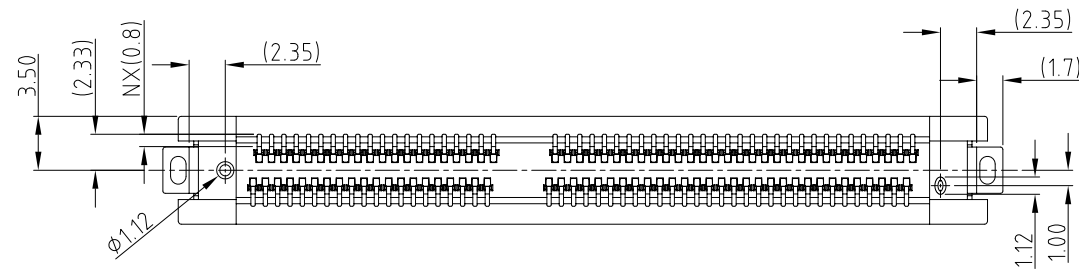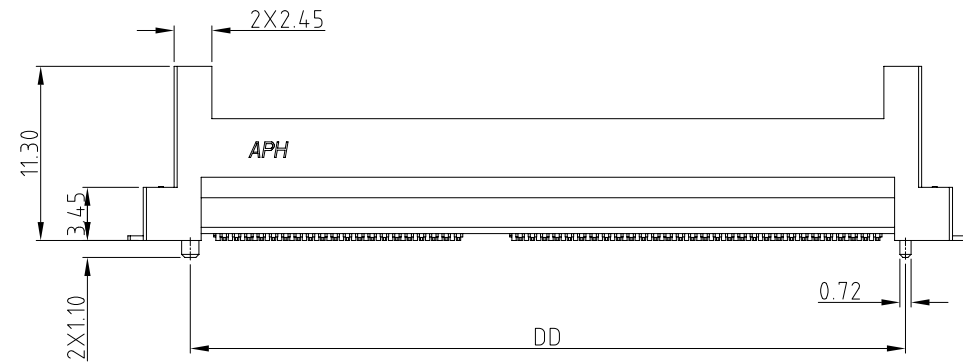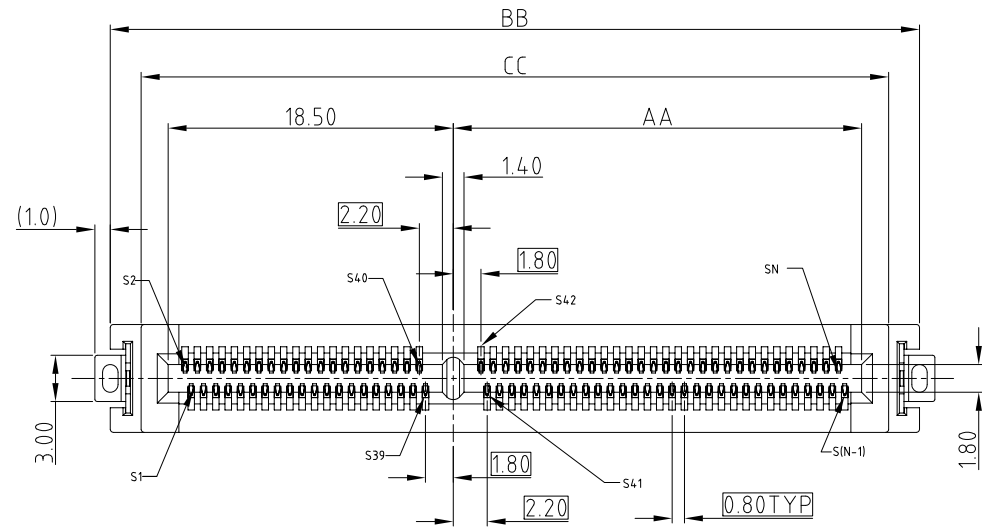

RECOMMENDED SOLDER PCB LAYOUT
GENERAL TOLERANCE ± 0.05

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S. METRIC		DRAWN		Apr.25,2018			
		CHECKED					
.X +/- 0.25		APPROVED				TITLE COOL EDGE CONNECTOR 0.80MM PITCH	
.XX +/- 0.20							
.XXX +/- 0.15							
FRACTIONS +/-		DRAWING FILE :				SIZE DRAWING NO.	

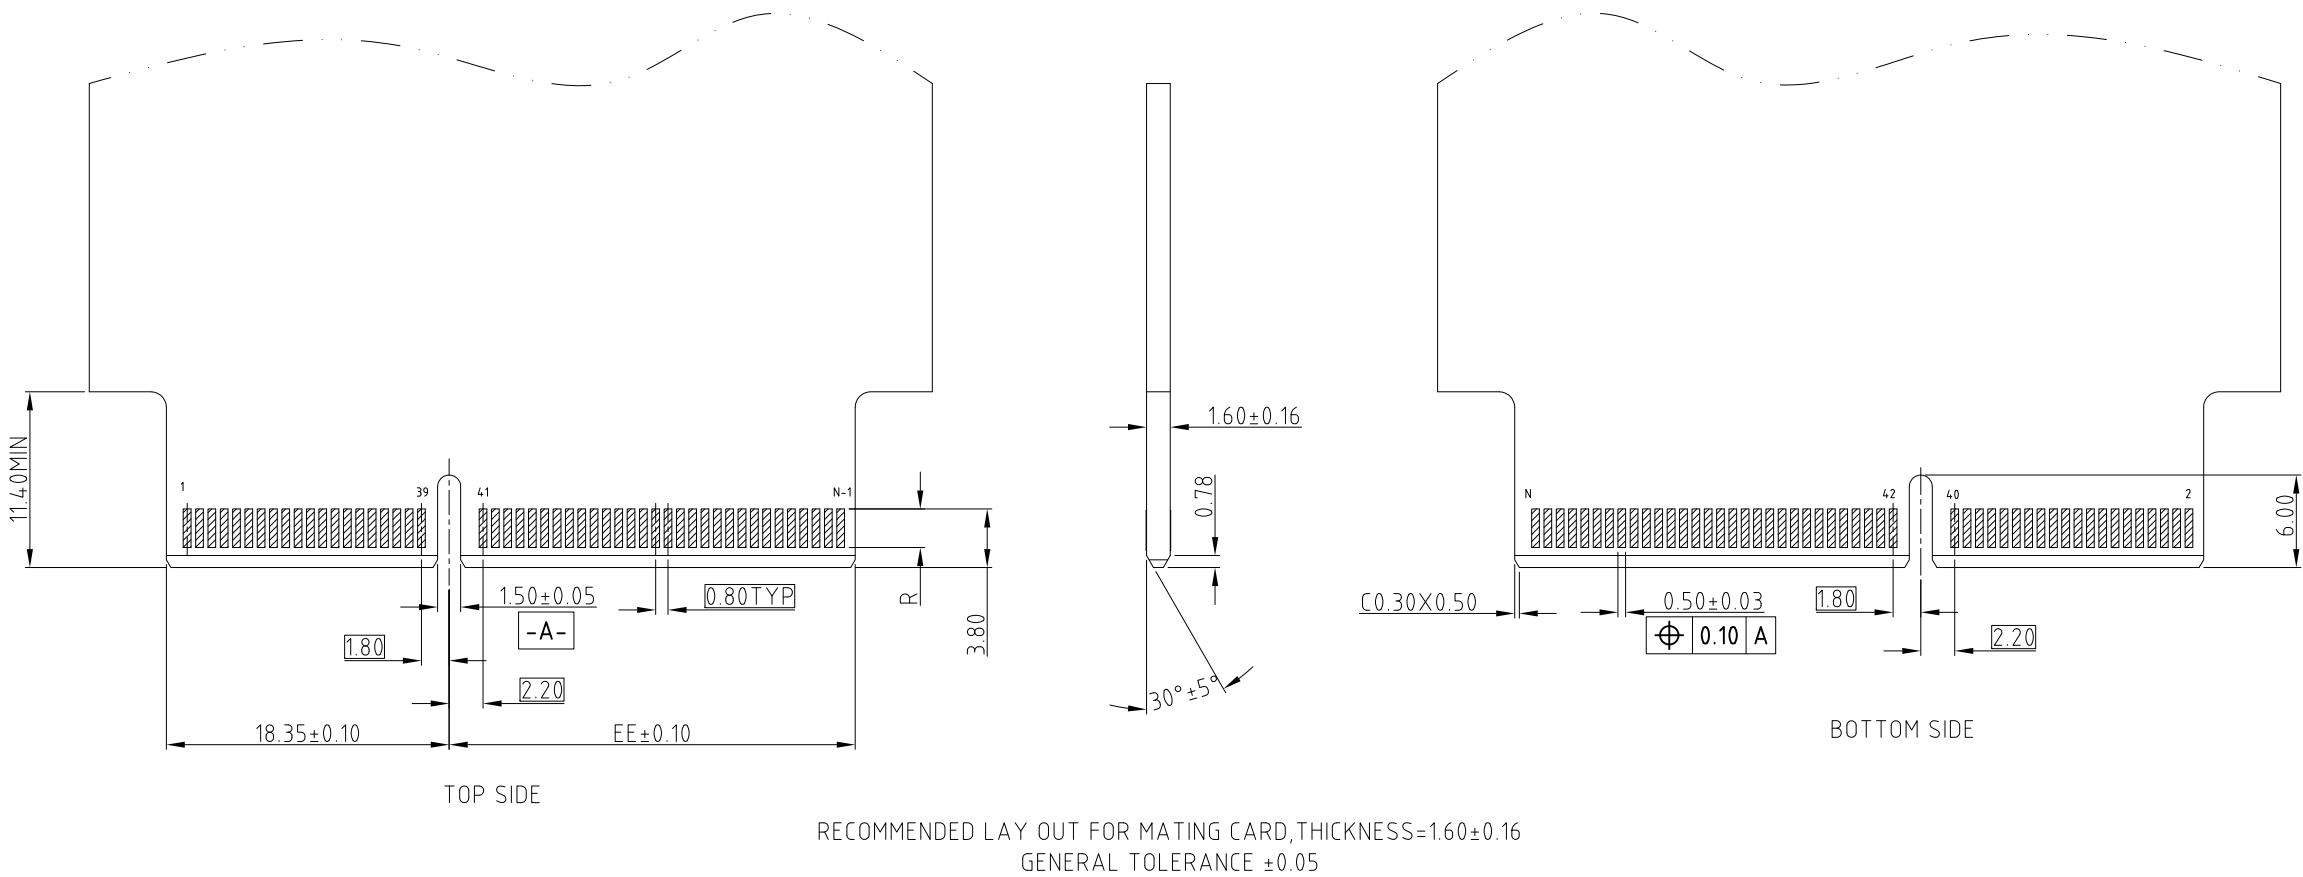

PIN COUNT	DIMENSION				
N (SIGNAL)	AA	BB	CC	DD	EE
60	10.50	36.50	32.50	30.40	10.35
80	18.50	44.50	40.50	38.40	18.35
100	26.50	52.50	48.50	46.40	26.35
120	34.50	60.50	56.50	54.40	34.35
140	42.50	68.50	64.50	62.40	42.35
160	50.50	76.50	72.50	70.40	50.35
180	58.50	84.50	80.50	78.40	58.35
200	66.50	92.50	88.50	86.40	66.35



SYSTEM	DIM R
IMPEDANCE	(GOLD FINGER LENGTH)
85 ohm	2.50

UNLESS OTHERWISE SPECIFIED
TOLERANCES

	U.S.	METRIC
.X	+/-	0.3
.XX	+/-	0.20
.XXX	+/-	0.15
FRACTIONS	+/-	
ANGLES	+/-	5°

FOR MATERIALS AND FINISHES
SEE NOTES

REMOVE SHARP EDGES

DIMENSIONS

—U.S.—	INCHES
(METRIC)	(mm)

APPROVAL		DATE
DRAWN		Apr.25,2018
CHECKED		
APPROVED		
DRAWING FILE :		
INTERNAL\DRAWING\CE\C CEXXXXXX011011X		
ANGLE OF PROJECTION		

Amphenol

TITLE






COOL EDGE CONNECTOR
0.80MM PITCH

SIZE	DRAWING NO.	REV.
A3	C CEXXXXXX011011X	7
SCALE	NONE	SHEET 3 OF 8

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.


CUSTOMER DRAWING

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	N/A	PRELIMINARY PROPOSAL	Mar.08,2017	

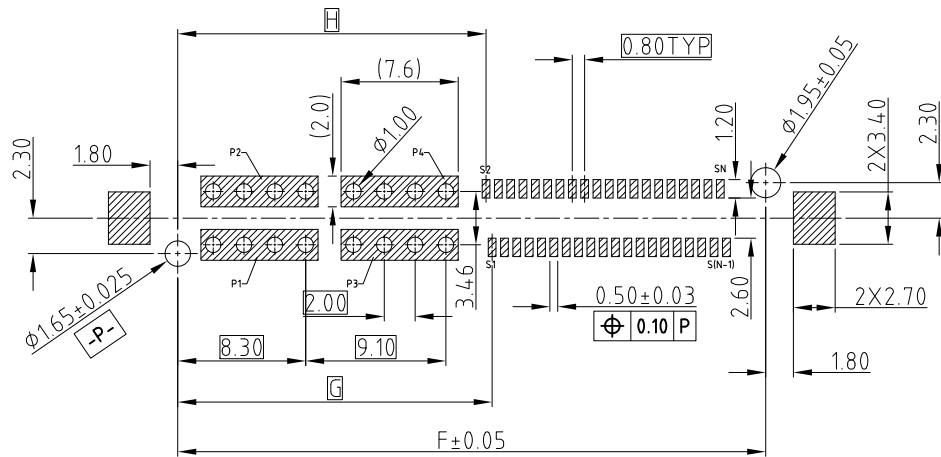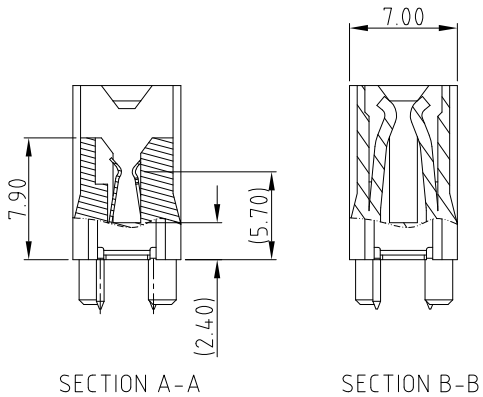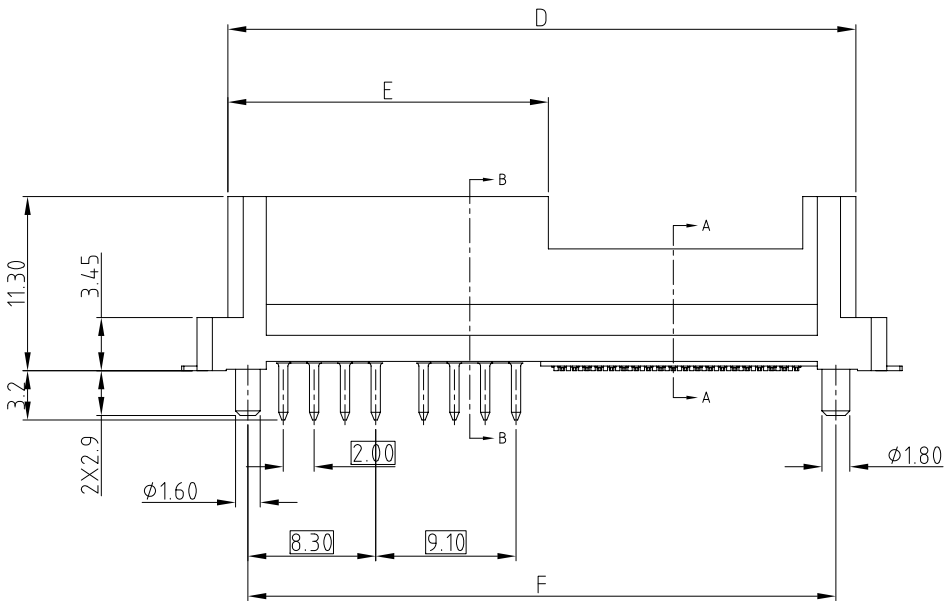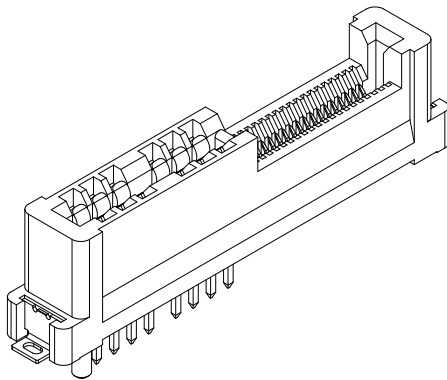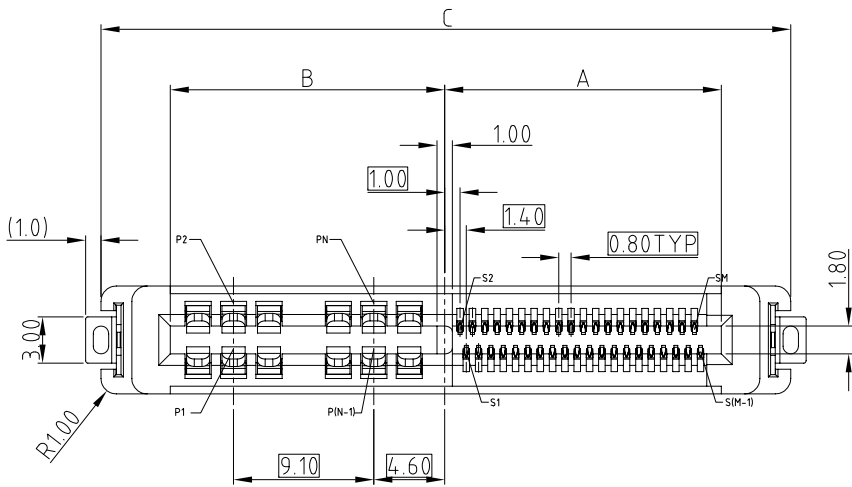

RECOMMEND SOLDER PCB LAYOUT
GENERAL TOLERANCE $\pm 0.05\text{MM}$




UNLESS OTHERWISE SPECIFIED		APPROVAL		DATE		Amphenol					
TOLERANCES		DRAWN		Apr.25,2018							
U.S. METRIC		CHECKED									
		APPROVED									
.X +/- 0.25		DRAWING FILE :				TITLE HYBRID COOL EDGE CONNECTOR 0.80MM PITCH					
.XX +/- 0.20											
.XXX +/- 0.15											
FRACTIONS +/-											
ANGLES +/- 5°											
FOR MATERIALS AND FINISHES SEE NOTES		INTERNAL\DRAWING\CE\C CEXXXXXX011011X									
REMOVE SHARP EDGES		ANGLE OF PROJECTION				SIZE		DRAWING NO.		REV.	
DIMENSIONS						A3		C CEXXXXXX011011X		7	
— U.S. —											
INCHES											
(METRIC)						SCALE		NONE		SHEET 4 OF 8	
(mm)											

CUSTOMER DRAWING

Technical drawing of a mechanical part showing a cross-section with dimensions and tolerances. The drawing includes the following features and dimensions:

- Overall Dimensions:**
 - Total width: 11.40
 - Distance from left face to center of first hole: 9.10
 - Distance from center of first hole to center of second hole: 7.00
 - Distance from center of second hole to center of third hole: 9.10
 - Distance from center of third hole to right face: 3.80
- Holes and Features:**
 - Two holes with diameter $\Phi 0.10$ and length 0.80 TYP .
 - A hole with diameter $\Phi 0.10$ and length 0.50 ± 0.03 .
 - A hole with diameter $\Phi 0.10$ and length 1.10 ± 0.05 .
 - A hole with diameter $\Phi 0.10$ and length 0.55 .
 - A hole with diameter $\Phi 0.10$ and length 1.40 .
- Tolerances and Surface Finish:**
 - Surface finish symbol: R
 - Dimensional tolerances: $K \pm 0.10$, $J \pm 0.10$, 0.50 ± 0.03 , 1.10 ± 0.05 .

Technical drawing of a vertical rod. The drawing shows a rod with a diameter dimensioned as $T = 1.60 \pm 0.16$. A section line is drawn across the rod, with a distance of 0.45 from the bottom to the section line. The section line is angled at $30^\circ \pm 5^\circ$ relative to the horizontal.

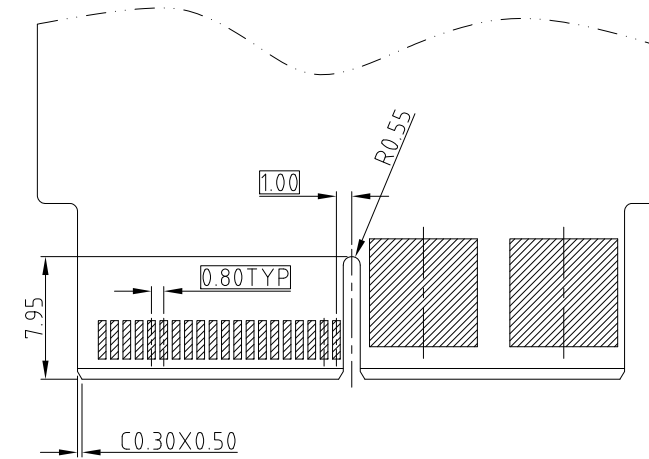

SYSTEM IMPEDANCE	DIM R (GOLD FINGER LENGTH)
85 ohm	2.50

PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
2	18	9.15	8.70	26.85	22.85	11.70	20.25	11.30	10.90	9.00	8.55
	20	9.95	8.70	27.65	23.65	11.70	21.05	11.30	10.90	9.80	8.55
	40	17.95	8.70	35.65	31.65	11.70	29.05	11.30	10.90	17.80	8.55
	60	25.95	8.70	43.65	39.65	11.70	37.05	11.30	10.90	25.80	8.55
	80	33.95	8.70	51.65	47.65	11.70	45.05	11.30	10.90	33.80	8.55
	100	41.95	8.70	59.65	55.65	11.70	53.05	11.30	10.90	41.80	8.55
	120	49.95	8.70	67.65	63.65	11.70	61.05	11.30	10.90	49.80	8.55
	140	57.95	8.70	75.65	71.65	11.70	69.05	11.30	10.90	57.80	8.55
	160	65.95	8.70	83.65	79.65	11.70	77.05	11.30	10.90	65.80	8.55
	180	73.95	8.70	91.65	87.65	11.70	85.05	11.30	10.90	73.80	8.55
	200	81.95	8.70	99.65	95.65	11.70	93.05	11.30	10.90	81.80	8.55

PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
4	20	9.95	17.80	36.75	32.75	20.80	30.15	20.40	20.00	9.80	17.65
	40	17.95	17.80	44.75	40.75	20.80	38.15	20.40	20.00	17.80	17.65
	60	25.95	17.80	52.75	48.75	20.80	46.15	20.40	20.00	25.80	17.65
	80	33.95	17.80	60.75	56.75	20.80	54.15	20.40	20.00	33.80	17.65
	100	41.95	17.80	68.75	64.75	20.80	62.15	20.40	20.00	41.80	17.65
	120	49.95	17.80	76.75	72.75	20.80	70.15	20.40	20.00	49.80	17.65
	140	57.95	17.80	84.75	80.75	20.80	78.15	20.40	20.00	57.80	17.65
	160	65.95	17.80	92.75	88.75	20.80	86.15	20.40	20.00	65.80	17.65
	180	73.95	17.80	100.75	96.75	20.80	94.15	20.40	20.00	73.80	17.65
200	81.95	17.80	108.75	104.75	20.80	102.15	20.40	20.00	81.80	17.65	





PIN COUNT		DIMENSION									
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K
6	20	9.95	26.90	45.85	41.85	29.90	39.25	29.50	29.10	9.80	26.75
	40	17.95	26.90	53.85	49.85	29.90	47.25	29.50	29.10	17.80	26.75
	60	25.95	26.90	61.85	57.85	29.90	55.25	29.50	29.10	25.80	26.75
	80	33.95	26.90	69.85	65.85	29.90	63.25	29.50	29.10	33.80	26.75
	100	41.95	26.90	77.85	73.85	29.90	71.25	29.50	29.10	41.80	26.75
	120	49.95	26.90	85.85	81.85	29.90	79.25	29.50	29.10	49.80	26.75
	140	57.95	26.90	93.85	89.85	29.90	87.25	29.50	29.10	57.80	26.75
	160	65.95	26.90	101.85	97.85	29.90	95.25	29.50	29.10	65.80	26.75
	170	69.95	26.90	105.85	101.85	29.90	99.25	29.50	29.10	69.80	26.75




1

CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

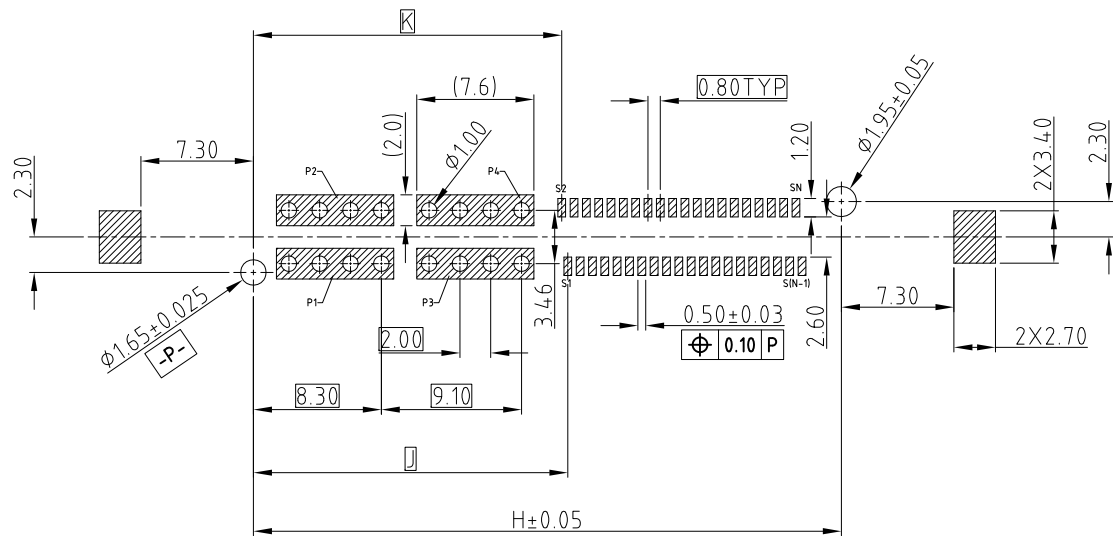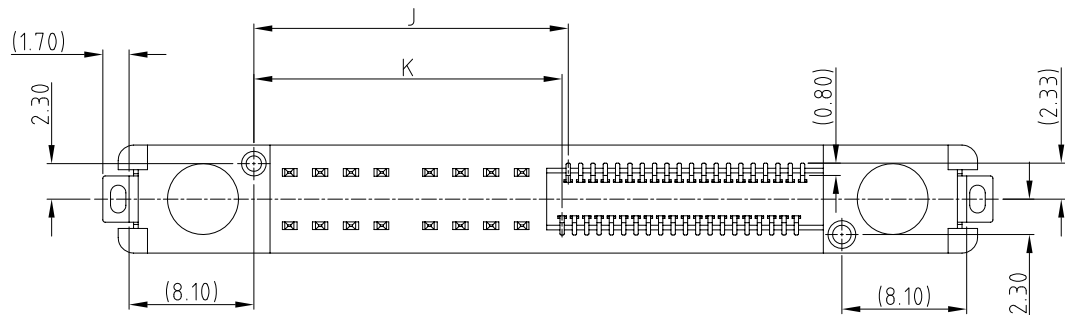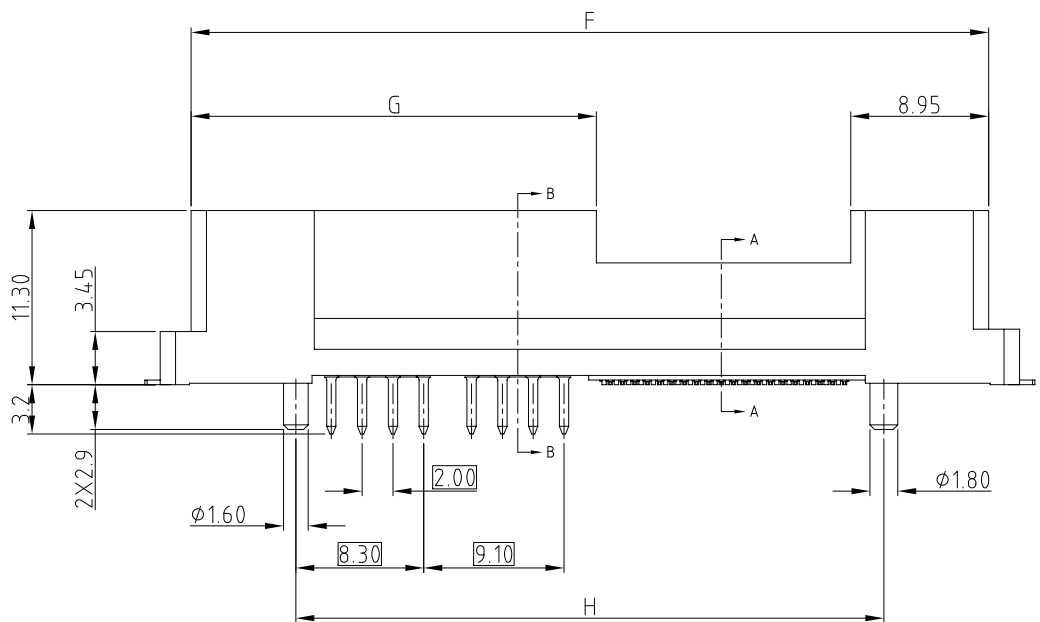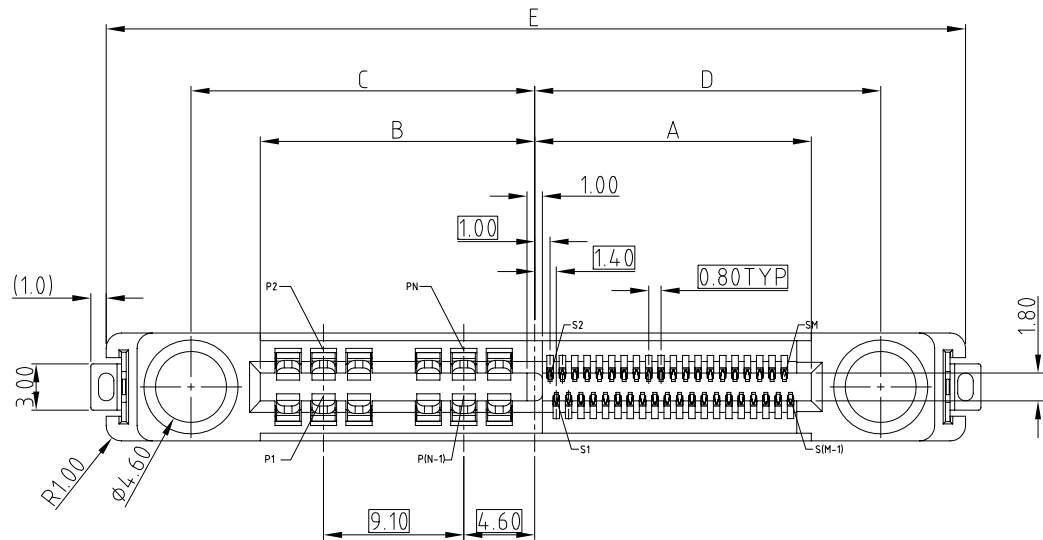


RECOMMEND SOLDER PCB LAYOUT
GENERAL TOLERANCE $\pm 0.05\text{MM}$

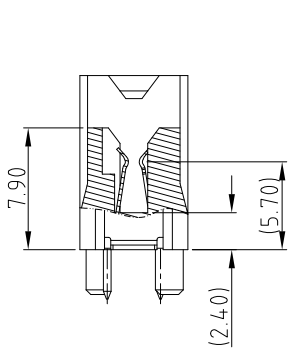


SECTION A-A



SECTION B-B

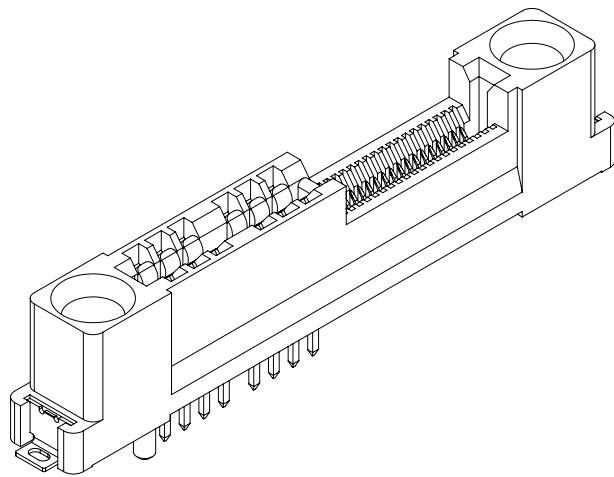



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol	
U.S. METRIC		DRAWN		Apr.25,2018			
.X +/- 0.25		CHECKED					
.XX +/- 0.20		APPROVED					
.XXX +/- 0.15		DRAWING FILE :		TITLE		HYBRID COOL EDGE CONNECTOR 0.80MM PITCH	
FRACTIONS +/-							
ANGLES +/- 5°							
FOR MATERIALS AND FINISHES SEE NOTES		INTERNAL\DRAWING\CE\G_CEXXXXXX011011X		SIZE DRAWING NO. REV. A3 C CEXXXXXX011011X 7		SCALE NONE SHEET 6 OF 8	
REMOVE SHARP EDGES		ANGLE OF PROJECTION					
DIMENSIONS							
— U.S. — INCHES —							
(METRIC) (mm)							

CUSTOMER DRAWING

TOP SIDE

Dimensions and Specifications:


- Overall Width: $Q \pm 0.10$
- Overall Length: $L \pm 0.10$
- Hole Specifications:
 - $2 \times \phi 2.50 \pm 0.05$
 - $2 \times \phi 3.20 \pm 0.05$
 - $2 \times \phi 2.50 \pm 0.05$
- Plating Thickness: $\phi 0.10 \times Y$
- Dimensions:
 - 24.00
 - 19.00
 - 14.00
 - 11.40
 - 9.10
 - 7.00
 - 9.10
 - 7.00
 - 0.55
 - 1.40
 - 0.80 TYP
 - 0.50 ± 0.03
 - 1.10 ± 0.05
 - 3.80
- Other: R

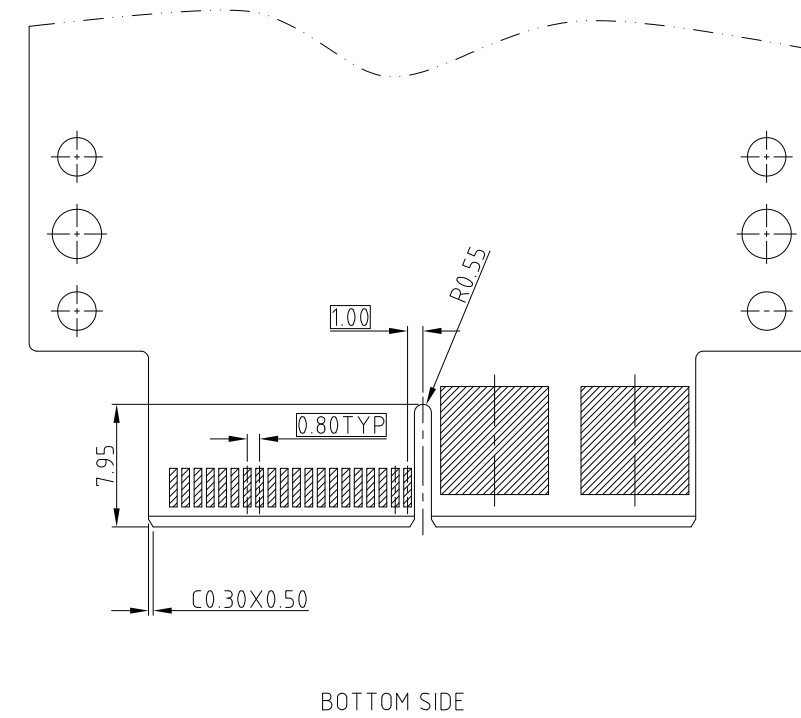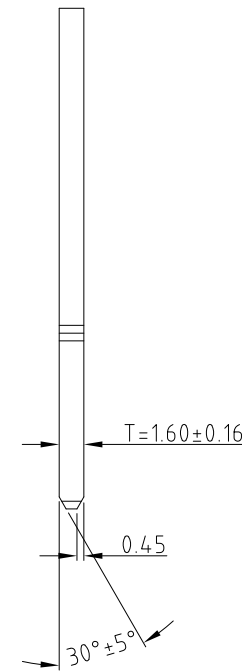

RECOMMEND MATING CARD, THICKNESS=1.60±0.16MM
GENERAL TOLERANCE ±0.05MM

SYSTEM IMPEDANCE	DIM R (GOLD FINGER LENGTH)
85 ohm	2.50



UNLESS OTHERWISE SPECIFIED TOLERANCES U.S. METRIC .X +/- 0.25 .XX +/- 0.20 .XXX +/- 0.15 FRACTIONS +/- ANGLES +/- 5°		APPROVAL DRAWN CHECKED APPROVED		DATE Apr.25,2018		Amphenol	
FOR MATERIALS AND FINISHES SEE NOTES REMOVE SHARP EDGES DIMENSIONS — U.S. — INCHES (METRIC) (mm)		DRAWING FILE : INTERNAL\DRAWING\CE\C CEXXXXXX011011X		TITLE HYBRID COOL EDGE CONNECTOR 0.80MM PITCH			
		ANGLE OF PROJECTION		SIZE DRAWING NO. A3 C CEXXXXXX011011X		REV. 7	
				SCALE NONE		SHEET 7 OF 8	

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

CUSTOMER DRAWING


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
		SEE SHEET 1		

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
2	18	9.15	8.70	13.20	13.65	37.85	33.85	17.20	20.25	11.30	10.90	9.00	8.55
	20	9.95	8.70	13.20	14.45	38.65	34.65	17.20	21.05	11.30	10.90	9.80	8.55
	40	17.95	8.70	13.20	22.45	46.65	42.65	17.20	29.05	11.30	10.90	17.80	8.55
	60	25.95	8.70	13.20	30.45	54.65	50.65	17.20	37.05	11.30	10.90	25.80	8.55
	80	33.95	8.70	13.20	38.45	62.65	58.65	17.20	45.05	11.30	10.90	33.80	8.55
	100	41.95	8.70	13.20	46.45	70.65	66.65	17.20	53.05	11.30	10.90	41.80	8.55
	120	49.95	8.70	13.20	54.45	78.65	74.65	17.20	61.05	11.30	10.90	49.80	8.55
	140	57.95	8.70	13.20	62.45	86.65	82.65	17.20	69.05	11.30	10.90	57.80	8.55
	160	65.95	8.70	13.20	70.45	94.65	90.65	17.20	77.05	11.30	10.90	65.80	8.55
	180	73.95	8.70	13.20	78.45	102.65	98.65	17.20	85.05	11.30	10.90	73.80	8.55
200	81.95	8.70	13.20	86.45	110.65	106.65	17.20	93.05	11.30	10.90	81.80	8.55	

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
4	20	9.95	17.80	22.30	14.45	47.75	43.75	26.30	30.15	20.40	20.00	9.80	17.65
	40	17.95	17.80	22.30	22.45	55.75	51.75	26.30	38.15	20.40	20.00	17.80	17.65
	60	25.95	17.80	22.30	30.45	63.75	59.75	26.30	46.15	20.40	20.00	25.80	17.65
	80	33.95	17.80	22.30	38.45	71.75	67.75	26.30	54.15	20.40	20.00	33.80	17.65
	100	41.95	17.80	22.30	46.45	79.75	75.75	26.30	62.15	20.40	20.00	41.80	17.65
	120	49.95	17.80	22.30	54.45	87.75	83.75	26.30	70.15	20.40	20.00	49.80	17.65
	140	57.95	17.80	22.30	62.45	95.75	91.75	26.30	78.15	20.40	20.00	57.80	17.65
	160	65.95	17.80	22.30	70.45	103.75	99.75	26.30	86.15	20.40	20.00	65.80	17.65
	180	73.95	17.80	22.30	78.45	111.75	107.75	26.30	94.15	20.40	20.00	73.80	17.65
	200	81.95	17.80	22.30	86.45	119.75	115.75	26.30	102.15	20.40	20.00	81.80	17.65

PIN COUNT		DIMENSION											
N (POWER)	M (SIGNAL)	A	B	C	D	E	F	G	H	J	K	L	Q
6	20	9.95	26.90	31.40	14.45	56.85	52.85	35.40	39.25	29.50	29.10	9.80	26.75
	40	17.95	26.90	31.40	22.45	64.85	60.85	35.40	47.25	29.50	29.10	17.80	26.75
	60	25.95	26.90	31.40	30.45	72.85	68.85	35.40	55.25	29.50	29.10	25.80	26.75
	80	33.95	26.90	31.40	38.45	80.85	76.85	35.40	63.25	29.50	29.10	33.80	26.75
	100	41.95	26.90	31.40	46.45	88.85	84.85	35.40	71.25	29.50	29.10	41.80	26.75
	120	49.95	26.90	31.40	54.45	96.85	92.85	35.40	79.25	29.50	29.10	49.80	26.75
	140	57.95	26.90	31.40	62.45	104.85	100.85	35.40	87.25	29.50	29.10	57.80	26.75
	160	65.95	26.90	31.40	70.45	112.85	108.85	35.40	95.25	29.50	29.10	65.80	26.75
	170	69.95	26.90	31.40	74.45	120.85	112.85	35.40	99.25	29.50	29.10	69.80	26.75



UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE		Amphenol			
U.S. METRIC		DRAWN		Apr.25,2018					
		CHECKED							
.X +/- 0.25		APPROVED				TITLE HYBRID COOL EDGE CONNECTOR 0.80MM PITCH			
.XX +/- 0.20									
.XXX +/- 0.15									
FRACTIONS +/-		DRAWING FILE :				SIZE A3			
ANGLES +/- 5°		INTERNAL\DRAWING\CE\G_CEXXXXXX011011X							
FOR MATERIALS AND FINISHES SEE NOTES		ANGLE OF PROJECTION							
REMOVE SHARP EDGES						DRAWING NO.		REV.	
DIMENSIONS						C CEXXXXXX011011X		7	
— U.S. —						INCHES			
(METRIC)		(mm)		SCALE		NONE		SHEET 8 OF 8	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.