



## Silicon Schottky Diodes


- For low-loss, fast-recovery, meter protection, bias isolation and clamping application
- Integrated diffused guard ring
- Low forward voltage
- Pb-free (RoHS compliant) package
- Qualified according AEC Q101

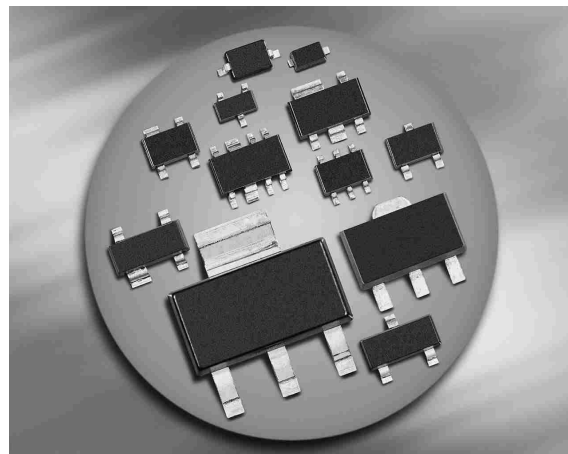


### BAT64




### BAT64-02W BAT64-02V




### BAT64-04 BAT64-04W



### BAT64-05 BAT64-05W



### BAT64-06 BAT64-06W



**ESD (Electrostatic discharge) sensitive device, observe handling precaution!**

| Type       | Package | Configuration  | $L_S$ (nH) | Marking |
|------------|---------|----------------|------------|---------|
| BAT64      | SOT23   | single         | 1.8        | 63s     |
| BAT64-02V  | SC79    | single         | 0.6        | t       |
| BAT64-02W* | SCD80   | single         | 0.6        | 64      |
| BAT64-04   | SOT23   | series         | 1.8        | 64s     |
| BAT64-04W  | SOT323  | series         | 1.4        | 64s     |
| BAT64-05   | SOT23   | common cathode | 1.8        | 65s     |
| BAT64-05W  | SOT323  | common cathode | 1.4        | 65s     |
| BAT64-06   | SOT23   | common anode   | 1.8        | 66s     |
| BAT64-06W  | SOT323  | common anode   | 1.4        | 66s     |

\* Not for new design

**Maximum Ratings** at  $T_A = 25\text{ °C}$ , unless otherwise specified

| Parameter                                                             | Symbol    | Value       | Unit |
|-----------------------------------------------------------------------|-----------|-------------|------|
| Diode reverse voltage                                                 | $V_R$     | 40          | V    |
| Forward current                                                       | $I_F$     | 250         | mA   |
| Non-repetitive peak surge forward current<br>( $t \leq 10\text{ms}$ ) | $I_{FSM}$ | 800         |      |
| Average rectified forward current (50/60Hz, sinus)                    | $I_{FAV}$ | 120         |      |
| Total power dissipation                                               | $P_{tot}$ |             | mW   |
| BAT64, $T_S \leq 86\text{°C}$                                         |           | 250         |      |
| BAT64-02W, -02V $T_S \leq 121\text{°C}$                               |           | 250         |      |
| BAT64-04, BAT64-06, $T_S \leq 61\text{°C}$                            |           | 250         |      |
| BAT64-04W, BAT64-06W, $T_S \leq 111\text{°C}$                         |           | 250         |      |
| BAT64-05, $T_S \leq 36\text{°C}$                                      |           | 250         |      |
| BAT64-05W, $T_S \leq 104\text{°C}$                                    |           | 250         |      |
| Junction temperature                                                  | $T_j$     | 150         | °C   |
| Storage temperature                                                   | $T_{stg}$ | -55 ... 150 |      |

### Thermal Resistance

| Parameter                                | Symbol     | Value      | Unit |
|------------------------------------------|------------|------------|------|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ |            | K/W  |
| BAT64                                    |            | $\leq 255$ |      |
| BAT64-02W, -02V                          |            | $\leq 115$ |      |
| BAT64-04, BAT64-06,                      |            | $\leq 355$ |      |
| BAT64-04W, BAT64-06W                     |            | $\leq 155$ |      |
| BAT64-05                                 |            | $\leq 455$ |      |
| BAT64-05W                                |            | $\leq 185$ |      |


<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note AN077 (Thermal Resistance Calculation)

**Electrical Characteristics** at  $T_A = 25\text{ °C}$ , unless otherwise specified

| Parameter                                                                                                                       | Symbol     | Values                   |                          |                          | Unit          |
|---------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------|--------------------------|--------------------------|---------------|
|                                                                                                                                 |            | min.                     | typ.                     | max.                     |               |
| DC Characteristics                                                                                                              |            |                          |                          |                          |               |
| Breakdown voltage<br>$I_{(BR)} = 10\text{ }\mu\text{A}$                                                                         | $V_{(BR)}$ | 40                       | -                        | -                        | V             |
| Reverse current<br>$V_R = 30\text{ V}$<br>$V_R = 30\text{ V}, T_A = 85\text{ }^{\circ}\text{C}$                                 | $I_R$      | -<br>-                   | -<br>-                   | 2<br>200                 | $\mu\text{A}$ |
| Forward voltage<br>$I_F = 1\text{ mA}$<br>$I_F = 10\text{ mA}$<br>$I_F = 30\text{ mA}$<br>$I_F = 100\text{ mA}$                 | $V_F$      | 270<br>310<br>370<br>500 | 320<br>385<br>440<br>570 | 350<br>430<br>520<br>750 | mV            |
| AC Characteristics                                                                                                              |            |                          |                          |                          |               |
| Diode capacitance<br>$V_R = 1\text{ V}, f = 1\text{ MHz}$                                                                       | $C_T$      | -                        | 4                        | 6                        | pF            |
| Reverse recovery time<br>$I_F = 10\text{ mA}, I_R = 10\text{ mA}$ , measured $I_R = 1\text{ mA}$ ,<br>$R_L = 100\text{ }\Omega$ | $t_{rr}$   | -                        | -                        | 5                        | ns            |


**Diode capacitance**  $C_T = f(V_R)$

$f = 1\text{MHz}$

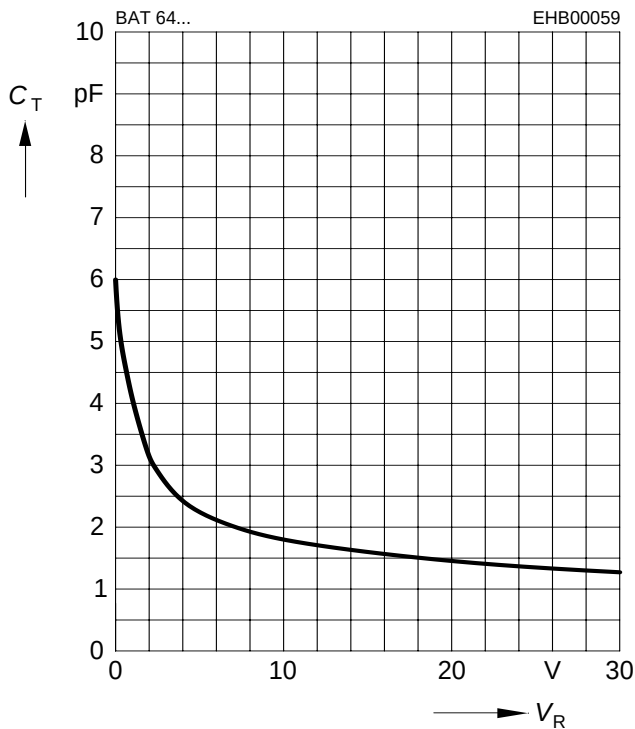


**Reverse current**  $I_R = f(V_R)$

$T_A = \text{Parameter}$

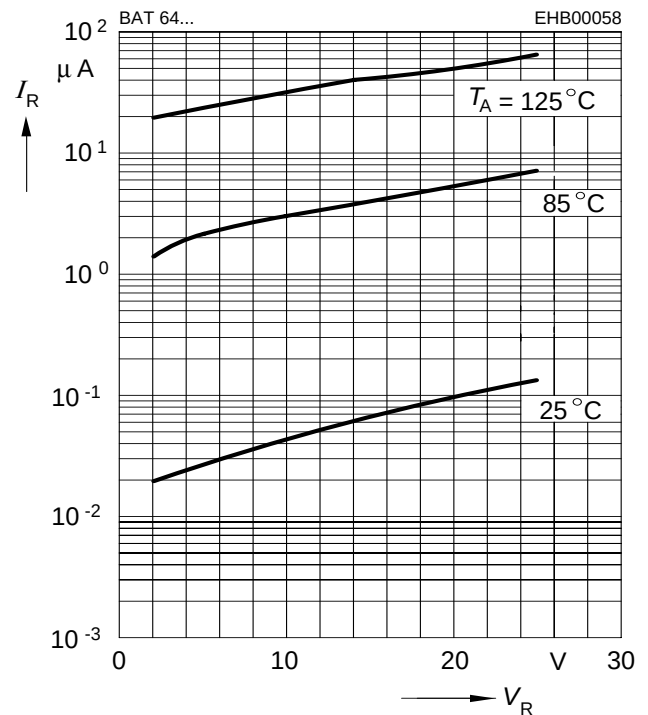


**Forward current**  $I_F = f(V_F)$

$T_A = \text{Parameter}$

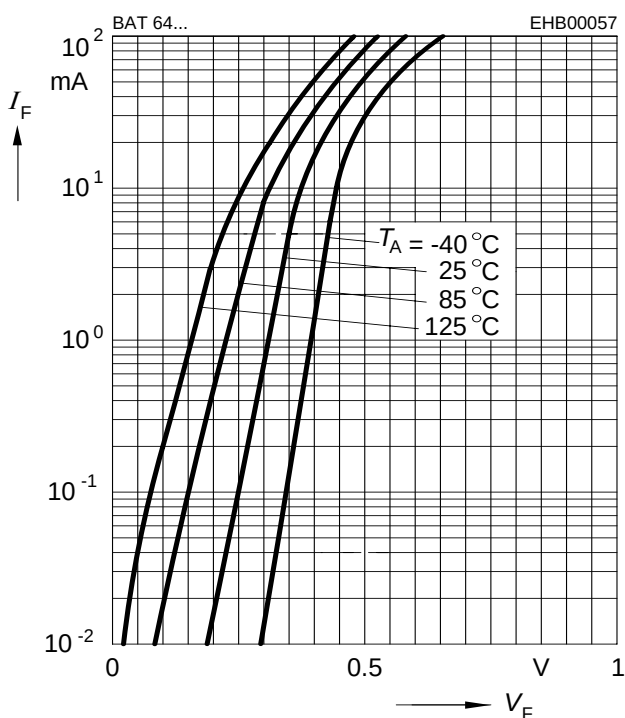


**Forward current**  $I_F = f(T_S)$

BAT64

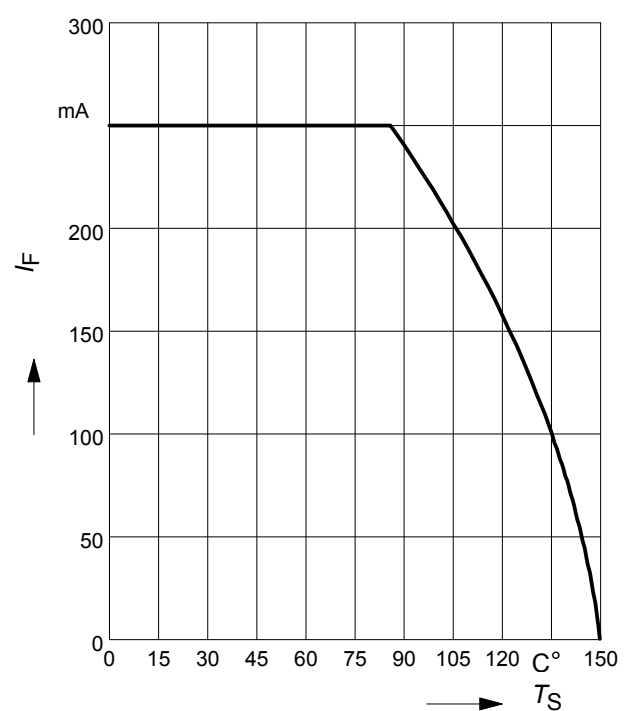


**Forward current  $I_F = f(T_S)$**

BAT64-02W, -02V

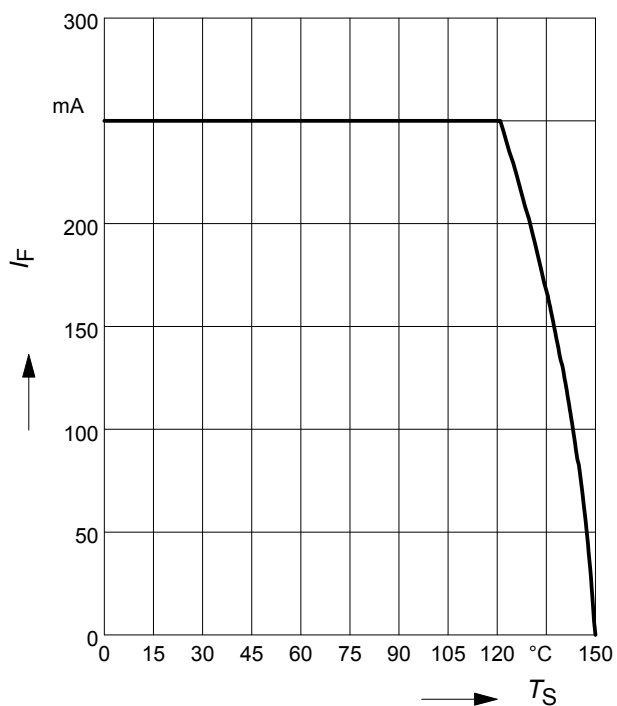


**Forward current  $I_F = f(T_S)$**

BAT64-04, BAT64-06

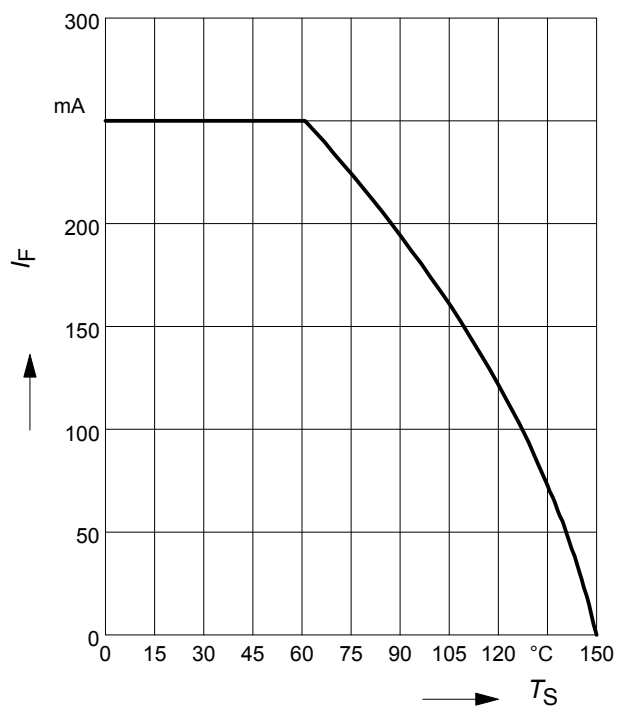


**Forward current  $I_F = f(T_S)$**

BAT64-04W, BAT64-06W

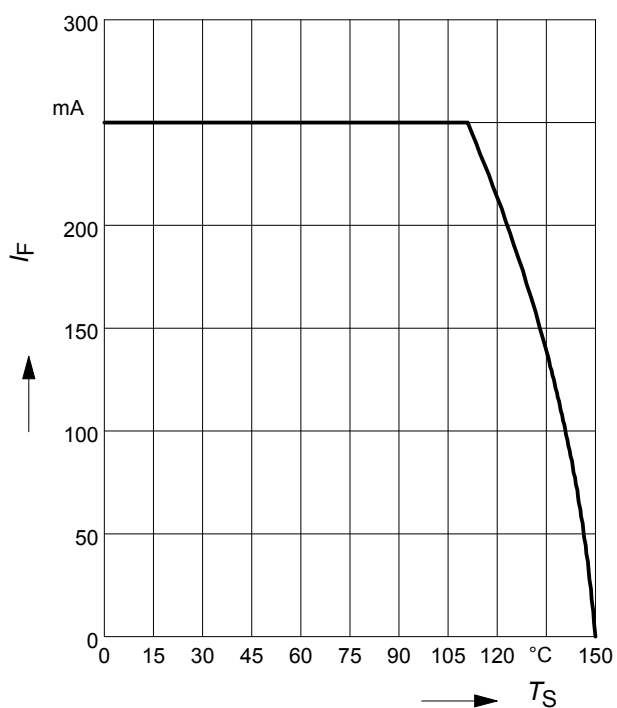


**Forward current  $I_F = f(T_S)$**

BAT64-05

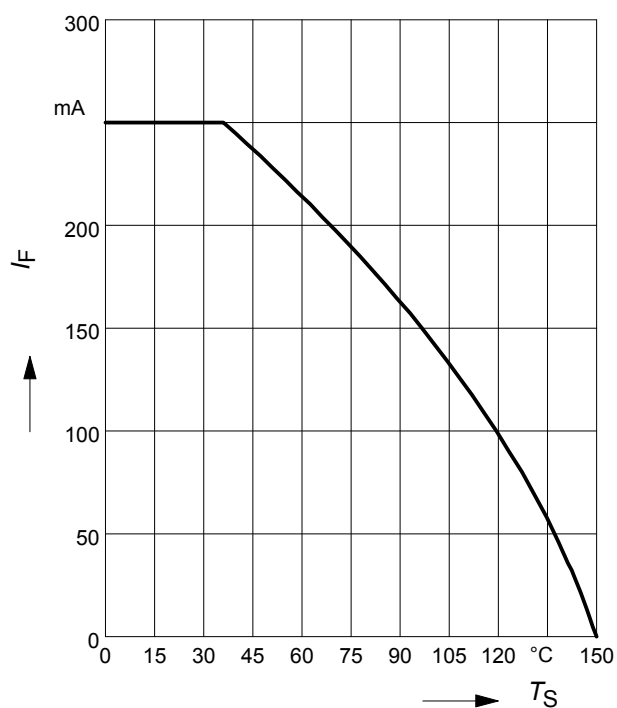


### Forward current $I_F = f(T_S)$

BAT64-05W

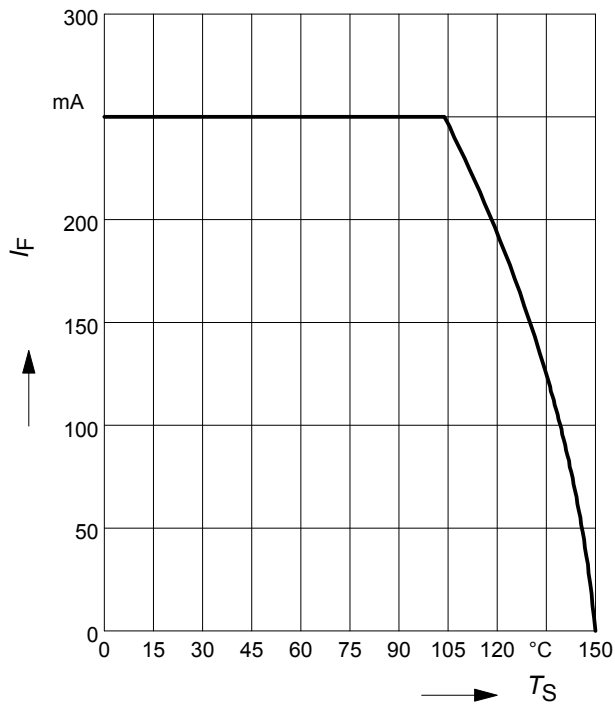

### Permissible Puls Load $R_{thJS} = f(t_p)$


BAT64-02W, -02V

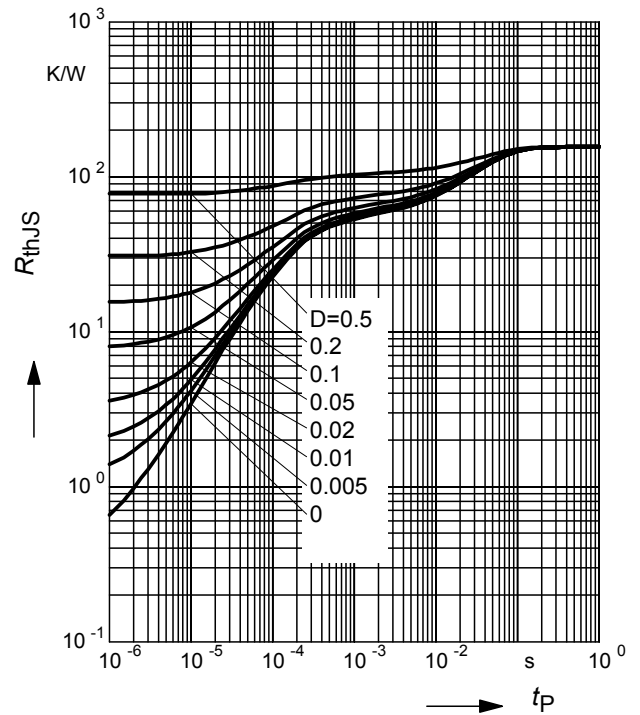

### Permissible Pulse Load


$I_{Fmax}/I_{FDC} = f(t_p)$

BAT64-02W, -02V

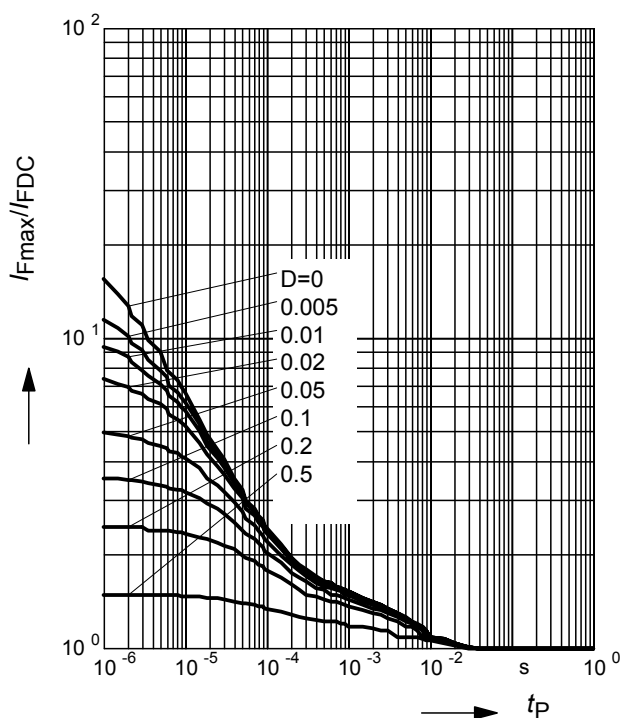

### Permissible Puls Load $R_{thJS} = f(t_p)$


BAT64-04W, BAT64-06W

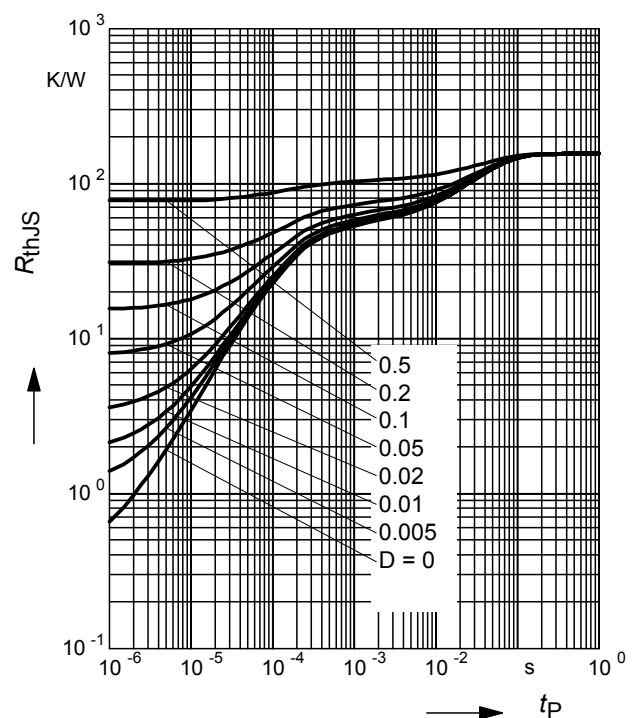

### Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAT64-04W, BAT64-06W

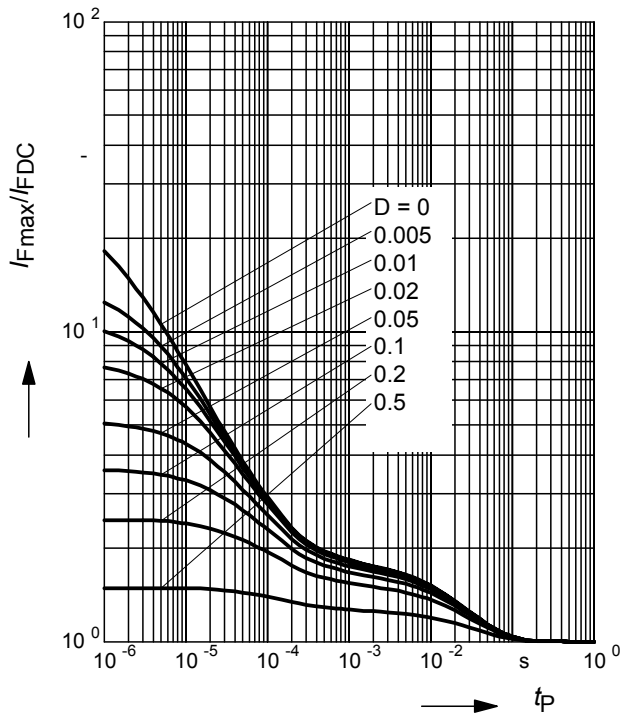

### Permissible Puls Load $R_{thJS} = f(t_p)$


BAT64-05W

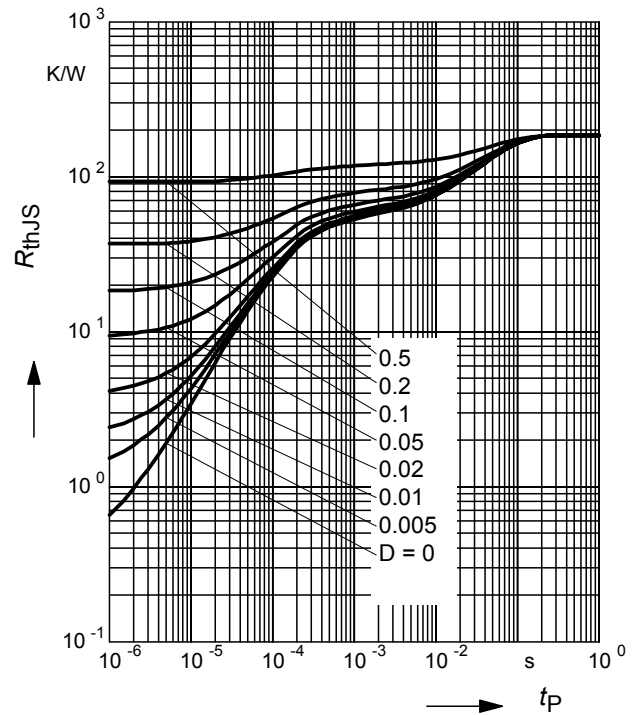

### Permissible Pulse Load

$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAT64-05W

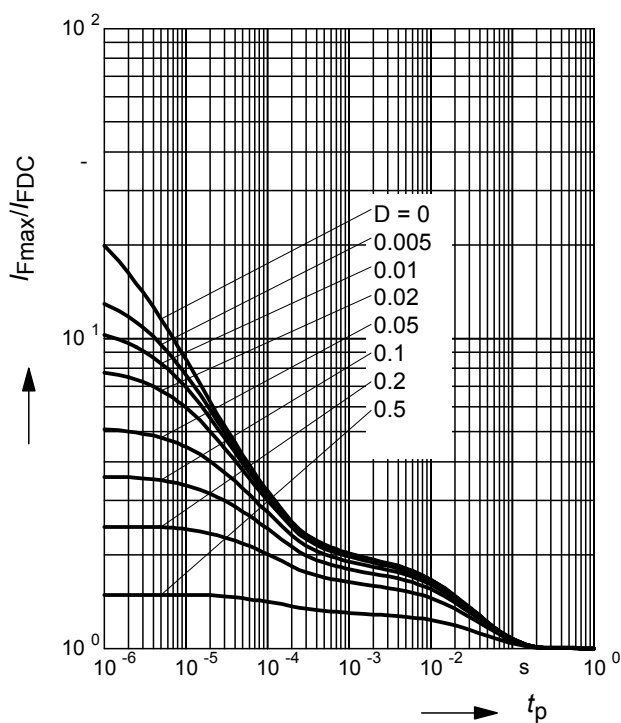

The drawing shows the 100-01 package from two perspectives. The top view (left) shows a rectangular package with a central square area labeled '2' and a shaded rectangular area labeled '1' with the text 'Cathode marking' pointing to it. Dimensions include a width of  $0.8 \pm 0.1$  and a height of  $0.3 \pm 0.05$ . The side view (right) shows the package profile with a total height of  $1.6 \pm 0.1$ , a base width of  $0.55 \pm 0.04$ , and a top width of  $0.13^{+0.05}_{-0.03}$ . It also indicates a maximum width of  $10^{MAX.}$  and a maximum height of  $10^{MAX.}$ . A symbol  $\square 0.2 \text{ (M) A}$  is present in the top right corner.

2005, June  
Date code


GF

BAR63-02V  
Type code


Cathode marking  
Laser marking




## Package Outline

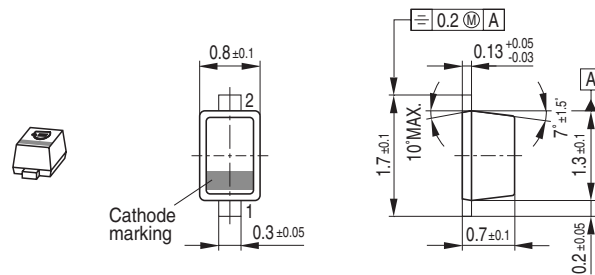

## Foot Print




## Marking Layout (Example)

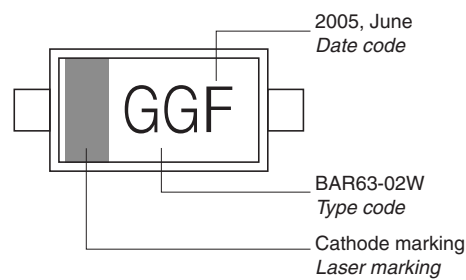

## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
 Reel ø180 mm = 8.000 Pieces/Reel (2 mm Pitch)  
 Reel ø330 mm = 10.000 Pieces/Reel


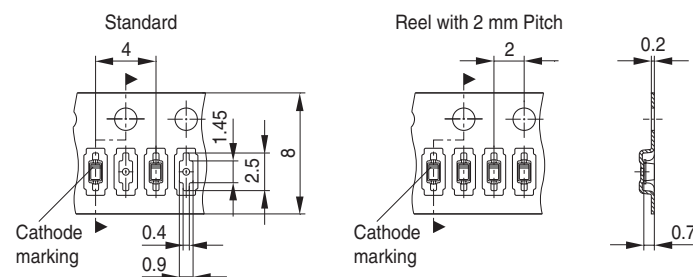


Date Code marking for discrete packages with one digit (SCD80, SC79, SC75<sup>1)</sup>) CES-Code

| Month | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| 01    | a    | p    | A    | P    | a    | p    | A    | P    | a    | p    | A    | P    |
| 02    | b    | q    | B    | Q    | b    | q    | B    | Q    | b    | q    | B    | Q    |
| 03    | c    | r    | C    | R    | c    | r    | C    | R    | c    | r    | C    | R    |
| 04    | d    | s    | D    | S    | d    | s    | D    | S    | d    | s    | D    | S    |
| 05    | e    | t    | E    | T    | e    | t    | E    | T    | e    | t    | E    | T    |
| 06    | f    | u    | F    | U    | f    | u    | F    | U    | f    | u    | F    | U    |
| 07    | g    | v    | G    | V    | g    | v    | G    | V    | g    | v    | G    | V    |
| 08    | h    | x    | H    | X    | h    | x    | H    | X    | h    | x    | H    | X    |
| 09    | j    | y    | J    | Y    | j    | y    | J    | Y    | j    | y    | J    | Y    |
| 10    | k    | z    | K    | Z    | k    | z    | K    | Z    | k    | z    | K    | Z    |
| 11    | l    | 2    | L    | 4    | l    | 2    | L    | 4    | l    | 2    | L    | 4    |
| 12    | n    | 3    | N    | 5    | n    | 3    | N    | 5    | n    | 3    | N    | 5    |

1) New Marking Layout for SC75, implemented at October 2005.


## Package Outline

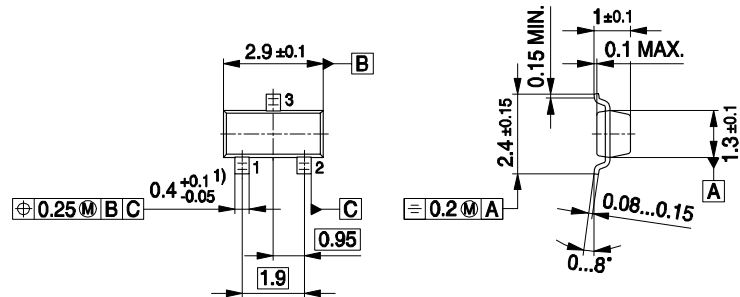

1) Lead width can be 0.6 max. in dambar area


SOT23-PO V08

## Foot Print




SOT23-FPR V08

## Marking Layout

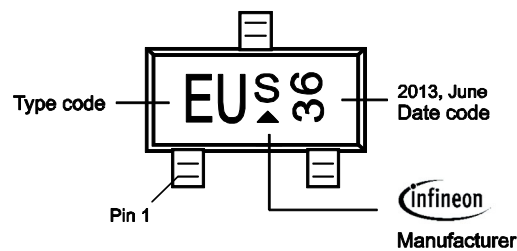


## Standard Packing

Reel o 180 mm: 3.000 Pieces / Reel  
Reel o 330 mm = 10.000 Pieces / Reel

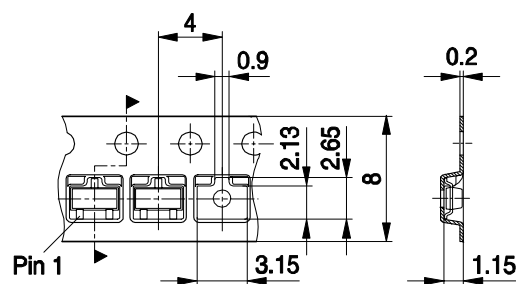


SOT23-TP V02


## Package Outline

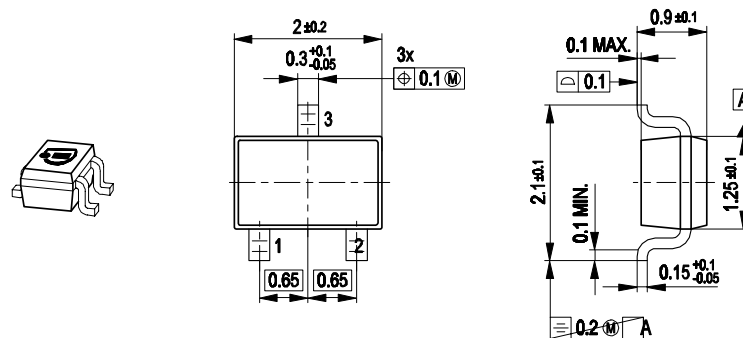

## Foot Print




## Marking Layout (Example)

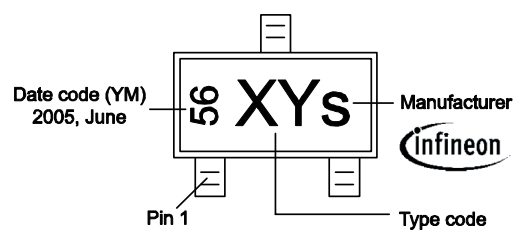

## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
 Reel ø330 mm = 10.000 Pieces/Reel

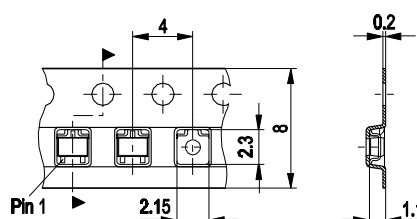

**Edition 2009-11-16**

**Published by  
Infineon Technologies AG  
81726 Munich, Germany**

**© 2009 Infineon Technologies AG  
All Rights Reserved.**

## **Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

## **Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([<www.infineon.com>](http://www.infineon.com)).

## **Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.