


1 A - 400 V ultrafast recovery diode

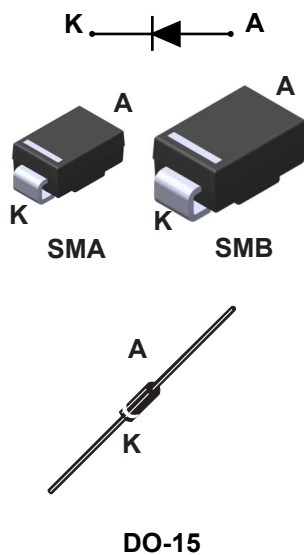

Features

- Negligible switching losses
- Low forward voltage drop
- High junction temperature
- ECOPACK compliant

Applications

- Switching diode
- Telecom power

Description

The **STTH1R04** series uses ST's new 400 V planar Pt doping technology. The STTH1R04 is specially suited for switching mode base drive and transistor circuits.

Packaged in SMA, SMB and DO-15, the **STTH1R04** is ideal for use low voltage, high frequency inverters, free wheeling and polarity protection

| Product status | |
|-----------------|--------|
| STTH1R04 | |
| Product summary | |
| Symbol | Value |
| $I_{F(AV)}$ | 1 A |
| V_{RRM} | 400 V |
| $T_{j(max.)}$ | 175 °C |
| $V_{F(typ.)}$ | 0.9 V |
| $t_{rr(typ.)}$ | 14 ns |

1 Characteristics

Table 1. Absolute ratings (limiting values at 25 °C, unless otherwise specified)

| Symbol | Parameter | | Value | Unit | |
|-------------|--|-------|---------------------------------|------|---|
| V_{RRM} | Repetitive peak reverse voltage | | 400 | V | |
| $I_{F(AV)}$ | Average forward current $\delta = 0.5$, square wave | SMA | $T_L = 125\text{ °C}$ | 1 | A |
| | | SMB | $T_L = 140\text{ °C}$ | | |
| | | DO-15 | $T_L = 105\text{ °C}$ | | |
| I_{FSM} | Surge non repetitive forward current | | $t_p = 10\text{ ms}$ sinusoidal | 30 | A |
| T_{stg} | Storage temperature range | | -65 to +175 | °C | |
| T_j | Operating junction temperature | | +175 | °C | |

Table 2. Thermal resistance parameter

| Symbol | Parameter | | Max. value | Unit |
|---------------|------------------|--|------------|------|
| $R_{th(j-l)}$ | Junction to lead | SMA | 35 | °C/W |
| | | SMB | 25 | |
| | Junction to lead | Lead length = 10 mm on infinite heatsink | DO-15 | |

For more information, please refer to the following application note :

- AN5088 : Rectifiers thermal management, handling and mounting recommendations

Table 3. Static electrical characteristics

| Symbol | Parameter | Test conditions | | Min. | Typ. | Max. | Unit |
|-------------|-------------------------|-----------------------|--------------------|------|------|------|---------------|
| $I_R^{(1)}$ | Reverse leakage current | $T_j = 25\text{ °C}$ | $V_R = V_{RRM}$ | - | | 5 | μA |
| | | $T_j = 125\text{ °C}$ | | - | 5 | 50 | μA |
| $V_F^{(2)}$ | Forward voltage drop | $T_j = 25\text{ °C}$ | $I_F = 1\text{ A}$ | - | | 1.50 | V |
| | | $T_j = 100\text{ °C}$ | | - | 1.0 | 1.25 | |
| | | $T_j = 150\text{ °C}$ | | - | 0.9 | 1.15 | |

1. Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 0.9 \times I_{F(AV)} + 0.250 \times I_F^2_{(RMS)}$$

For more information, please refer to the following application notes related to the power losses :

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

Table 4. Dynamic characteristics ($T_j = 25\text{ °C}$ unless otherwise stated)

| Symbol | Parameters | Test conditions | Min. | Typ. | Max. | Unit |
|----------|--------------------------|---|------|------|------|------|
| t_{rr} | Reverse recovery time | $I_F = 1\text{ A}$, $di_F/dt = -50\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$ | - | | 30 | ns |
| | | $I_F = 1\text{ A}$, $di_F/dt = -100\text{ A}/\mu\text{s}$, $V_R = 30\text{ V}$ | - | 14 | 20 | |
| I_{RM} | Reverse recovery current | $I_F = 1\text{ A}$, $di_F/dt = -200\text{ A}/\mu\text{s}$, $V_R = 320\text{ V}$, $T_j = 125\text{ °C}$ | - | 2.5 | 3.5 | A |
| t_{fr} | Forward recovery time | $I_F = 1\text{ A}$, $di_F/dt = 100\text{ A}/\mu\text{s}$, $V_{FR} = 1.1 \times V_{F(max)}$ | - | | 50 | ns |
| V_{FP} | Forward recovery voltage | $I_F = 1\text{ A}$, $di_F/dt = 100\text{ A}/\mu\text{s}$ | - | 3.5 | | V |

1.1 Characteristics (curves)

Figure 1. Average forward power dissipation versus average forward current

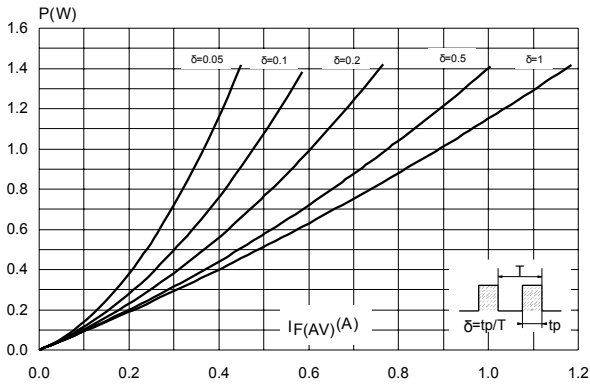


Figure 2. Forward voltage drop versus forward current

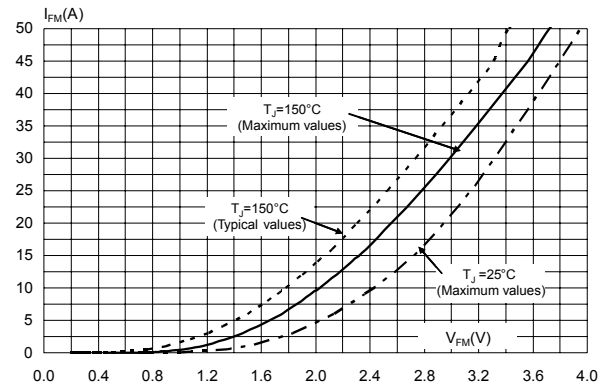


Figure 3. Relative variation of thermal impedance junction to lead versus pulse duration (SMA)

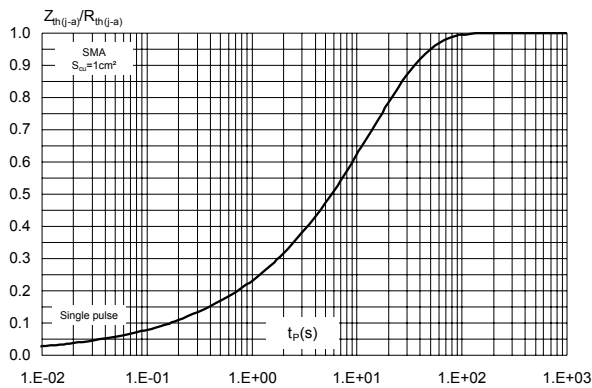


Figure 4. Relative variation of thermal impedance junction to lead versus pulse duration (SMB)

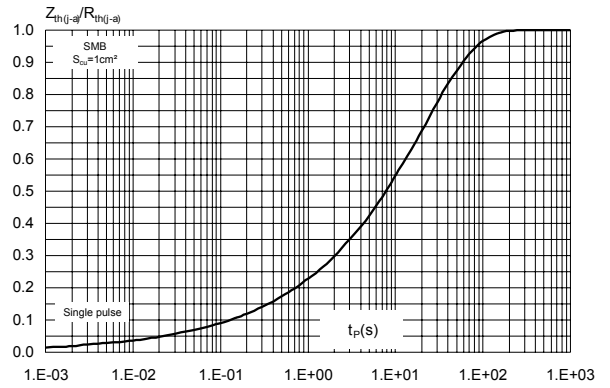


Figure 5. Relative variation of thermal impedance junction to lead versus pulse duration (DO-15)

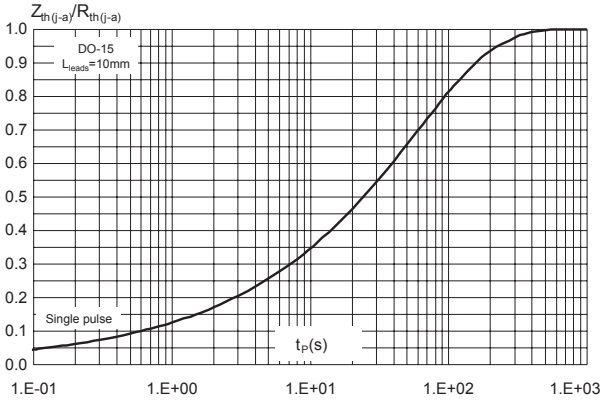


Figure 6. Reverse recovery charges versus di_F/dt (typical values)

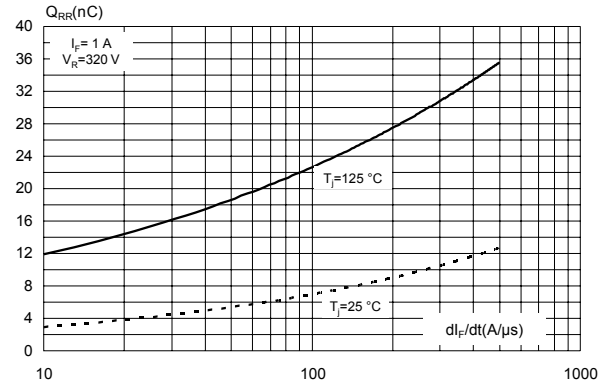


Figure 7. Junction capacitance versus reverse voltage applied (typical values)

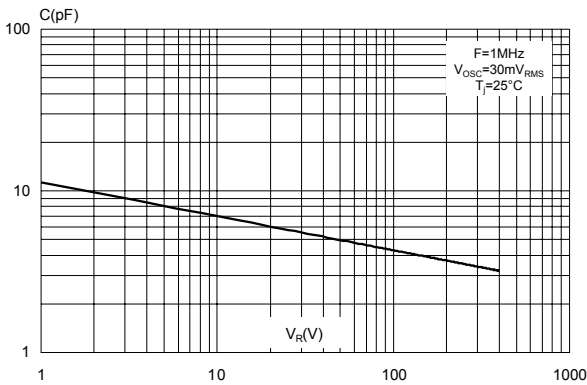


Figure 8. Reverse recovery time versus di_F/dt (typical values)

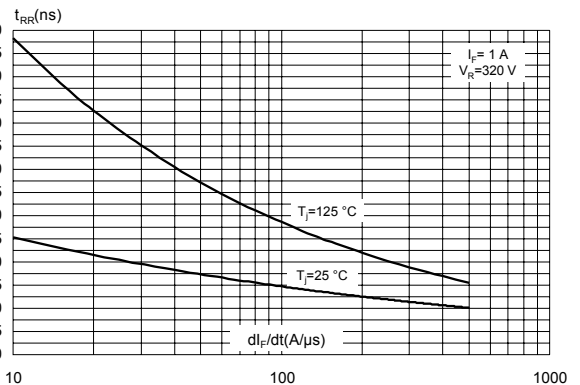


Figure 9. Peak reverse recovery current versus di_F/dt (typical values)

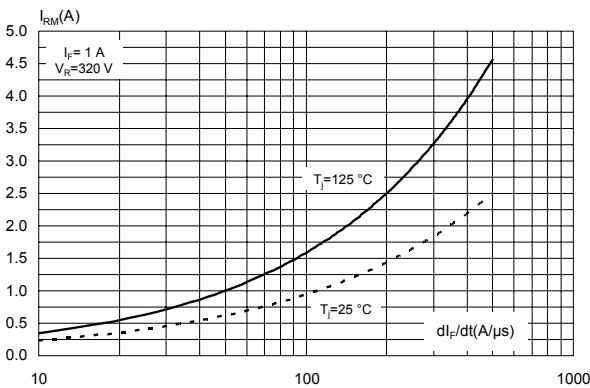


Figure 10. Relative variations of dynamic parameters versus junction temperature

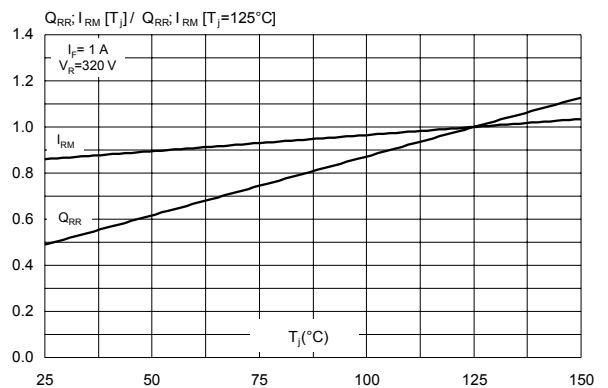


Figure 11. Transient peak forward voltage versus di_F/dt (typical values)

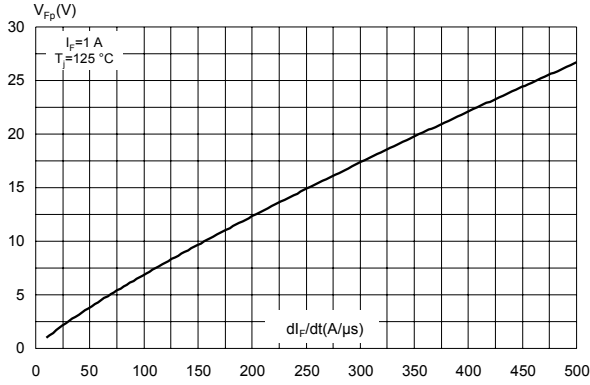


Figure 12. Forward recovery time versus di_F/dt (typical values)

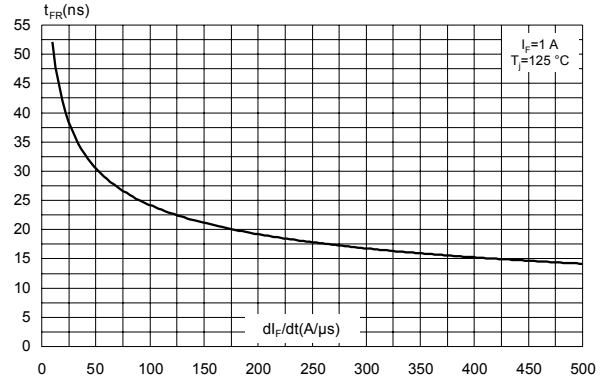


Figure 13. Thermal resistance junction to ambient versus copper surface under each lead (typical values)

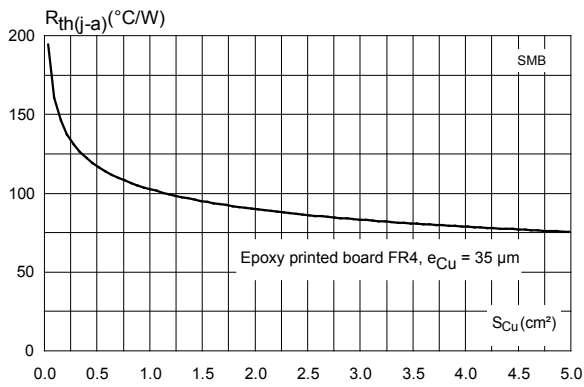


Figure 14. Thermal resistance junction to ambient versus copper surface under each lead (typical values)


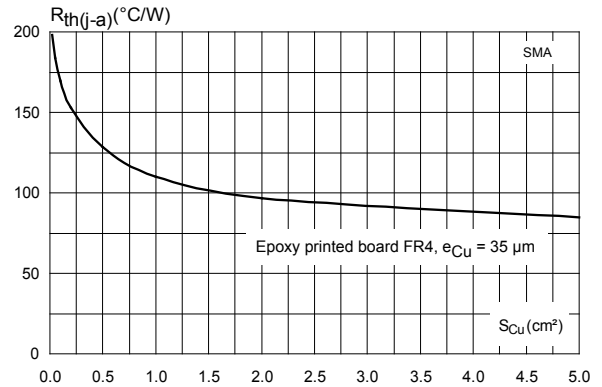


Figure 15. Thermal resistance junction to ambient versus lead length, DO-15

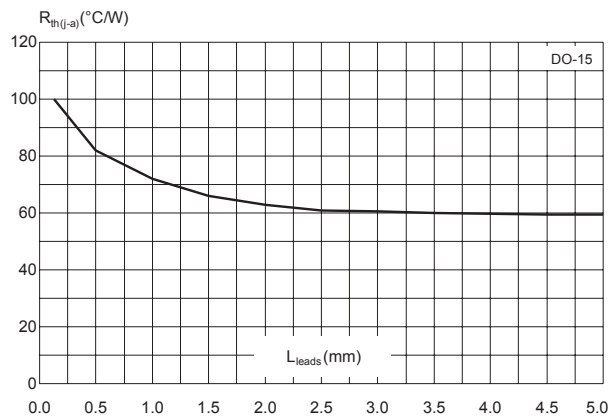

2 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 SMB package information

- Epoxy meets UL94, V0
- Lead-free package

Figure 16. SMB package outline


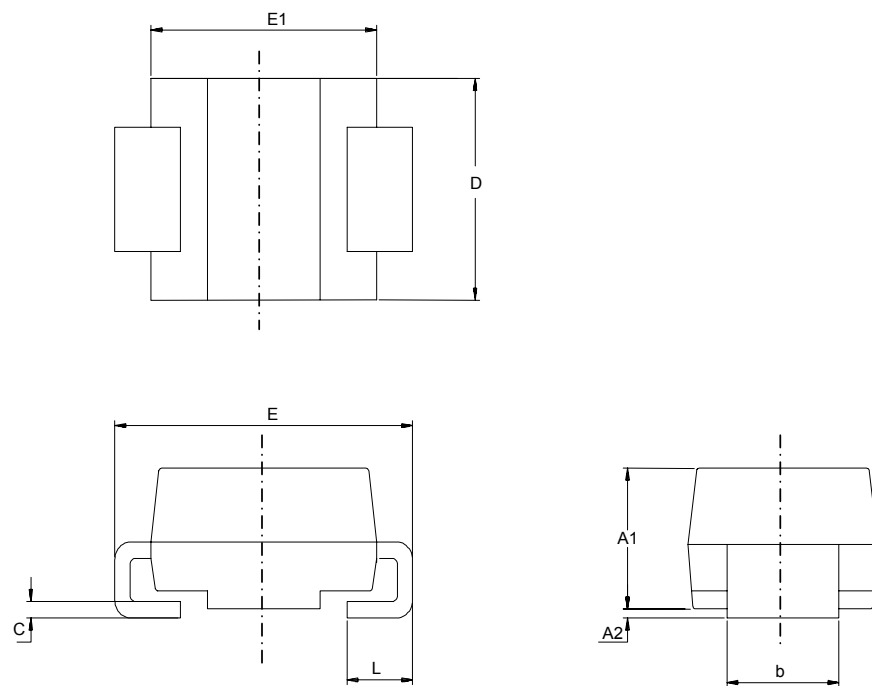


Table 5. SMB package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|------|-----------------------------|-------|
| | Millimeters | | Inches (for reference only) | |
| | Min. | Max. | Min. | Max. |
| A1 | 1.90 | 2.45 | 0.074 | 0.097 |
| A2 | 0.05 | 0.20 | 0.001 | 0.008 |
| b | 1.95 | 2.20 | 0.076 | 0.087 |
| c | 0.15 | 0.40 | 0.005 | 0.016 |
| D | 3.30 | 3.95 | 0.129 | 0.156 |
| E | 5.10 | 5.60 | 0.200 | 0.221 |
| E1 | 4.05 | 4.60 | 0.159 | 0.182 |
| L | 0.75 | 1.50 | 0.029 | 0.060 |

Figure 17. SMB recommended footprint

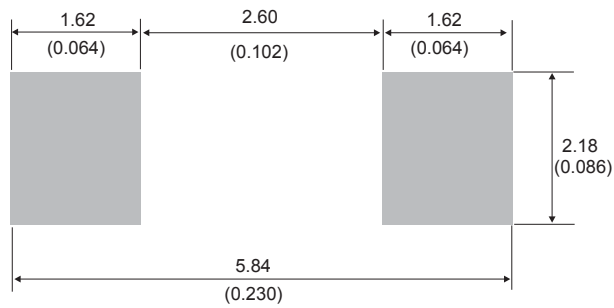

2.2 SMA package information

- Epoxy meets UL94, V0
- Cooling method : by conduction (C)

Figure 18. SMA package outline


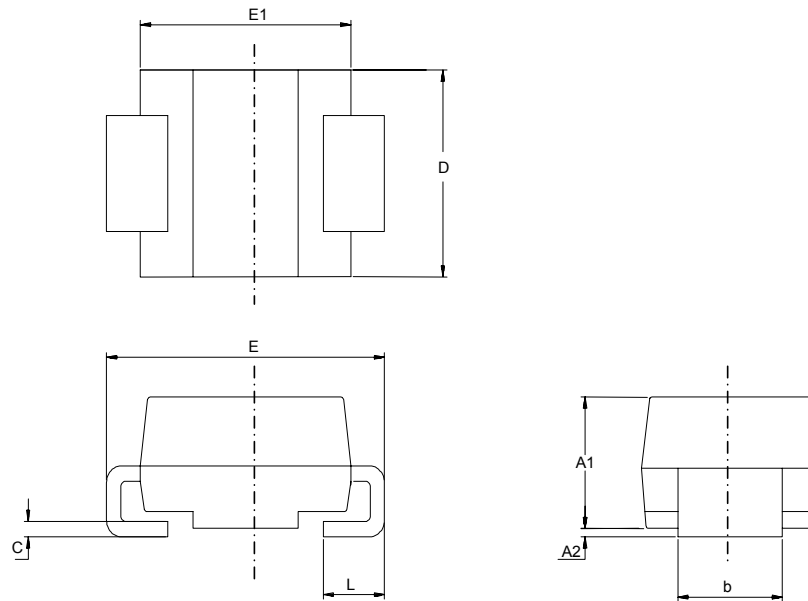


Table 6. SMA package mechanical data

| Ref. | Dimensions | | | |
|------|-------------|------|-----------------------------|-------|
| | Millimeters | | Inches (for reference only) | |
| | Min. | Max. | Min. | Max. |
| A1 | 1.90 | 2.45 | 0.074 | 0.097 |
| A2 | 0.05 | 0.20 | 0.001 | 0.008 |
| b | 1.25 | 1.65 | 0.049 | 0.065 |
| c | 0.15 | 0.40 | 0.005 | 0.016 |
| D | 2.25 | 2.90 | 0.088 | 0.115 |
| E | 4.80 | 5.35 | 0.188 | 0.211 |
| E1 | 3.95 | 4.60 | 0.155 | 0.182 |
| L | 0.75 | 1.50 | 0.029 | 0.060 |

Figure 19. SMA recommended footprint in mm (inches)

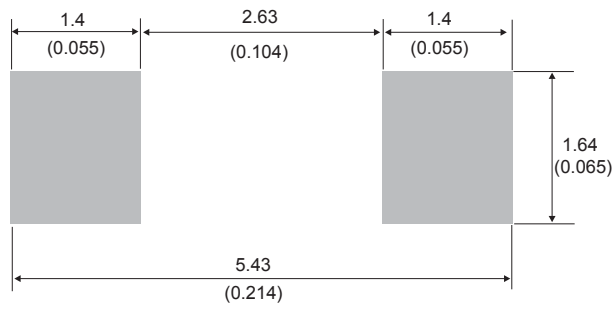

2.3 DO-15 package information

- Epoxy meets UL 94, V0

Figure 20. DO-15 package outline

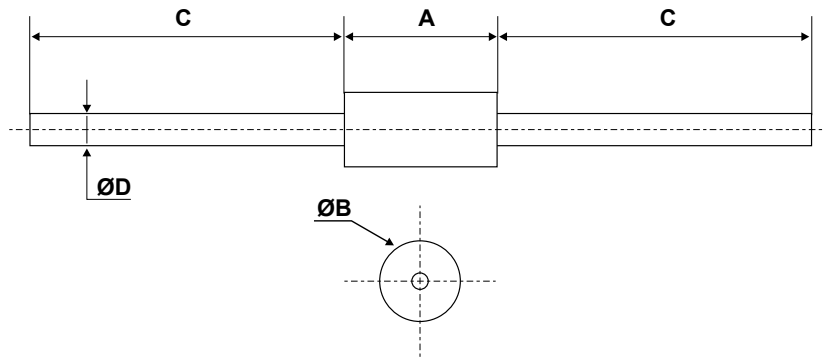


Table 7. DO-15 package mechanical data

| Ref. | Dimensions | | | | | |
|------|-------------|------|-------|-----------------------------|------|--------|
| | Millimeters | | | Inches (for reference only) | | |
| | Min. | Typ. | Max. | Min. | Typ. | Max. |
| A | 6.05 | - | 6.75 | 0.238 | - | 0.266 |
| B | 2.95 | - | 3.53 | 0.116 | - | 0.139 |
| C | 26.00 | - | 31.00 | 1.024 | - | 1.220 |
| D | 0.71 | - | 0.88 | 0.028 | - | 0.0035 |

3 Ordering information

Table 8. Ordering information

| Order code | Marking | Package | Weight | Base qty. | Delivery mode |
|-------------|-----------|---------|---------|-----------|---------------|
| STTH1R04A | HR4 | SMA | 0.068 g | 5000 | Tape and reel |
| STTH1R04U | BR4 | SMB | 0.107 g | 2500 | Tape and reel |
| STTH1R04QRL | STTH1R04Q | DO-15 | 0.400 g | 6000 | Tape and reel |

Revision history

Table 9. Document revision history

| Date | Revision | Changes |
|-------------|----------|--|
| 30-May-2008 | 1 | First issue. |
| 12-Nov-2015 | 2 | Updated Figure 3, Figure 4, Figure 5 and Figure 6. Minor text changes. |
| 13-Nov-2018 | 3 | Removed DO-41 package information. |
| 15-Mar-2019 | 4 | Updated Table 3. Static electrical characteristics . |

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2019 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.