

LTC2165, LTC2164, LTC2163 LTC2162, LTC2161, LTC2160, LTC2159, LTC2269 16-Bit, 20Msps to 125Msps ADCs

DESCRIPTION

Demonstration circuit 1762A supports a family of 16-Bit 20Msps to 125Msps ADCs. Each assembly features one of the following devices: LTC[®]2165, LTC2164, LTC2163, LTC2162, LTC2161, LTC2160, LTC2159, or LTC2269 high speed, high dynamic range ADCs.

Demonstration circuit 1762A supports the LTC2165 family DDR LVDS output mode.

The versions of the 1762A demo board supporting the LTC2165 series of A/D converters are listed in Table 1.

Depending on the required resolution and sample rate, the DC1762A is supplied with the appropriate ADC. The circuitry on the analog inputs is optimized for analog input frequencies from 5MHz to 140MHz. Refer to the data sheet for proper input networks for different input frequencies.

Design files for this circuit board are available at <http://www.linear.com/demo>

LT, LT, LTC, LTM, μ Module, Linear Technology and the Linear logo are registered trademarks and PScope is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.

Table 1. DC1762A Variants

DC1762A VARIANTS	ADC PART NUMBER	RESOLUTION	MAXIMUM SAMPLE RATE	INPUT FREQUENCY
1762A-A	LTC2165	16-Bit	125Msps	5MHz to 140MHz
1762A-B	LTC2164	16-Bit	105Msps	5MHz to 140MHz
1762A-C	LTC2163	16-Bit	80Msps	5MHz to 140MHz
1762A-D	LTC2162	16-Bit	65Msps	5MHz to 140MHz
1762A-E	LTC2161	16-Bit	40Msps	5MHz to 140MHz
1762A-F	LTC2160	16-Bit	25Msps	5MHz to 140MHz
1762A-G	LTC2159	16-Bit	20Msps	5MHz to 140MHz
1762A-H	LTC2269	16-Bit	20Msps	5MHz to 140MHz

PERFORMANCE SUMMARY (T_A = 25°C)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Supply Voltage – DC1762A	Depending on Sampling Rate and the A/D Converter Provided, this Supply Must Provide up to 500mA.	4.5		6	V
Analog Input Range	Depending on SENSE Pin Voltage	1		2	V _{P-P}
Logic Input Voltages	Minimum Logic High		1.3		V
	Maximum Logic Low		0.6		V
Logic Output Voltages (Differential)	Nominal Logic Levels (100 Ω Load, 3.5mA Mode)		350		mV
		Common Mode	1.25		V
	Minimum Logic Levels (100 Ω Load, 3.5mA Mode)		247		mV
		Common Mode	1.25		V
Sampling Frequency (Convert Clock Frequency)	See Table 1				
Convert Clock Level	Single-Ended Encode Mode (ENC ⁻ Tied to GND)	0		3.6	V
	Differential Encode Mode (ENC ⁻ Not Tied to GND)	0.2		3.6	V
Resolution	See Table 1				
Input Frequency Range	See Table 1				
SFDR	See Applicable Data Sheet				
SNR	See Applicable Data Sheet				

DEMO MANUAL DC1762A

QUICK START PROCEDURE

Demonstration circuit 1762A is easy to set up to evaluate the performance of the LTC2165 A/D converter family. Refer to Figure 1 for proper measurement equipment setup and follow the procedure below:

Setup

If a DC890 USB demonstration circuit was supplied with the DC1762A demonstration circuit, follow the DC890 Quick Start Guide to install the required software and for connecting the DC890 to the DC1762A and to a PC.

DC1762 Demonstration Circuit Board Jumpers

The DC1762A demonstration circuit board should have the following jumper settings as default positions: (as per Figure 1)

JP2 PAR/SER: Selects parallel or serial programming mode. (default: serial)

JP3 Duty Cycle Stabilizer: enables/disables duty cycle stabilizer. (default: enable)

JP4 SHDN: Enables and disables the LTC2165. (default: enable)

JP5 NAP: Enables and disables NAP mode. (default: enable)

JP6 LVDS/CMOS: Selects between LVDS and CMOS output signaling. (default: LVDS)

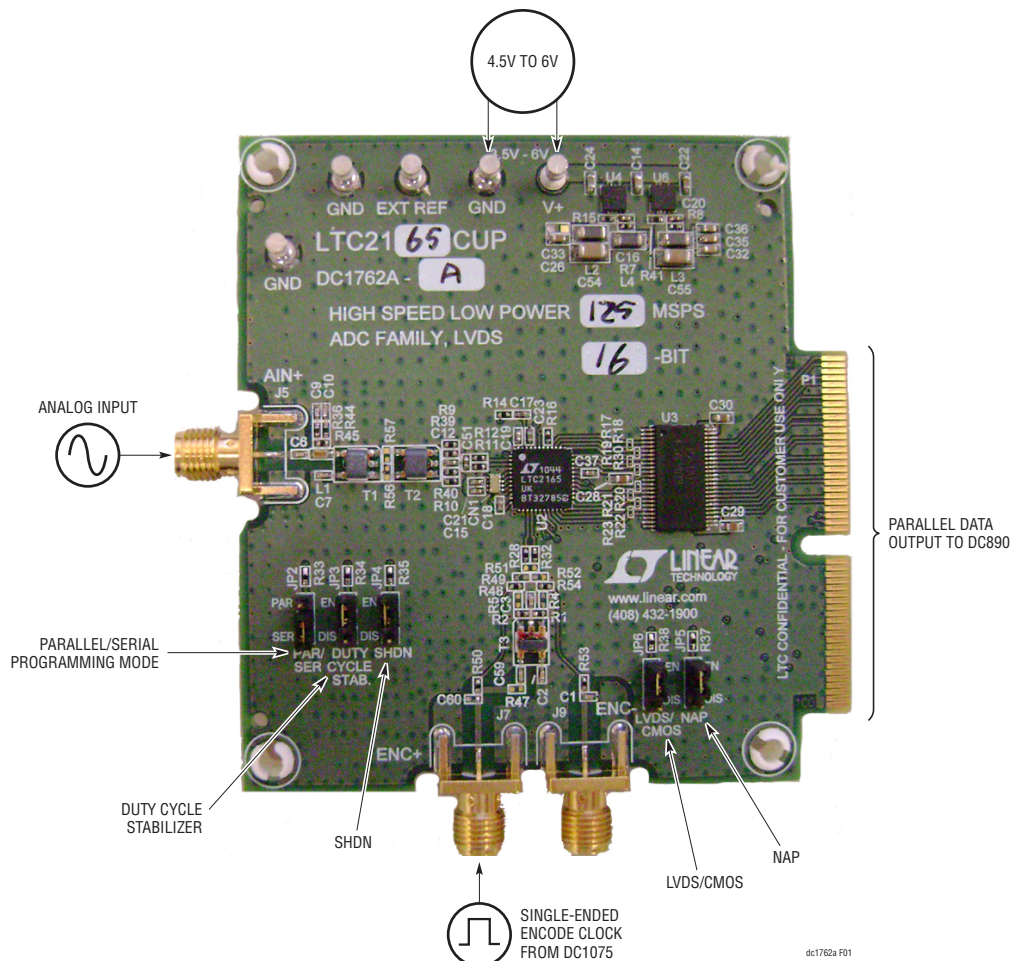


Figure 1. DC1762 Setup

QUICK START PROCEDURE

Applying Power and Signals to the DC1762A Demonstration Circuit

If a DC890 is used to acquire data from the DC1762A, the DC890 must FIRST be connected to a powered USB port or provided an external 6V to 9V BEFORE applying 4.5V to 6V across the pins marked V⁺ and GND on the DC1762A. DC1762A requires 4.5V for proper operation. Regulators on the board produce the voltages required for the ADC. The DC1762A demonstration circuit requires up to 500mA depending on the sampling rate and the A/D converter supplied.

The DC890 data collection board is powered by the USB cable and does not require an external power supply when collecting data from an LVDS demo board. It must be supplied an external 6V to 9V on turrets G7(+) and G1(-) or the adjacent 2.1mm power jack.

Analog Input Network

For optimal distortion and noise performance the RC network on the analog inputs may need to be optimized for different analog input frequencies. For input frequencies above 140MHz, refer to the respective ADC data sheet for a proper input network. Other input networks may be more appropriate for input frequencies less than 5MHz, or above 140MHz.

In almost all cases, filters will be required on both analog input and encode clock to provide data sheet SNR. In the case of the DC1762A, a bandpass filter used for the clock should be used prior to the DC1075 clock divider board.

The filters should be located close to the inputs to avoid reflections from impedance discontinuities at the driven end of a long transmission line. Most filters do not present 50Ω outside the passband. In some cases, 3dB to 10dB pads may be required to obtain low distortion.

If your generator cannot deliver full-scale signals without distortion, you may benefit from a medium power amplifier based on a Gallium Arsenide Gain block prior to the final filter. This is particularly true at higher frequencies where

IC based operational amplifiers may be unable to deliver the combination of low noise figure and High IP3 point required. A high order filter can be used prior to this final amplifier, and a relatively lower Q filter used between the amplifier and the demo circuit.

Apply the analog input signal of interest to the SMA connector on the DC1762A demonstration circuit board marked J5 AIN⁺. This input is capacitively coupled to a Balun transformer ETC1-1-13 (lead free part number: MABA007159-000000).

Encode Clock

NOTE: Apply an encode clock to the SMA connector on the DC1762A demonstration circuit board marked J3 ENC⁺. As a default the DC1762A is populated to have a single-ended input.

For the best noise performance, the encode input must be driven with a very low jitter, square wave source. The amplitude should be large, up to 3V_{P-P} or 13dBm. When using a sinusoidal signal generator a squaring circuit can be used. Linear Technology also provides demo board DC1075 that divides a high frequency sine wave by four, producing a low jitter square wave for best results with the LTC2165.

Using bandpass filters on the clock and the analog input will improve the noise performance by reducing the wideband noise power of the signals. In the case of the DC1762A a bandpass filter used for the clock should be used prior to the DC1075. Datasheet FFT plots are taken with 10 pole LC filters made by TTE (Los Angeles, CA) to suppress signal generator harmonics, non-harmonically related spurs and broadband noise. Low phase noise Agilent 8644B generators are used with TTE bandpass filters for both the clock input and the analog input.

An internally generated conversion clock output is available on J1 which could be collected via a logic analyzer, or other data collection system if populated with a SAMTEC MEC8-150 type connector or collected by the DC890 QuikEval-II Data Acquisition Board using PScope™ software.

QUICK START PROCEDURE

Software

The DC890 is controlled by the PScope System Software provided or downloaded from the Linear Technology website at <http://www.linear.com/software/>. If a DC890 was provided, follow the DC890 Quick Start Guide and the instructions below.

To start the data collection software if PScope.exe, is installed (by default) in \Program Files\LTC\PScope\, double click the PScope icon or bring up the run window under the start menu and browse to the PScope directory and select PScope.

If the DC1762A demonstration circuit is properly connected to the DC890, PScope should automatically detect the DC1762A, and configure itself accordingly. If necessary the procedure below explains how to manually configure PScope.

Under the Configure menu, go to ADC Configuration... Check the Config Manually box and use the following configuration options, see Figure 2.

Manual Configuration settings:

Bits: 16

Alignment: 16

FPGA Ld: DDR LVDS

Channs: 2

Bipolar: Unchecked

Positive-Edge Clk: Unchecked

If everything is hooked up properly, powered and a suitable convert clock is present, clicking the Collect button should result in time and frequency plots displayed in

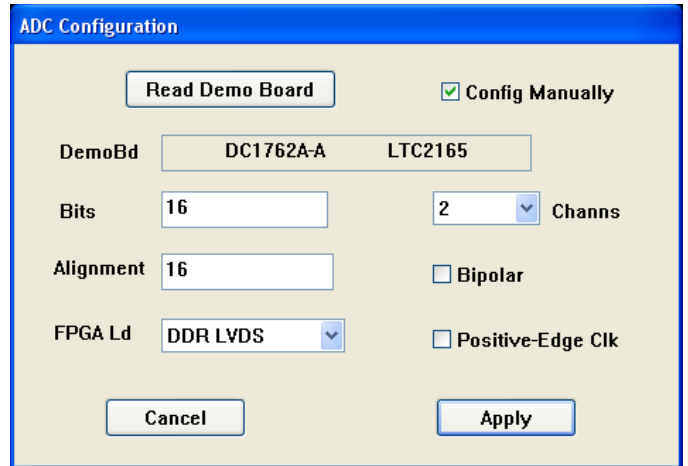


Figure 2: ADC Configuration

the PScope window. Additional information and help for PScope is available in the DC890 Quick Start Guide and in the online help available within the PScope program itself.

Serial Programming

PScope has the ability to program the DC1762A board serially through the DC890. There are several options available in the LTC2165 family that are only available through serially programming. PScope allows all of these features to be tested.

These options are available by first clicking on the Set Demo Bd Options icon on the PScope toolbar (Figure 3).

This will bring up the menu shown in Figure 4.




Figure 3: PScope Toolbar

QUICK START PROCEDURE

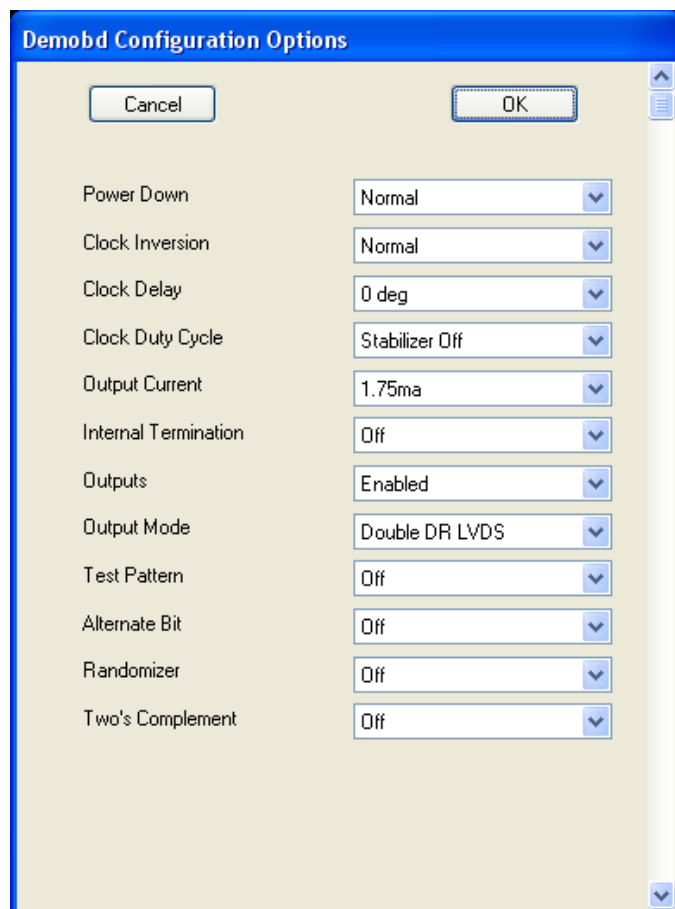


Figure 4: Demobd Configuration Options

This menu allows any of the options available for the LTC2165 family to be programmed serially. The LTC2165 family has the following options:

Power Down: Selects between normal operation, nap, and sleep modes:

- Normal (Default): Entire ADC is powered, and active.
- Nap: ADC core powers down while references stay active.
- Shutdown: The entire ADC is powered down.

Clock Inversion: Selects the polarity of the CLKOUT signal:

- Normal (Default): Normal CLKOUT polarity
- Inverted: CLKOUT polarity is inverted

Clock Delay: Selects the phase delay of the CLKOUT signal:

- None (Default): No CLKOUT delay
- 45 deg: CLKOUT delayed by 45 degrees
- 90 deg: CLKOUT delayed by 90 degrees
- 135 deg: CLKOUT delayed by 135 degrees

Clock Duty Cycle: Enables or disables duty cycle stabilizer

- Stabilizer off (Default): Duty cycle stabilizer disabled
- Stabilizer on: Duty cycle stabilizer enabled

Output Current: Selects the LVDS output drive current

- 1.75mA (Default): LVDS output driver current
- 2.1mA: LVDS output driver current
- 2.5mA: LVDS output driver current
- 3.0mA: LVDS output driver current
- 3.5mA: LVDS output driver current
- 4.0mA: LVDS output driver current
- 4.5mA: LVDS output driver current

Internal Termination: Enables LVDS internal termination

- Off (Default): Disables internal termination
- On: Enables internal termination

Outputs: Enables digital outputs

- Enabled (Default): Enables digital outputs
- Disabled: Disables digital outputs

QUICK START PROCEDURE

Output Mode: Selects digital output mode

- Full Rate: Full rate CMOS output mode (This mode is not supported by the DC1762A)
- Double LVDS (Default): Double data rate LVDS output mode
- Double CMOS: Double data rate CMOS output mode (This mode is not supported by the DC1762A)

Test Pattern: Selects digital output test patterns

- Off (Default): ADC data presented at output
- All out =1: All digital outputs are 1
- All out = 0: All digital outputs are 0
- Checkerboard: OF, and D13-D0 Alternate between 101 0101 1010 0101 and 010 1010 0101 1010 on alternating samples.
- Alternating: Digital outputs alternate between all 1's and all 0's on alternating samples.

Alternate Bit: Alternate Bit Polarity (ABP) Mode

- Off (Default): Disables alternate bit polarity
- On: Enables alternate bit polarity (Before enabling ABP, be sure the part is in offset binary mode)

Randomizer: Enables Data Output Randomizer

- Off (Default): Disables data output randomizer
- On: Enables data output randomizer

Two's complement: Enables two's complement mode

- Off (Default): Selects offset binary mode
- On: Selects two's complement mode

Once the desired settings are selected hit OK and PScope will automatically update the register of the device on the DC1762A demo board.

PARTS LIST


ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	CN1	Capacitor, Array, 0508, 2.2 μ F, 20%, 10V, X5R	AVX W2L14D225MAT1A
2	7	C1, R28, R32, R47, R48, R53, R54	Resistor, 0402, 0 Ω , Jumper	Vishay CRCW04020000Z0ED
3	7	C2, C3, C6, C7, C8, C59, C60	Capacitor, 0402, 0.01 μ F, 10%, 16V, X7R	AVX 0402YC103KAT
4	2	C9, C10	Capacitor, 0402, 8.2pF, 5%, 50V, COG	AVX 04025A8R2JAT2A
5	8	C12, C13, C15, C18, C19, C21, C37, C61	Capacitor, 0402, 0.1 μ F, 10%, 10V, X5R	TDK C1005X5R1A104K
6	2	C14, C22	Capacitor, 0603, 1 μ F, 10%, 16V, X7R	TDK C1608X7R1C105K
7	2	C17, C23	Capacitor, 0402, 2.2 μ F, 20%, 6.3V, X5R	Taiyo Yuden JMK105BJ225MV-T
8	1	C24	Capacitor, 0603, 4.7 μ F, 20%, 6.3V, X5R	TDK C1608X5R0J475MT
9	11	C26-C32, C34-C36, C62	Capacitor, 0603, 0.1 μ F, 10%, 50V, X7R	TDK C1608X7R1H104K
10	0	C33, C40, C41	Capacitor, 0603, 0.1 μ F, 10%, 50V, X7R Option	TDK C1608X7R1H104K Option
11	2	C38, C39	Capacitor, 0402, 22pF, 5%, 16V, NPO	AVX 0402YA220JAT2A
12	1	C51	Capacitor, 0402, 4.7pF, \pm 0.25pF, 50V, NPO	AVX 04025A4R7CAT2A
13	2	C54, C55	Capacitor, 1206, 1 μ F, 10%, 16V, X7R	AVX 1206YC105KAT2A
14	5	JP2, JP3, JP4, JP5, JP6	Header, 3-Pin, 2mm	Samtec TMM-103-02-L-S
15	3	J5, J7, J9	Connector, BNC, SMA, 50 Ω , Edge-Lanch	E. F. Johnson, 142-0701-851
16	2	L1, L5	Inductor, 0603, 56 μ H, 5%	Murata LQP18MN56NG02D
17	3	L2, L3, L4	Ferrite Bead, 1206	Murata BLM31PG330SN1L
18	1	RN2	Resistor, Array, 33 Ω	Vishay CRA04SS08333R0JTD
19	2	R1, R2	Resistor, 0402, 49.9 Ω , 1%, 1/16W	Vishay CRCW040249R9FKED
20	0	R4, R5	Resistor, 0402, 5.1 Ω , 1%, 1/16W Option	Vishay CRCW04025R10FNED Option
21	1	R6	Resistor, 0402, 10k Ω , 5%, 1/16W	Vishay CRCW040210K0JNED
22	1	R7	Resistor, 0402, 180k Ω , 1%, 1/16W	Vishay CRCW0402180KFKED
23	1	R8	Resistor, 0402, 330k Ω , 1%, 1/16W	Vishay CRCW0402330KFKED
24	4	R9, R10, R11, R12	Resistor, 0402, 10 Ω , 1%, 1/16W	Vishay CRCW040210R0FKED
25	6	R14, R33, R34, R35, R37, R38	Resistor, 0402, 1k Ω , 5%, 1/16W	Vishay CRCW04021K00JNTDE3
26	2	R15, R41	Resistor, 0402, 3k Ω , 1%, 1/16W	Vishay CRCW04023K00FKED
27	4	R16, R27, R46, R55	Resistor, 0402, 100 Ω , 5%, 1/16W	Vishay CRCW0402100RJNED
28	9	R17-R23, R30, R31	Resistor, 0201, 100 Ω , 5%, 1/16W	Vishay CRCW0201100RFNTD
29	1	R24	Resistor, 0402, 100k Ω , 5%, 1/16W	Vishay CRCW0402100KJNED
30	3	R25, R26, R29	Resistor, 0603, 4.99k Ω , 1%, 1/16W	AAC CR16-4991FM
31	3	R36, R44, R45	Resistor, 0402, 86.6 Ω , 1%, 1/16W	Vishay CRCW040286R6FKED
32	2	R39, R40	Resistor, 0402, 33.2 Ω , 1%, 1/16W	Vishay CRCW040233R2FKED
33	0	R49, R50, R51, R52	Resistor, 0402, 100 Ω , 5%, 1/16W Option	Vishay CRCW0402100RJNED Option
34	5	TP1, TP2, TP3, TP4, TP5	Turrets	Millmax 2501-2-00-80-00-00-07-0

DEMO MANUAL DC1762A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
35	1	T1	XFMR, 1:1	Macom MABA-007159-000000
36	1	T2	XFMR, 1:1 CT	M/A-COM MABAES0060
		T2 - Alternate	XFMR, 1:1 CT	Coilcraft WBC1-1LB
37	1	T3	XFMR, 1:1	Macom MABA-007159-000000
38	1	U1	IC, EEPROM	Microchip Tech. 24LC025-I/ST
39	1	U2	Refer to Schematic Table	Linear, Technology
40	1	U3	IC, FIN1108	Fairchild FIN1108
41	2	U4, U6	IC, Adjustable 1.1A Regulators	Linear, Technology LT3080EDD
42	1	U5	IC, 8-Bit I/O Expander	Philips Semi PCF8574TS/3
43	1	U8	IC, LVDS Single Port High Speed Repeater	Fairchild FIN1101K8X
44	5	JP2, JP3, JP4, JP5, JP6	Shunt, 2mm	Samtec 2SN-BK-G
45	4		Standoff, Snap On	KEYSTONE_8831

SCHEMATIC DIAGRAM

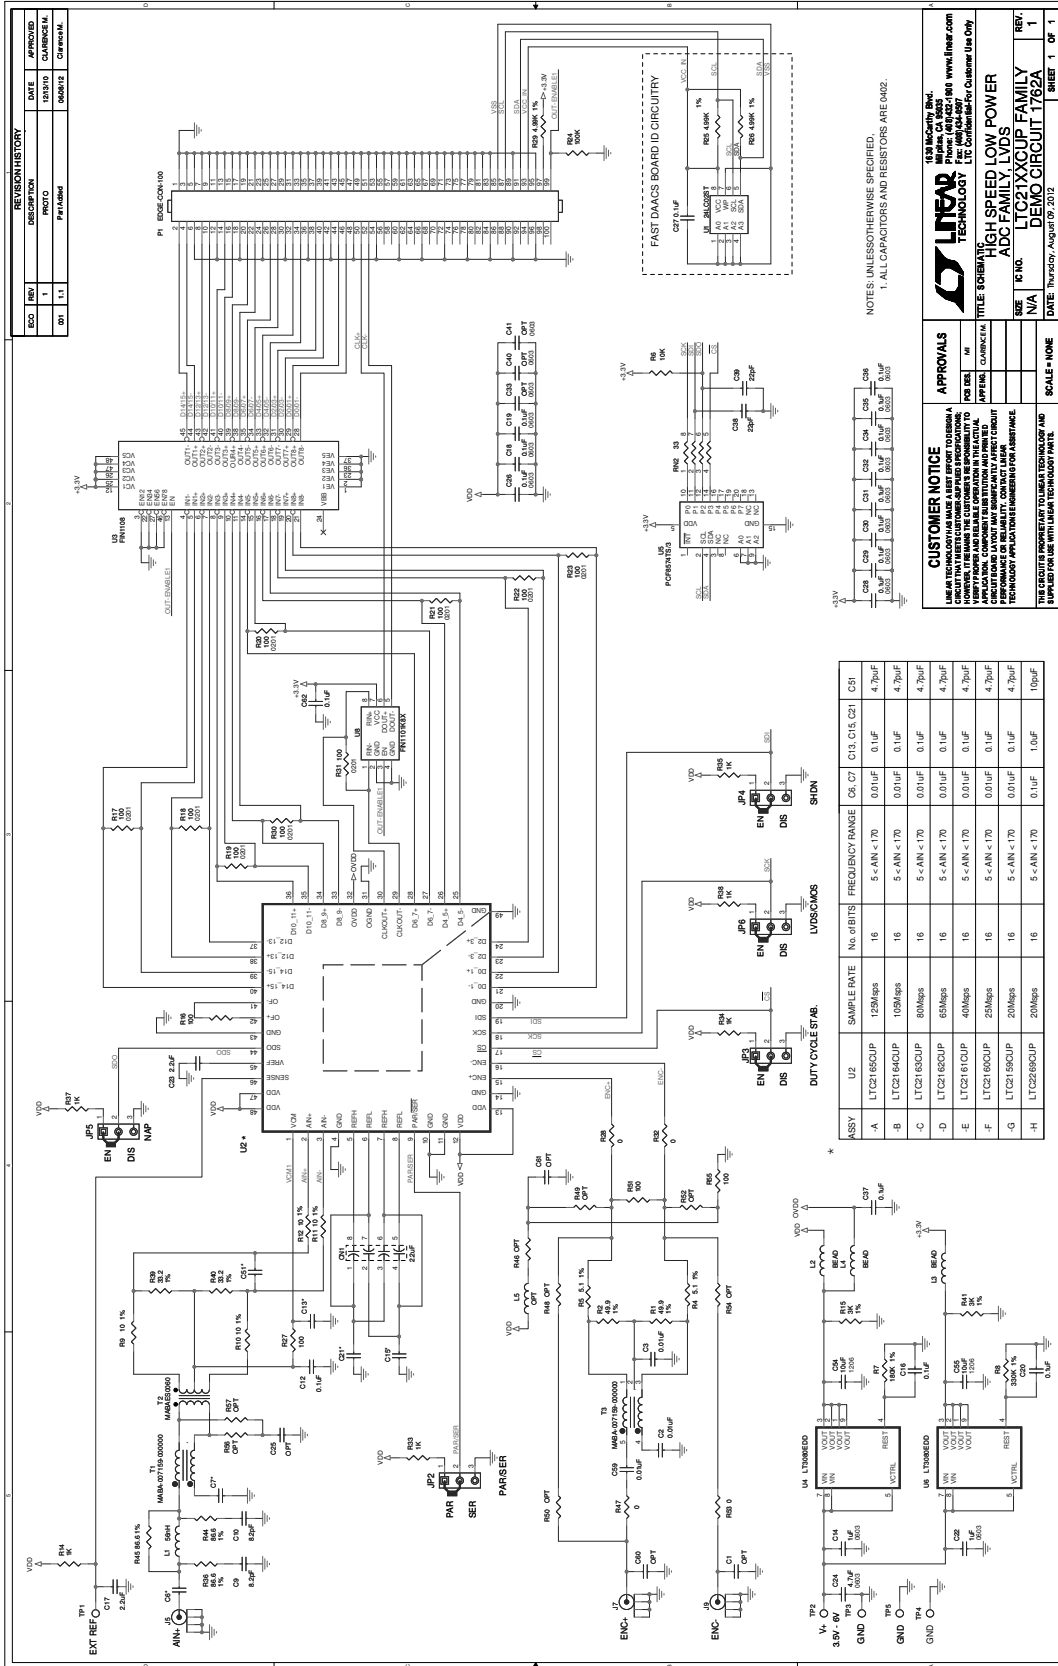

REVISION HISTORY			
ECO	REV	DESCRIPTION	DATE
	1	INITIAL	
	1.1	PARAMS	
	1.1	CHANGES	

NOTES: UNLESS OTHERWISE SPECIFIED,
1. ALL CAPACITORS AND RESISTORS ARE 0402.

CUSTOMER NOTICE
LINEAR TECHNOLOGY MAKES A SERIES OF DESIGN AID DEMO BOARDS. THESE DEMO BOARDS ARE NOT INTENDED FOR PRODUCTION. THEY ARE PROVIDED AS A DESIGN AID ONLY. CUSTOMERS ARE RESPONSIBLE FOR VERIFYING THE BOARD OPERATION IN THEIR FINAL DESIGN. CUSTOMERS SHOULD NOT ASSUME THAT A PROTOTYPE BOARD WILL BE IDENTICAL TO THE PRODUCTION BOARD. LINEAR TECHNOLOGY ASSUMES NO LIABILITY FOR BOARD PERFORMANCE.

APPROVALS

DESIGN	DATE	BY
TEST		
MANUFACTURING		
MARKETING		

SCALE: NONE

LINEAR TECHNOLOGY, INC.
100 N. MOODY BLVD.
FOLSOM, CA 95630
TEL: 916.444.0000
WWW.LINEAR.COM

TITLE: SCHEMATIC
PROJECT: HIGH SPEED LOW POWER ADC FAMILY, LVDS
BOARD: LTC21XXQUP FAMILY DEMO CIRCUIT 1762A

REV. 1 OF 1
DATE: Thursday, August 09, 2012
SHEET 1 OF 1

ASSEMBLY	U2	SAMPLE RATE	No. of BITS	FREQUENCY RANGE	C1, C7, C13, C15, C21, C51
A	LTC2165QUP	125MSPS	16	5 < -AN < 170	0.01uF, 0.1uF, 4.7nF
B	LTC2164QUP	105MSPS	16	5 < -AN < 170	0.01uF, 0.1uF, 4.7nF
C	LTC2163QUP	85MSPS	16	5 < -AN < 170	0.01uF, 0.1uF, 4.7nF
D	LTC2162QUP	65MSPS	16	5 < -AN < 170	0.01uF, 0.1uF, 4.7nF
E	LTC2161QUP	45MSPS	16	5 < -AN < 170	0.01uF, 0.1uF, 4.7nF
F	LTC2160QUP	25MSPS	16	5 < -AN < 170	0.01uF, 0.1uF, 4.7nF
G	LTC2159QUP	20MSPS	16	5 < -AN < 170	0.01uF, 0.1uF, 4.7nF
H	LTC2160QUP	20MSPS	16	5 < -AN < 170	0.01uF, 1.0uF



Information furnished by Linear Technology Corporation is believed to be accurate and reliable. However, no responsibility is assumed for its use. Linear Technology Corporation makes no representation that the interconnection of its circuits as described herein will not infringe on existing patent rights.

DEMO MANUAL DC1762A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.