# Type SSQC & SSTC

## 2410 size SMD fuses, pre-assembled in SMD clips

HF Pb Conflict free metals — **RoHS 6 Compliant**

## Features

- Surface mount, 2410 assembly
- Allows solderless field replacement of open fuse
- Available in rating of SSQC 250mA to 8A and SSTC 375mA to 7A
- Wide operating temperature range
- Tape & Reel for automatic placement
- RoHS 6 compliant (MSL = 1)
- Halogen Free
- Leadfree

## Applications

- Notebook
- LCD monitor
- PC computer
- Office electronic equipment
- Industrial equipment
- Medical equipment
- POE, POE+
- LCD / LED monitor
- Power supply
- LCD / LED TV

These fuse/clip assemblies can be efficiently placed in a single pass. Once reflowed, fuse replacement requires no resoldering.

LEAD FREE = Pb

HALOGEN FREE = HF

## Physical Specification

Materals
Clip Terminals : Matte Tin Plated Inconel Alloy

## Electrical Specification

Maximum Recommended Fuse Current Rating 8Amperes, 125Volts.
Use of SSQ fuses rated higher than 8A, i.e. 10A, 12A, 15A may be suitable with proper evaluation. (Consult with bel engineering)

## Environmental Specification

| | |
|---|---|
| Shock Resistance | MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform) |
| Vibration Resistance | MIL-STD-202G, Method 201A(10-55 Hz,0.06 inch, total excursion). |
| Salt Spray Resistance | MIL-STD-202G, Method 101E, Test Condition B(48 hrs). |
| Insulation Resistance | MIL-STD-202G, Method 302, Test Condition A (After Opening) 10,000 ohms minimum. |
| Solderability | MIL-STD-202G, Method 208H |
| Thermal Shock | MIL-STD-202G, Method 107G, Test Condition B (-65 °C to +125 °C). |
| Operating Temperature | -55 °C to +125 °C |
| Moisture Sensitivity Level | 1 (According to IPC J-Std-020) |

Specifications subject to change without notice

bel POWER SOLUTIONS & PROTECTION
a bel group

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com

© 2014 Bel Fuse, Inc.

# Type SSQC & SSTC

## 2410 size SMD fuses, pre-assembled in SMD clips

HF Pb Conflict free metals

**RoHS 6 Compliant**

| SSQ Square Ceramic Surface Mount Quick Action Fuse | |
|---|---|
| Catalog Number | Ampere Rating |
| SSQC 250 | 250mA |
| SSQC 375 | 375mA |
| SSQC 500 | 500mA |
| SSQC 750 | 750mA |
| SSQC 1 | 1A |
| SSQC 1.25 | 1.25A |
| SSQC 1.5 | 1.5A |
| SSQC 2 | 2A |
| SSQC 2.5 | 2.5A |
| SSQC 3 | 3A |
| SSQC 3.5 | 3.5A |
| SSQC 4 | 4A |
| SSQC 5 | 5A |
| SSQC 6.3 | 6.3A |
| SSQC 7 | 7A |
| SSQC 8 | 8A |

| SST Square Ceramic Surface Mount Slow Blow Fuse | |
|---|---|
| Catalog Number | Ampere Rating |
| SSTC 375 | 375mA |
| SSTC 500 | 500mA |
| SSTC 625 | 625mA |
| SSTC 750 | 750mA |
| SSTC 1 | 1A |
| SSTC1.5 | 1.5A |
| SSTC 2 | 2A |
| SSTC 2.5 | 2.5A |
| SSTC 3 | 3A |
| SSTC 3.5 | 3.5A |
| SSTC 3.75 | 3.75A |
| SSTC 4 | 4A |
| SSTC 5 | 5A |
| SSTC 6 | 6A |
| SSTC 6.3 | 6.3A |
| SSTC 7 | 7A |

Consult manufacturer for other ratings

## Mechanical Dimensions

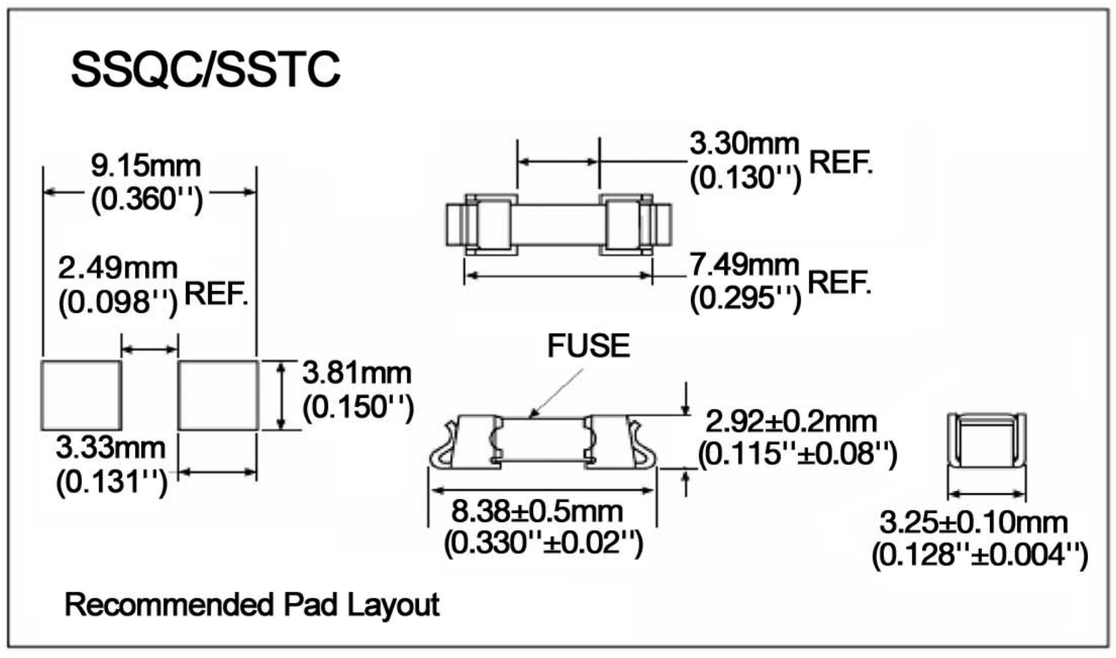


## RoHS 6 Compliant Product

| IR Reflow Profile (IPC/JEDEC J-STD-020D) | |
|---|---|
| **Preheat & Soak**<br>Temperature min ($T_{smin}$)<br>Temperature max ($T_{smax}$)<br>Time ($T_{smin}$ to $T_{smax}$) ($t_s$) | <br>150 °C<br>200 °C<br>60 -120 seconds |
| Average ramp-up rate ($T_{smax}$ to $T_p$) | 3 °C/second max. |
| Liquidous temperature ($T_L$)<br>Time at liquidous ($t_L$) | 217 °C<br>60 - 150 seconds |
| Peak temperature ($T_p$) | 260 °C max |
| Time (tp) within 5 °C of the specified classification temperture ($T_c$) | 30 seconds |
| Average ramp-down rate ($T_p$ to $T_{smax}$) | 6 °C/second max. |
| Time 25 °C to peak temperature | 8 minutes max. |

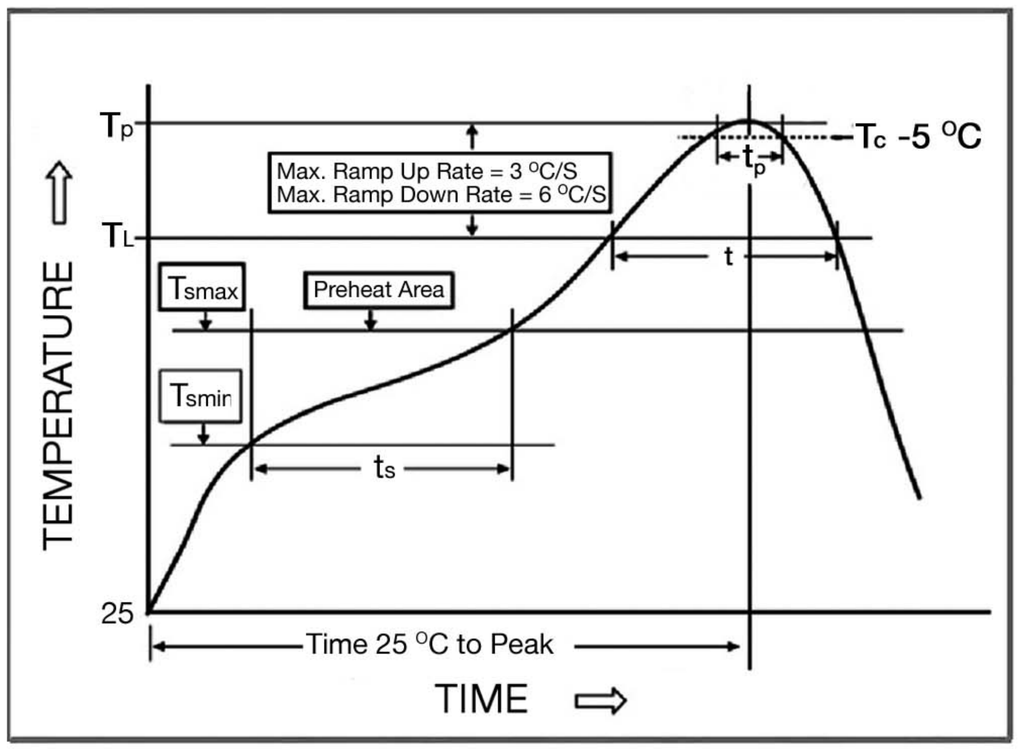


## Packaging

| Packaging Tape & Reel | Packaging Specification | Quantity | Part Number Code | Type |
|---|---|---|---|---|
| 16mm wide tape, 8mm pitch with 7 inches Diameter reel | EIA Standard 481-E | 500 | 0679-XXXX-12 | SSQC |
| 16mm wide tape, 8mm pitch with 7 inches Diameter reel | EIA Standard 481-E | 500 | 0680-XXXX-12 | SSTC |

Specifications subject to change without notice

bel POWER SOLUTIONS & PROTECTION
a bel group


Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA

+1 201.432.0463
techhelp@belf.com
belfuse.com


© 2014 Bel Fuse, Inc.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.




**Как с нами связаться**

**Телефон:** 8 (812) 309 58 32 (многоканальный)
**Факс:** 8 (812) 320-02-42
**Электронная почта:** org@eplast1.ru
**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.