



## Bulk Metal® Foil Technology Power and Current Sensing Resistors with TCR of 2 ppm/°C, Tolerance to ± 0.01 % and power up to 10 W

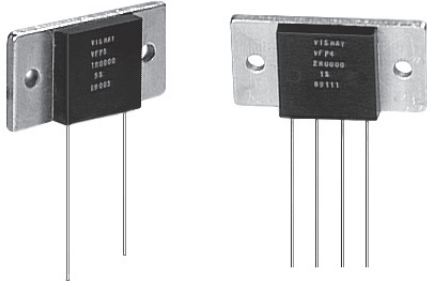

Any value available within resistance range

The basic features of Vishay Bulk Metal® Foil resistors; tight resistance tolerance, fast response time, low TCR, and exceptional long-term stability, are available for power-circuit applications. Typical applications are non-inductive design, current sensing applications, deflection amplifiers, constant current power supplies, forced balance electronic scales, graphic display computers, character generation on CRTs, and electron beam controls.

Our Application Engineering Department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.



### FEATURES

- Temperature Coefficient of Resistance (TCR):  $\pm 2$  ppm/°C typical (- 55 °C to + 125 °C, + 25 °C Ref.) (see Tables 1 and 2)
- Tolerance: to  $\pm 0.01$  % (see Tables 1 and 2)
- Power Rating (heat-sinked): 10 W
- Load Life Stability:  $\pm 0.005$  % at 25 °C, 2000 hours at Rated Power
- Resistance Range: 0.05  $\Omega$  to 80 k $\Omega$
- Electrostatic Discharge (ESD) above 25 000 V
- Non Inductive, Non Capacitive Design
- Rise Time: 1 ns without Ringing
- Current Noise: < - 40 dB
- Thermal EMF: 0.05  $\mu$ V/°C typical
- Voltage Coefficient: < 0.1 ppm/V
- Non Inductive: < 0.08  $\mu$ H
- Non Hot Spot Design
- Terminal Finishes Available: Lead (Pb)-free  
Tin/Lead Alloy
- Any Value available within Resistance Range (e.g. 1K2345)
- Prototype Samples available from 48 hours. For more Information, please contact [foil@vishaypg.com](mailto:foil@vishaypg.com)
- For better Performances, please see VFP-3Z and VFP-4Z Datasheets



RoHS\*  
COMPLIANT

**TABLE 1 - VFP-3<sup>1)</sup> SPECIFICATIONS**

RESISTANCE RANGE ( $\Omega$ )	STANDARD TOLERANCE	TYPICAL TCR <sup>3)</sup>	MAXIMUM TCR <sup>3)</sup>
50 to 80K	$\pm 0.01$ %	$\pm 2$ ppm/°C	$\pm 5$ ppm/°C
25 to < 50	$\pm 0.02$ %		$\pm 7$ ppm/°C
10 to < 25	$\pm 0.05$ %		$\pm 10$ ppm/°C
5 to < 10	$\pm 0.1$ %		$\pm 13$ ppm/°C
2 to < 5	$\pm 0.25$ %		$\pm 20$ ppm/°C
1 to < 2	$\pm 0.5$ %		$\pm 25$ ppm/°C
0.5 to < 1	$\pm 1.0$ %		$\pm 50$ ppm/°C
0.25 to < 0.5	$\pm 2.0$ %		
0.1 to < 0.25	$\pm 5.0$ %		

**TABLE 2 - VFP-4<sup>1), 2)</sup> SPECIFICATIONS**

RESISTANCE RANGE ( $\Omega$ )	STANDARD TOLERANCE	TYPICAL TCR <sup>3)</sup>	MAXIMUM TCR <sup>3)</sup>
10 to 500	$\pm 0.01$ %	$\pm 2$ ppm/°C	$\pm 5$ ppm/°C
5 to < 10	$\pm 0.02$ %		$\pm 6$ ppm/°C
2 to < 5	$\pm 0.05$ %		$\pm 8$ ppm/°C
1 to < 2	$\pm 0.1$ %		$\pm 10$ ppm/°C
0.5 to < 1	$\pm 0.25$ %		$\pm 15$ ppm/°C
0.25 to < 0.5	$\pm 0.5$ %		$\pm 20$ ppm/°C
0.1 to < 0.25	$\pm 1.0$ %		$\pm 25$ ppm/°C
0.05 to < 0.1	$\pm 2.0$ %		$\pm 30$ ppm/°C


### Notes

Tighter tolerance available upon request  
See page 3 in this data sheet for numbered footnotes.

1. Weight = 15 g Max
2. VFP-4 available up to 500  $\Omega$ .
3. - 55 °C to + 125 °C, + 25 °C Ref.

\* Pb containing terminations are not RoHS compliant, exemptions may apply


**FIGURE 1 - STANDARD IMPRINTING AND DIMENSIONS** in inches (millimeters)

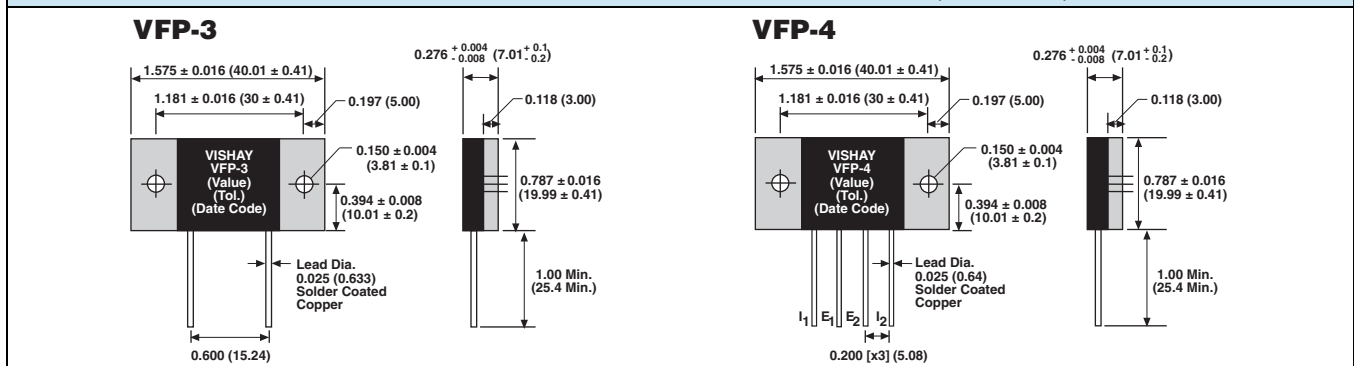


**TABLE 3 - SPECIFICATIONS**

<b>Stability</b> Load Life at 2000 hours	± 0.05 % maximum ΔR under full rated power (3 W at + 25 °C)
<b>Power Rating</b> At + 25 °C	10 W or 3 A <sup>1)</sup> on heat sink <sup>2)</sup> 3 W or 3 A <sup>1)</sup> in free air Power rating based on ΔR. Further derating not necessary.
<b>Current Noise</b>	< 0.010 μV (RMS)/V of applied voltage (- 40 dB)
<b>High Frequency Operation</b> Rise Time Inductance (L) <sup>3)</sup> Capacitance (C)	1.0 ns at 1 kΩ 0.1 μH maximum; 0.08 μH typical 1.0 pF maximum; 0.5 pF typical
<b>Voltage Coefficient</b>	< 0.1 ppm/V <sup>4)</sup>
<b>Operating Temp. Range</b>	- 55 °C to + 150 °C
<b>Maximum Working Voltage<sup>5)</sup></b>	350 V
<b>Thermal EMF<sup>6)</sup></b>	0.5 μV/°C typical (lead effect)

**FIGURE 2 - POWER DERATING CURVE**

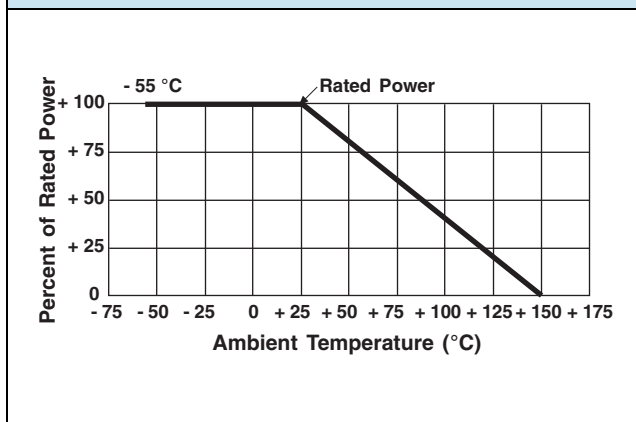

**FIGURE 3 - TRIMMING TO VALUES**  
(Conceptual Illustration)

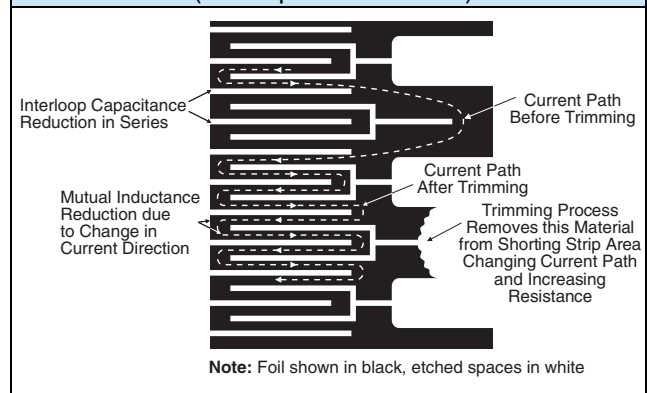

**TABLE 4 - POWER RESISTOR ENVIRONMENTAL PERFORMANCE COMPARISON**

	METHOD PARAGRAPH <sup>7)</sup>	MIL-PRF-39009 $\Delta R$ LIMITS	VFP-3, VFP-4 MAXIMUM TEST DATA <sup>10)</sup>
<b>TEST GROUP I</b>			
Conditioning	4.8.2	$\pm 0.2\% + 0.01\ \Omega$	$\pm 0.03\%$
<b>TEST GROUP II</b>			
Resistance Temperature Characteristic (- 55 °C to + 125 °C)	4.8.4	< 1 $\Omega$ : $\pm 100\ \text{ppm}/^\circ\text{C}$ ; 1 $\Omega$ to 19.6 $\Omega$ : $\pm 50\ \text{ppm}/^\circ\text{C}$ ; $\geq 20\ \Omega$ : $\pm 30\ \text{ppm}/^\circ\text{C}$	See tables 1 and 2
Low Temp Storage DWV (750 V at atmosphere pressure)	4.8.16	$\pm 0.3\% + 0.01\ \Omega$	$\pm 0.01\%$
Insulation Resistance	4.8.5	$\pm 0.2\% + 0.01\ \Omega$	$\pm 0.005\%$
Low Temp Operation	4.8.6	10 <sup>4</sup> M $\Omega$	> 10 <sup>4</sup> M $\Omega$
Short time Overload <sup>9)</sup>	4.8.7	$\pm 0.3\% + 0.01\ \Omega$	$\pm 0.01\%$
Moisture Resistance	4.8.8	$\pm 0.3\% + 0.01\ \Omega$	$\pm 0.01\%$
Terminal Strength	4.8.9	$\pm 0.5\% + 0.01\ \Omega$	$\pm 0.05\%$
	4.8.10	$\pm 0.2\% + 0.01\ \Omega$	$\pm 0.005\%$
<b>TEST GROUP III</b>			
Shock - Specified Pulse	4.8.11	$\pm 0.2\% + 0.01\ \Omega$	$\pm 0.01\%$
Vibration - High Frequency	4.8.12	$\pm 0.2\% + 0.01\ \Omega$	$\pm 0.005\%$
<b>TEST GROUP IV</b>			
Life Test 10 W at + 25 °C for 2000 hours 60 % power at + 70 °C for 2000 hours	4.8.13	$\pm 1.0\% + 0.01\ \Omega$	$\pm 0.05\%$
	-	-	$\pm 0.05\%$
<b>TEST GROUP V</b>			
High Temp Exposure (2000 hours at + 150 °C)	4.8.14	$\pm 1.0\% + 0.01\ \Omega$	$\pm 0.03\%$


**Notes**

- Whichever is lower.
- Heat sink chassis dimensions and requirements per MIL-PRF-39009:

	INCHES	MILLIMETERS
L	6.00	152.4
W	4.00	101.6
H	2.00	50.8
T	0.04	1.0
- Inductance (L) due mainly to the leads.
- The resolution limit of existing test equipment (within the measurement capability of the equipment, or "essentially zero").
- Not to exceed power rating of resistor.
- $\mu\text{V}/^\circ\text{C}$  relates to EMF due to lead temperature difference and  $\mu\text{V}/\text{watt}$  due to power applied to the resistor.
- Vishay test data as compared to MIL-PRF-39009 is shown for illustration purposes, Vishay test conditions that deviate from the MIL test method are noted within parentheses.
- Maximum ambient temperature rating is + 150 °C.
- Maximum overload rating is 15 W (5 x rated power in free air; 1.5 x rated power on heat sink), with applied voltage not to exceed 750 V.
- $\Delta R$ 's are as shown plus 0.001  $\Omega$  to allow for measurement errors at low resistance values.

**TABLE 5 - GLOBAL PART NUMBER INFORMATION**


NEW GLOBAL PART NUMBER: Y073321K5000T9L (preferred part number format)

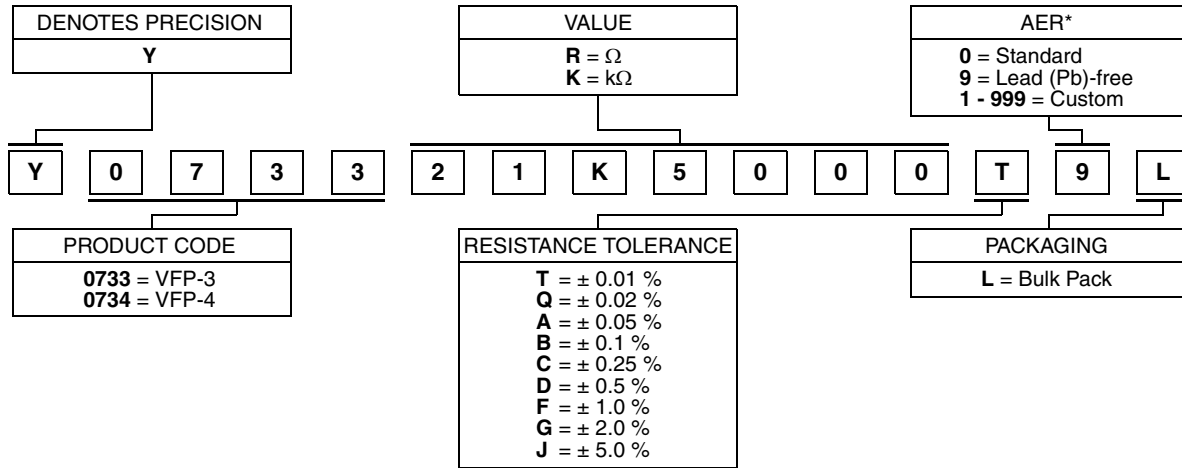

FOR EXAMPLE: ABOVE GLOBAL ORDER Y0733 21K5000 T 9 L:

TYPE: VFP-3  
 VALUE: 21.5  $k\Omega$   
 ABSOLUTE TOLERANCE:  $\pm 0.01\%$   
 TERMINATION: Lead (Pb)-free  
 PACKAGING: Bulk Pack

HISTORICAL PART NUMBER: VFP-3T 21K500 T B (will continue to be used)

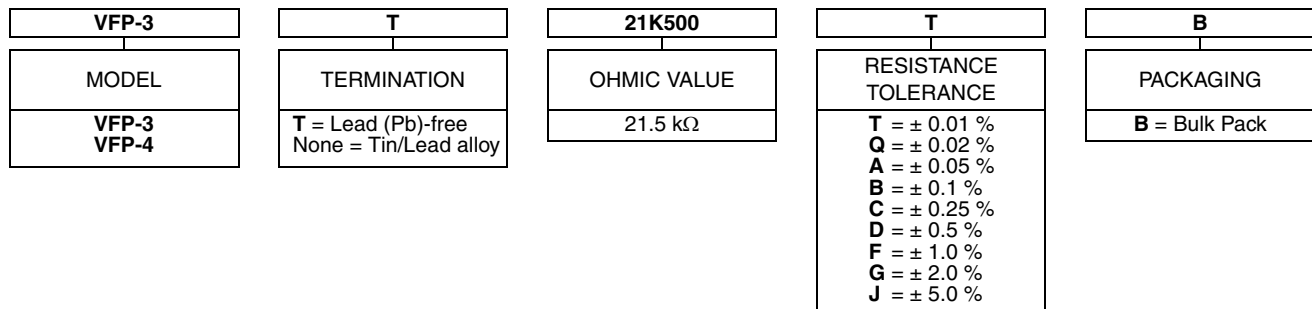

**Note**

\* For non-standard requests, please contact Application Engineering.



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.