

HIGH SPEED SINGLE SUPPLY OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION

The **NJM2742** is a high speed single supply operational amplifier. The low V_{OL} enables to treat small output signal on a single supply.


It has wide supply voltage range, +3 to +32 volt and high slew rate.

The **NJM2742** is suitable for power supply and motor driver units.


■ FEATURES

- Single Supply
- Operating Voltage (3 to 32V)
- Low Saturation Output Voltage ($V_{OL} = 0.2V$ typ. at $R_L = 2k\Omega, V^+ = 5V$)
- High Slew Rate (10V/ μs typ.)
- Bipolar Technology
- Package Outline DIP8, DMP8, SSOP8, TVSP8

■ PACKAGR OUTLINE



NJM2742D



NJM2742M




NJM2742V



NJM2742RB1

■ PIN CONFIGURATION

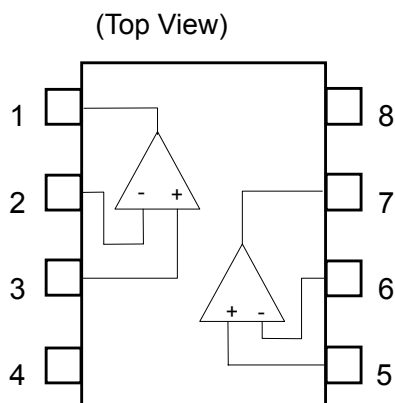

PIN FUNCTION

- 1.A OUTPUT
- 2.A -INPUT1
- 3.A +INPUT1
- 4.V⁻
- 5.B +INPUT2
- 6.B -INPUT2
- 7.B OUTPUT2
- 8.V⁺

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	+36	V
Differential Input Voltage	V_{ID}	± 36	V
Common Mode Input Voltage	V_{IC}	-0.3 to +36	V
Power Dissipation	P_D	500 (DIP8) 300 (DMP8) 250 (SSOP8) 320 (TVSP8)	mW
Operating Temperature Range	Topr	-40 to +85	°C
Storage Temperature Range	Tstg	-40 to +150	°C

■ RECOMMENDED OPERATING CONDITION

(Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Voltage Range	V^+		3.0	-	32	V

■ DC CHARACTERISTICS

($V^+/V^- = \pm 15V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I_{CC}	No Signal	-	4.3	5.5	mA
Input Offset Voltage	V_{IO}		-	1.0	12	mV
Input Bias Current	I_B		-	80	400	nA
Input Offset Current	I_{IO}		-	5	75	nA
Open Loop Voltage Gain	A_v	$R_L > 2k\Omega$	80	110	-	dB
Common Mode Rejection	CMR	$-15V < V_{IC} < 12.5V$	55	75	-	dB
Supply Voltage Rejection	SVR	$3V < V^+ < 32V$	70	90	-	dB
Maximum Output Voltage 1	V_{OM1}	$R_L > 10k\Omega$	+13.7 /-13.7	+14 /-14.8	-	V
Maximum Output Voltage 2	V_{OM2}	$R_L > 2k\Omega$	+13.5 /-13.5	-	-	V
Source Output Current	I_{SOURCE}	$V_{IN+} = 1V, V_{IN-} = 0V, V_O = 0V$	10	30	-	mA
Sink Output Current	I_{SINK}	$V_{IN+} = 0V, V_{IN-} = 1V, V_O = 0V$	10	30	-	mA
Input Common Mode Voltage Range	V_{ICM}	CMR > 55dB	-15	-	12.5	V

■ AC CHARACTERISTICS

($V^+/V^- = \pm 15V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth product	GB	$f = 10kHz$	-	2	-	MHz
Equivalent Input Noise Voltage	V_{NI}	$f = 1kHz$	-	40	-	nV/ $\sqrt{Hz}$
Capacitive Load Tolerance	CL		-	1000	-	pF

■ TRANSIENT CHARACTERISTICS

($V^+/V^- = \pm 15V$, Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR		-	10	-	V/ μs

■ DC CHARACTERISTICS

($V^+=+5V$, $T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Operating Current	I_{CC}	No Signal	-	3.3	4.5	mA
Input Offset Voltage	V_{IO}		-	1.0	12	mV
Input Bias Current	I_B		-	80	400	nA
Input Offset Current	I_{IO}		-	5	75	nA
Open Loop Voltage Gain	A_v	$R_L > 2k\Omega$	80	110	-	dB
Common Mode Rejection	CMR	$0V < V_{IC} < 2.8V$	50	60	-	dB
Supply Voltage Rejection	SVR	$3V < V^+ < 32V$	70	90	-	dB
Maximum Output Voltage	V_{OH}	$R_L = 2k\Omega$	3.7	4.0	-	V
	V_{OL}	$R_L = 2k\Omega$	-	0.1	0.2	
Source Output Current	I_{SOURCE}	$V_{IN+}=1V, V_{IN-}=0V, V_O=2.5V$	10	30	-	mA
Sink Output Current	I_{SINK}	$V_{IN+}=0V, V_{IN-}=1V, V_O=2.5V$	10	30	-	mA
Input Common Mode Voltage Range	V_{ICM}	CMR > 50dB	0	-	2.8	V

■ AC CHARACTERISTICS

($V^+=+5V$, $T_a=25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Gain Bandwidth product	GB	$f=10kHz$	-	2	-	MHz
Equivalent Input Noise Voltage	V_{NI}	$f=1kHz$	-	40	-	nV/ $\sqrt{Hz}$
Capacitive Load Tolerance	CL		-	1000	-	pF

■ TRANSIENT CHARACTERISTICS

($V^+=+5V$, $T_a=25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Slew Rate	SR		-	7	-	V/ μs

Note: The common mode input voltage range of NJM2742 is shifted toward the V- for single supply use.
At the low operating voltage, the center potential of the V+ and V- may be out of the common mode voltage range. In this case, shift the common mode input voltage toward the V-.

■ TYPICAL CHARACTERISTICS


Operating Current vs. Operating Voltage

$V_{in}=0V, T_a=25^{\circ}C$

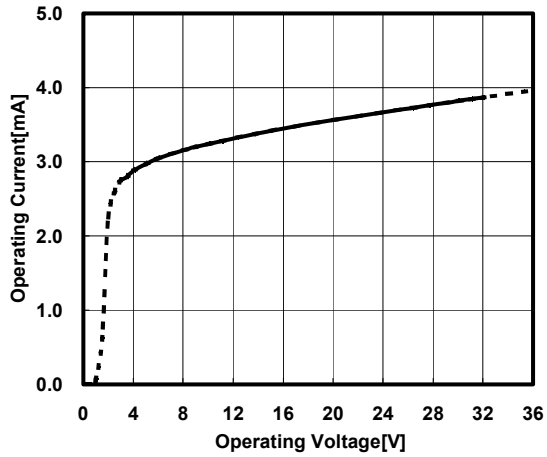


Operating Current vs. Temperature

$V_{in}=0V$

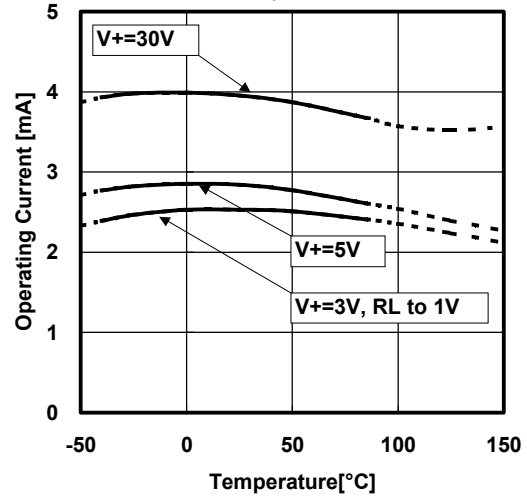


Input Offset Voltage vs. Temperature

$V+=5V$

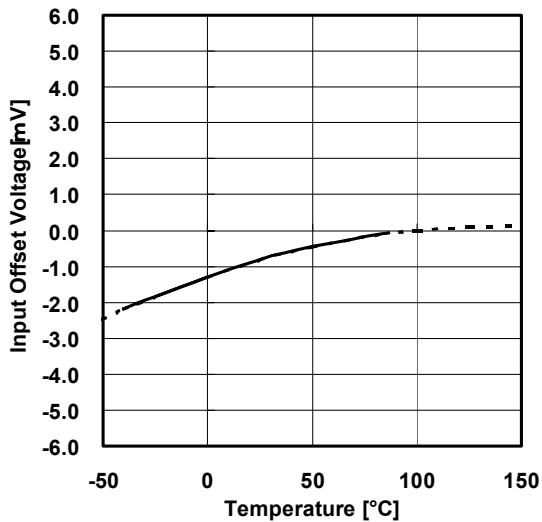


Input Offset Current vs. Temperature

$V+=5V$

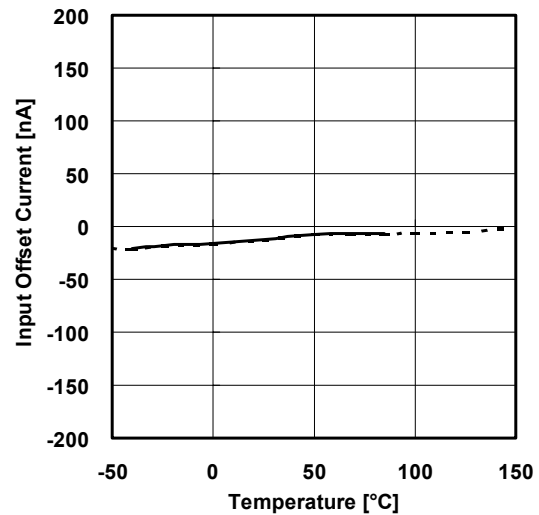


Input Bias Current vs. Temperature





$V+=5V$

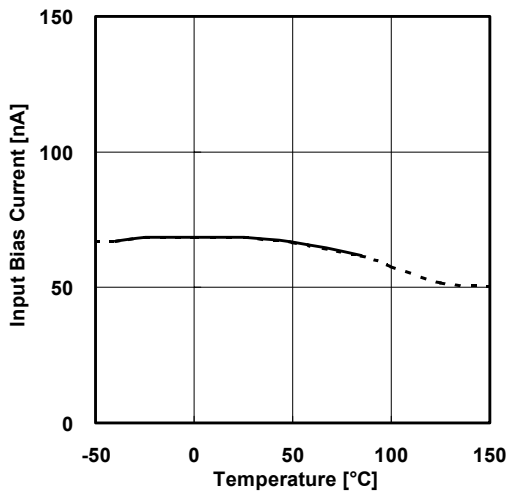

Voltage Gain vs. Temperature


$V+=5V$

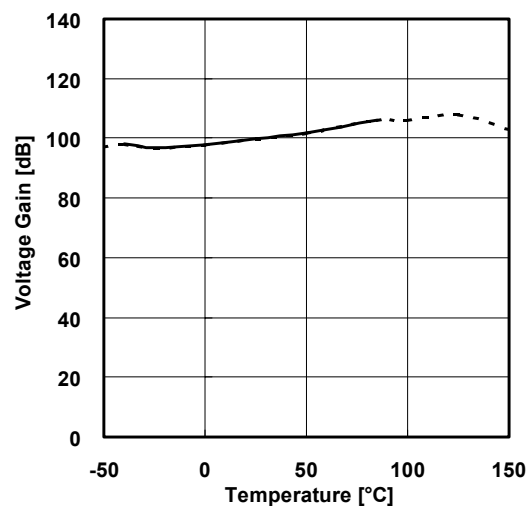

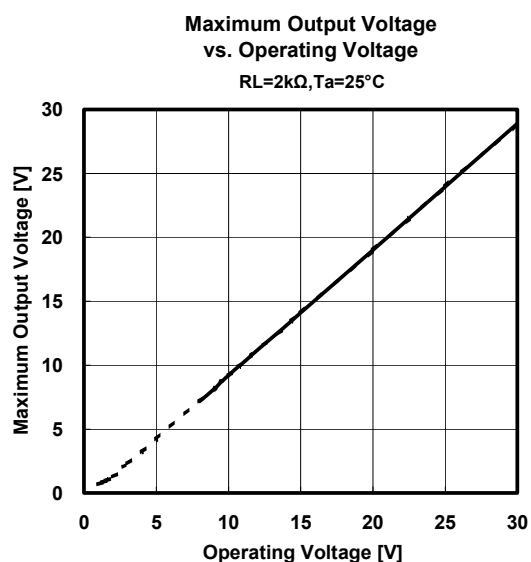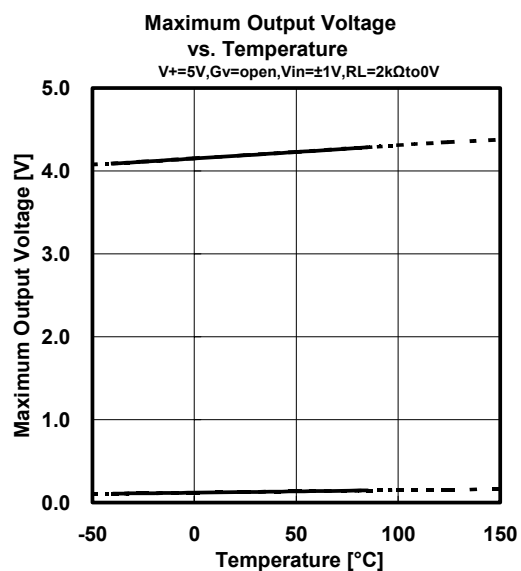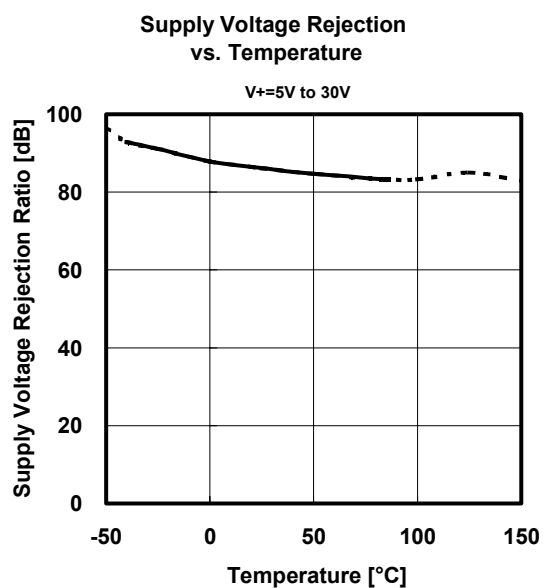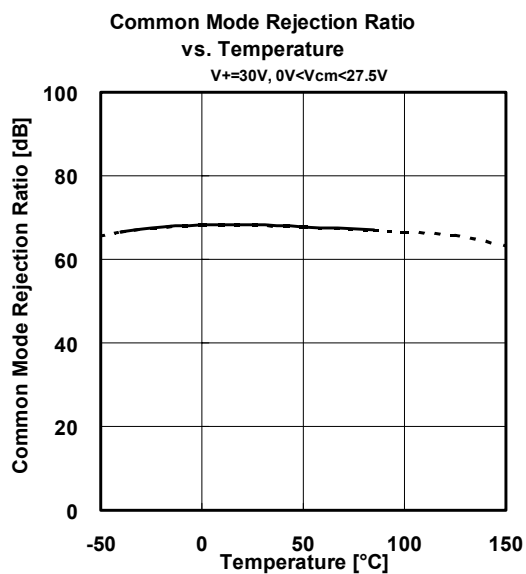


Voltage Gain & Phase vs. Frequency

V+=5V, VIN=0.02Vpp, GV=40dB, RT=50Ω, RF=1.98kΩ, RG=20Ω, CF=0, RL=2kΩ, CL=50pF

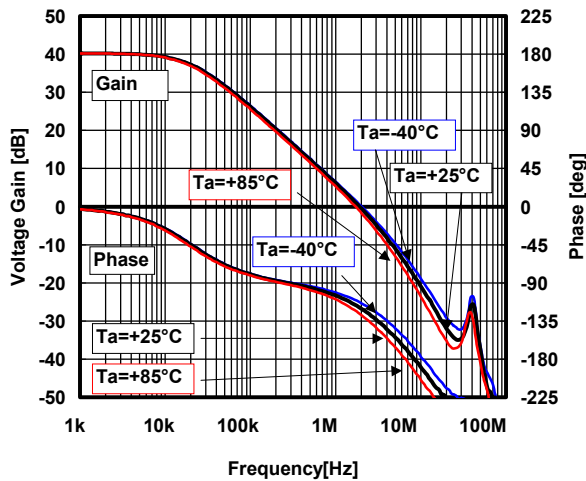


Voltage Gain & Phase vs. Frequency

V+=5V, VIN=0.01Vpp, GV=40dB, RT=50Ω, RF=1.98kΩ, RG=20Ω, RL=10kΩ, Ta=+25°C

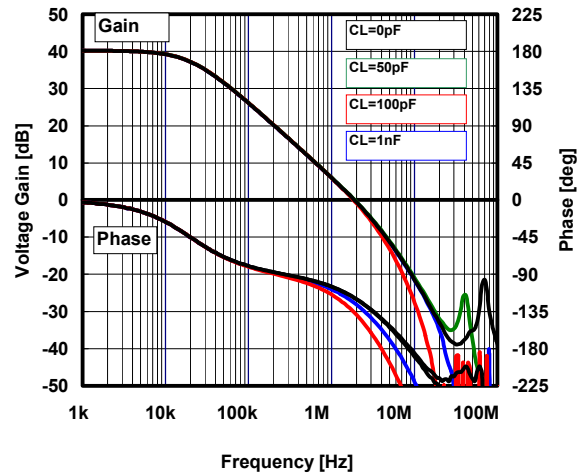


Peak Gain of Voltage Follower

V+=5V, VIN=0.02Vpp, GV=0dB, RT=50Ω, RF=0Ω, RG=open, CL=50pF, RL=1kΩ

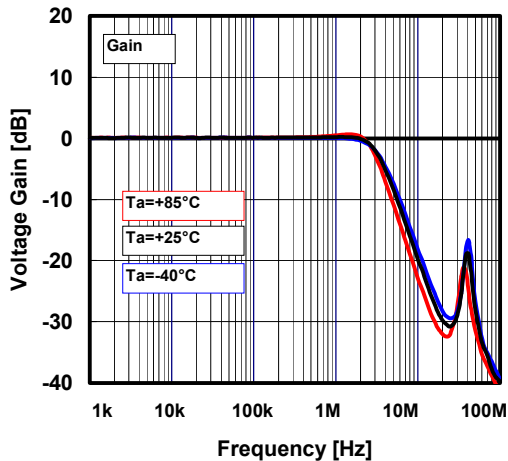


Peak Gain of Voltage Follower

V+=5V, VIN=0.02Vpp, GV=0dB, RT=50Ω, RF=0Ω, RG=open, RL=1kΩ, Ta=+25°C

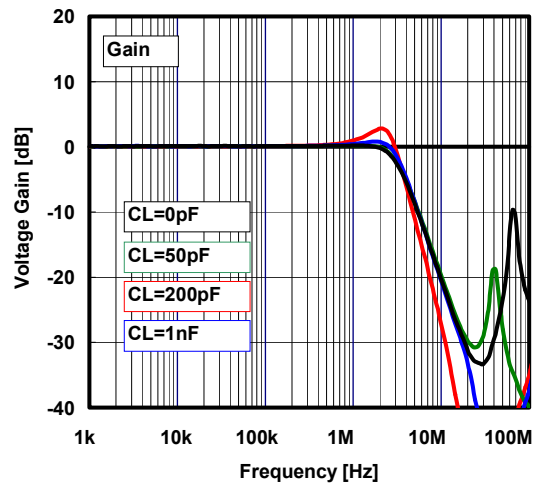


Pulse Response

V+=5V, f=250kHz, VO=4VPP, GV=0dB, RT=50Ω, RF=0Ω, CL=10pF, RG=open, RL=10kΩ, Ta=25°C

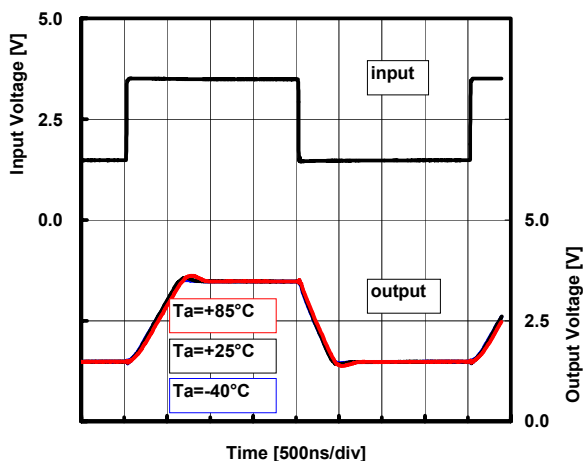


Pulse Response


V+=5V, f=250kHz, VO=4VPP, GV=0dB, RT=50Ω, RF=0Ω, CF=0, RG=open, RL=2kΩ, Ta=25°C

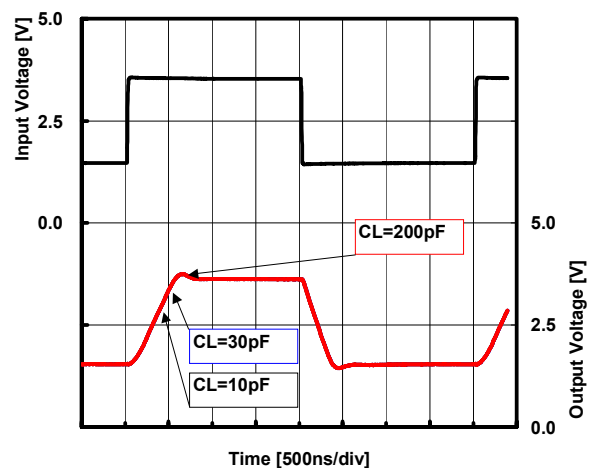


Operating Current vs. Operating Voltage
 $V_{in}=0V, T_a=25^{\circ}C$

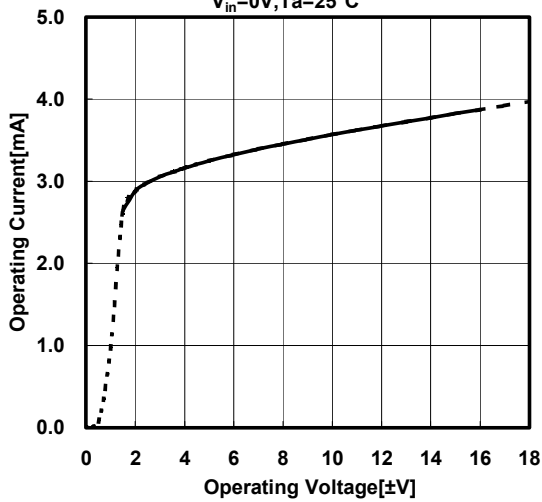


Operating Current vs. Temperature
 $V_{in}=0V$

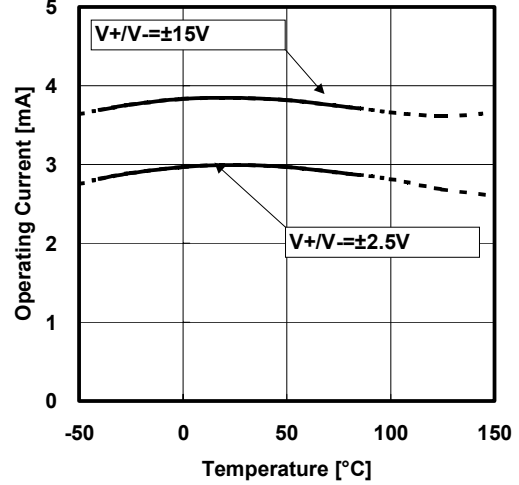


Input Offset Voltage vs. Temperature
 $V+/V-=\pm 15V$

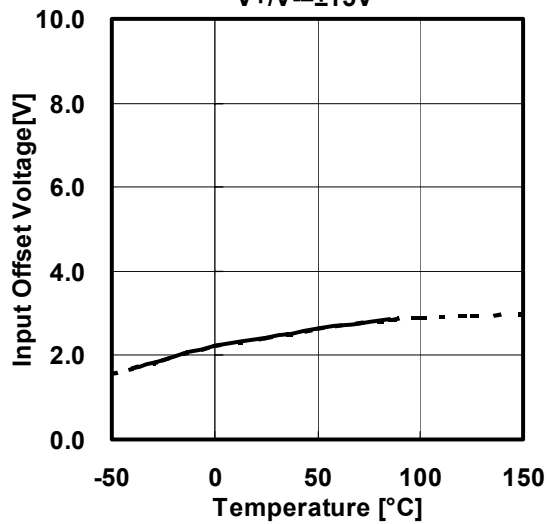


Input Offset Current vs. Temperature
 $V+/V-=\pm 15V$

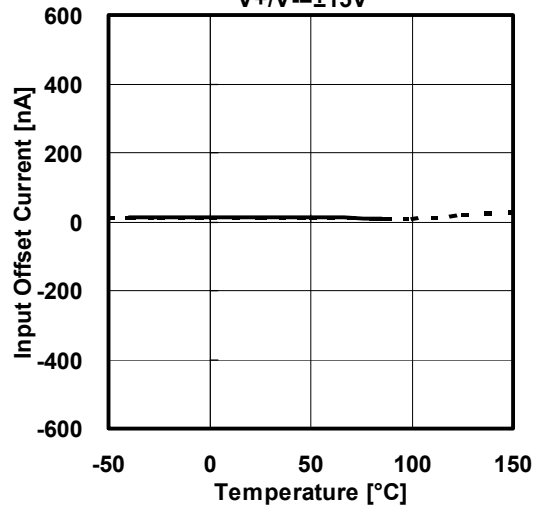


Input Bias Current vs. Temperature
 $V+/V-=\pm 15V$

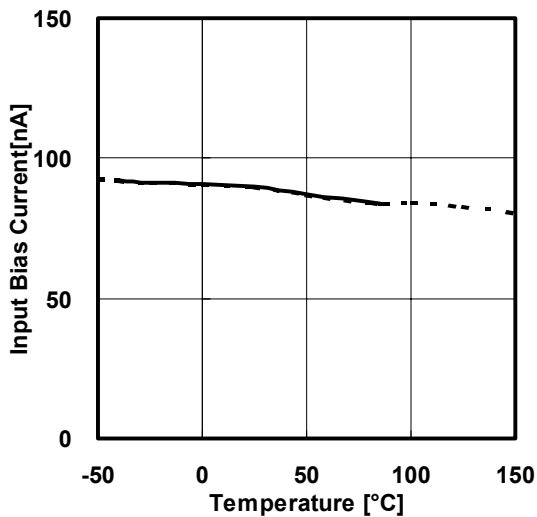

Voltage Gain vs. Temperature
 $V+/V-=\pm 15V, R_L=2k\Omega$

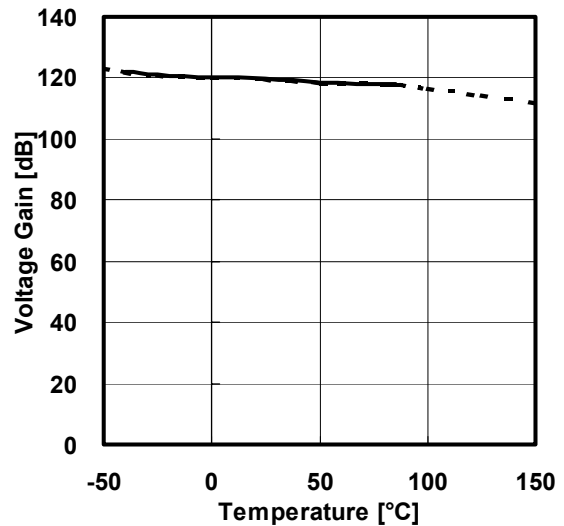


Common Mode Rejection Ratio
vs. Temperature
 $V_+/V_- = \pm 15V, -15V < V_{cm} < +12.5V$

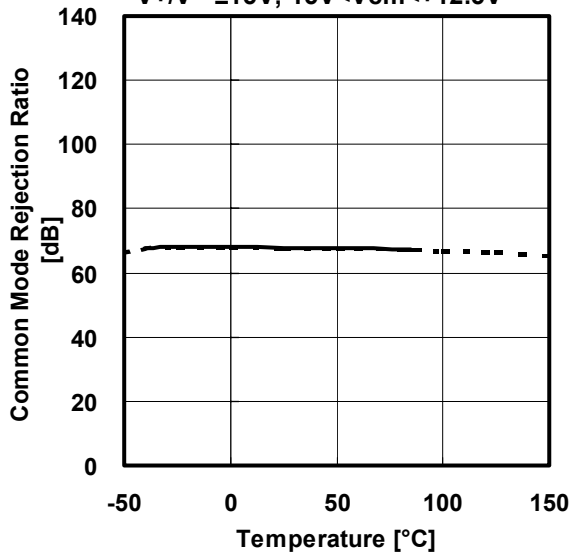


Supply Voltage Rejection Ratio
vs. Temperature

$V_+/V_- = \pm 2.5V$ to $\pm 15V$

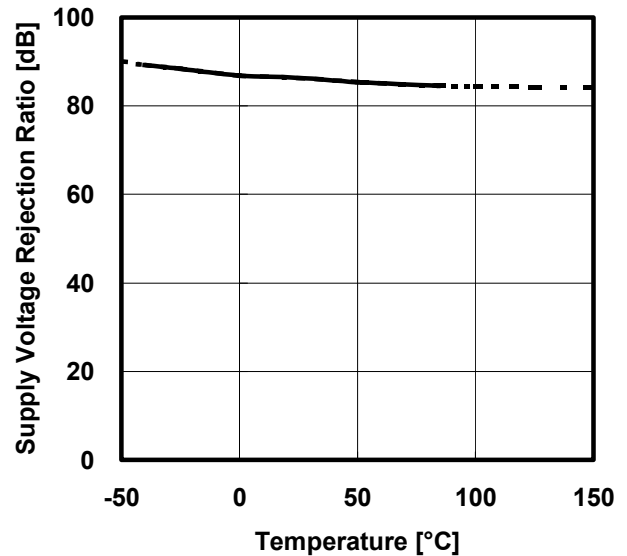


Maximum Output Voltage
vs. Temperature

$V_+/V_- = \pm 15V, G_v = \text{open}, V_{in} = \pm 1V, R_L = 10k\Omega$

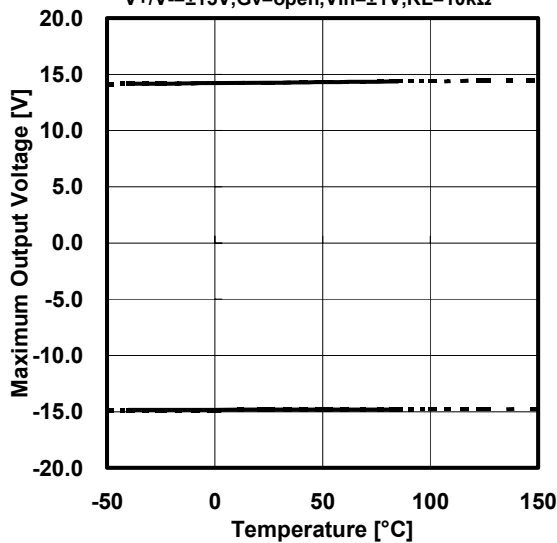


Maximum Output Voltage vs. Operating Voltage

$R_L = 2k\Omega, T_a = 25^\circ C$

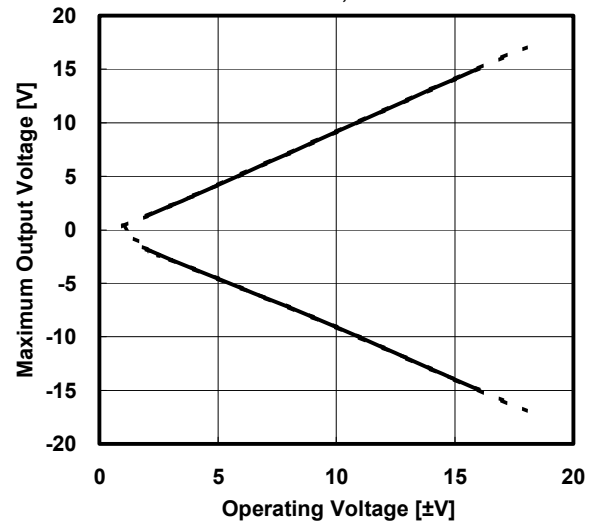


Maximum Output Voltage vs. Operating Current

$V_+/V_- = \pm 15V, T_a = 25^\circ C$

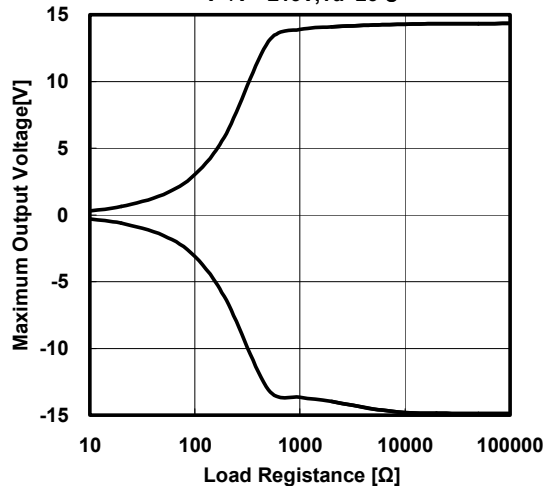


Voltage Gain & Phase vs. Frequency

$V+/V- = \pm 15V$, $V_{IN} = 0.02V_{pp}$, $GV = 40dB$, $RT = 50\Omega$,
 $RF = 1.98k\Omega$, $RG = 20\Omega$, $CF = 0$, $RL = 2k\Omega$, $CL = 50pF$

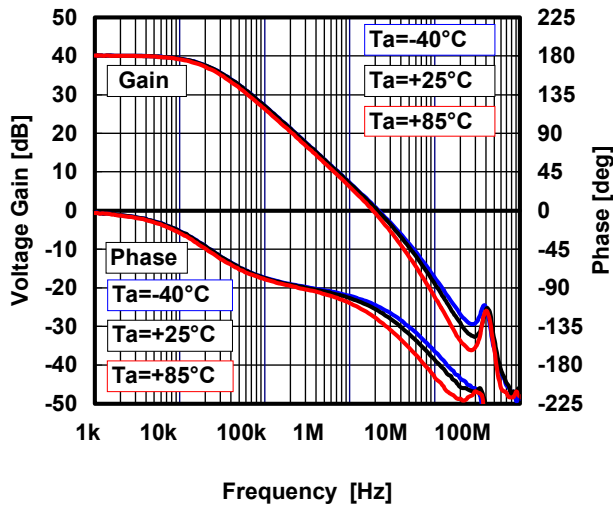


Voltage Gain & Phase vs. Frequency

$V+/V- = \pm 15V$, $V_{IN} = 0.01V_{pp}$, $GV = 40dB$, $RT = 50\Omega$,
 $RF = 1.98k\Omega$, $RG = 20\Omega$, $RL = 10k\Omega$, $T_a = +25^\circ C$

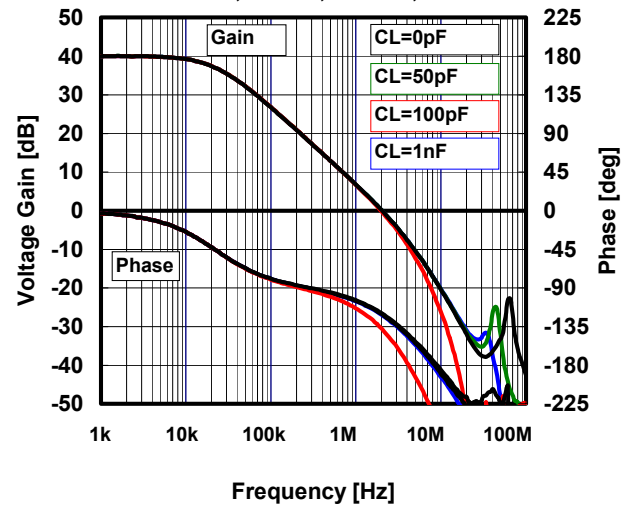


Peak Gain of Voltage Follower

$V+/V- = \pm 15V$, $V_{IN} = 0.02V_{pp}$, $GV = 0dB$, $RT = 50\Omega$, $RF = 0$,
 Ω , $RG = open$, $CF = 0$, $RL = 2k\Omega$, $CL = 50pF$

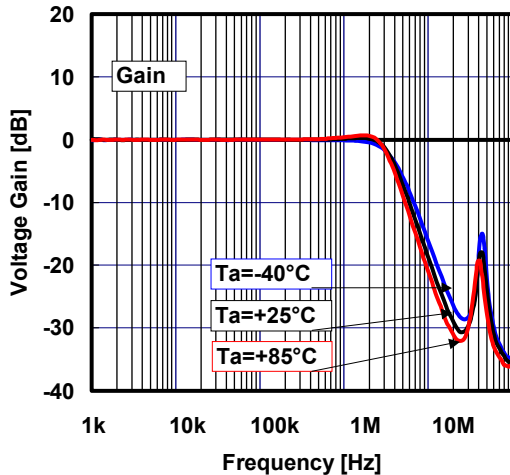


Peak Gain of Voltage Follower

$V+/V- = \pm 15V$, $V_{IN} = 0.02V_{pp}$, $GV = 0dB$, $RT = 50\Omega$,
 $RF = 0\Omega$, $RG = open$, $RL = 10k\Omega$, $T_a = +25^\circ C$

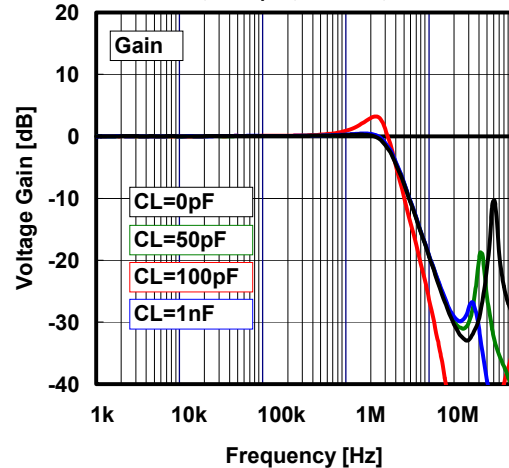


Pulse Response

$V+/V- = \pm 15V$, $f = 250kHz$, $VO = 4V_{PP}$, $GV = 0dB$,
 $RT = 50\Omega$, $RF = 0\Omega$, $CF = 0$, $RG = open$, $CL = 50pF$, $RL = 10k\Omega$

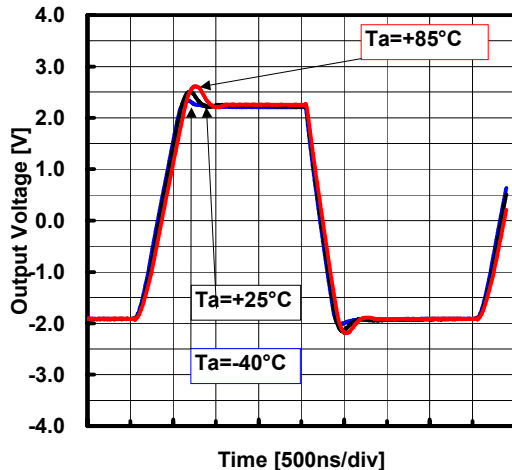

Pulse Response

$V+/V- = \pm 15V$, $f = 250kHz$, $VO = 4V_{PP}$, $GV = 0dB$,
 $RT = 50\Omega$, $RF = 0\Omega$, $CF = 0$, $RG = open$, $RL = 10k\Omega$, $T_a = +25^\circ C$

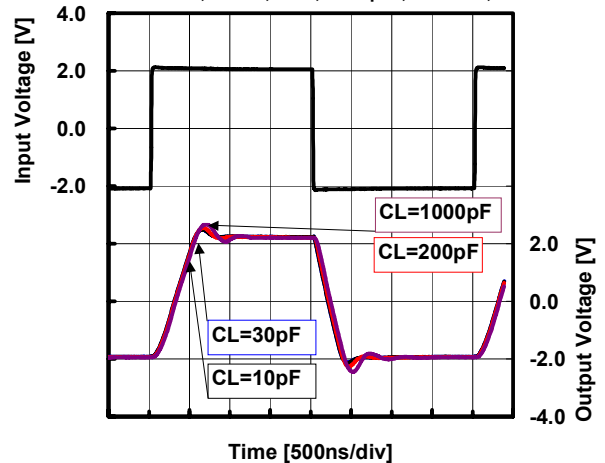

[CAUTION]
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2742RB1-TE1](#) [NJM2742V-TE1](#) [NJM2742M](#) [NJM2742D](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.