

SFP

Single Port Multi-Port Ganged



Amphenol's SFP connector series is a 20 position connector and cage combo for mounting to a host PCB with a metal cage enclosing the connector. These connectors are similar to the Gigabit Interface Converter Interface (GBIC), but they are smaller in size and operate at much faster data transfer rates.

Amphenol single port and stacked versions are rated up to 10 Gbps. They are available in standard RoHS compliant or non-RoHS compliant versions. The cages are a one-piece construction with enhanced transceiver mating tabs presently available in press-fit version, with solder version and longer or shorter pins available as custom options.

Applications

- Fibre Channel
- Gigabit Ethernet
- InfiniBand™
- Servers
- Routers
- Storage Devices
- Switches
- Optical Devices
- Networking Devices

Product Specification for SFP cages and connector system

The interconnect system comprises of an SFP cage assembly which is used with 20 position SFP connectors complying with MSA Agreement INF-8074i.

Availability: 1X1, 1x2, 1x4 and 1x6 cages as well as versions with heat sinks and light pipes, including stacked 2x1 and 2x4 are available. SFP+ and enhanced EMI performance cages also available.

General Requirements

- RoHS compliant
- Cages are tray packaged or tape and reel (single port)
- Dust cover for front face is available (bulk packed)
- Industry standard EIA-364

Temperature Rating

- Operating Temperature = -55°C to +85°C
- Storage Temperature = -55°C to +105°C

Mechanical Characteristics

Accepts multiple transceivers per INF-8074i
Durability of 250 mating cycles

Packaging

- Tape and reel available for single port, Tray packaging for all sizes.
- Bulk packaged dust covers

Electrical Characteristics

Hot swappable
Operating voltage 3.3V at 0.5A maximum
Cages include spring contacts for superior EMI grounding
Selected versions provide enhanced EMI shielding through the use of supplementary ground tabs.

Materials

Cage: Copper alloy, nickel plated.
Selected versions available with matte tin over nickel.

- Enhanced EMI versions incorporate stainless steel ground tabs

Connectors:

- Contacts: Copper alloy plating - refer to p/n table
- Housing: Glass reinforced lead-free process solder reflow compatible UL94V-0

www.sfpconnectors.com

Telephone: (416) 291-4401 Fax: (416) 754-8668 E-Mail: sales@amphenolcanada.com

All specifications are subject to change without notice.

Single Port Multi-Port Ganged



Ordering Information

Contact Amphenol for additional options

SFP & XFP Connector

UE75 - A X0 - X 0 0 0 T

SERIES DESIGNATION (ROHS)

STYLE

A - R/A single surface mount connector

NUMBER OF POSITIONS

20 - 20 position SFP connector

30 - 30 position XFP connector

CONTACT PLATING

2 - 30µ" gold plating on mating area
gold flash on termination

3 - 30µ" gold plating
RoHS plating on termination (tin matte)

5 - 15µ" gold plating on mating area
gold flash on termination

6 - 15µ" gold plating
RoHS plating on termination (tin matte)

PACKAGING

T = Tape and reel packaging

LUBRICANT OPTION

0 = Non lubricated

0 = Standard

0 = Standard (black)

Ordering Information

Contact Amphenol for additional options

SFP Cage

U77 - X 1 1 1 X - X 0 X X

SERIES DESIGNATION

STYLE

A = One row

C = One row cage + Light Pipe combo

E = One row cage + Heat Sink combo

F = One row cage 1 deg angle

NUMBER OF PORT IN ROW

1 = Single in row

1 = Tab grounding

2 = Enhanced EMI tabs

6 = SFP+/ IPF cage

1 = Standard

PACKAGING

1 = Tray packaging

T = Tape and reel packaging (for 1X1 and 1X2 only)

OPTION 1

0 = Standard

X = Customer specific

0 = Standard

PLATING

0 = No plating (for low cost version)

1 = Bright tin (for wave solder)

2 = Nickel

3 = Matte tin (for reflow up to 245 degree)

MOUNTING

Various options available

Consult sales or website for details



www.sfpconnectors.com

Telephone: (416) 291-4401 Fax: (416) 754-8668 E-Mail: sales@amphenolcanada.com

All specifications are subject to change without notice.


Ganged & Stacked Options




2x1 SFP Cage & Connector Combo




Custom 2x1 SFP Cage & Connector Combo

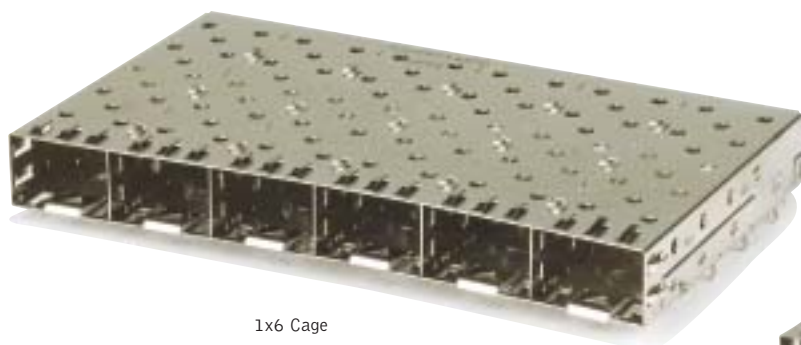

1x6 Cage

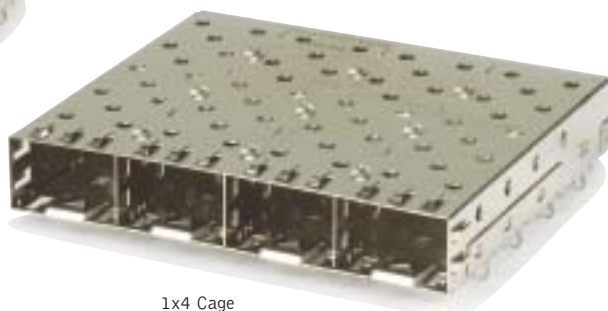

1x4 Cage

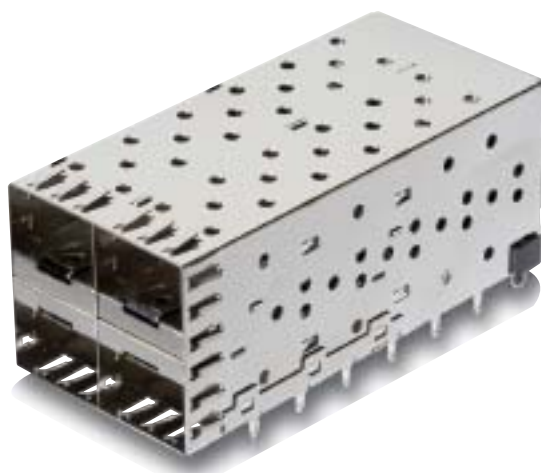

2x2 Combo (planned)




2x4 Combo

Heat Sinks & Light Pipe Options



1x4 SFP cage with heat sinks

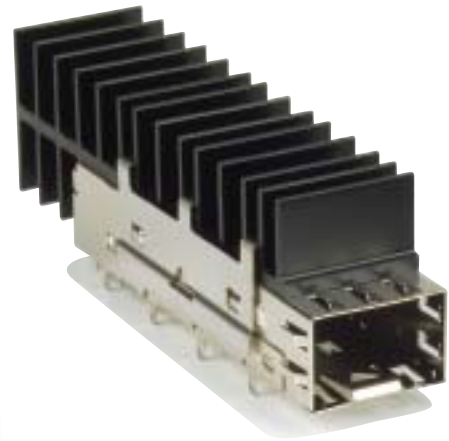

Single port SFP cage with heat sinks



1x4 SFP cage with light pipes



1x6 SFP cage with light pipes

SFP Combos

ORDERING INFORMATION

Contact Amphenol for additional options

SFP Cage & Connector

U X 78 - X X 1 1 X - X X X X X

SERIES DESIGNATION

RoHS 5 for Press Fit Pins on connector
RoHS 6 for Through Hole Pins on connector

STYLE

A - Single connector + cage combo
B - Stacked connector and cage
C - Single/stacked con, cage, Light Pipe (on Top) combo
D - Stacked connector+cage, Light Pipe (in the cage)
L - Stacked low profile combo

NUMBER OF PORT IN ROW

1 - 1X1 or 2X1
2 - 1X2 or 2X2
4 - 1X4 or 2X4

1 - Standard

1 - Standard

X - Various options available, customer specific
Consult sales or website for details

PACKAGING

1 - Tray packaging (stacked)
T - Tape and reel packaging
(Both connector and cage)
H - T&R for connector/tray for cage
(for 1Xn only)

PLATING OPTIONS FOR CAGE

1 - Bright tin (for wave soldering)
2 - Nickel
3 - Matte tin (for SMT soldering)

PLATING OPTIONS FOR CONNECTOR

1 - 30µ" gold plating on mating area
150-300µ" tin/lead on termination
2 - 30µ" gold plating on mating area
gold flash on termination
3 - 30µ" gold plating on mating area
150-300µ" matte tin on termination
4 - 15µ" gold plating on mating area
150-300µ" tin/lead on termination
5 - 15µ" gold plating on mating area
gold flash on termination
6 - 15µ" gold plating on mating area
150-300µ" matte tin on termination


OPTIONAL DUST COVER

0 - Without dust cover
D - With dust cover (shipped loose)

HEAT SINK / LIGHT PIPE OPTION

0 - None
X - Other options available, customer specific

SFP Plus & SFP Enhanced

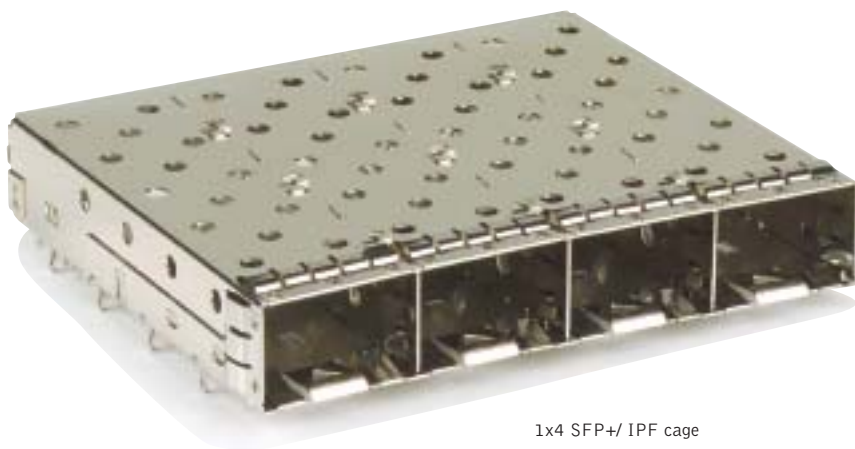

1x4 SFP+/ IPF cage



1x2 SFP+/ IPF cage



2x4 SFP+/ IPF cage (planned)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.