

GECA40


40 Watt Series



Commercial Wide-Range Input

2 Year Warranty

- Wide-Range AC Input 90-264 VAC
- Industry Standard Footprint - 3"x 5"x 1.25"
- Conducted EMI Exceeds FCC Class B and CISPR 22 Class B
- Single and Multiple Outputs
- Approved to UL60950-1: 2003, CSA-22.2 No. 60950-1-03, IEC and EN60950-1
- CB Report Available
- RoHS Compliant
- CE Marked to LVD

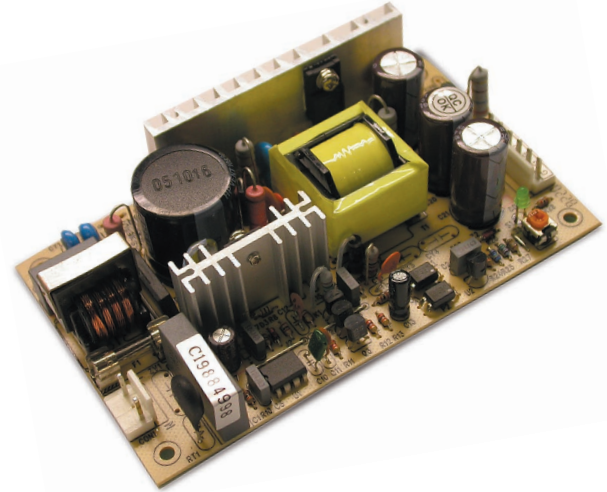

CONDOR

Specifications

Unless otherwise noted, all parameters are nominal values measured at 120 VAC @25°C and 0-95% relative humidity, non-condensing. For limits at unusual operating conditions, consult factory.

AC Input

Universal Input 90-264 VAC, 47-63 Hz single phase.

Input Current

Maximum input current at 120 VAC, 60 Hz with full rated output load:
Multiple models 1.7 A, Single models 1.0 A.

Hold-Up Time

10 ms minimum with 40 W load, nominal line (120 VAC).

Output Power

40 W continuous, 45 W peak. Peak ratings are for 60 s maximum duration, 10% duty cycle. During peak load condition, output regulation may exceed total regulation limits.

Overload Protection

Fully protected against short circuit and output overload. Short circuit protection is cycling type power limit on V1 and V2, foldback type on V3.

Overvoltage Protection

On V1 is 120% to 160%. See chart.

Efficiency

75 to 80% at full rated load, nominal input voltage, depending on model and load distribution.

Turn-on Time

Less than 2 seconds.

Input Protection

Internal AC fuse provided. Designed to blow only if a catastrophic failure occurs in the unit. Fuse does not blow on overload or short circuit.

Inrush Current

Inrush is limited by internal thermistors. Inrush at 240 VAC under cold start conditions will not exceed 37A.

Temperature Coefficient

0.03%/°C typical on all outputs.

Temperature Range

Designed for 0 to 45°C operation at full rated output power; derate output current and total output power by 2.5% per °C above 45°C.

Output Noise

0.5% rms, 1% pk-pk typical (see chart), 20 MHz bandwidth, differential mode. Measured with noise probe directly across output terminals of the power supply with load terminated with 0.1 μF capacitor.

Transient Response

Main output—500 μs typical response time for return to within 0.5% of final value for a 50% load step change. $\Delta i / \Delta t < 0.2 \text{ A}/\mu\text{s}$. Maximum voltage deviation is 3.5%. Startup/ shutdown overshoot less than 3%.

Switching Frequency

70 kHz +/- 10 kHz.

Voltage Adjustment

Provided on V1. Adjustable voltages are preset at factory. Outputs are capable of minimum +/- 5% change from nominal setting. Multiple output models - V2 voltage will track V1 adjustment.

EMI/EMC Compliance

All models include built-in EMI filtering to meet the following emissions requirements:

EMI SPECIFICATIONS

Conducted Emissions
Static Discharge
RF Field Susceptibility
Fast Transients/Bursts
Surge Susceptibility

COMPLIANCE LEVEL

EN55022 Class B; FCC Class B
EN61000-4-2, Level 3
EN61000-4-3, Level 3
EN61000-4-4, Level 3
EN61000-4-5, Level 3

Safety Approvals

SL Power Electronics, Corp. declares under our sole responsibility that all GECA models are in conformity with the applicable requirements of EN60950 following the provisions of the Low Voltage Directive 73/23/EEC.

All GECA models are approved to UL60950-1: 2003, CSA-22.2 No. 60950-1-03, IEC and EN60950-1

MTBF

120kHrs.

GECA40

40 Watt Series

Commercial Wide-Range Input

Commercial Model	Output No.	Output (V)	Current Minimum	Current Maximum	Line Regulation	Load Regulation	V1 OVP Set Point	Ripple & Noise(P-P)
GECA40AG	V1	+5 V	0.35 A	3.5 A	+/-0.5%	+/-3%	6.6 +/-0.9 V	50 mV
	V2	+12 V	0 A	2 A	+/-1%	+/-10%		120 mV
	V3	-12 V	0 A	0.3 A	+/-1%	+/-5%		120 mV
GECA40BG	V1	+5 V	0.35 A	3.5 A	+/-0.5%	+/-3%	6.6 +/-0.9 V	50 mV
	V2	+12V	0 A	2 A	+/-1%	+/-10%		120 mV
	V3	-5 V	0 A	0.3 A	+/-1%	+/-5%		50 mV
GECA40HG	V1	+3.3 V	0.4 A	4 A	+/-0.5%	+/-3%	4.4 +/-0.6 V	50 mV
	V2	+12 V	0 A	2 A	+/-1%	+/-10%		120 mV
	V3	-12 V	0 A	0.3 A	+/-1%	+/-5%		120 mV
GECA40DG	V1	+5 V	0.35 A	3.5 A	+/-0.5%	+/-3%	6.6 +/-0.9 V	50 mV
	V2	+24 V	0 A	1.2 A	+/-1%	+/-10%		240 mV
	V3	-12 V	0 A	0.3 A	+/-1%	+/-5%		120 mV
GECA40-5G	V1	5 V	0 A	7 A	+/-0.5%	+/-3%	7.0 +/-1.0 V	50 mV
GECA40-12G	V1	12 V	0 A	3.3 A	+/-0.5%	+/-3%	16.8 +/-2.4 V	120 mV
GECA40-15G	V1	15 V	0 A	2.7 A	+/-0.5%	+/-3%	21.0 +/-3.0 V	150 mV
GECA40-24G	V1	24 V	0 A	1.7 A	+/-0.5%	+/-3%	33.6 +/-4.8 V	240 mV

Environmental Specifications

ENVIRONMENT	OPERATING	NON-OPERATING
Temperature (A)	0 to 45°C	-40 to +85°C
Humidity (A)	20 to 90% RH	10 to 95% RH
Shock (B)	20 g _{pk}	40 g _{pk}
Altitude	-500 to 10,000 ft	-500 to 40,000 ft
Vibration (C)	1.5 g _{rms} 0.0032 g ² /Hz	5 g _{rms} 0.026 g ² /Hz

- A. Units should be allowed to warm up/operate under non-condensing conditions before application of power.
- B. Shock testing—half-sinusoidal, 10 ± 3 ms duration, ± direction, 3 orthogonal axes, total 6 shocks.
- C. Random vibration—10 to 2000Hz, 6dB/octave roll-off from 350 to 2000Hz, 3 orthogonal axes. Tested for 10 min./axis operating and 1 hr./axis non-operating.

GECA40 Series Mechanical Specifications

CON 1:
MOLEX P/N 26-60-4030, w/center PIN Removed
0.156 [3.96 mm] CTR Header

CON 2:
MOLEX P/N 26-60-4060, 0.156 [3.96 mm] CTR Header

Input J1
PIN 1) AC Line
PIN 3) AC Neutral


Output J2	Multiple Output Models	Single Output Models
PIN 1)	Output 2	Output 1
PIN 2)	Common	Output 1
PIN 3)	Common	Output 1
PIN 4)	Output 1	Common
PIN 5)	Output 1	Common
PIN 6)	Output 3	Common

Mating Connector	Housing P/N	Contacts P/N
MOLEX		
Input	09-50-3031	08-52-0072
Output	09-50-3061	08-52-0072

Note: 5A maximum recommended current per Connector PIN

Weight
1.0 lbs Max [0.45 kg Max.]

Tolerance
X.XX=0.030
X.XXX=0.010 [0.mm]

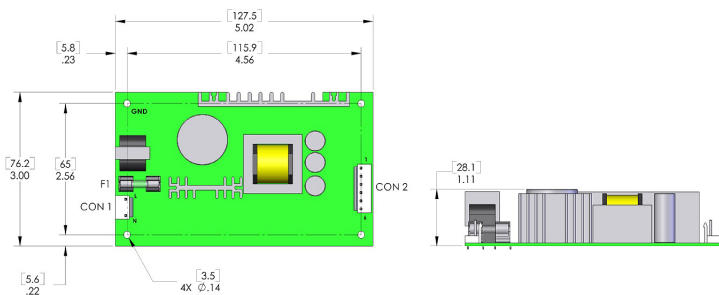

SL Power Electronics, Corp. • 6050 King Drive • Ventura CA, 93003 • Phone:805.486.4565 • Fax:805.487.8911 • Email:info@slpower.com • www.slpower.com

Data Sheet © 2006 SL Power Electronics, Corp. The information and specifications contained in this data sheet are believed to be correct at time of publication.

However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.

Rev.8/30/06



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.