

ORIGINAL

This document is the property of Amphenol Corporation and is delivered on the express condition that is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant or per IEC 61249-2-21 for Halogen-Free compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-14070	NEW RELEASE	04/28/2014	HANK HSU





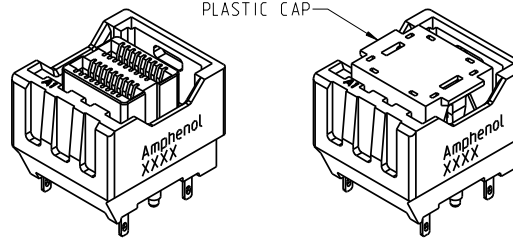


TABLE 1

DIM A	APPLICABLE PCB THK
2.40	1.57~1.60
3.59	2.36~2.79
3.98	3.18

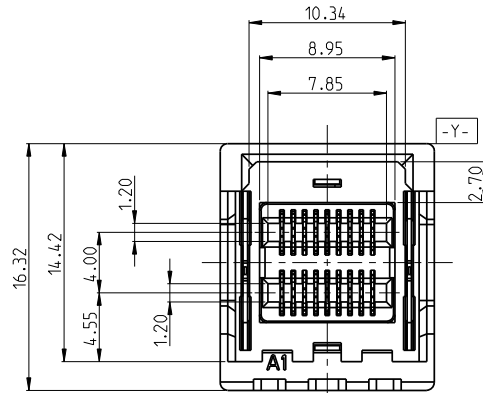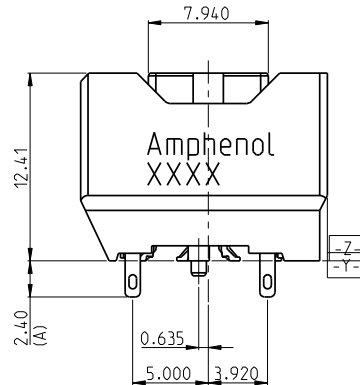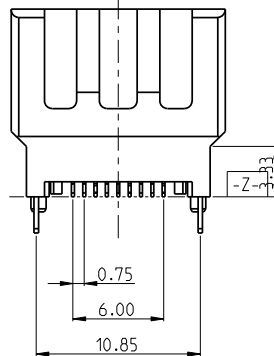

PART NUMBER SYSTEM									
G40H	D	X	X	X	X	X	XX	-	X
Mini SAS HD Integrated Connector									
Connector Style D: V/T.w/enclosing wall.85 ohm									
Number of Integration X: OPTION 1: 1X1 2: 1X2									
Contact Finish X: OPTION 3: 30u" Gold									
Terminal Style X: OPTION 2: SMT, 100u" MIN MATTE TIN PLATING									
Verification Code X: OPTION BLANK: STANDARD									
Compliant Code XX: OPTION HR: Halogen-Free & RoHS									
BOARDLOCK CODE X: OPTION 1: 2.40 mm 2: 3.59 mm 3: 3.98 mm									
Variation Code X: OPTION 1: with Cap 2: without Cap									
Packing Code X: OPTION 1: Tray 2: Tape & Reel 3: Narrow Tray									

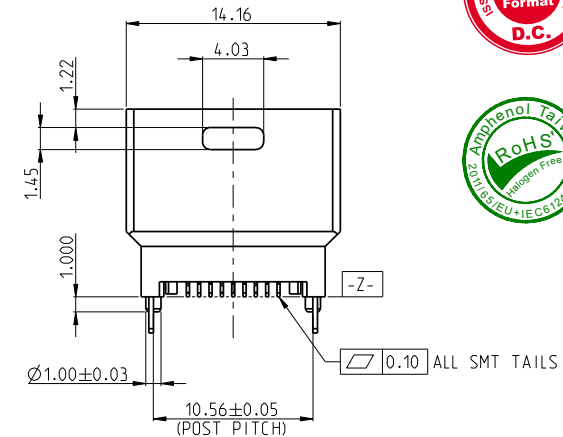

NOTES:

- INSULATOR: HIGH TEMPERATURE UL94V-0, COLOR: NC(BRACKET), BK(HOUSING)
- TERMINAL: COPPER ALLOYBRASS
CONTACT AREA: OPTION
SOLDERING AREA: OPTION
UNDER PLTING.: Ni 100u" MIN.
- THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS PER DIRECTIVE 2011/65/EU FOR RoHS AND PER IEC 61249-2-21 FOR HALOGEN-FREE COMPLIANT.







TOLERANCE		DRAWN APPROVALS		DATE	TITLE			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation					
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10		DESIGNED	Hank Hsu	04/28/2014	MINI SAS HD INTEGRATED CONNECTOR 0.75 PITCH, V/T, SMT TYPE								
		CHECKED	Sondra Sang	04/28/2014									
ANGULAR ±2°		APPROVED	Hank Hsu	04/28/2014			UNIT	mm	SIZE	A3	PART No.	G40HDXXXXXXHR	
UNLESS OTHERWISE SPECIFIED		DWG TYPE	CUST DWG	PROJECT CODE	T515	SCALE	NA	SHEET	1 OF 3	DWG No.	G40HDXXXXXXHR	REV.	A

ORIGINAL

This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant or per IEC 61249-2-21 for Halogen-Free compliant.

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-14070	NEW RELEASE	04/28/2014	HANK HSU

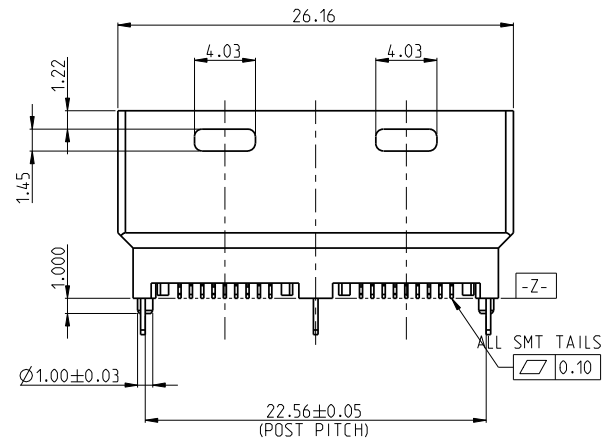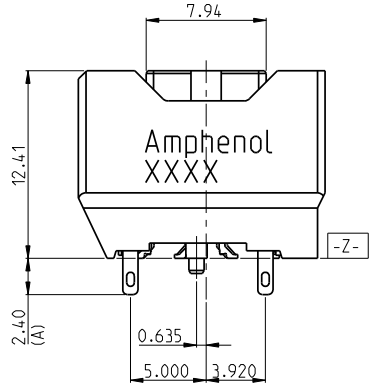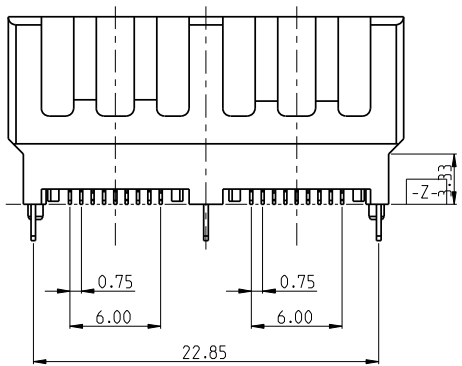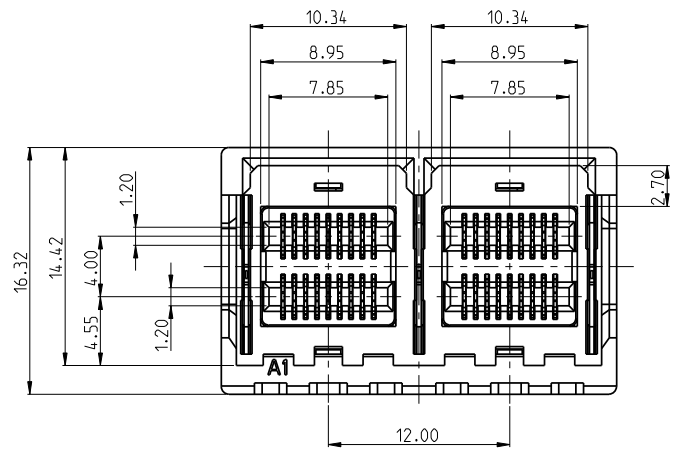


TOLERANCE		DRAWN	APPROVALS	DATE	TITLE			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation		
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10		DESIGNED	Hank Hsu	04/28/2014	MINI SAS HD INTEGRATED CONNECTOR 0.75 PITCH, V/T, SMT TYPE					
		CHECKED	Sondra Sang	04/28/2014				PART No. G40HDXXXXXXHR		
ANGULAR ±2°		APPROVED	Hank Hsu	04/28/2014			UNIT mm	SIZE A3	DWG No. G40HDXXXXXXHR	
UNLESS OTHERWISE SPECIFIED		DWG TYPE	CUST DWG	PROJECT CODE T515			SCALE NA	SHEET 2 OF 3	REV. A	


The marking on this product doesn't contain environmental hazardous materials per Material Specification SS-00259 for Sony GP compliant or per directive 2011/65/EU for RoHS compliant or per IEC 61249-2-21 for Halogen-Free compliant.

ORIGINAL

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A	NE-14070	NEW RELEASE	04/28/2014	HANK HSU

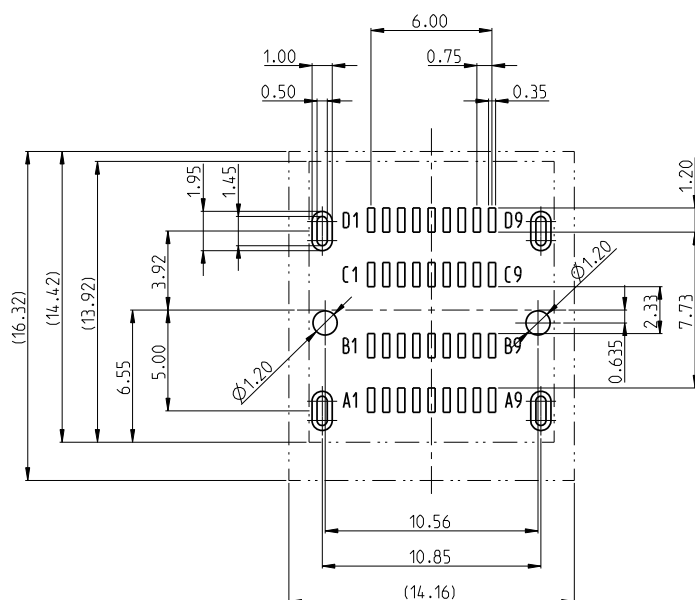

1X1 RECOMMENDED PCB LAYOUT
(ALL TOLERANCES ARE ± 0.05)

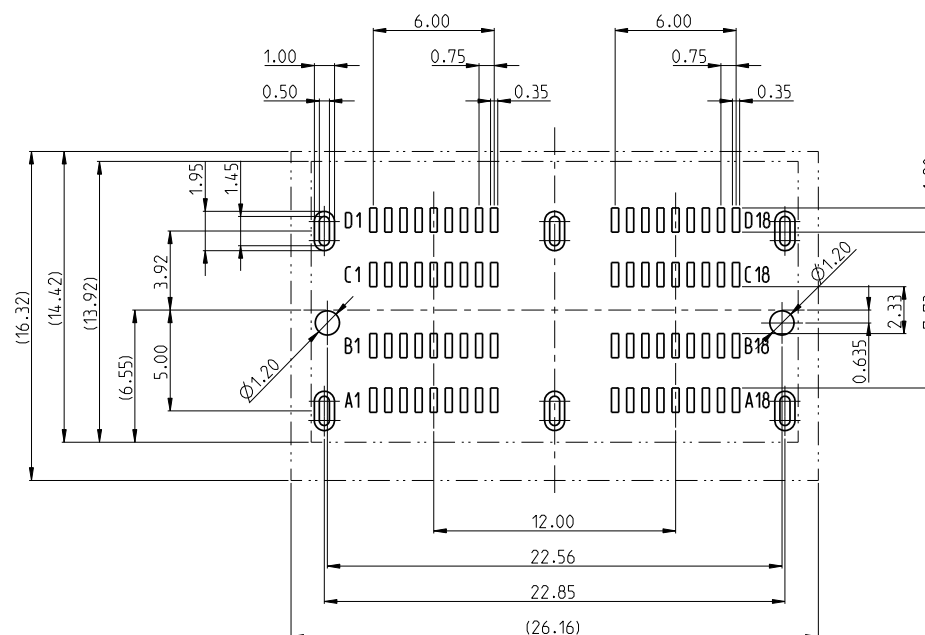

1X2 RECOMMENDED PCB LAYOUT
(ALL TOLERANCES ARE ± 0.05)

1. RECOMMENDED PCB HOLE Ø1.20 IS NPTH FOR ORIENTATION POST.
2. RECOMMENDED PCB ELLIPTICAL HOLE 0.5X1.45 IS PTH FOR BOARD-LOCK.
3. MINIMUM PCB THICKNESS: 1.57MM
4. PIN ASSIGNMENTS PLEASE REFER TO SERIAL ATTACHED SCSI-3 (SAS-3) STANDARD.

TOLERANCE		DRAWN APPROVALS		DATE		TITLE			Amphenol® Amphenol Corporation Amphenol Taiwan Corporation			
X. X.X ±0.30 X.XX ±0.20 X.XXX ±0.10		DESIGNED Hank Hsu		04/28/2014		MINI SAS HD INTEGRATED CONNECTOR 0.75 PITCH, V/T, SMT TYPE						
		CHECKED Sondra Sang		04/28/2014								
ANGULAR ±2°		APPROVED Hank Hsu		04/28/2014								
UNLESS OTHERWISE SPECIFIED		DWG TYPE CUST DWG		PROJECT CODE T515				UNIT mm	SIZE A3	PART No. G40HDXXXXXXHR		
						SCALE NA		SHEET 3 OF 3	DWG No. G40HDXXXXXXHR		REV. A	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.