


GT36 Series

— Integrates AM-FM, SDARS, GPS, Bluetooth, and Cell —

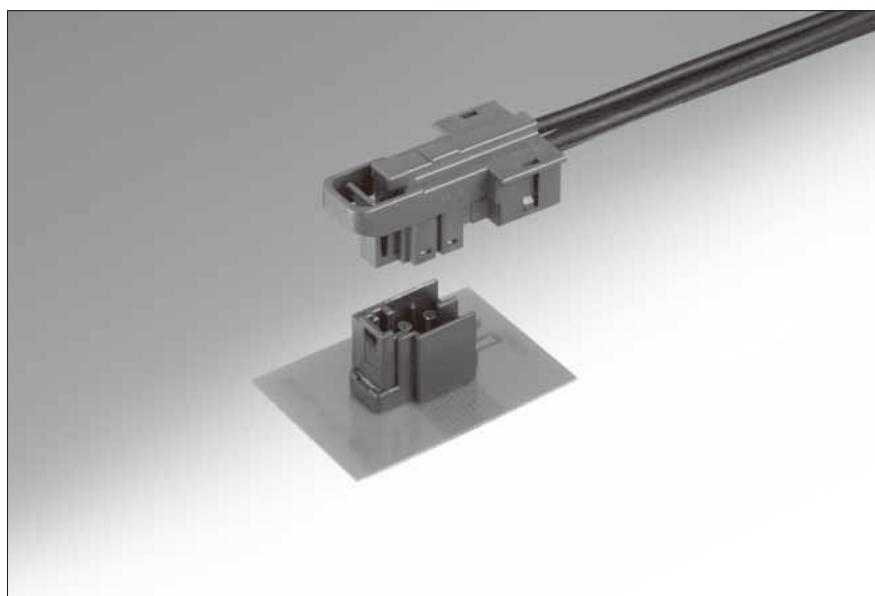




■ Features

- Frequency range DC ~ 2.5GHz
- Board connector straight type/ Cable connector right-angle type

■ Applications



Various antennas with frequency range DC~2.5GHz
(Ex. AM-FM, SDARS, GPS, Bluetooth, and Cell etc)

Housing for F connector (4 coaxials)

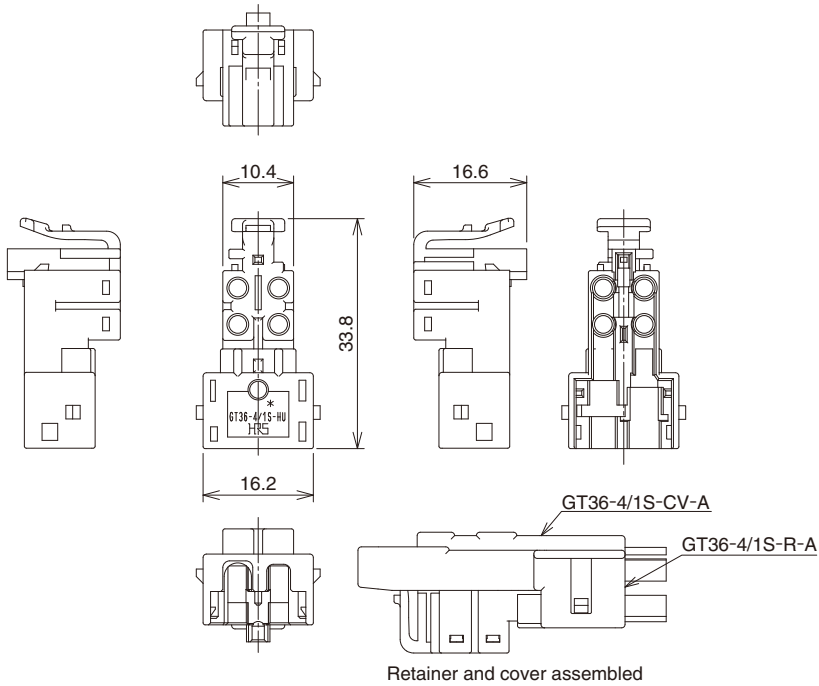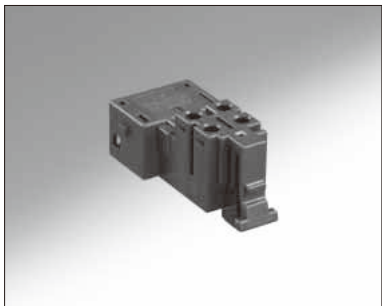



Part No.	HRS No.	Material	Color	Key polarizing code	Packaging	RoHS
GT36-4/1S-HU(A)-A	786-0065-0	PBT	Brown	(A)	1	YES
GT36-4/1S-HU(B)-A	786-0066-2		Green	(B)		
GT36-4/1S-HU(C)-A	786-0067-5		Blue	(C)		
GT36-4/1S-HU(D)-A	786-0068-8		Black	(D)		

Retainer for F connector

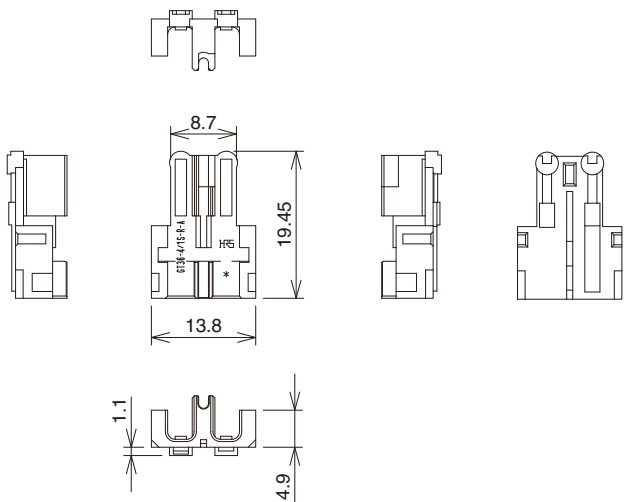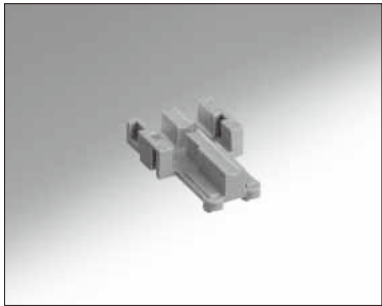



Part No.	HRS No.	Material	Color	Packaging	RoHS
GT36-4/1S-R-A	786-0069-0	PBT	Light Gray	1	YES

■ Cover for F connector

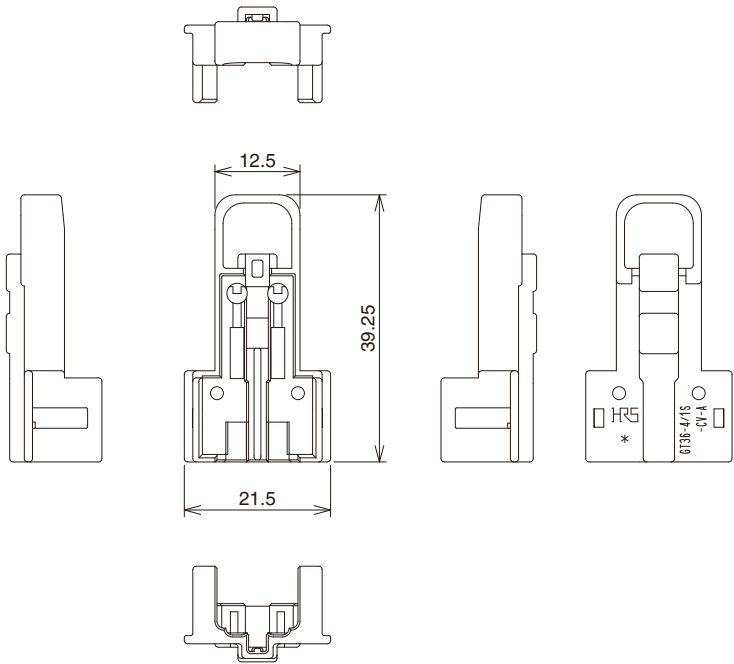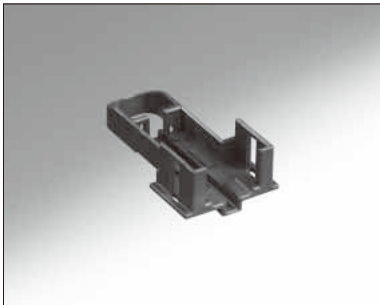

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT36-4/1S-CV-A	786-0070-0	PBT	Dark Gray	1	YES

■ Center terminal for F connector (short)

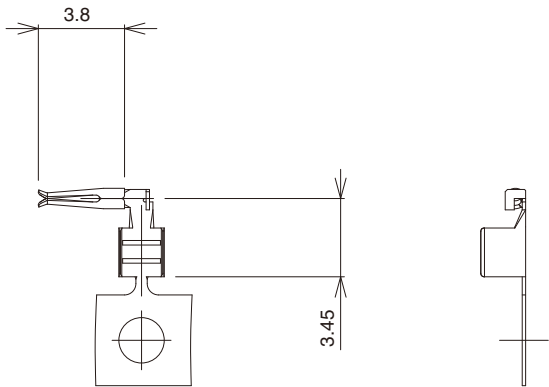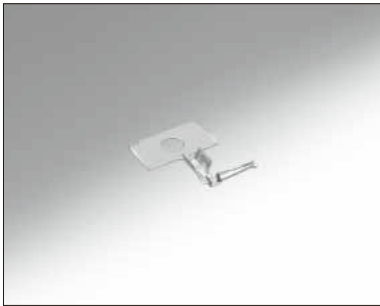

Part No.	HRS No.	Material/Plating or Color	Applicable cable	Packaging	RoHS
GT36A-2022SCF	786-0028-3	Center terminal : Phosphor bronze/Tin plating	2.5D-2V	12,000 pcs/reel	YES
GT36-2428SCF	786-0001-7		1.5D-2V	13,000 pcs/reel	

GT5

GT13

GT16

PO5G

GT19

GT21

GT26

GT36

GT11

GT17

GT32

GT3

GT7

GT10

GT18W

GT25



GT8E

GT9

GT15



For Antenna

Center terminal for F connector (long)

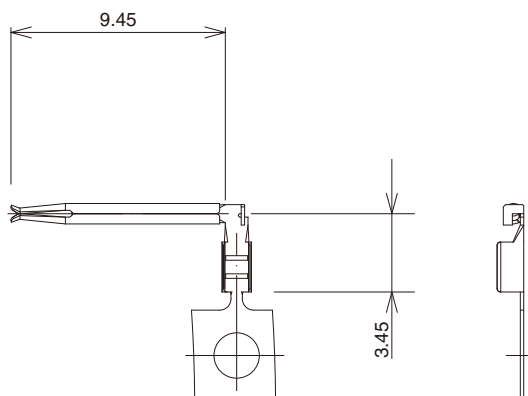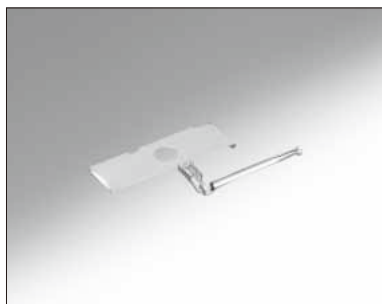



Part No.	HRS No.	Material/Plating or Color	Applicable cable	Packaging	RoHS
GT36-2428SCF(A)	786-0010-8	Center terminal : Phosphor bronze / Tin plating	1.5D-2V	9,000 pcs/reel	YES
GT36-30SCF(ID)(A)	786-0042-4		1.5C-2V(single wire)	12,000 pcs/reel	

Outer terminal for F connector (long)

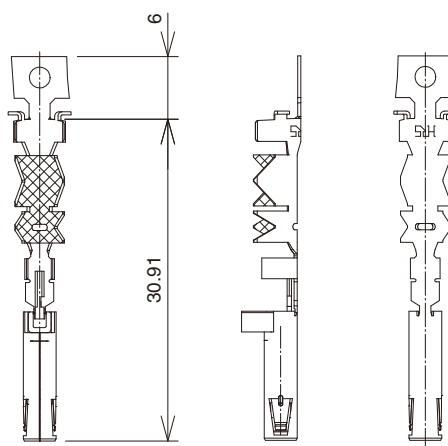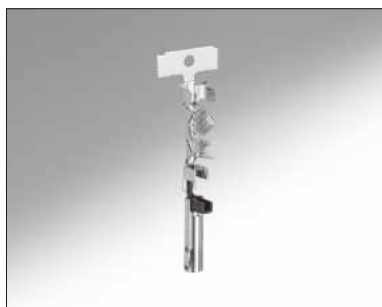




Part No.	HRS No.	Material/Plating or Color	Applicable cable	Packaging	RoHS
GT36-1.6-2.9SCF(A)	786-0004-5	Insulator : PBT / Dark Gray Outer terminal : Brass / Tin plating	1.5D-2V	6,500 pcs/reel	YES

Outer terminal for F connector (short)

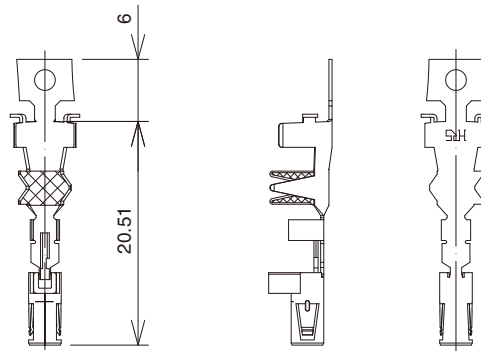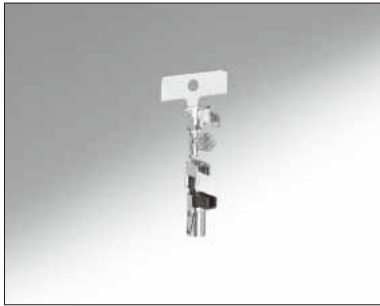


Part No.	HRS No.	Material/Plating or Color	Applicable cable	Packaging	RoHS
GT36-3.3-3.8SCF	786-0005-8	Insulator: PBT/Dark Gray	2.5D-2V	5,000 pcs/reel	YES
GT36-1.6-2.9SCF	786-0003-2	Outer terminal: Brass/Tin plating	1.5D-2V	3,000 pcs/reel	

Board type (4 coaxials)

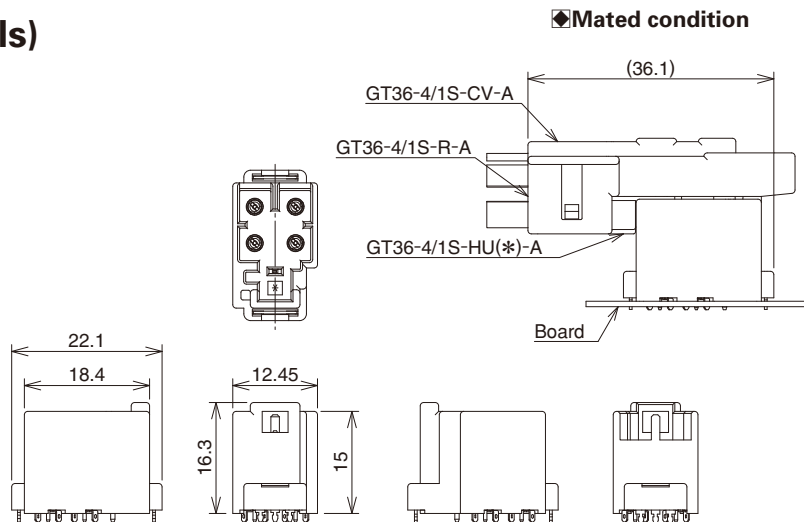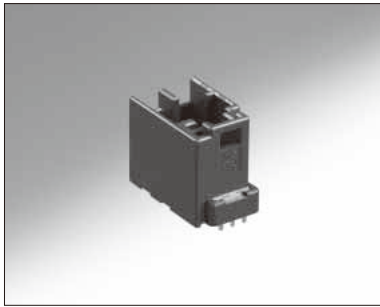

Recommended Board Mounting Pattern

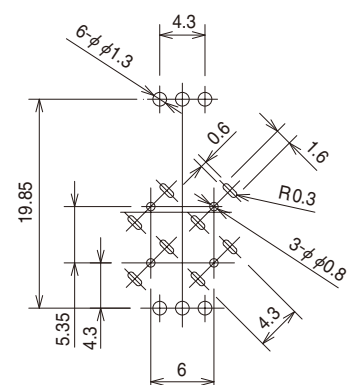


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT36-4ABD0P-DSAA	786-0011-0	PA	Brown	200 pcs/reel	YES
GT36-4A0P-DSAC	786-0012-3		Blue		
GT36-4D0P-DSAC	786-0013-6		Green		
GT36-4BD0P-DSAB	786-0014-9				

* Applicable PCB thickness : 0.8mm

◆ Crimping tools

User manuals are available. Please ask your Hirose Electric account representative.

Automatic crimping machine

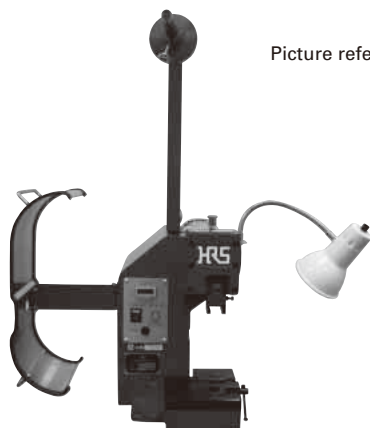

Picture reference only

Specifications

Item	Specification	Remarks
Press capacity	1.5tons	
Stroke length	30mm	
Number of strokes	200spm(50Hz)	200spm(60Hz)
Weight	75kg	
Motor	0.2kw	AC100V
Crimping speed	2000 to 4000 pcs/hour	

Part No. CM-105C

- * In terms of terminal's crimp height, a separate crimp height table is available for each cable type.
Please contact sales personnel.
In the event of a new cable, the appropriate crimp height will need to be defined.
- * Separate reel stand required (CM105/RS-ED)
- * Separate applicator tooling required for each terminal.

Applicator (for use with the automatic crimping machine)

Terminal Product No.	Terminal HRS No.	Tool No.	Tool HRS No.
GT36A-2022SCF	786-0028-3	AP105-GT36A-2022S	901-5220-4
GT36-2428SCF	786-0001-7	AP105-GT36-2428S	901-5222-0
GT36-2428SCF(A)	786-0010-8	AP105-GT36-2428S(A)	901-5212-6
GT36-30SCF(ID)(A)	786-0042-4	AP105-GT36-30SI(A)	901-5225-8
GT36-3.3-3.8SCF	786-0005-8	GT36-3338S/CK-AD	902-5113-0
GT36-1.6-2.9SCF	786-0003-2	GT36-1629S/CK-AD	902-5116-9
GT36-1.6-2.9SCF(A)	786-0004-5	GT36-1629S(A)/CK-AD	902-5112-8

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:

[GT36-1629S\(A\)/CK-AD2\(66\)](#) [GT36-3338S/CK-AD\(65\)](#) [GT36-3338S/CK-AD2\(64\)](#) [GT36-1629S\(A\)/CK-AD2\(64\)](#)
[GT36-3338S/CK-AD2\(61\)](#) [GT36-3338S/CK-AD](#) [GT36/WH-MD](#) [GT36-1629S\(A\)/CK-AD2\(61\)](#) [GT36-3338S/CK-AD\(64\)](#)
[GT36-1629S\(A\)/CK-AD](#) [GT36-1629S\(A\)/CK-AD\(67\)](#) [GT36-1629S\(A\)/CK-AD\(63\)](#) [GT36-1629S\(A\)/CK-AD\(64\)](#) [GT36-](#)
[1629S\(A\)/CK-AD2\(62\)](#) [GT36-1629S\(A\)/CK-AD2\(65\)](#) [GT36-1629S\(A\)/CK-AD\(65\)](#) [GT36-3338S/CK-AD\(61\)](#) [GT36-](#)
[1629S\(A\)/CK-AD\(66\)](#) [GT36-1629S\(A\)/CK-AD\(62\)](#) [GT36-1629S\(A\)/CK-AD2\(80\)](#) [GT36-3338S/CK-AD2\(65\)](#) [GT36-](#)
[1629S\(A\)/CK-AD2\(63\)](#) [GT36-1629S\(A\)/CK-AD2\(67\)](#) [GT36-3338S/CK-AD2\(63\)](#) [GT36-3338S/CK-AD\(66\)](#) [GT36-](#)
[3338S/CK-AD\(63\)](#) [GT36-1629S\(A\)/CK-AD\(61\)](#) [GT36-1629S\(A\)/CK-AD2](#) [GT36-3338S/CK-AD2\(80\)](#) [GT36-3338S/CK-](#)
[AD2\(62\)](#) [GT36-3338S/CK-AD\(62\)](#) [GT36-3338S/CK-AD2](#) [GT36-3338S/CK-AD2\(66\)](#) [AP105-GT36-2022S\(61\)](#) [AP105-](#)
[GT36A-2022S](#) [AP105-GT36-2022S\(90\)](#) [AP105-GT36A-2022S\(62\)](#) [AP105-GT36-2022S\(62\)](#) [AP105-GT36A-2022S\(63\)](#)
[AP105-GT36A-2022S\(90\)](#) [AP105-GT36A-2022S\(70\)](#) [AP105-GT36A-2022S\(71\)](#) [AP105-GT36-2022S\(64\)](#) [AP105-](#)
[GT36-2022S](#) [AP105-GT36A-2022S\(61\)](#) [AP105-GT36-2428S\(A\)\(61\)](#) [AP105-GT36-2428S\(A\)\(63\)](#) [AP105-GT36-](#)
[2428S\(A\)\(90\)](#) [AP105-GT36-2428S\(A\)\(64\)](#) [AP105-GT36-2428S\(A\)\(62\)](#) [AP105-GT36-2428S\(A\)](#) [AP105-GT36A-](#)
[2022S\(64\)](#) [AP105-GT36-2022S\(63\)](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.