



# BZW04-5V8/376 BZW04-5V8B/376B


TRANSIL™

## FEATURES

- PEAK PULSE POWER : 400 W (10/1000 $\mu$ s)
- STAND-OFF VOLTAGE RANGE :  
From 5.8V to 376 V
- UNI AND BIDIRECTIONAL TYPES
- LOW CLAMPING FACTOR
- FAST RESPONSE TIME
- UL RECOGNIZED

## DESCRIPTION

Transil diodes provide high overvoltage protection by clamping action. Their instantaneous response to transient overvoltages makes them particularly suited to protect voltage sensitive devices such as MOS Technology and low voltage supplied IC's.

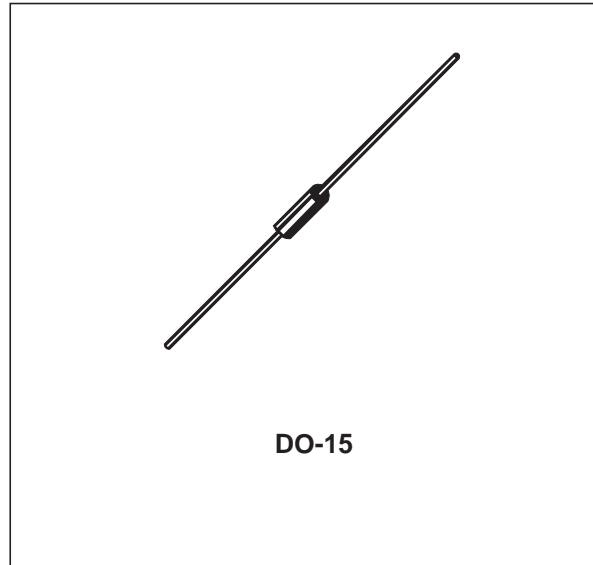

## ABSOLUTE MAXIMUM RATINGS ( $T_{amb} = 25^{\circ}\text{C}$ )

Symbol	Parameter		Value	Unit
$P_{PP}$	Peak pulse power dissipation (see note 1)	$T_j \text{ initial} = T_{amb}$	400	W
P	Power dissipation on infinite heatsink	$T_{amb} = 75^{\circ}\text{C}$	1.7	W
$I_{FSM}$	Non repetitive surge peak forward current for unidirectional types	$t_p = 10\text{ms}$ $T_j \text{ initial} = T_{amb}$	30	A
$T_{stg}$ $T_j$	Storage temperature range Maximum junction temperature		- 65 to + 175 175	$^{\circ}\text{C}$ $^{\circ}\text{C}$
$T_L$	Maximum lead temperature for soldering during 10s a 5mm from case.		230	$^{\circ}\text{C}$

**Note 1** : For a surge greater than the maximum values, the diode will fail in short-circuit.


## THERMAL RESISTANCES

Symbol	Parameter		Value	Unit
$R_{th(j-l)}$	Junction to leads		60	$^{\circ}\text{C}/\text{W}$
$R_{th(j-a)}$	Junction to ambient on printed circuit.	$L_{lead} = 10\text{mm}$	100	$^{\circ}\text{C}/\text{W}$

## BZW04-xx

### ELECTRICAL CHARACTERISTICS (T<sub>amb</sub> = 25°C)

Symbol	Parameter
V <sub>RM</sub>	Stand-off voltage
V <sub>BR</sub>	Breakdown voltage
V <sub>CL</sub>	Clamping voltage
I <sub>RM</sub>	Leakage current @ V <sub>RM</sub>
I <sub>PP</sub>	Peak pulse current
αT	Voltage temperature coefficient
V <sub>F</sub>	Forward voltage drop

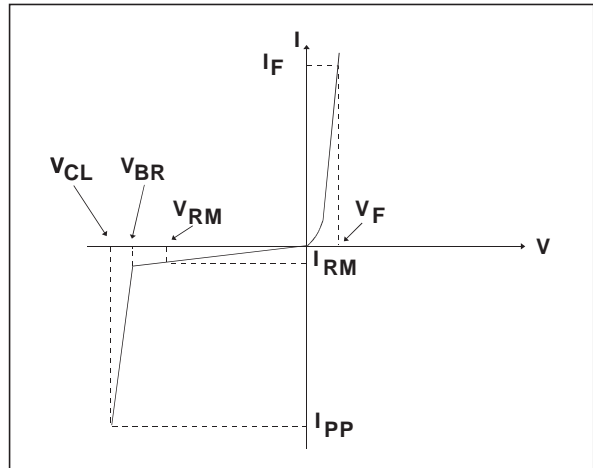

Types		I <sub>RM</sub> @ V <sub>RM</sub>		V <sub>BR</sub> @ I <sub>R</sub>		V <sub>CL</sub> @ I <sub>PP</sub>		V <sub>CL</sub> @ I <sub>PP</sub>		αT	C
		max		min		max		max		max	typ
				note2		10/1000μs		8/20μs		note3	note4
Unidirectional	Bidirectional	μA	V	V	mA	V	A	V	A	10 <sup>-4</sup> /°C	pF
BZW04-5V8	BZW04-5V8B	1000	5.8	6.45	10	10.5	38.0	13.4	174	5.7	3500
BZW04-6V4	BZW04-6V4B	500	6.4	7.13	10	11.3	35.4	14.5	160	6.1	3100
BZW04-8V5	BZW04-8V5B	10	8.5	9.5	1	14.5	27.6	18.6	124	7.3	2000
BZW04-10	BZW04-10B	5	10.2	11.4	1	16.7	24.0	21.7	106	7.8	1550
BZW04-13	BZW04-13B	5	12.8	14.3	1	21.2	19.0	27.2	85	8.4	1200
BZW04-15	BZW04-15B	1	15.3	17.1	1	25.2	16.0	32.5	71	8.8	975
BZW04-19	BZW04-19B	1	18.8	20.9	1	30.6	13.0	39.3	59	9.2	800
BZW04-20	BZW04-20B	1	20.5	22.8	1	33.2	12.0	42.8	54	9.4	725
BZW04-23	BZW04-23B	1	23.1	25.7	1	37.5	10.7	48.3	48	9.6	625
BZW04-26	BZW04-26B	1	25.6	28.5	1	41.5	9.6	53.5	43	9.7	575
BZW04-28	BZW04-28B	1	28.2	31.4	1	45.7	8.8	59.0	39	9.8	510
BZW04-31	BZW04-31B	1	30.8	34.2	1	49.9	8.0	64.3	36	9.6	480
BZW04-33	BZW04-33B	1	33.3	37.1	1	53.9	7.4	69.7	33	<b>10.0</b>	450
BZW04-40	BZW04-40B	1	40.2	44.7	1	64.8	6.2	84	27	10.1	370
BZW04-48	BZW04-48B	1	47.8	53.2	1	77.0	5.2	100	23	10.3	320
BZW04-58	BZW04-58B	1	58.1	64.6	1	92.0	4.3	121	19	10.4	270
BZW04-70	BZW04-70B	1	70.1	77.9	1	113	3.5	146	16.0	10.5	230
BZW04-85	BZW04-85B	1	85.5	95.0	1	137	2.9	178	13.0	10.6	200
BZW04-102	BZW04-102B	1	102	114	1	165	2.4	212	11.0	10.7	170
BZW04-128	BZW04-128B	1	128	143	1	207	2.0	265	9.0	10.8	145
BZW04-154	BZW04-154B	1	154	171	1	246	1.6	317	7.0	10.8	125
BZW04-171	BZW04-171B	1	171	190	1	274	1.5	353	6.5	10.8	120
BZW04-188	BZW04-188B	1	188	209	1	328	1.4	388	6.0	10.8	110
BZW04-213	BZW04-213B	1	231	237	1	344	1.5	442	5.2	11.0	100
BZW04-256	BZW04-256B	1	256	285	1	414	1.2	529	4.3	11.0	90

Types		I <sub>RM</sub> @ V <sub>RM</sub>		V <sub>BR</sub> @ I <sub>R</sub>		V <sub>CL</sub> @ I <sub>PP</sub>		V <sub>CL</sub> @ I <sub>PP</sub>		αT	C
				min	note2	max		max		max	note3
Unidirectional	Bidirectional	μA	V	V	mA	V	A	V	A	10 <sup>-4</sup> /°C	pF
BZW04-273	BZW04-273B	1	273	304	1	438	1.2	564	4.0	11.0	85
BZW04-299	BZW04-299B	1	299	332	1	482	0.9	618	3.7	11.0	80
BZW04-342	BZW04-342B	1	342	380	1	548	0.9	706	3.2	11.0	75
BZW04-376	BZW04-376B	1	376	418	1	603	0.8	776	3.0	11.0	70



- Note 2 :** Pulse test: t<sub>p</sub> < 50 ms.
- Note 3 :** ΔV<sub>BR</sub> = αT \* (T<sub>amb</sub> - 25) \* V<sub>BR</sub>(25°C)
- Note 4 :** V<sub>R</sub> = 0 V, F = 1 MHz. For bidirectional types, capacitance value is divided by 2

**Fig. 1:** Peak pulse power dissipation versus initial junction temperature (printed circuit board).

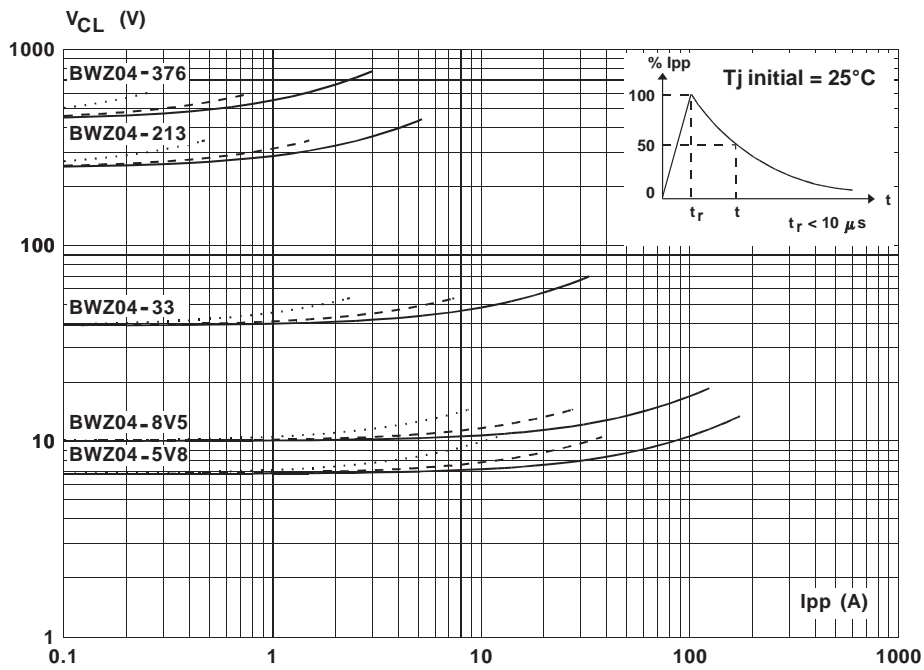


Fig. 2 : Peak pulse power versus exponential pulse duration.



Fig. 3 : Clamping voltage versus peak pulse current.

Exponential waveform  $t_p = 20 \mu s$  \_\_\_\_\_  
 $t_p = 1 ms$  \_\_\_\_\_  
 $t_p = 10 ms$  .....



**Note :** The curves of the figure 3 are specified for a junction temperature of 25°C before surge.  
 The given results may be extrapolated for other junction temperatures by using the following formula :  
 $\Delta V_{BR} = \alpha T * (T_{amb} - 25) * V_{BR} (25^\circ C)$ .  
 For intermediate voltages, extrapolate the given results.

**Fig. 4a:** Capacitance versus reverse applied voltage for unidirectional types (typical values).

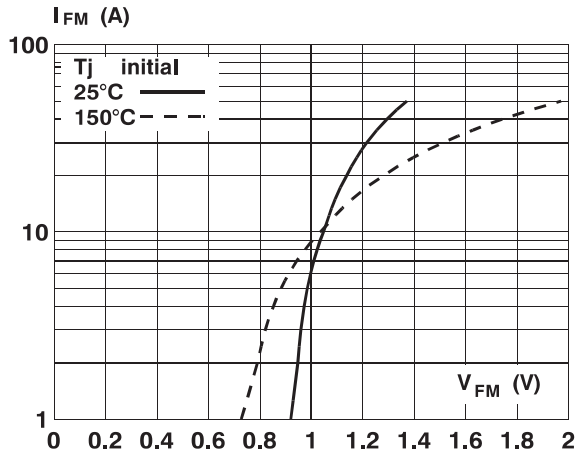


**Fig. 4b:** Capacitance versus reverse applied voltage for bidirectional types (typical values).



**Fig. 5:** Peak forward voltage drop versus peak forward current (typical values for unidirectional types).

Note : Multiply by 2 for units with  $V_{BR} > 220V$ .



**Fig. 6:** Transient thermal impedance junction ambient versus pulse duration (For FR4 PC Board with L lead = 10mm).



**Fig. 7 :** Relative variation of leakage current versus junction temperature.



## BZW04-xx


### ORDER



**MARKING** : Logo, Date Code, Type Code, Cathode Band (for unidirectional types only).

### PACKAGE MECHANICAL DATA

DO-15 (Plastic)

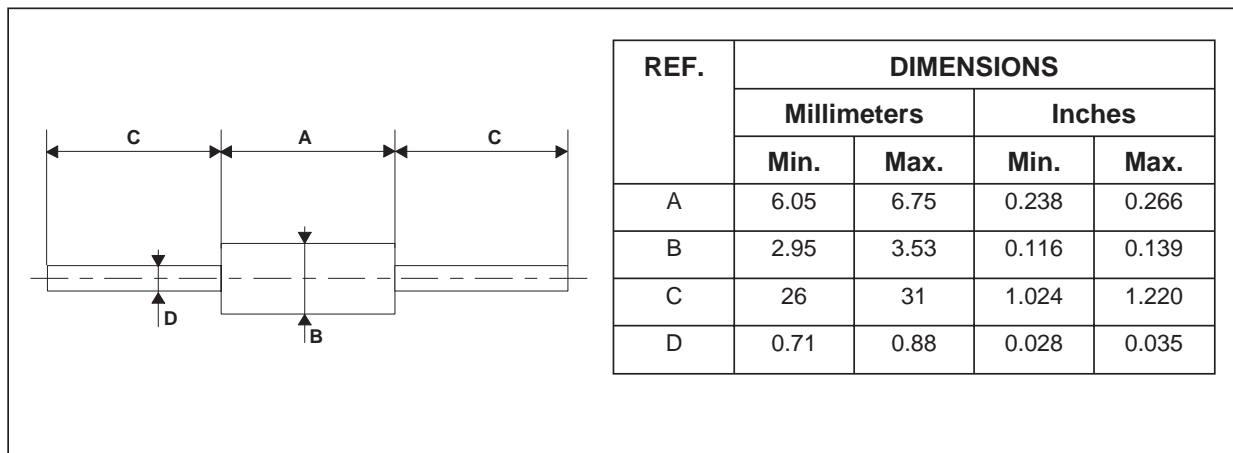

**Packaging:** standard packaging is in tape and reel.

**Weight** = 0.4 g.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
 © 2003 STMicroelectronics - Printed in Italy - All rights reserved.  
 STMicroelectronics GROUP OF COMPANIES  
 Australia - Brazil - Canada - China - Finland - France - Germany  
 Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore  
 Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.