


## MT 1,5-TWIN BU


Order No.: 3025532

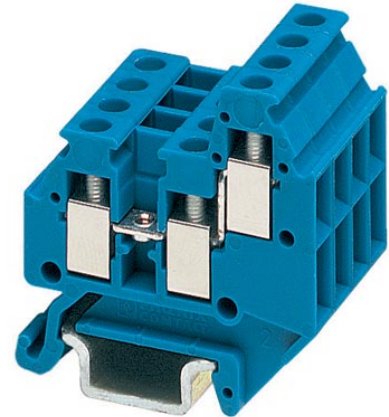

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3025532>

Feed-through modular terminal block, Cross section: 0.14 mm<sup>2</sup> - 1.5 mm<sup>2</sup>, AWG: 26 - 16, Connection type: Screw connection, Width: 4.2 mm, Color: blue, Mounting type: NS 15

### Commercial data

|                          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 154660 |
| sales group              | A100   |
| Pack                     | 50 pcs.  |
| Customs tariff           | 85369010   |
| Catalog page information | Page 429 (CL-2009)   |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

|                       |      |
|-----------------------|------|
| Number of levels      | 2    |
| Number of connections | 3    |
| Color                 | blue |

|                                    |    |
|------------------------------------|----|
| Insulating material                | PA |
| Inflammability class acc. to UL 94 | V0 |

**Dimensions**

|        |        |
|--------|--------|
| Width  | 4.2 mm |
| Length | 28 mm  |

**Technical data**

|                                  |   |
|----------------------------------|---|
| Rated surge voltage              | 4 kV  |
| Pollution degree                 | 3   |
| Surge voltage category           | III   |
| Insulating material group        | I   |
| Connection in acc. with standard | IEC 60947-7-1   |
| Nominal current $I_N$            | 17.5 A (the maximum load current must not be exceeded by the total current of all connected conductors) |
| Nominal voltage $U_N$            | 400 V   |

**Connection data**

|   |                      |
|---|----------------------|
| Conductor cross section solid min.  | 0.14 mm <sup>2</sup> |
| Conductor cross section solid max.  | 1.5 mm <sup>2</sup>  |
| Conductor cross section stranded min.   | 0.14 mm <sup>2</sup> |
| Conductor cross section stranded max.   | 1.5 mm <sup>2</sup>  |
| Conductor cross section AWG/kcmil min.  | 26                   |
| Conductor cross section AWG/kcmil max   | 16                   |
| Conductor cross section stranded, with ferrule without plastic sleeve min.            | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule without plastic sleeve max.            | 0.75 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve min.               | 0.25 mm <sup>2</sup> |
| Conductor cross section stranded, with ferrule with plastic sleeve max.               | 0.75 mm <sup>2</sup> |
| 2 conductors with same cross section, solid min.                                      | 0.14 mm <sup>2</sup> |
| 2 conductors with same cross section, solid max.                                      | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded min.                                   | 0.14 mm <sup>2</sup> |
| 2 conductors with same cross section, stranded max.                                   | 0.5 mm <sup>2</sup>  |
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, min. | 0.25 mm <sup>2</sup> |

|   |                      |
|---|----------------------|
| 2 conductors with same cross section, stranded, ferrules without plastic sleeve, max. | 0.34 mm <sup>2</sup> |
| Type of connection  | Screw connection     |
| Stripping length  | 6 mm                 |
| Internal cylindrical gage   | A1                   |
| Screw thread  | M2                   |
| Tightening torque, min  | 0.22 Nm              |
| Tightening torque max   | 0.25 Nm              |

**Certificates / Approvals**



Certification CCA, DNV, GL, GOST, KEMA, UL

**Accessories**

| Item            | Designation          | Description   |
|-----------------|----------------------|---|
| <b>Assembly</b> |                      |   |
| 3025545         | D-MT 1,5-TWIN BU     | End cover, Length: 28 mm, Width: 1 mm, Color: blue                                |
| 1401637         | E/MBK                | End clamp, width: 6.2 mm, color: gray   |
| 1401763         | NS 15 AL PERF 2000MM | DIN rail, material: Aluminum, perforated, height 5.5 mm, width 15 mm, length: 2 m |
| 1401682         | NS 15 PERF 2000MM    | DIN rail, material: steel, perforated, height 5.5 mm, width 15 mm, length: 2 m    |
| 1401695         | NS 15 UNPERF 2000MM  | DIN rail, material: Steel, unperforated, height 5.5 mm, width 15 mm, length: 2 m  |

| <b>Bridges</b> |             |  |
|----------------|-------------|--|
| Item           | Designation | Description  |
| 3001569        | FBRN 4-4 N  | Fixed bridge, Number of positions: 4, Color: aluminum  |
| 3001572        | FBRN 5-4 N  | Fixed bridge, Number of positions: 5, Color: aluminum  |
| 3001585        | FBRN 6-4 N  | Fixed bridge, Number of positions: 6, Color: aluminum  |
| 3001598        | FBRN 7-4 N  | Fixed bridge, Number of positions: 7, Color: aluminum  |
| 3001608        | FBRN 8-4 N  | Fixed bridge, Number of positions: 8, Color: aluminum  |
| 3001624        | FBRN 10-4 N | Fixed bridge, Number of positions: 10, Color: silver   |
| 3001637        | FBRN 20-4 N | Fixed bridge, Number of positions: 20, Color: aluminum |

**Marking**

|         |               |   |
|---------|---------------|---|
| 0803634 | ZBFM 4:SO/CMS | Special printing, Zack marker sheet, flat, 100-section, divisible, marking according to customer requirements |
|---------|---------------|---|

**Tools**

|         |                 |   |
|---------|-----------------|---|
| 1205037 | SZS 0,4X2,5 VDE | Screwdriver, bladed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip |
|---------|-----------------|---|

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.