



## SERIES: VBM-100 | DESCRIPTION: AC-DC POWER SUPPLY

### FEATURES


- up to 100 W isolated output
- baseplate cooling
- active PFC meets EN61000-3-2 Class D
- 17mm ultra low profile encapsulated packaging
- universal input (90~264 Vac)
- no load power consumption < 0.5 W
- single output from 12~48 Vdc
- 4,242 Vdc isolation
- wide operating temperature range (-20°C~85°C)
- over temperature, over voltage, and short circuit protections
- high efficiency up to 92%



| MODEL      | output<br>voltage<br>(Vdc) | output<br>current<br>max<br>(A) | output<br>power<br>max<br>(W) | ripple<br>and noise <sup>1</sup><br>max<br>(mVp-p) | efficiency<br>typ<br>(%) |
|------------|----------------------------|---------------------------------|-------------------------------|----------------------------------------------------|--------------------------|
| VBM-100-12 | 12                         | 8.4                             | 100                           | 120                                                | 90                       |
| VBM-100-24 | 24                         | 4.2                             | 100                           | 240                                                | 91                       |
| VBM-100-28 | 28                         | 3.6                             | 100                           | 280                                                | 91                       |
| VBM-100-36 | 36                         | 2.8                             | 100                           | 360                                                | 91                       |
| VBM-100-48 | 48                         | 2.1                             | 100                           | 480                                                | 92                       |

Notes: 1. ripple and noise are measured at 20 MHz BW with 10μF electrolytic capacitor and 0.1μF ceramic capacitor across output

### PART NUMBER KEY

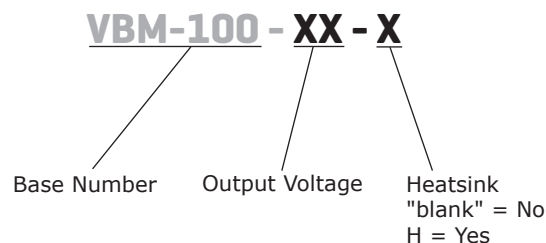

## INPUT

| parameter                 | conditions/description | min | typ | max | units |
|---------------------------|------------------------|-----|-----|-----|-------|
| voltage                   |                        | 90  |     | 264 | Vac   |
| frequency                 |                        | 47  |     | 63  | Hz    |
| inrush current            | at 240 Vac             |     |     | 100 | A     |
| leakage current           | at 264 Vac             |     |     | 3.5 | mA    |
| no load power consumption |                        |     |     | 0.5 | W     |

## OUTPUT

| parameter               | conditions/description           | min | typ   | max  | units |
|-------------------------|----------------------------------|-----|-------|------|-------|
| line regulation         | high line to low line, full load |     |       | ±0.5 | %     |
| load regulation         | 60% ±40% rated load              |     |       | ±1   | %     |
| voltage accuracy        | set at 60% rated load and 25°C   |     |       | ±1   | %     |
| hold-up time            |                                  |     | 16    |      | ms    |
| switching frequency     |                                  |     | 130   |      | kHz   |
| temperature coefficient |                                  |     | ±0.05 |      | %/°C  |

## PROTECTIONS

| parameter                   | conditions/description              | min | typ | max | units |
|-----------------------------|-------------------------------------|-----|-----|-----|-------|
| over voltage protection     | recycle ac input to restart         |     |     |     |       |
| short circuit protection    | hiccup mode, recovers automatically |     |     |     |       |
| over temperature protection | auto recovery                       |     |     |     |       |


## SAFETY AND COMPLIANCE

| parameter         | conditions/description                                                                          | min   | typ | max | units |
|-------------------|-------------------------------------------------------------------------------------------------|-------|-----|-----|-------|
| isolation voltage | input to output                                                                                 | 4,242 |     |     | Vdc   |
| safety approvals  | IEC 60950-1, EN 60950-1, UL 60950-1                                                             |       |     |     |       |
| EMI/EMC           | EN 55022 Class B, FCC Part 15 Class B, EN 61000-6-(1,3), EN 61000-3-(2,3), EN 55024, EN 61204-3 |       |     |     |       |
| RoHS compliant    | yes                                                                                             |       |     |     |       |

## ENVIRONMENTAL

| parameter             | conditions/description | min | typ | max | units |
|-----------------------|------------------------|-----|-----|-----|-------|
| operating temperature | see derating curves    | -20 |     | 85  | °C    |
| storage temperature   |                        | -40 |     | 100 | °C    |
| humidity              | non-condensing         |     |     | 93  | %     |

## DERATING CURVES

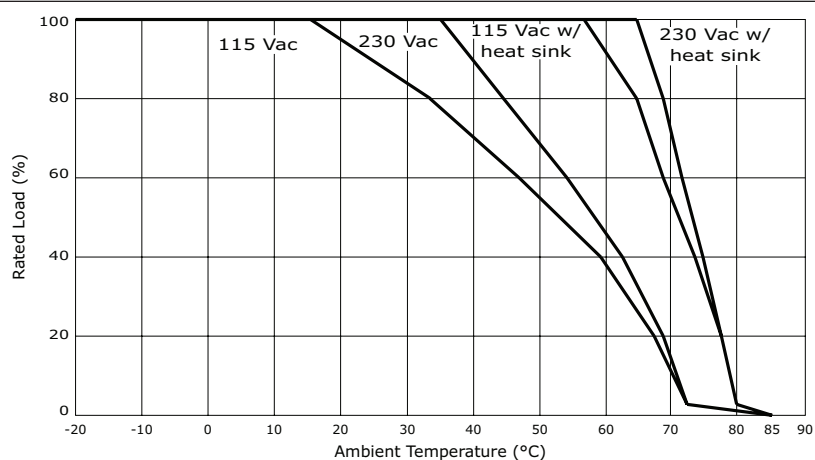

## MECHANICAL




| parameter  | conditions/description                            | min | typ        | max | units    |
|------------|---------------------------------------------------|-----|------------|-----|----------|
| dimensions | 4.598 x 2.402 x 0.669 (116.80 x 61.00 x 17.00 mm) |     |            |     | inch     |
| weight     | without heatsink                                  |     | 220<br>0.5 |     | g<br>lbs |

## MECHANICAL DRAWING

units: inch[mm]



tolerance: inches: x.xx =  $\pm 0.02$ , x.xxx =  $\pm 0.010$ mm: x.x =  $\pm 0.5$ , x.xx =  $\pm 0.25$ 

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN             | FUNCTION |
| 1               | AC(L)    |
| 2               | AC(N)    |
| 3               | FG       |
| 4               | +Vout    |
| 5               | -Vout    |

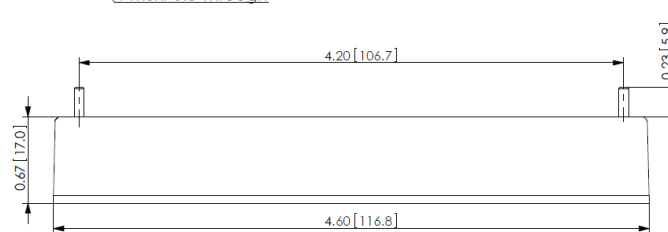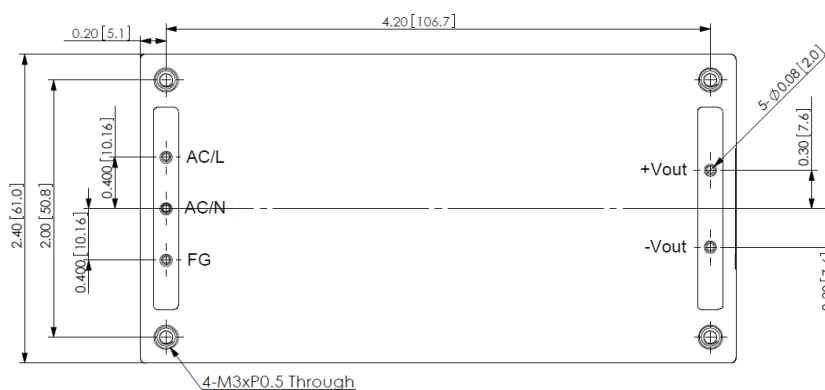

## HEATSINK

units: mm

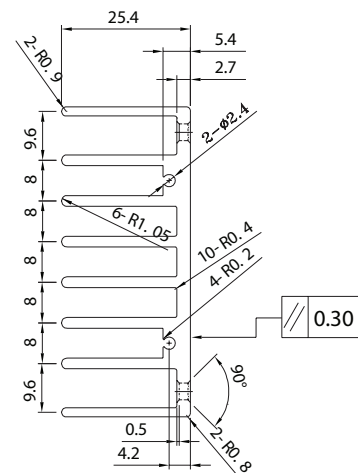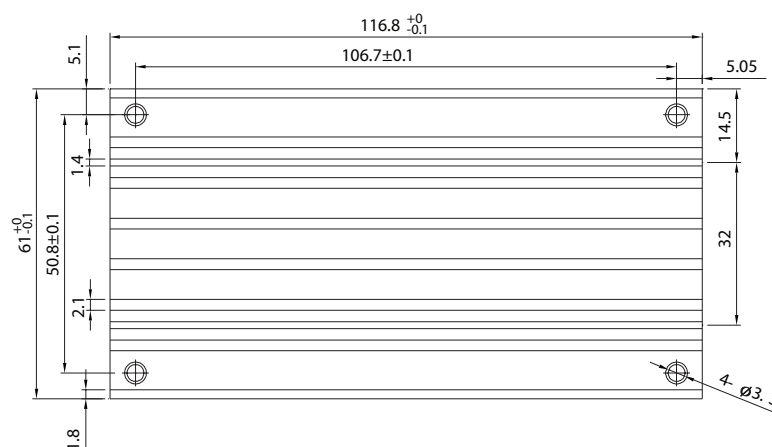

All specifications measured at: Ta=25°C, 230 Vac input voltage and 60% rated output load, unless otherwise specified.

## REVISION HISTORY

| rev. | description             | date       |
|------|-------------------------|------------|
| 1.0  | initial release         | 06/10/2013 |
| 1.01 | updated derating curves | 07/08/2013 |
| 1.02 | added features          | 07/17/2013 |

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.