




COMMUNICATIONS AND
CONTROL PROCESSOR

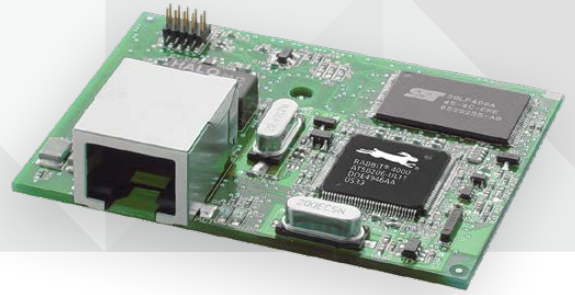

DIGI RABBITCORE RCM4000 SERIES

A powerful embedded Ethernet control device with the intelligence and Internet connectivity needed for remote monitoring and control of your devices

The RCM4000 series is designed to mount directly to a user-supplied motherboard and acts as the microprocessor of the embedded system. The microprocessor features 28 GPIO lines shared with up to five serial ports and four levels of alternate pin functions that include variable phase PWM, quadrature decoder and input capture.

The RCM4000 series, with its robust feature set, ample memory, 10Base-T Ethernet and analog, is ready for network

connectivity and I/O control for true device Internet communication and control. Evaluation of the RCM4000 is easy with the RCM4000 development kit.

BENEFITS

- Rabbit 4000 running at 59 MHz
- Up to 1 MB (16-bit) Program Flash, 1 MB (16-bit) SRAM, 32 MB of Flash memory
- 10Base-T Ethernet (RJ-45 connector), up to 28 GPIO, up to 5 serial ports
- 8 channels 12-bit A/D converter
- Web server capability and remote device control
- Low-cost and easily deployable platform for non-critical embedded security
- Security-key feature with “tamper detect” and encryption capabilities

RELATED PRODUCTS



RabbitCore®
RCM4100
Series



RabbitCore®
RCM4200
Series



Rabbit® SBC
BL4S200
Series



RabbitCore®
RCM4300
Series



Dynamic C®

APPLICATION EXAMPLE



COMPUTER
TERMINAL

Ethernet



JUNCTION BOX WHERE
RCM400 RESIDES

BUILDING SECURITY

RABBITCORE® RCM4000



RS-232



Door Sensor



Camera



Door Sensor

SPECIFICATIONS		RCM4000		RCM4010	
FEATURES					
MICROPROCESSOR		Rabbit® 4000 at 59 MHz			
EMI REDUCTION		Spectrum spreader for reduced EMI (radiated emissions)			
ETHERNET PORT		10Base-T, RJ-45, 2 LEDs			
SRAM (16-BIT)		512K			
FLASH MEMORY (16-BIT) (PROGRAM)		512K			
SERIAL MEMORY (DATA) (NAND FLASH)		32 MB (NAND flash)		—	
BACKUP BATTERY		Connection for user-supplied backup battery (to support RTC and data SRAM)			
GENERAL PURPOSE I/O		22 parallel digital I/O lines: Configurable with 4 layers of alternate functions		28 parallel digital I/O lines: Configurable with 4 layers of alternate functions	
ADDITIONAL INPUTS		2 startup mode, reset in, CONVERT		2 startup mode, reset in	
ADDITIONAL OUTPUTS		Status, reset out, analog VREF		Status, reset out	
ANALOG INPUTS		8 channels single-ended or 4 channels differential programmable gain 1, 2, 4, 5, 8, 10, 16 and 20 V/V		—	
A/D CONVERTER RESOLUTION		12 bits (11 bits single-ended)		—	
A/D CONVERSION TIME (INCLUDING 120 MS RAW COUNTED AND DYNAMIC C®)		180 µs		—	
AUXILIARY I/O BUS		8 data lines and 6 address lines (shared with parallel I/O lines), plus I/O read/write			
SERIAL PORTS		4 shared high-speed, CMOS-compatible ports: All 4 configurable as asynchronous (with IrDA) or as clocked serial (SPI) 1 asynchronous clocked serial port shared with programming port 1 clocked serial port shared with A/D converter		5 shared high-speed, CMOS-compatible ports: All 5 configurable as asynchronous (with IrDA), 4 as clocked serial (SPI), and 1 as SDLC/HDLC 1 asynchronous clocked serial port shared with programming port	
SERIAL RATE		Maximum asynchronous baud rate = CLK/8			
SLAVE INTERFACE		Slave port allows the RCM4000 to be used as an intelligent peripheral device slaved to a master processor			
REAL TIME CLOCK		Yes			
TIMERS		Ten 8-bit timers (6 cascable from the first), one 10-bit timer with 2 match registers, and one 16-bit timer with 4 outputs and 8 set/reset registers			
WATCHDOG/SUPERVISOR		Yes			
PULSE-WIDTH MODULATORS		—		2 channels: Synchronized PWM with 10-bit counter Variable-phase synchronized PWM with 16-bit counter	
QUADRATURE DECODER		—		2-channel quadrature decoder accepts inputs from external incremental encoder modules	
POWER		3.0– 3.6 VDC, 90 mA @ 3.3V (preliminary, pins unloaded)			
OPERATING TEMPERATURE		0° C to +70° C			
HUMIDITY		5% to 95%, non-condensing			
CONNECTORS		Programming header			
BOARD SIZE		1.84" × 2.42" × 0.77" (47 mm × 61 mm × 20 mm)			
PRODUCT WARRANTY		3 years			

PART NUMBERS	DESCRIPTION
20-101-1094	RCM4000
20-101-1112	RCM4010

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2019 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001547
C4/319

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.