



# PHOTOCOUPLER PS2802-1, PS2802-4

## HIGH ISOLATION VOLTAGE DARLINGTON TRANSISTOR TYPE SSOP PHOTOCOUPLER

–NEPOC Series–

### DESCRIPTION

The PS2802-1 and PS2802-4 are optically coupled isolators containing a GaAs light emitting diode and an NPN silicon darlington-connected photo transistor in a plastic SSOP for high density applications.

This package has shield effect to cut off ambient light.

### FEATURES


- High isolation voltage ( $BV = 2\,500\text{ V}_{r.m.s.}$ )
- Small and thin package (4,16-pin SSOP, Pin pitch 1.27 mm)
- High current transfer ratio ( $CTR = 2\,000\%$  TYP. @  $I_F = 1\text{ mA}$ ,  $V_{CE} = 2\text{ V}$ )
- Ordering number of tape product: PS2802-1-F3, F4, PS2802-4-F3, F4
- ★ • Safety standards: PS2802-1, -4
  - UL approved: File No. E72422
  - BSI approved: No. 8188, 8189
  - CSA approved: File No. CA 101391
  - DIN EN60747-5-2 (VDE0884 Part2) approved (Option)

### APPLICATIONS


- Programmable logic controllers
- Measuring instruments
- Hybrid IC

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

**PACKAGE DIMENSIONS (UNIT: mm)**

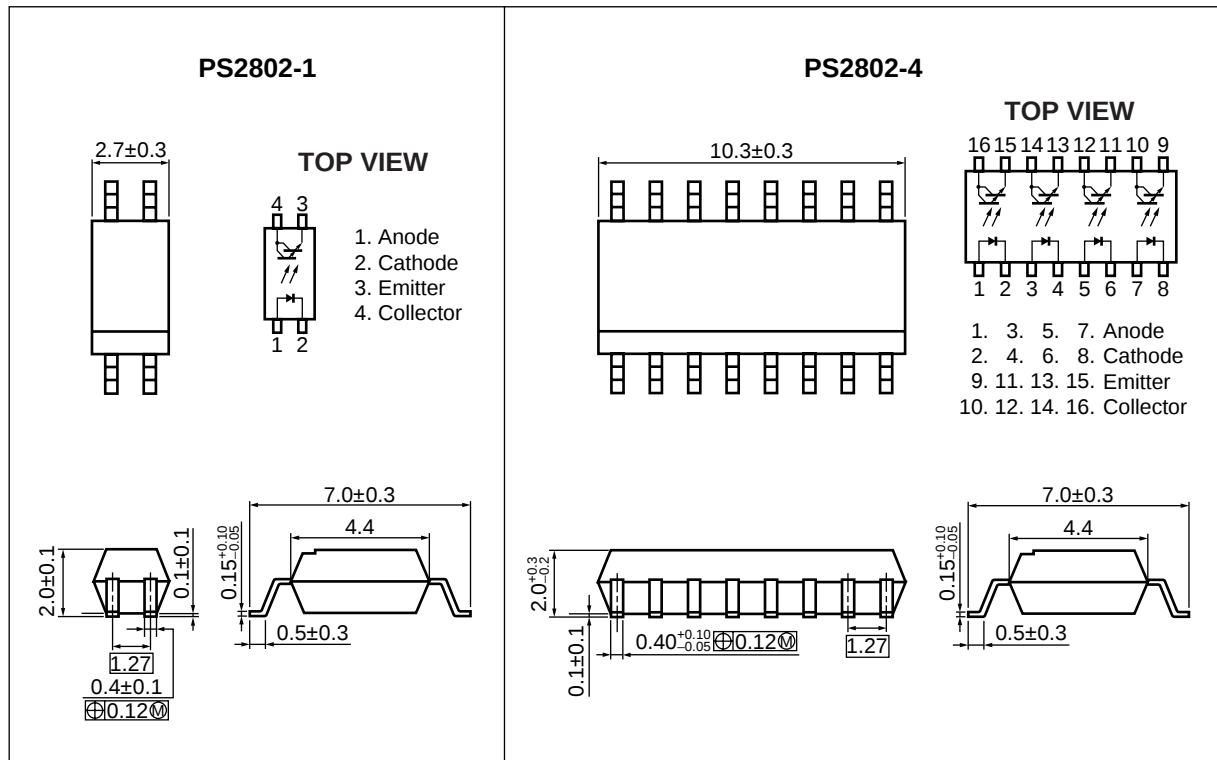

★ **MARKING EXAMPLE**

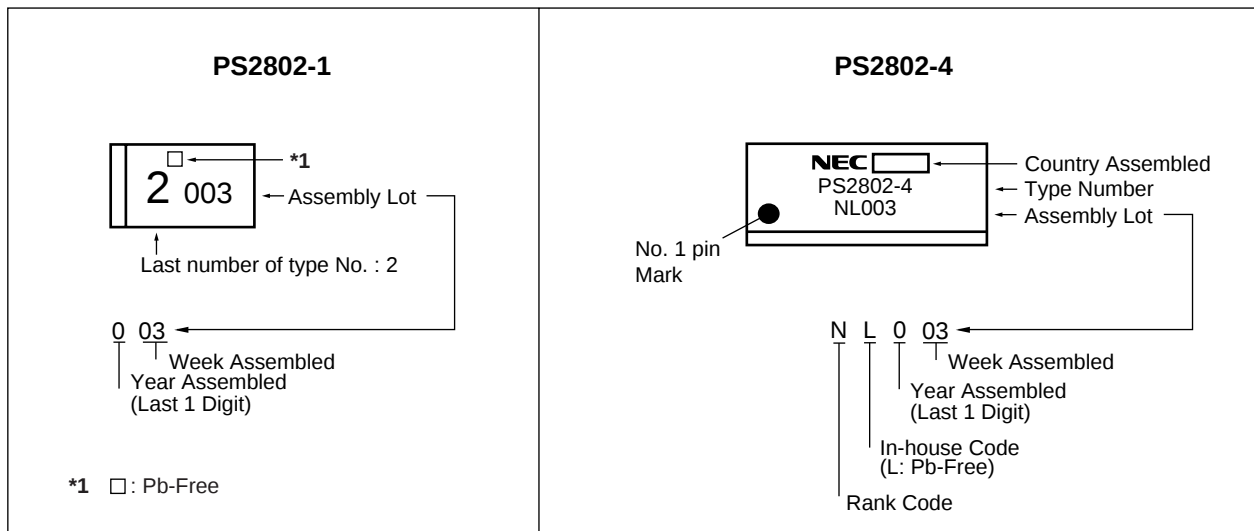

**★ ORDERING INFORMATION**

| Part Number   | Order Number    | Solder Plating Specification | Packing Style                | Safety Standard Approval                                | Application Part Number*1 |
|---------------|-----------------|------------------------------|------------------------------|---------------------------------------------------------|---------------------------|
| PS2802-1      | PS2802-1-A      | Pb-Free                      | 50 pcs (Tape 50 pcs cut)     | Standard products<br>(UL, BSI, CSA approved)            | PS2802-1                  |
| PS2802-1-F3   | PS2802-1-F3-A   |                              | Embossed Tape 3 500 pcs/reel |                                                         |                           |
| PS2802-1-F4   | PS2802-1-F4-A   |                              |                              |                                                         |                           |
| PS2802-1-V    | PS2802-1-V-A    |                              | 50 pcs (Tape 50 pcs cut)     | DIN EN60747-5-2<br>(VDE0884 Part2)<br>Approved (Option) |                           |
| PS2802-1-V-F3 | PS2802-1-V-F3-A |                              | Embossed Tape 3 500 pcs/reel |                                                         |                           |
| PS2802-1-V-F4 | PS2802-1-V-F4-A |                              |                              |                                                         |                           |
| PS2802-4      | PS2802-4-A      | Pb-Free                      | Magazine Case 45 pcs         | Standard products<br>(UL, BSI, CSA approved)            | PS2802-4                  |
| PS2802-4-F3   | PS2802-4-F3-A   |                              | Embossed Tape 2 500 pcs/reel |                                                         |                           |
| PS2802-4-F4   | PS2802-4-F4-A   |                              |                              |                                                         |                           |
| PS2802-4-V    | PS2802-4-V-A    |                              | Magazine Case 45 pcs         | DIN EN60747-5-2<br>(VDE0884 Part2)<br>Approved (Option) |                           |
| PS2802-4-V-F3 | PS2802-4-V-F3-A |                              | Embossed Tape 2 500 pcs/reel |                                                         |                           |
| PS2802-4-V-F4 | PS2802-4-V-F4-A |                              |                              |                                                         |                           |

**\*1** For the application of the Safety Standard, following part number should be used.

**ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C, unless otherwise specified)**

| Parameter                       |                                    | Symbol              | Ratings     |          | Unit    |
|---------------------------------|------------------------------------|---------------------|-------------|----------|---------|
|                                 |                                    |                     | PS2802-1    | PS2802-4 |         |
| Diode                           | Forward Current (DC)               | I <sub>F</sub>      | 50          |          | mA/ch   |
|                                 | Reverse Voltage                    | V <sub>R</sub>      | 6           |          | V       |
|                                 | Power Dissipation Derating         | ΔP <sub>D</sub> /°C | 0.6         | 0.8      | mW/°C   |
|                                 | Power Dissipation                  | P <sub>D</sub>      | 60          | 80       | mW/ch   |
|                                 | Peak Forward Current <sup>*1</sup> | I <sub>FP</sub>     | 1           |          | A/ch    |
| Transistor                      | Collector to Emitter Voltage       | V <sub>CEO</sub>    | 40          |          | V       |
|                                 | Emitter to Collector Voltage       | V <sub>ECO</sub>    | 6           |          | V       |
|                                 | Collector Current                  | I <sub>C</sub>      | 90          | 100      | mA/ch   |
|                                 | Power Dissipation Derating         | ΔP <sub>C</sub> /°C | 1.2         |          | mW/°C   |
|                                 | Power Dissipation                  | P <sub>C</sub>      | 120         |          | mW/ch   |
| Isolation Voltage <sup>*2</sup> |                                    | BV                  | 2 500       |          | Vr.m.s. |
| Operating Ambient Temperature   |                                    | T <sub>A</sub>      | -55 to +100 |          | °C      |
| Storage Temperature             |                                    | T <sub>stg</sub>    | -55 to +150 |          | °C      |

**\*1** PW = 100 μs, Duty Cycle = 1%

**\*2** AC voltage for 1 minute at T<sub>A</sub> = 25°C, RH = 60% between input and output

Pins 1-2 shorted together, 3-4 shorted together (PS2802-1).

Pins 1-8 shorted together, 9-16 shorted together (PS2802-4).

ELECTRICAL CHARACTERISTICS ( $T_A = 25\text{ }^{\circ}\text{C}$ )

| Parameter  |                                                    | Symbol        | Conditions                                                              | MIN.      | TYP.  | MAX. | Unit          |
|------------|----------------------------------------------------|---------------|-------------------------------------------------------------------------|-----------|-------|------|---------------|
| Diode      | Forward Voltage                                    | $V_F$         | $I_F = 5\text{ mA}$                                                     |           | 1.1   | 1.4  | V             |
|            | Reverse Current                                    | $I_R$         | $V_R = 5\text{ V}$                                                      |           |       | 5    | $\mu\text{A}$ |
|            | Terminal Capacitance                               | $C_t$         | $V = 0\text{ V}$ , $f = 1.0\text{ MHz}$                                 |           | 15    |      | pF            |
| Transistor | Collector to Emitter Dark Current                  | $I_{CEO}$     | $V_{CE} = 40\text{ V}$ , $I_F = 0\text{ mA}$                            |           |       | 400  | nA            |
| Coupled    | Current Transfer Ratio ( $I_C/I_F$ ) <sup>*1</sup> | CTR           | $I_F = 1\text{ mA}$ , $V_{CE} = 2\text{ V}$                             | 200       | 2 000 |      | %             |
|            | Collector Saturation Voltage                       | $V_{CE(sat)}$ | $I_F = 1\text{ mA}$ , $I_C = 2\text{ mA}$                               |           |       | 1.0  | V             |
|            | Isolation Resistance                               | $R_{I-O}$     | $V_{I-O} = 1.0\text{ kV}_{DC}$                                          | $10^{11}$ |       |      | $\Omega$      |
|            | Isolation Capacitance                              | $C_{I-O}$     | $V = 0\text{ V}$ , $f = 1.0\text{ MHz}$                                 |           | 0.4   |      | pF            |
|            | Rise Time <sup>*2</sup>                            | $t_r$         | $V_{CC} = 5\text{ V}$ , $I_C = 2\text{ mA}$ , $R_L = 100\text{ }\Omega$ |           | 200   |      | $\mu\text{s}$ |
|            | Fall Time <sup>*2</sup>                            | $t_f$         |                                                                         |           | 200   |      |               |


**\*1** CTR rank (PS2802-1 only)

K : 2 000 to (%)

L : 700 to 3 400 (%)


M : 200 to 1 000 (%)

N : 200 to (%)

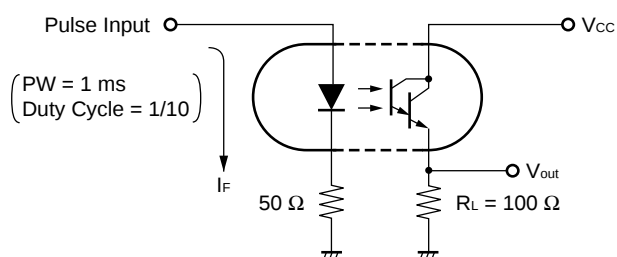
**\*2** Test circuit for switching time

**TYPICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)**


**DIODE POWER DISSIPATION vs. AMBIENT TEMPERATURE**

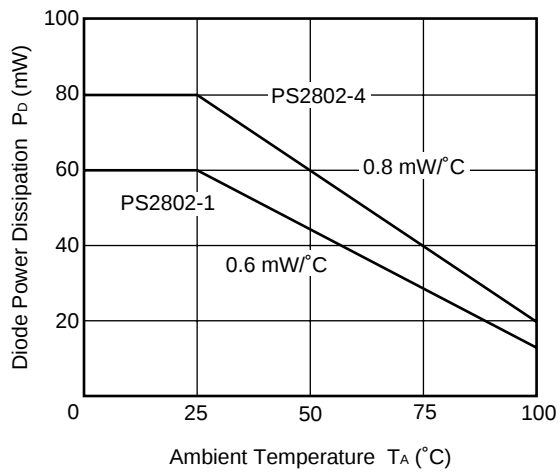


**TRANSISTOR POWER DISSIPATION vs. AMBIENT TEMPERATURE**

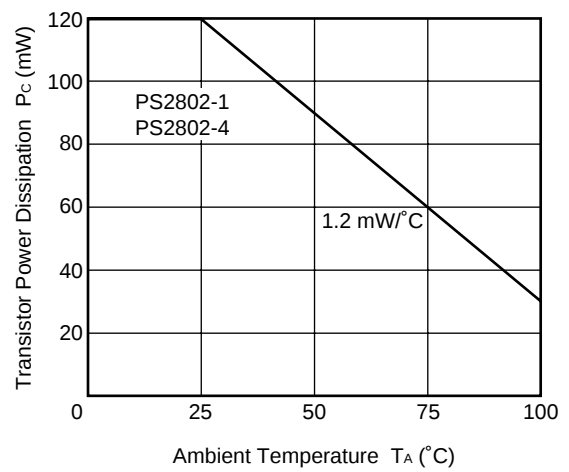


**FORWARD CURRENT vs. FORWARD VOLTAGE**

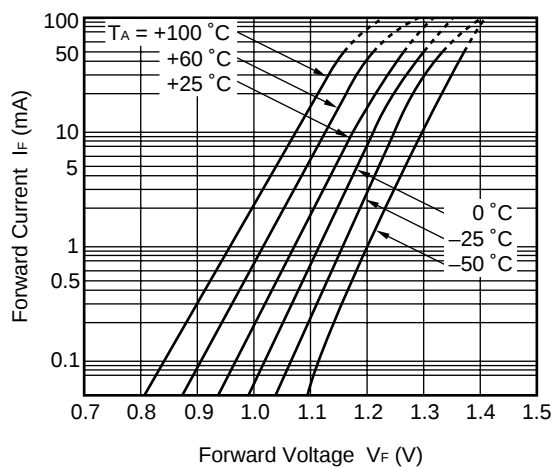


**COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE**

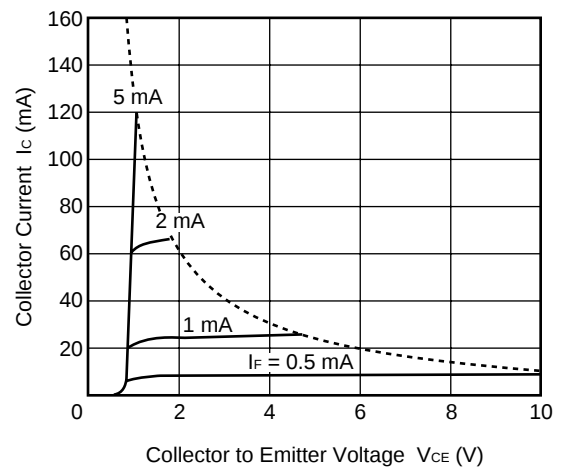

**COLLECTOR TO EMITTER DARK CURRENT vs. AMBIENT TEMPERATURE**

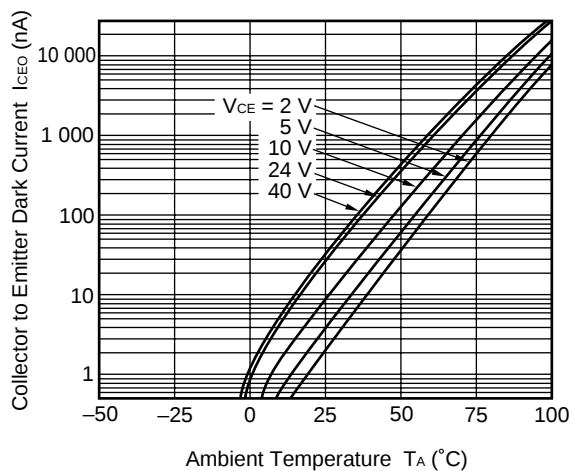


**COLLECTOR CURRENT vs. COLLECTOR SATURATION VOLTAGE**

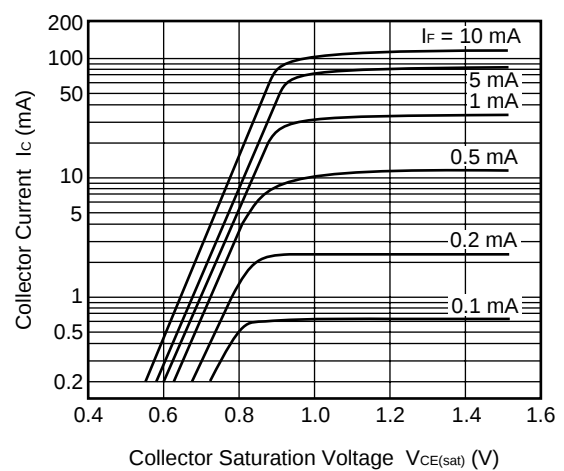


**Remark** The graphs indicate nominal characteristics.


NORMALIZED CURRENT TRANSFER RATIO vs. AMBIENT TEMPERATURE

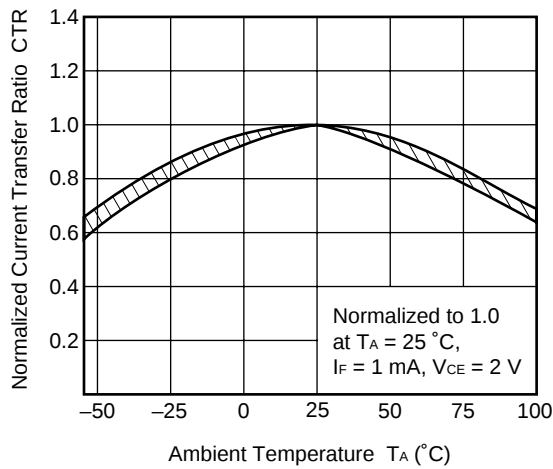


CURRENT TRANSFER RATIO vs. FORWARD CURRENT

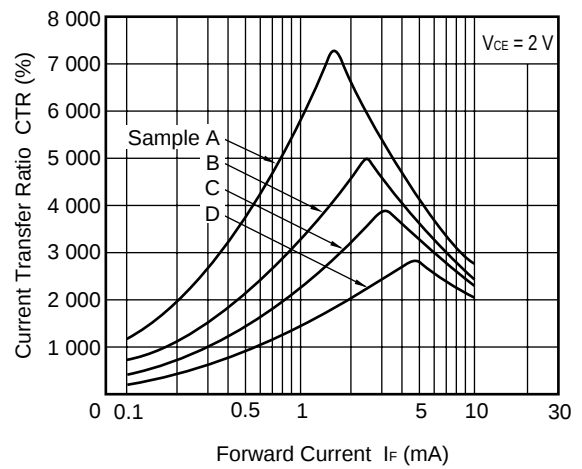


SWITCHING TIME vs. LOAD RESISTANCE

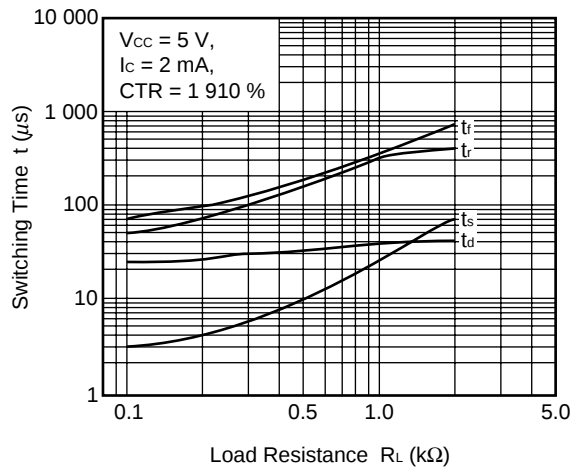


CURRENT TRANSFER RATIO vs. FORWARD CURRENT

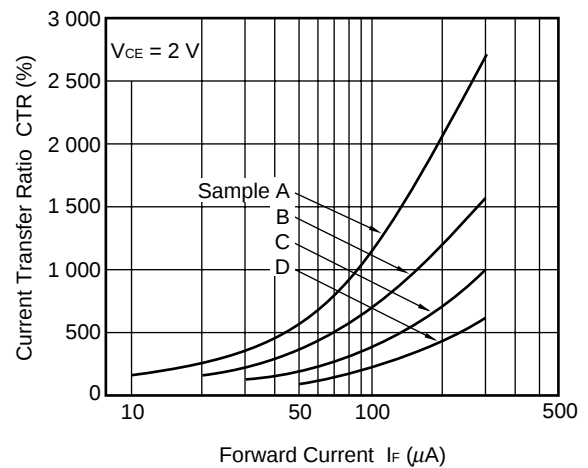


SWITCHING TIME vs. LOAD RESISTANCE

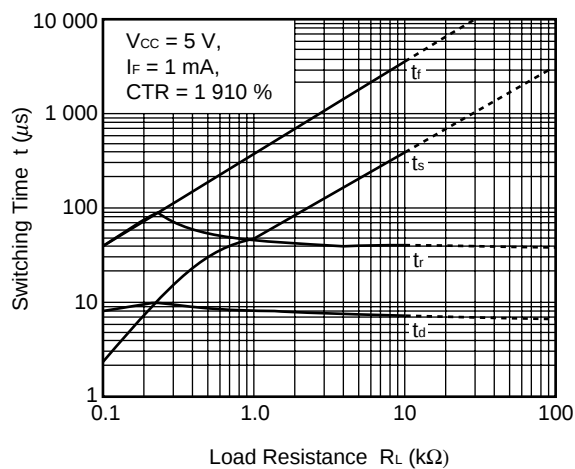

FREQUENCY RESPONSE

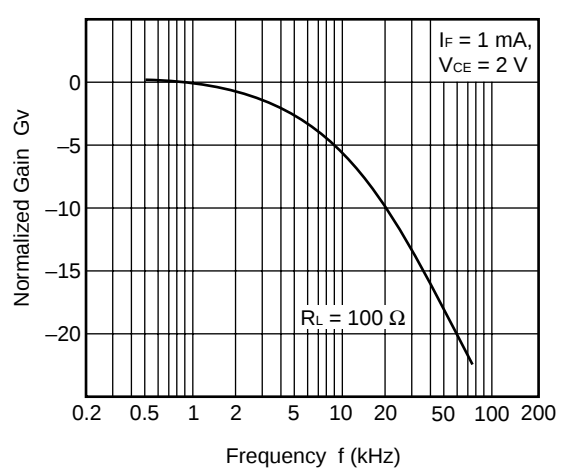


**Remark** The graphs indicate nominal characteristics.

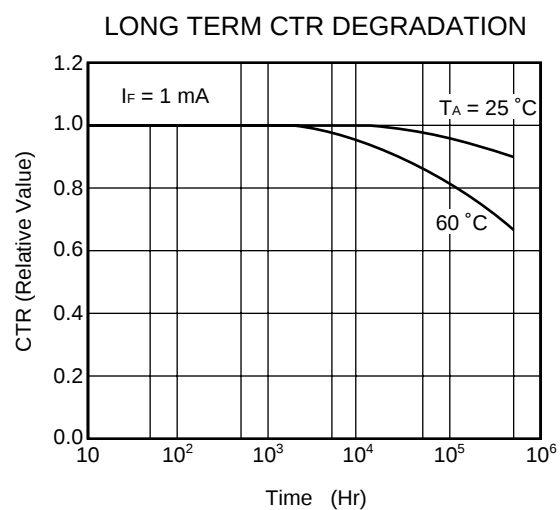


**Remark** The graph indicates nominal characteristics.

TAPING SPECIFICATIONS (UNIT: mm)


Outline and Dimensions (Tape)

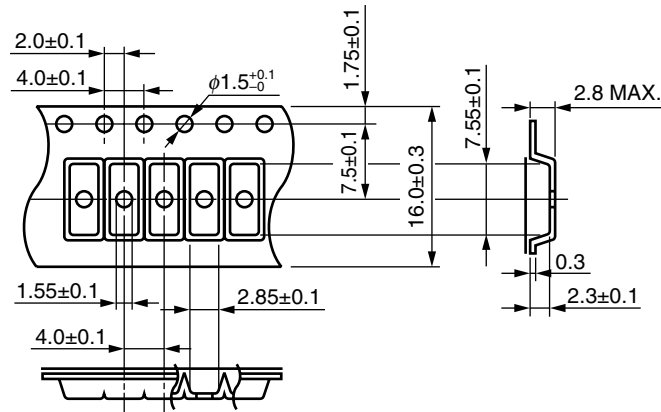

Tape Direction

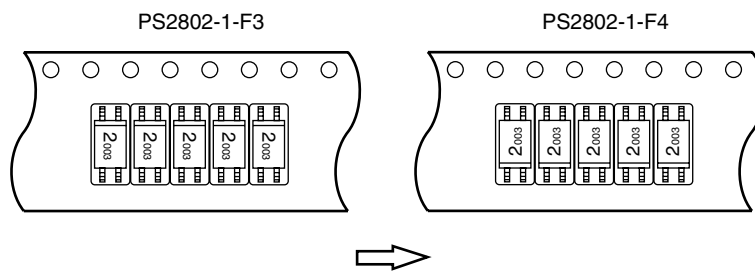


Outline and Dimensions (Reel)

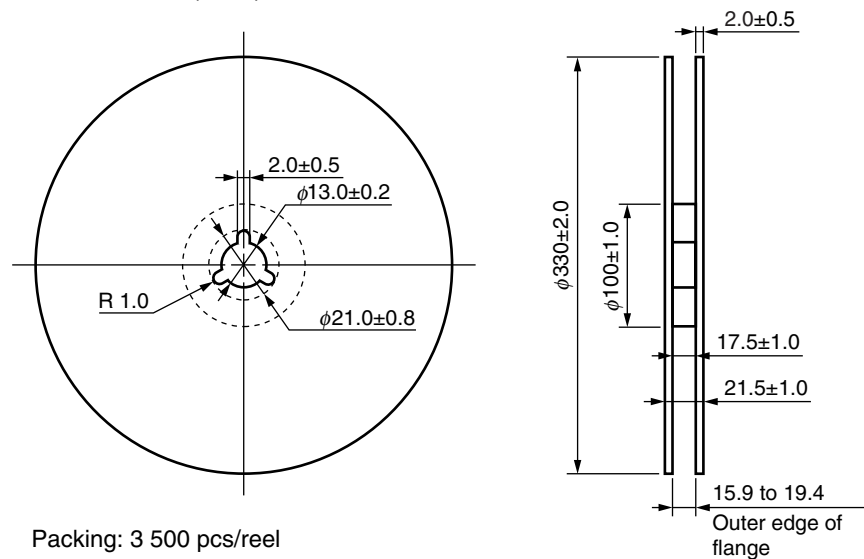

Technical drawing of a mechanical part with dimensions in mm. The drawing includes a top view, a side view, and a cross-sectional view. Dimensions are given with tolerances. Key features include a central slot, two rectangular cutouts, and a circular hole. Dimensions include  $2.0 \pm 0.1$ ,  $4.0 \pm 0.1$ ,  $1.5 \pm 0.1$ ,  $1.75 \pm 0.1$ ,  $7.5 \pm 0.1$ ,  $16.0 \pm 0.3$ ,  $10.7 \pm 0.1$ ,  $2.8 \text{ MAX.}$ ,  $1.55 \pm 0.1$ ,  $8.3 \pm 0.1$ ,  $12.0 \pm 0.1$ ,  $0.3$ , and  $2.3 \pm 0.1$ .

## PS2802-4-F4

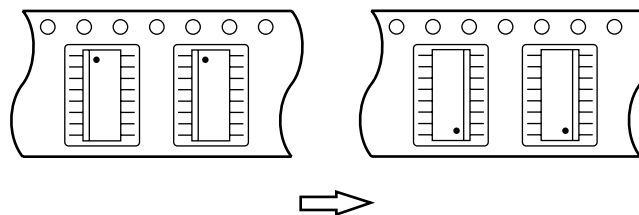

Packing: 2 500 pcs/reel


## NOTES ON HANDLING

### 1. Recommended soldering conditions

#### (1) Infrared reflow soldering

- Peak reflow temperature 260°C or below (package surface temperature)
- Time of peak reflow temperature 10 seconds or less
- Time of temperature higher than 220°C 60 seconds or less
- Time to preheat temperature from 120 to 180°C 120±30 s
- Number of reflows Three
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

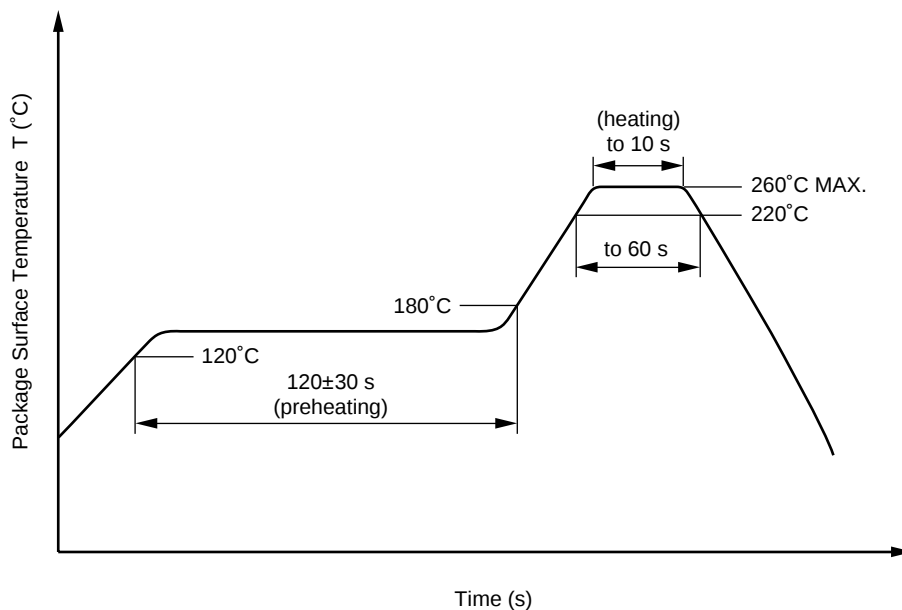

#### (2) Wave soldering

- Temperature 260°C or below (molten solder temperature)
- Time 10 seconds or less
- Preheating conditions 120°C or below (package surface temperature)
- Number of times One (Allowed to be dipped in solder including plastic mold portion.)
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

#### ★ (3) Soldering by soldering iron

- Peak temperature (lead part temperature) 350°C or below
- Time (each pins) 3 seconds or less
- Flux Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(a) Soldering of leads should be made at the point 1.5 to 2.0 mm from the root of the lead.

(b) Please be sure that the temperature of the package would not be heated over 100°C.

**(4) Cautions**

- Fluxes

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

**2. Cautions regarding noise**

Be aware that when voltage is applied suddenly between the photocoupler's input and output or between collector-emitters at startup, the output transistor may enter the on state, even if the voltage is within the absolute maximum ratings.

**★ 3. Measurement conditions of current transfer ratios (CTR), which differ according to photocoupler**

Check the setting values before use, since the forward current conditions at CTR measurement differ according to product.


When using products other than at the specified forward current, the characteristics curves may differ from the standard curves due to CTR value variations or the like. Therefore, check the characteristics under the actual operating conditions and thoroughly take variations or the like into consideration before use.

**USAGE CAUTIONS**

1. Protect against static electricity when handling.
2. Avoid storage at a high temperature and high humidity.

# PROGRAMMABLE LOGIC CONTROLLERS EXAMPLE

Purpose: In-out interface

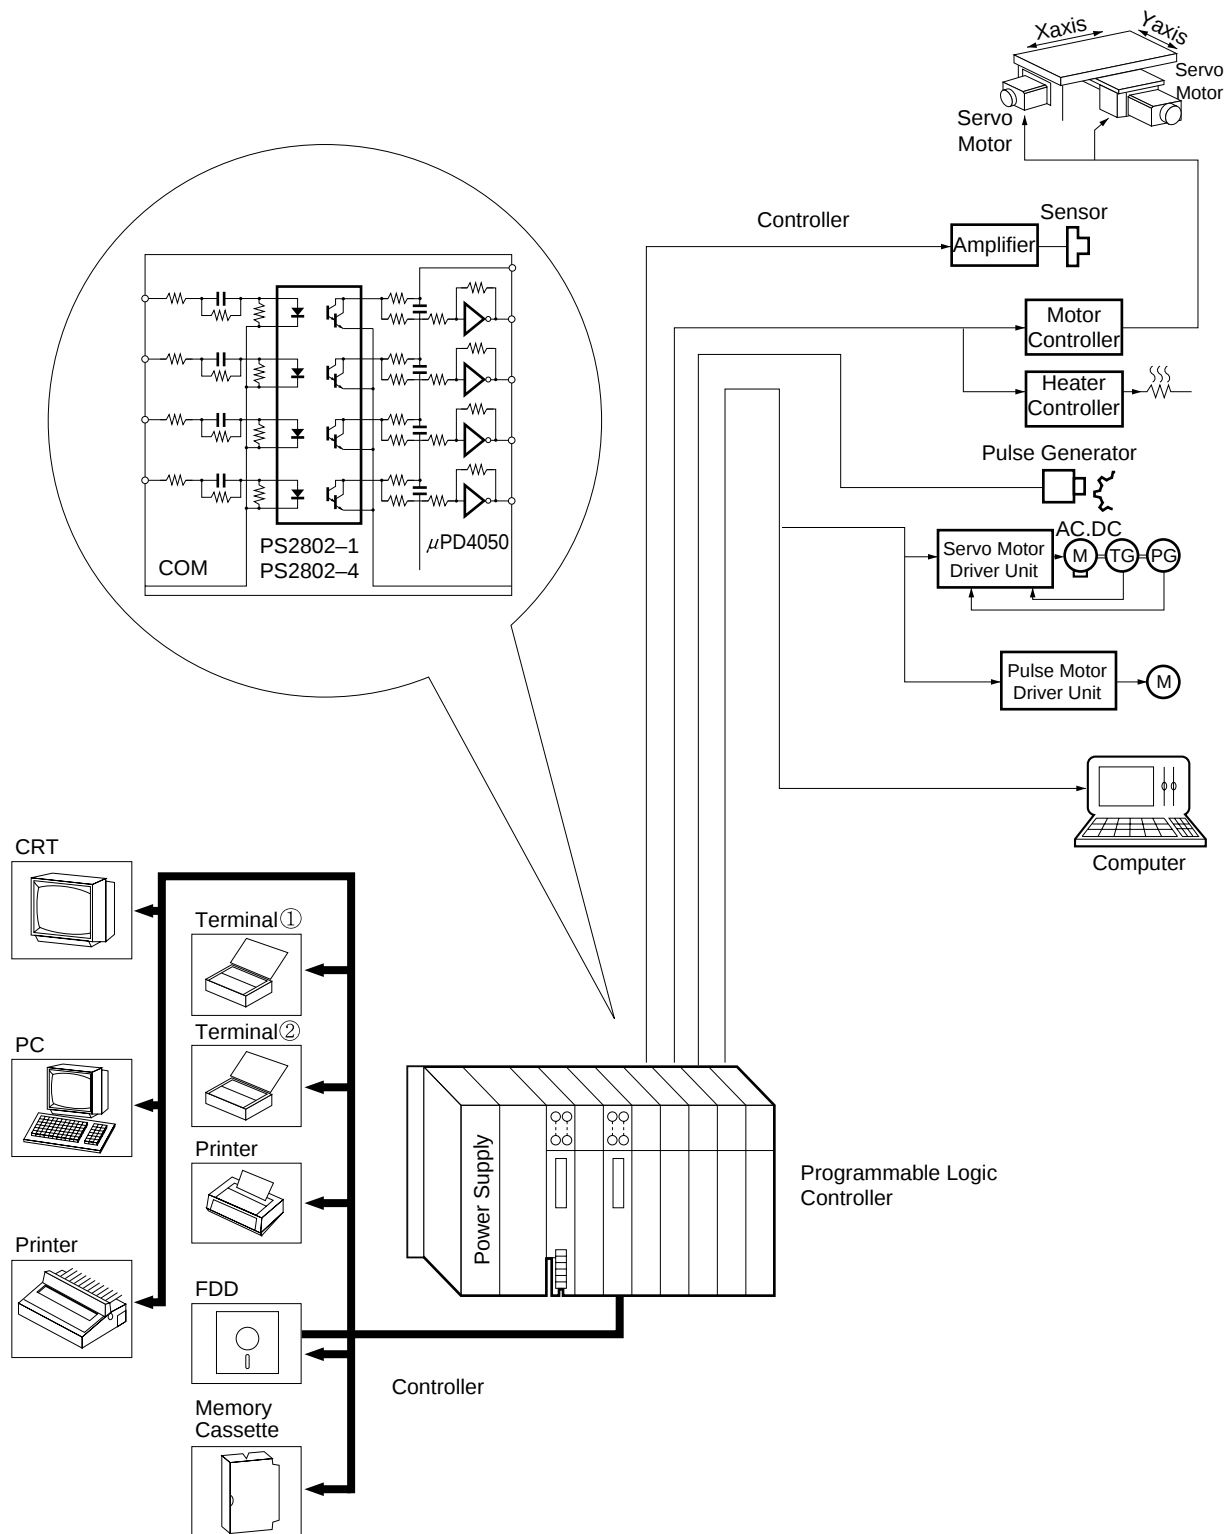

When the product(s) listed in this document is subject to any applicable import or export control laws and regulation of the authority having competent jurisdiction, such product(s) shall not be imported or exported without obtaining the import or export license.

- **The information in this document is current as of March, 2006. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC's data sheets or data books, etc., for the most up-to-date specifications of NEC semiconductor products. Not all products and/or types are available in every country. Please check with an NEC sales representative for availability and additional information.**

- No part of this document may be copied or reproduced in any form or by any means without prior written consent of NEC. NEC assumes no responsibility for any errors that may appear in this document.
- NEC does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC semiconductor products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of customer's equipment shall be done under the full responsibility of customer. NEC assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC endeavours to enhance the quality, reliability and safety of NEC semiconductor products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC semiconductor products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment, and anti-failure features.
- NEC semiconductor products are classified into the following three quality grades:  
 "Standard", "Special" and "Specific". The "Specific" quality grade applies only to semiconductor products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of a semiconductor product depend on its quality grade, as indicated below. Customers must check the quality grade of each semiconductor product before using it in a particular application.  
 "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots  
 "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)  
 "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC semiconductor products is "Standard" unless otherwise expressly specified in NEC's data sheets or data books, etc. If customers wish to use NEC semiconductor products in applications not intended by NEC, they must contact an NEC sales representative in advance to determine NEC's willingness to support a given application.

(Note)

- (1) "NEC" as used in this statement means NEC Corporation, NEC Compound Semiconductor Devices, Ltd. and also includes its majority-owned subsidiaries.
- (2) "NEC semiconductor products" means any semiconductor product developed or manufactured by or for NEC (as defined above).

M8E 00.4-0110

|                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div style="border: 1px solid black; padding: 2px; display: inline-block;"><b>Caution</b></div> GaAs Products | <p>This product uses gallium arsenide (GaAs).<br/>GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.</p> <ul style="list-style-type: none"> <li>• Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.             <ol style="list-style-type: none"> <li>1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.</li> <li>2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.</li> </ol> </li> <li>• Do not burn, destroy, cut, crush, or chemically dissolve the product.</li> <li>• Do not lick the product or in any way allow it to enter the mouth.</li> </ul> |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

► For further information, please contact

**NEC Compound Semiconductor Devices, Ltd.** <http://www.ncsd.necel.com/>

E-mail: salesinfo@ml.ncsd.necel.com (sales and general)

techinfo@ml.ncsd.necel.com (technical)

Sales Division TEL: +81-44-435-1573 FAX: +81-44-435-1579

**NEC Compound Semiconductor Devices Hong Kong Limited**

E-mail: ncsd-hk@elhk.nec.com.hk (sales, technical and general)

Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309

Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859

Korea Branch Office TEL: +82-2-558-2120 FAX: +82-2-558-5209

**NEC Electronics (Europe) GmbH** <http://www.ee.nec.de/>

TEL: +49-211-6503-0 FAX: +49-211-6503-1327

**California Eastern Laboratories, Inc.** <http://www.cel.com/>

TEL: +1-408-988-3500 FAX: +1-408-988-0279



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.