

January 2009


## DESCRIPTION

The 78Q2120C is a 10BASE-T/100BASE-TX Fast Ethernet transceiver. It includes integrated MII, ENDECs, scrambler/descrambler, dual-speed clock recovery, and full-featured auto-negotiation function. The transmitter includes an on-chip pulse-shaper and a low-power line driver. The receiver has an adaptive equalizer and a baseline restoration circuit required for accurate clock and data recovery. The transceiver interfaces to Category-5 unshielded twisted pair (Cat-5 UTP) cabling for 100BASE-TX/10BASE-T and Category-3 unshielded twisted pair for 10BASE-T. Connection to the line media is via 1:1 isolation transformers. No external filter is required. Interface to the MAC is accomplished through an IEEE-802.3 compliant Media Independent Interface (MII). The product is fabricated in an advanced CMOS process for high performance and low power operation.

## FEATURES

- **10BASE-T/100BASE-TX IEEE-802.3 compliant TX and RX functions requiring a dual 1:1 isolation transformer interface to the line**
- **Integrated MII, 10BASE-T/100BASE-TX ENDEC, 100BASE-TX scrambler/descrambler, and full-featured auto-negotiation function**
- **Full duplex operation capable**
- **PCS Bypass supports 5-bit symbol interface**
- **Register-programmable transmit amplitude**
- **Dual speed digital clock recovery**
- **Automatic polarity correction during auto-negotiation and 10BASE-T signal reception**
- **Power-saving and power-down modes including transmitter disable**
- **LED indicators: LINK, TX, RX, COL, 100, 10, FDX**
- **User programmable Interrupt pin**
- **64-Pin TQFP (JEDEC LQFP) package**
- **Single 3.3 V  $\pm$  0.3V Supply**

## BLOCK DIAGRAM

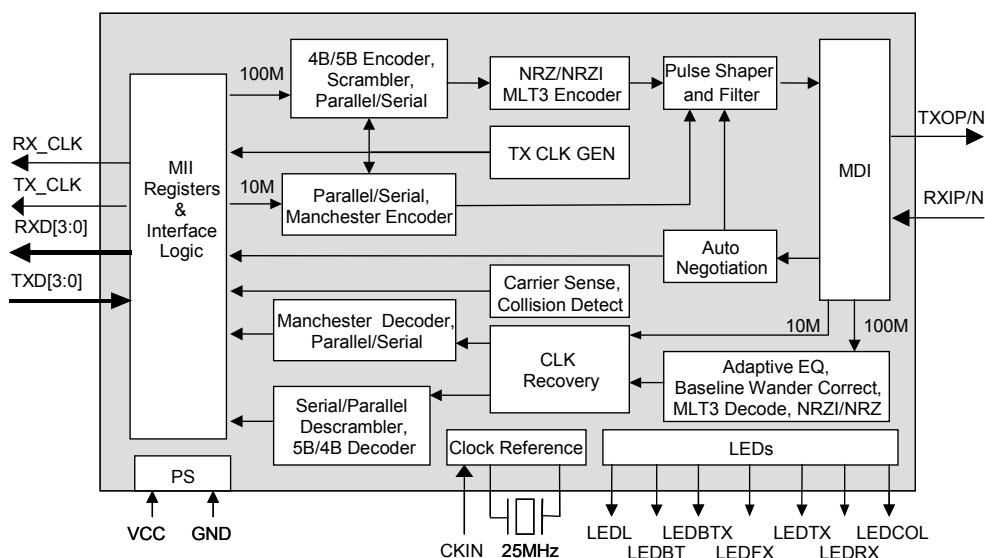

## FUNCTIONAL DESCRIPTION

### GENERAL

#### Power Management

The 78Q2120C has three power saving modes:

- Chip Power-Down
- Receive Power Management
- Transmit High Impedance Mode

Chip power-down is activated by setting the PWRDN bit in MII register MR0.11 or pulling high the PWRDN pin. When the chip is in the power-down mode, all on-chip circuitry is shut off, and the device consumes minimum power. While in the power-down state, the 78Q2120C still responds to management transactions.

Receive power management (RXCC mode) is activated by setting the RXCC bit in MII register MR16.0. In this mode of operation, the adaptive equalizer, the clock recovery phase lock loop (PLL), and all other receive circuitry will be powered down when no valid MLT-3 signal is present at the UTP receive line interface. As soon as a valid signal is detected, all circuits will automatically be powered up to resume normal operation. During this mode of operation, RX\_CLK will be inactive when there is no data being received. Note that the RXCC mode is not supported during 10BASE-T operation.

Transmit high impedance mode is activated by setting the TXHIM bit in MII register MR16.12. In this mode of operation, the transmit UTP drivers are in a high impedance state and TX\_CLK is tri-stated. A weak internal pull-up is enabled on TX\_CLK. The receive circuitry remains fully operational. The default state of MR16.12 is a logic low for disabling the transmit high impedance mode. The transmitter is fully functional when MR16.12 is cleared.

#### Analog Biasing and Supply Regulation

The 78Q2120C requires no external component to generate on-chip bias voltages and currents. High accuracy is maintained through a closed-loop trimmed biasing network.

On-chip digital logic runs off an internal voltage regulator. Hence only a single Vcc supply is required to power-up the device. The on-chip regulator is not affected by the power-down mode.

#### Clock Selection

The 78Q2120C will use the on-chip crystal oscillator as the clock source if the CKIN pin is tied low. In this

mode of operation, a 25MHz crystal should be connected between the XTLP and XTLN pins. Alternatively, an external 25MHz clock signal can be connected to the CKIN pin. The chip senses activity on the CKIN pin, and will automatically configure itself to use the external clock. In this mode of operation, a crystal is not required and the XTLP and XTLN pins should be left floating or connected together.

#### Transmit Clock Generation

The transmitter uses an on-chip frequency synthesizer to generate the transmit clock. In 100BASE-TX operation, the synthesizer multiplies the reference clock by 5 to obtain the internal 125MHz serial transmit clock. In 10BASE-T mode, it generates an internal 20MHz transmit clock by multiplying the 25MHz reference clock by 4/5. The synthesizer references either the local 25 MHz crystal oscillator, or the externally applied clock, depending on the selected mode of operation.

#### Receive Signal Qualification

The integrated signal qualifier has separate squelch and unsquelch thresholds. It also includes a built-in timer to ensure fast and accurate signal detection and line noise rejection. Upon detection of two or more valid 10BASE-T or 100BASE-TX pulses on the line receive port, signal detect is indicated. The signal detect threshold is then lowered by about 40%. All adaptive circuits are released from their initial states and allowed to lock onto the incoming data. In 100BASE-TX operation, signal detect is de-asserted when no signal is presented for a period of about 1.2us. In 10BASE-T operation, signal detect is de-asserted whenever no Manchester data is received. In either case, the signal detect threshold will return to the squelched level whenever the signal detect indication is de-asserted. Signal detect is also used to control the operation of the clock/data recovery circuit to assure fast acquisition.

#### Receive Clock Recovery

In 100BASE-TX mode, the 125MHz receive clock is extracted using a digital DLL-based loop. When no receive signal is present, the CDR is directed to lock onto the 125MHz transmit serial clock. When signal detect is asserted, the CDR will use the received MLT-3 signal as the clock reference. The recovered clock is used to re-time the data signal and for conversion of the data to NRZ format.

In 10BASE-T mode, the 10MHz receive clock is recovered digitally from the Manchester data using a DLL locked to the reference clock. When Manchester-coded preambles are detected, the

CDR immediately re-aligns the phase of the clock to synchronize with the incoming data. Hence clock acquisition is fast and immediate.

## **100BASE-TX OPERATION**

### **100BASE-TX Transmit**

The 78Q2120C contains all of the necessary circuitry to convert the transmit MII signaling from a MAC to an IEEE-802.3 compliant data-stream driving Cat-5 UTP cabling. The internal PCS interface maps 4 bit nibbles from the MII to 5 bit code groups as defined in Table 24-1 of IEEE-802.3. These 5 bit code groups are then scrambled and converted to a serial stream before being sent to the MLT-3 pulse shaping circuitry and line driver. The pulse-shaper uses current modulation to produce the desired output waveform. Controlled rise/fall time in the MLT-3 signal is achieved using an accurately controlled voltage ramp generator. The line driver requires an external 1:1 isolation transformer to interface with the line media. The center-tap of the primary side of the transformer must be connected to the Vcc supply.

### **100BASE-TX Receive**

The 78Q2120C receives a 125MBaud MLT-3 signal through a 1:1 transformer. The signal then goes through a combination of adaptive offset adjustment (baseline wander correction) and adaptive equalization. The effect of these circuits is to sense the amount of dispersion and attenuation caused by the cable and transformer, and restore the received pulses to logic levels. The amount of gain and equalization applied to the pulses varies with the detected attenuation and dispersion and, therefore, with the length of the cable. The 78Q2120C can compensate for cable loss of up to 10dB at 16 MHz. This loss is represented as test-chan 5 in Annex A of the ANSI X3.263:199X specification. The equalized MLT-3 data signal is bi-directionally sliced and the resulting NRZI bit-stream is presented to the CDR where it is re-timed and decoded to NRZ format. The re-timed serial data passes through a serial to parallel converter, then is descrambled and aligned into 5 bit code groups. The receive PCS interface maps these code groups to 4 bit data for the MII as outlined in Table 24-1 in Clause 24 of IEEE-802.3.

### **PCS Bypass Mode (Auto-negotiate must be off)**

The PCS Bypass mode is entered by pulling PCSBP high or by setting register bit MR 16.1. In this mode the 78Q2120C accepts scrambled 5 bit code words at the TX\_ER and TXD[3:0] pins, TX\_ER being the

MSB of the data input. The 5 bit code groups are converted to MLT-3 signal for transmission.

The received MLT-3 signal is converted to 5 bit NRZ code groups and output from the RX\_ER and RXD[3:0] pins, RX\_ER being the MSB of the data output. The RX\_DV and TX\_EN pins are unused in PCS Bypass mode.

## **10BASE-T OPERATION**

### **10BASE-T Transmit**

The 78Q2120C takes 4-bit parallel NRZ data via the MII interface and passes it through a parallel to serial converter. The data is then passed through a Manchester encoder, pre-emphasis pulse-shaper, media filter, and finally to the twisted-pair line driver. The pulse-shaper and filter ensure the output waveforms meet the voltage template and spectral content requirements detailed in Clause 14 of IEEE-802.3. Interface to the twisted-pair media is through a center-tapped 1:1 transformer. No external filtering is required. During auto-negotiation and 10BASE-T idle periods, link pulses are transmitted.

The 78Q2120C employs an onboard timer to prevent the MAC from capturing a network through excessively long transmissions. When this timer expires, the chip enters the jabber state and transmission is halted. The jabber state is exited after the MII goes idle for  $500 \pm 250$ ms.

### **10BASE-T Receive**

The 78Q2120C receives Manchester-encoded 10BASE-T data through the twisted pair inputs and re-establishes logic levels through a slicer with a smart squelch function. The slicer automatically adjusts its level after detection of valid data with the appropriate levels. Data is passed on to the CDR where the clock is recovered, and the data is re-timed and decoded. From there, data enters the serial-to-parallel converter for transmission to the MAC via the Media Independent Interface. Interface to the twisted-pair media is through an external 1:1 transformer. Polarity information is detected and corrected within internal circuitry.

### **Polarity Correction**

The 78Q2120C is capable of either automatic or manual polarity reversal for 10BASE-T and auto-negotiation functions. Register bits MR16.5 and MR16.4 control this feature. The default is automatic mode where MR16.5 is low and MR16.4 indicates if the detection circuitry has inverted the input signal. To enter manual mode, MR16.5 should be set high and MR16.4 will then control the signal polarity.

## SQE TEST

The 78Q2120C supports the Signal Quality Error (SQE) function detailed in IEEE-802.3. At an interval of 1 $\mu$ s after each negative transition of the TXEN pin in 10BASE-T mode, the COL pin will go high for a period of 1 $\mu$ s. SQE is not signaled during transmission after collision is detected. SQE is automatically disabled when repeater mode is enabled. This function can be disabled through register bit MR16.11.

## Natural Loopback

When enabled, whenever the 78Q2120C is transmitting and not receiving on the twisted pair media (10BASE-T Half Duplex mode), data on the TXD[3:0] pins is looped back onto the RXD[3:0] pins. During a collision, data from the RXI pins is routed to the RXD[3:0] pins. The natural loopback function is enabled through register bit MR16.10.

## Repeater Mode

When the RPTR pin is high or register bit MR16.15 is set, the 78Q2120C is placed in repeater mode. In this mode, full duplex operation is prohibited, CRS responds only to receive activity and, in 10BASE-T mode, the SQE test function is disabled.

## AUTO-NEGOTIATION

The 78Q2120C supports the auto-negotiation functions of Clause 28 of IEEE-802.3 for 10/100 Mbps operation over copper wiring. This function can be enabled via a pin selection or register settings. If the ANEGA pin is tied high, the auto-negotiation function defaults to ON and bit MR0.12 (ANEGEN) is high after reset. Software can disable the auto-negotiation function by writing to bit MR0.12. If the ANEGA pin is tied low, the function defaults to OFF and bit MR0.12 is set low after reset and cannot be written to.

The contents of register MR4 are sent to the 78Q2120C's link partner during auto-negotiation using fast link pulse coding. Bits MR4.8:5 reflect the state of the TECH[2:0] pins after reset. If TECH[2:0] = '111', then all 4 bits are high. If TECH[2:0] = '001', then only bit 5 is high. After reset, software can change any of these bits from a '1' to a '0'; but not from a '0' to a '1'. Therefore, a technology permitted by the setting of the TECH pins can be disabled, but cannot be enabled through register selection.

With auto-negotiation enabled, the 78Q2120C will start sending fast link pulses at power on, loss of link or upon a command to restart. At the same time, it

will look for either 10BASE-T idle, 100BASE-TX idle, or fast link pulses from its link partner. If either idle pattern is detected, the 78Q2120C configures itself in half-duplex mode at the appropriate speed. If it detects fast link pulses, it decodes and analyzes the link code transmitted by the link partner. When three identical link code words are received (ignoring the acknowledge bit) the link code word is stored in register MR5. Upon receiving three more identical link code words, with the acknowledge bit set, the 78Q2120C configures itself to the highest priority technology common to the two link partners. The technology priorities are, in descending order:

- 100BASE-TX, Full Duplex
- 100BASE-TX, Half Duplex
- 10BASE-T, Full Duplex
- 10BASE-T, Half Duplex

Once auto-negotiation is complete, register bits MR18.11:10 will reflect the actual speed and duplex that was chosen.

If auto-negotiation fails to establish a link for any reason, register bit MR18.12 will reflect this and auto negotiation will restart from the beginning. Writing a '1' to bit MR0.9(RANEG) will also cause auto-negotiation to restart.

## MEDIA INDEPENDENT INTERFACE

### MII Transmit and Receive Operation

The MII interface on the 78Q2120C provides independent transmit and receive paths for both 10Mb/s and 100Mb/s data rates as described in Clause 22 of the IEEE-802.3 standard.

The transmit clock, TX\_CLK, provides the timing reference for the transfer of TX\_EN, TXD[3:0], and TX\_ER signals from the MAC to the 78Q2120C. TXD[3:0] is captured on the rising edge of TX\_CLK when TX\_EN is asserted. TX\_ER is also captured on the rising edge of TX\_CLK and is asserted by the MAC to request that an error code group is to be transmitted. The assertion of TX\_ER is ignored when the 78Q2120C is operating in 10BASE-T mode.

The receive clock, RX\_CLK, provides the timing reference to transfer RX\_DV, RXD[3:0], and RX\_ER signals from the 78Q2120C to the MAC. RX\_DV transitions synchronously with respect to RX\_CLK and is asserted when the 78Q2120C is presenting valid data on RXD[3:0]. RX\_ER is asserted and is synchronous to RX\_CLK when a code group violation has been detected in the current receive packet.

## Station Management Interface

The station management interface consists of circuitry which implements the serial protocol as described in Clause 22.2.4.5 of IEEE-802.3. A 16-bit shift register receives serial data applied to the MDIO pin at the rising-edge of the MDC clock signal. Once the preamble is received, the station management control logic looks for the start-of-frame sequence and a read or write op-code, followed by the PHYAD and REGAD fields. For a read operation, the MDIO port becomes enabled as an output and the register data is loaded into a shift register for transmission. The 78Q2120C can work with a one bit preamble rather than the 32 bits prescribed by IEEE-802.3. This allows for faster programming of the registers. If a register does not exist at an address indicated by the REGAD field or if the PHYAD field does not match the 78Q2120C PHYAD indicated by the PHYAD pins, a read of the MDIO port will return all ones. For a write operation, the data is shifted in and loaded into the appropriate register after the sixteenth data bit has been received.

When the PHYAD field is all zeros, the Station Management Entity (STA) is requesting a broadcast data transaction. All PHYs sharing the same Management Interface must respond to this broadcast request. The 78Q2120C will respond to the broadcast data transaction.

## ADDITIONAL FEATURES

### LED Indicators

There are seven LED pins that can be used to indicate various states of operation of the

78Q2120C. There is an LED pin that indicates the link is up (LEDL), others that indicate the 78Q2120C is either transmitting (LEDTX) or receiving (LEDRX), one that signals a collision event (LEDCOL), two more that reflect the data rate (LEDBTX and LEDBT), and one that reflects full duplex mode of operation (LEDFDX).

### Interrupt Pin

The 78Q2120C has an Interrupt pin (INTR) that is asserted whenever any of the eight interrupt bits of MR17.7:0 are set. These interrupt bits can be disabled via the MR17.15:8 Interrupt Enable bits. The Interrupt Polarity bit, MR16.14, controls the active level of the INTR pin. When the INTR pin is not asserted, this pin is held in a high impedance state. An external pull-up or pull-down resistor may be required for use with the INTR pin.

## APPLICATIONS REQUIREMENTS

### RXIP/N Termination Connection

The input circuitry of the TERIDIAN 78Q2120C has changed for continuing performance improvements. Device revision C09 requires that the RXIP/N termination resistors and transformer center tap connections be directly connected to VCC for proper receiver operation. Refer to Figure 1: Typical Applications Circuit for the schematic showing the required RXIP/N termination resistors and transformer center tap connections to VCC for revision 78Q2120C.

## PIN DESCRIPTION

### LEGEND

| TYPE | DESCRIPTION                                        | TYPE | DESCRIPTION                                       |
|------|----------------------------------------------------|------|---------------------------------------------------|
| A    | Analog Pin                                         | CI   | TTL-level Input (5V compatible)                   |
| CIU  | TTL-level Input w/ Pull-up (5V compatible)         | CIO  | TTL-compatible Bi-directional Pin (5V compatible) |
| CID  | TTL-level Input w/ Pull-down (5V compatible)       | COZ  | Tristate-able CMOS output                         |
| CIS  | TTL-level Input w/ Schmitt Trigger (5V compatible) | G    | Ground                                            |
| CO   | CMOS Output                                        | S    | Supply                                            |

### MII (MEDIA INDEPENDENT INTERFACE)

| NAME     | PIN   | TYPE | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------|-------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TX_CLK   | 27    | COZ  | TRANSMIT CLOCK: TX_CLK is a continuous clock, which provides a timing reference for the TX_EN, TX_ER and TXD[3:0] signals from the MAC. The clock frequency is 25MHz in 100BASE-TX mode and 2.5MHz in 10BASE-T mode. This pin is tristated in the isolate mode and the TXHIM mode.                                                                                                                                                                     |
| TX_EN    | 28    | CI   | TRANSMIT ENABLE: TX_EN is asserted by the MAC to indicate that valid data for transmission is present on the TXD[3:0] pins.                                                                                                                                                                                                                                                                                                                            |
| TXD[3:0] | 32-29 | CI   | TRANSMIT DATA: TXD[3:0] receives data from the MAC for transmission on a nibble basis. This data is captured on the rising edge of TX_CLK when TX_EN is high.                                                                                                                                                                                                                                                                                          |
| TX_ER    | 26    | CI   | TRANSMIT ERROR: TX_ER is asserted high by the MAC to request that an error code-group be transmitted when TX_EN is high. In PCS bypass mode this pin becomes the MSB of the transmit 5-bit code group.                                                                                                                                                                                                                                                 |
| CRS      | 34    | COZ  | CARRIER SENSE: When the 78Q2120C is not in repeater mode, CRS is high whenever a non-idle condition exists on either the transmitter or the receiver. In repeater mode, CRS is only active when a non-idle condition exists on the receiver. This pin is tristated in the isolate mode.                                                                                                                                                                |
| COL      | 33    | COZ  | COLLISION: COL is asserted high when a collision has been detected on the media. In 10BASE-T mode, COL is also used for the SQE test function. This pin is tristated in the isolate mode. During half duplex operation, the rising edge of COL will occasionally occur upon the rising edge of TX_CLK.                                                                                                                                                 |
| RX_CLK   | 24    | COZ  | RECEIVE CLOCK: RX_CLK is a continuous clock, which provides a timing reference to the MAC for the RX_DV, RX_ER and RXD[3:0] signals. The clock frequency is 25MHz in 100BASE-TX mode, and 2.5MHz in 10BASE-T mode. To reduce power consumption in 100BASE-TX mode, the 78Q2120C provides an optional mode, enabled through MR16.0, in which RX_CLK is held inactive (low) when no receive data is detected. This pin is tristated in the isolate mode. |
| RX_DV    | 23    | COZ  | RECEIVE DATA VALID: RX_DV is asserted high to indicate that valid data is present on the RXD[3:0] pins. In 100BASE-TX mode, it transitions high with the first nibble of the preamble and is pulled low when the last data nibble has been received. In 10BASE-T mode, it transitions high when the start-of-frame delimiter (SFD) is detected. This pin is tristated in the isolate mode.                                                             |
| RXD[3:0] | 19-22 | COZ  | RECEIVE DATA: Received data is provided to the MAC via RXD[3:0]. These pins are tristated in the isolate mode.                                                                                                                                                                                                                                                                                                                                         |

**MII (continued)**

| NAME  | PIN | TYPE | DESCRIPTION                                                                                                                                                                                                        |
|-------|-----|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RX_ER | 25  | COZ  | RECEIVE ERROR: RX_ER is asserted high when an error is detected during a frame reception. In PCS bypass mode, this pin becomes the MSB of the receive 5-bit code group. This pin is tristated in the isolate mode. |
| MDC   | 18  | CIS  | MANAGEMENT DATA CLOCK: MDC is the clock used for transferring data via the MDIO pin.                                                                                                                               |
| MDIO  | 17  | CIO  | MANAGEMENT DATA INPUT/OUTPUT: MDIO is a bi-directional port used to access management registers within the 78Q2120C. This pin requires an external pull-up resistor as specified in IEEE-802.3.                    |

**PHY ADDRESS**

| NAME       | PIN   | TYPE | DESCRIPTION                                                                                                                                                                                                               |
|------------|-------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PHYAD[4:0] | 12-16 | CI   | PHY ADDRESS: Allows 31 configurable PHY addresses. The 78Q2120C always responds to broadcast data transactions via the MII interface when the PHYAD bits are all zero, independent of the logic levels of the PHYAD pins. |

**PMA (PHYSICAL MEDIA ATTACHMENT) INTERFACE**

| NAME  | PIN | TYPE | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------|-----|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PCSBP | 64  | CID  | PCS BYPASS: When high, the 100BASE-TX PCS is bypassed, as well as the scrambler and descrambler functions. Scrambled 5-bit code groups for transmission are applied to the TX_ER, TXD[3:0] pins and received on the RX_ER, RXD[3:0] pins. The RX_DV and TX_EN signals are not valid in this mode. PCS bypass mode is only valid when 100BASE-TX is enabled and auto-negotiation is disabled. This mode can also be entered by setting MR16.1. |

**CONTROL AND STATUS**

| NAME  | PIN | TYPE | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------|-----|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RST   | 6   | CIU  | ACTIVE-LOW RESET: When pulled low, the pin resets the chip. The reset pulse must be long enough to guarantee stabilization of the supply voltage and startup of the oscillator. Refer to the Electrical Specifications for the reset pulse requirements. There are 2 other ways to reset the chip:<br>i) through the internal power-on-reset (activated when the chip is being powered up)<br>ii) through the MII register bit (MR0.15) |
| PWRDN | 7   | CID  | POWER-DOWN: The 78Q2120C may be placed in a low power consumption state by setting this signal to logic high. While in the power-down state, the 78Q2120C still responds to management transactions. This power-down state can also be activated using the PWRDN bit in the MII register (MR0.11).                                                                                                                                      |

**CONTROL AND STATUS (CONTINUED)**

| NAME      | PIN   | TYPE | DESCRIPTION                                                                                                                                                                                                                                                                                                                                             |
|-----------|-------|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ISO       | 2     | CI   | ISOLATE: When set to logic one, the 78Q2120C will present a high impedance on its MII output pins. This allows for multiple chips to be attached to the same MII interface. When the 78Q2120C is isolated, it still responds to management transactions. This high impedance state can also be achieved using the ISO bit in the MII register (MR0.10). |
| ISODEF    | 1     | CI   | ISOLATE DEFAULT: This pin determines the power-up/reset default of the ISO bit (MR0.10). If it is connected to VCC, the ISO bit will have a default value of '1'. Otherwise, the bit defaults to '0'. When this signal is tied to VCC, it allows multiple chips to be connected to the same MII interface.                                              |
| ANEGA     | 47    | CI   | AUTO-NEGOTIATION ABILITY: Connect to logic high to enable the auto-negotiation function. When connected to logic low, the auto-negotiation logic is disabled and manual technology selection is done through TECH[2:0] pins. This pin is reflected as the ANEGA bit in MR1.3.                                                                           |
| TECH[2:0] | 44-46 | CI   | TECHNOLOGY ABILITY/SELECT: TECH[2:0] sets the technology ability of the chip which is reflected in MR0.13,8, MR1.14:11 and MR4.12:5.                                                                                                                                                                                                                    |
|           |       |      | TECH[2:0]      Technology Ability                                                                                                                                                                                                                                                                                                                       |
|           |       |      | 111      Both 10BASE-T and 100BASE-TX, and<br>Both half and full duplex                                                                                                                                                                                                                                                                                 |
|           |       |      | 000      None                                                                                                                                                                                                                                                                                                                                           |
|           |       |      | 001      10BASE-T, half duplex                                                                                                                                                                                                                                                                                                                          |
|           |       |      | 010      100BASE-TX, half duplex                                                                                                                                                                                                                                                                                                                        |
|           |       |      | 011      Both 10BASE-T and 100BASE-TX, half duplex only                                                                                                                                                                                                                                                                                                 |
|           |       |      | 100      None                                                                                                                                                                                                                                                                                                                                           |
|           |       |      | 101      10BASE-T Both half and full duplex                                                                                                                                                                                                                                                                                                             |
|           |       |      | 110      100BASE-TX Both half and full duplex                                                                                                                                                                                                                                                                                                           |
| RPTR      | 50    | CID  | REPEATER MODE: When pulled high, this pin puts the chip into repeater mode. In this mode, full duplex is prohibited, CRS responds to receive activity only. In 10BASE-T mode, the SQE test function is disabled. This mode can also be enabled by setting bit MR16.15                                                                                   |

**MDI (MEDIA DEPENDENT INTERFACE)**

| NAME   | PIN   | TYPE | DESCRIPTION                                                                                                     |
|--------|-------|------|-----------------------------------------------------------------------------------------------------------------|
| TXOP/N | 61,62 | A    | TRANSMIT OUTPUT POSITIVE/NEGATIVE: Transmitter differential outputs for both 10BASE-T and 100BASE-TX operation. |
| RXIP/N | 52,51 | A    | RECEIVE INPUT POSITIVE/NEGATIVE: Receiver differential inputs for both 10BASE-T and 100BASE-TX operation.       |



## LED INDICATORS

The LED pins use standard logic drivers. They output a logic low when the LED is meant to be on and a logic high when it is meant to be off. The LED should be connected in series with a resistor between the output pin and the power supply.

| NAME   | PIN | TYPE | DESCRIPTION                                                                                                                                        |
|--------|-----|------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| LEDL   | 40  | CO   | LED LINK: ON for link up.                                                                                                                          |
| LEDTX  | 39  | CO   | LED TRANSMIT: ON when there is a transmission (normally OFF).                                                                                      |
| LEDRX  | 38  | CO   | LED RECEIVE: ON when there is a reception (normally OFF).                                                                                          |
| LEDCOL | 37  | CO   | LED COLLISION: In half duplex mode, this is a collision indicator and turns ON when a collision occurs. In full duplex mode, this LED is held OFF. |
| LEDBTX | 36  | CO   | LED 100BASE-TX: ON for 100BASE-TX connection and OFF for other connections. LEDBTX is OFF during auto-negotiation.                                 |
| LEDBT  | 48  | CO   | LED 10BASE-T: ON for 10BASE-T connection and OFF for other connections. LEDBT is OFF during auto-negotiation.                                      |
| LEDFDX | 49  | CO   | LED FULL DUPLEX: ON when in full duplex mode and OFF when in half duplex mode.                                                                     |

## OSCILLATOR/CLOCK

| NAME   | PIN   | TYPE | DESCRIPTION                                                                                                                                                          |
|--------|-------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CKIN   | 4     | CIS  | CLOCK INPUT: Connects to a 25 MHz TTL compatible clock source. This pin should be held low when XTLP and XTLN are being used as the 25 MHz clock source.             |
| XTLP/N | 59,58 | A    | CRYSTAL PINS: Should be connected to a 25 MHz crystal. When CKIN is being used as the 25 MHz clock source, these pins should be left floating or connected together. |

## MISCELLANEOUS PIN

| NAME | PIN   | TYPE | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                               |
|------|-------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INTR | 35    | COZ  | INTERRUPT PIN: This pin is used to signal an interrupt to the media access controller. The pin is held in the high impedance state when an interrupt is not indicated. The pin will be forced high or low to signal an interrupt depending upon the value of the INPOL bit (MR16.14). The events which trigger an interrupt can be programmed via the Interrupt Control Register located at address MR17. |
| NC   | 54,56 | --   | No Connect. Do not connect to ground or supply.                                                                                                                                                                                                                                                                                                                                                           |

## POWER SUPPLY AND GROUND

| NAME | PIN                      | TYPE | DESCRIPTION |
|------|--------------------------|------|-------------|
| VCC  | 8,11,41,<br>43,57,63     | S    | 3.3V SUPPLY |
| GND  | 3,5,9,10,<br>42,53,55,60 | G    | GROUND      |

## REGISTER DESCRIPTION

The 78Q2120C implements 11 16-bit registers, which are accessible via the MDIO and MDC pins. The supported registers are shown below in the following table. Attempts to read unsupported registers will be ignored and the MDIO pin will not be enabled as an output, as per the IEEE 802.3 specification. All of the registers except those which are unique to the 78Q2120C, will respond to the broadcast PHYAD value of '00000'. The registers specific to the 78Q2120C occupy address space MR16-22.

| ADDRESS | SYMBOL    | NAME                                  | DEFAULT (HEX) |
|---------|-----------|---------------------------------------|---------------|
| 0       | MR0       | Control                               | (3100)        |
| 1       | MR1       | Status                                | (7809)        |
| 2       | MR2       | PHY Identifier 1                      | 000E          |
| 3       | MR3       | PHY Identifier 2                      | 70C9          |
| 4       | MR4       | Auto-Negotiation Advertisement        | (01E1)        |
| 5       | MR5       | Auto-Negotiation Link Partner Ability | 0000          |
| 6       | MR6       | Auto-Negotiation Expansion            | 0000          |
| 7       | MR7       | Not Implemented                       | 0000          |
| 8-14    | MR8-14    | Reserved                              | 0000          |
| 15      | MR15      | Not Implemented                       | 0000          |
| 16      | MR16      | Vendor Specific                       | (0140)        |
| 17      | MR17      | Interrupt Control/Status Register     | 0000          |
| 18      | MR18      | Diagnostic Register                   | 0000          |
| 19      | MR19      | Transceiver Control                   | 4XXX          |
| 20-22   | MR20-MR22 | Reserved                              | 0000          |

### Legend:

| TYPE | DESCRIPTION                             | TYPE  | DESCRIPTION                                                                           |
|------|-----------------------------------------|-------|---------------------------------------------------------------------------------------|
| R    | Readable by management.                 | W     | Writeable by management.                                                              |
| SC   | Writeable by management. Self Clearing. | RC    | Readable by management. Cleared upon a read operation.                                |
| 0/1  | Default value upon power up or reset.   | (0/1) | Default value dependent on pin settings. The value in bracket indicates typical case. |

**MR0: Control Register**

| BIT  | SYMBOL  | TYPE | DEFAULT | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------|---------|------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0.15 | RESET   | R/SC | 0       | Reset: Setting this bit to '1' resets the device and sets all registers to their default states. This bit is self-clearing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 0.14 | LOOPBK  | R/W  | 0       | Loopback: When this bit is set to '1', no transmission of data on the network medium occurs and any receive data on the network medium is ignored. The loopback signal path will encompass most of the digital circuitry.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| 0.13 | SPEEDSL | R/W  | (1)     | Speed Selection: This bit determines the speed of operation of the 78Q2120C. Setting this bit to '1' indicates 100Base-TX operation and a '0' indicates 10Base-T mode. This bit will default to a '1' upon reset. If the TECH[2:0] pins are all logic zero and auto-negotiation is not enabled, this bit will be writeable. If auto-negotiation is not enabled and the TECH[2:0] pins are set to indicate that only 10Base-T is supported, this bit will be forced to logic zero and will not be writeable. If auto-negotiation is not enabled and the TECH[2:0] pins are set to indicate that only 100Base-TX is supported, this bit will be forced to logic one and will not be writeable. When auto-negotiation is enabled, this bit will not be writeable and will have no effect on the 78Q2120C. If the TECH[2:0] pins are brought to zero from another value, this bit will retain its original value until it is overwritten. |
| 0.12 | ANEGEN  | R/W  | (1)     | Auto-Negotiation Enable: Setting this bit to '1' enables the auto-negotiation process. This bit can only be set if the ANEGA pin is a logic one and will default to '1' upon reset. If this bit is cleared to '0', manual speed and duplex mode selection is accomplished through bits 0.13 ( <i>SPEEDSL</i> ) and 0.8 ( <i>DUPLEX</i> ) of the Control Register or the TECH[2:0] pins according to the table shown in the section describing the TECH[2:0] pins. If the ANEGA pin is brought from '0' to '1' and reset is not asserted, this bit will remain at '0' until a '1' is written.                                                                                                                                                                                                                                                                                                                                          |
| 0.11 | PWRDN   | R/W  | 0       | Power-Down: The device may be placed in a low power consumption state by setting this bit to '1'. While in the power-down state, the device will still respond to management transactions. Setting the PWRDN pin high also activates the power-down state.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 0.10 | ISO     | R/W  | (0)     | Isolate: When set to '1', the device presents a high-impedance on its MII output pins. This allows for multiple PHY's to be attached to the same MII interface. When the device is isolated, it still responds to management transactions. The default value of this bit depends on the ISODEF pin. When ISODEF pin is tied high, the <i>ISO</i> bit defaults to high. Otherwise, it defaults to low. The Isolate mode can also be activated using the ISO pin.                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| 0.9  | RANEG   | R/SC | 0       | Restart Auto-Negotiation: Normally, the Auto-Negotiation process is started at power up. The process can be restarted by setting this bit to '1'. This bit is self-clearing.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

**MR0: Control Register (continued)**

| BITS  | SYMBOL | TYPE | DEFAULT | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------|--------|------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0.8   | DUPLEX | R/W  | (1)     | Duplex Mode: This bit determines whether the device supports full-duplex or half-duplex. A '1' indicates full-duplex operation and a '0' indicates half-duplex. This bit will default to '0' upon reset and will be writeable if the TECH[2:0] pins are all logic zero and auto-negotiation is not enabled. If auto-negotiation is not enabled and the TECH[2:0] pins are set to indicate that only full-duplex is supported, this bit will be forced to '1' and will not be writeable. If auto-negotiation is not enabled and the TECH[2:0] pins are set to indicate that only half-duplex is supported, this bit will be forced to '0' and will not be writeable. When auto-negotiation is enabled, this bit will not be writeable and will have no effect on the device. If the TECH[2:0] pins are brought to zero from another value, this bit will retain its original value until it is overwritten. |
| 0.7   | COLT   | R/W  | 0       | Collision Test: When this bit is set to '1', the device will assert the COL signal in response to the assertion of the TX_EN signal. Collision test is disabled if the PCSBP pin is high. Collision test can be activated regardless of the duplex mode of operation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 0.6:0 | RSVD   | R    | 0       | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

**MR1: Status Register**

Bits 1.15 through 1.11 reflect the ability of the 78Q2120C as configured by the TECH[2:0] pins. They do not reflect any ability changes made via the MII Management interface to bits 0.13 (*SPEEDSL*), 0.12 (*ANEGEN*) and 0.8 (*DUPLEX*).

| BITS | SYMBOL  | TYPE | DEFAULT | DESCRIPTION                                                                                                      |
|------|---------|------|---------|------------------------------------------------------------------------------------------------------------------|
| 1.15 | 100T4   | R    | 0       | 100BASE-T4 Ability: Reads '0' to indicate the 78Q2120C does not support 100Base-T4 mode.                         |
| 1.14 | 100X_F  | R    | (1)     | 100BASE-TX Full Duplex Ability:<br>0 : Not able<br>1 : Able                                                      |
| 1.13 | 100X_H  | R    | (1)     | 100BASE-TX Half Duplex Ability:<br>0 : Not able<br>1 : Able                                                      |
| 1.12 | 10T_F   | R    | (1)     | 10BASE-T Full Duplex Ability:<br>0 : Not able<br>1 : Able                                                        |
| 1.11 | 10T_H   | R    | (1)     | 10BASE-T Half Duplex Ability:<br>0 : Not able<br>1 : Able                                                        |
| 1.10 | 100T2_F | R    | 0       | 100BASE-T2 Full Duplex Ability: Reads '0' to indicate the 78Q2120C does not support 100Base-T2 full duplex mode. |

**MR1: Status Register**

| BIT | SYMBOL  | TYPE | DEFAULT | DESCRIPTION                                                                                                                                                                                                              |
|-----|---------|------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1.9 | 100T2_H | R    | 0       | 100BASE-T2 Half Duplex Ability: Reads '0' to indicate the 78Q2120C does not support 100Base-T2 full duplex mode.                                                                                                         |
| 1.8 | EXTS    | R    | 0       | Extended Status Information Availability: Reads '0' to indicate the 78Q2120C does not support Extended Status information on MR15.                                                                                       |
| 1.7 | RSVD    | R    | 0       | Reserved                                                                                                                                                                                                                 |
| 1.6 | MFPS    | R    | 0       | Management Frame Preamble Suppression Support: A "0" indicates that the 78Q2120C can read management frames with a preamble.                                                                                             |
| 1.5 | ANEGC   | R    | 0       | Auto-Negotiation Complete: A logic one indicates that the Auto-Negotiation process has been completed, and that the contents of registers MR4,5,6 are valid.                                                             |
| 1.4 | RFAULT  | RC   | 0       | Remote Fault: A logic one indicates that a remote fault condition has been detected and remains set until it is cleared. This bit can only be cleared by reading this register (MR1) via the management interface.       |
| 1.3 | ANEGA   | R    | (1)     | Auto-Negotiation Ability: When set, this bit indicates the device's ability to perform Auto-Negotiation. The value of this bit is determined by the <i>ANEGEN</i> bit (MR0.12).                                          |
| 1.2 | LINK    | R    | 0       | Link Status: A logic one indicates that a valid link has been established. If the link status should transition from an OK status to a NOT-OK status, this bit will become cleared and remains cleared until it is read. |
| 1.1 | JAB     | RC   | 0       | Jabber Detect: In 10Base-T mode, this bit is set during a jabber event. After a jabber event, the bit remains set until cleared by a read operation.                                                                     |
| 1.0 | EXTD    | R    | 1       | Extended Capability: Reads '1' to indicate the 78Q2120C provides an extended register set (MR2 and beyond).                                                                                                              |

**MR2: PHY Identifier Register 1**

| BIT    | SYMBOL        | TYPE | VALUE | DESCRIPTION                                                                                                                                                    |
|--------|---------------|------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 2.15:0 | OUI<br>[23:6] | R    | 000Eh | Organizationally Unique Identifier: This value is 00-C0-39 for TERIDIAN Semiconductor Corporation. This register contains the first 16-bits of the identifier. |

**MR3: PHY Identifier Register 2**

| BIT     | SYMBOL       | TYPE | VALUE | DESCRIPTION                                                                               |
|---------|--------------|------|-------|-------------------------------------------------------------------------------------------|
| 3.15:10 | OUI<br>[5:0] | R    | 1Ch   | Organizationally Unique Identifier: Remaining 6 bits of the OUI.                          |
| 3.9:4   | MN           | R    | 0Ch   | Model Number: The last 2 digits of the model number 78Q2120C are encoded into the 6 bits. |
| 3.3:0   | RN           | R    | 9h    | Revision Number: The value '1001' corresponds to the ninth revision of the silicon.       |

**MR4: Auto-Negotiation Advertisement Register**

| <b>BIT</b> | <b>SYMBOL</b> | <b>TYPE</b> | <b>DEFAULT</b> | <b>DESCRIPTION</b>                                                                                                                                                                                                                                                                       |
|------------|---------------|-------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 4.15       | NP            | R           | 0              | Next Page: Not supported. Reads logic zero.                                                                                                                                                                                                                                              |
| 4.14       | RSVD          | R           | 0              | Reserved                                                                                                                                                                                                                                                                                 |
| 4.13       | RF            | R/W         | 0              | Remote Fault: Setting this bit to '1' allows the device to indicate to the link partner a Remote Fault Condition.                                                                                                                                                                        |
| 4.12:5     | TAF           | R/W         | (0Fh)          | Technology Ability Field: The default value of this field is dependent upon the MR1.15:11 register bits. This field can be overwritten by management to auto-negotiate to an alternate common technology. Writing to this register has no effect until auto-negotiation is re-initiated. |
| 4.12       | A7            | R           | 0              | Reserved for future technology.                                                                                                                                                                                                                                                          |
| 4.11       | A6            | R/W         | 0              | Reserved                                                                                                                                                                                                                                                                                 |
| 4.10       | A5            | R/W         | 0              | Reserved.                                                                                                                                                                                                                                                                                |
| 4.9        | A4            | R           | 0              | 100BASE-T4: The 78Q2120C does not support 100BASE-T4 operation.                                                                                                                                                                                                                          |
| 4.8        | A3            | R/W         | (1)            | 100BASE-TX Full Duplex: If the MR1.14 bit is '1', this bit will be set to '1' upon reset and will be writeable. Otherwise, this bit cannot be set to '1' by the management.                                                                                                              |
| 4.7        | A2            | R/W         | (1)            | 100BASE-TX: If the MR1.13 bit is '1', this bit will be set to '1' upon reset and will be writeable. Otherwise, this bit cannot be set to '1' by the management.                                                                                                                          |
| 4.6        | A1            | R/W         | (1)            | 10BASE-T Full Duplex: If the MR1.12 bit is '1', this bit will be set to '1' upon reset and will be writeable. Otherwise, this bit cannot be set to '1' by the management.                                                                                                                |
| 4.5        | A0            | R/W         | (1)            | 10BASE-T: If the MR1.11 bit is '1', this bit will be set to '1' upon reset and will be writeable. Otherwise, this bit cannot be set to '1' by the management.                                                                                                                            |
| 4.4:0      | S4:0          | R           | 01h            | Selector Field: Hard coded with the value of '00001' for IEEE 802.3.                                                                                                                                                                                                                     |

**MR5: Auto-Negotiation Link Partner Ability Register**

| BIT    | SYMBOL | TYPE | DEFAULT | DESCRIPTION                                                                                                                                            |
|--------|--------|------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5.15   | NP     | R    | 0       | Next Page: When '1' is read, it indicates the link partner wishes to engage in Next Page exchange.                                                     |
| 5.14   | ACK    | R    | 0       | Acknowledge: When '1' is read, it indicates the link partner has successfully received at least 3 consecutive and consistent FLP bursts.               |
| 5.13   | RF     | R    | 0       | Remote Fault: When '1' is read, it indicates the link partner has a fault.                                                                             |
| 5.12:5 | A7:0   | R    | 0       | Technology Ability Field: This field contains the technology ability of the link partner. The bit definition is the same as MR4.12:5.                  |
| 5.4:0  | S4:0   | R    | 00h     | Selector Field: This field contains the type of message sent by the link partner. For IEEE 802.3 compliant link partner, this field should be '00001'. |

**MR6: Auto-Negotiation Expansion Register**

| BIT    | SYMBOL      | TYPE | DEFAULT | DESCRIPTION                                                                                                                                                  |
|--------|-------------|------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6.15:5 | RSVD        | R    | 0       | Reserved                                                                                                                                                     |
| 6.4    | PDF         | RC   | 0       | Parallel Detection Fault: When '1' is read, it indicates that more than one technology has been detected during link up. This bit is cleared when read.      |
| 6.3    | LPNPA       | R    | 0       | Link Partner Next Page Able: When '1' is read, it indicates the link partner supports the Next Page function.                                                |
| 6.2    | NPA         | R    | 0       | Next Page Able: Reads '0' since the 78Q2120C does not support Next Page function.                                                                            |
| 6.1    | PRX         | RC   | 0       | Page Received: Reads '1' when a new link code word has been received into the Auto-Negotiation Link Partner Ability Register. This bit is cleared upon read. |
| 6.0    | LPANEG<br>A | R    | 0       | Link Partner Auto-Negotiation Able: When '1' is read, it indicates the link partner is able to participate in the Auto-Negotiation function.                 |

**MR16: Vendor Specific Register**

| BITS   | SYMBOL | TYPE | DEFAULT | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------|--------|------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 16.15  | RPTR   | R/W  | (0)     | Repeater Mode: When set, the 78Q2120C is put into Repeater mode of operation. In this mode, full duplex is prohibited, CRS responds to receive activity only and, in 10Base-T mode, the SQE test function is disabled.                                                                                                                                                                                                                                                                                     |
| 16.14  | INPOL  | R/W  | 0       | When this bit is '0', the INTR pin is forced low to signal an interrupt. Setting this bit to '1' causes the INTR pin to be forced high to signal an interrupt.                                                                                                                                                                                                                                                                                                                                             |
| 16.13  | RSVD   | R    | 0       | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 16.12  | TXHIM  | R/W  | 0       | Transmitter High-Impedance Mode: When set, the TXOP/TXON transmit pins and the TX_CLK pin are put into a high-impedance state. The receive circuitry remains fully functional.                                                                                                                                                                                                                                                                                                                             |
| 16.11  | SQEI   | R/W  | 0       | SQE Test Inhibit: Setting this bit to '1' disables 10Base-T SQE testing. By default, this bit is '0' and the SQE test is performed by generating a COL pulse following the completion of a packet transmission.                                                                                                                                                                                                                                                                                            |
| 16.10  | NL10   | R/W  | 0       | 10Base-T Natural Loopback: Setting this bit to '1' causes transmit data received on the TXD0-3 pins to be automatically looped back to the RXD[0:3] pins when 10Base-T mode is enabled.                                                                                                                                                                                                                                                                                                                    |
| 16.9   | RSVD   | R/W  | 0       | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 16.8   | RSVD   | R/W  | 1       | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 16.7   | RSVD   | R/W  | 0       | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 16.6   | RSVD   | R/W  | 1       | Reserved                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 16.5   | APOL   | R/W  | 0       | Auto Polarity: During auto-negotiation and 10BASE-T mode, the 78Q2120C is able to automatically invert the received signal due to a wrong polarity connection. It does so by detecting the polarity of the link pulses. Setting this bit to '1' disables this feature.                                                                                                                                                                                                                                     |
| 16.4   | RVSPOL | R/W  | 0       | Reverse Polarity: The reverse polarity is detected either through 8 inverted 10Base-T link pulses (NLP) or through one burst of inverted clock pulses in the auto-negotiation link pulses (FLP). When the reverse polarity is detected and if the Auto Polarity feature is enabled, the 78Q2120C will invert the receive data input and set this bit to '1'. If Auto Polarity is disabled, then this bit is writeable. Writing a '1' to this bit forces the polarity of the receive signal to be reversed. |
| 16.3:2 | RSVD   | R/W  | 0h      | Reserved: Must set to '00'.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



**MR16: Vendor Specific Register (continued)**

| Bit  | Symbol | Type | Default | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------|--------|------|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 16.1 | PCSBP  | R/W  | (0)     | PCS Bypass Mode: When set, the 100Base-TX PCS and scrambling/descrambling functions are bypassed. Scrambled 5-bit code groups for transmission are applied to the TX_ER, TXD[3:0] pins and received on the RX_ER, RXD[3:0] pins. The RX_DV and TX_EN signals are not valid in this mode. PCSBP mode is valid only when 100Base-TX mode is enabled and auto-negotiation is disabled.                                                                        |
| 16.0 | RXCC   | R/W  | 0       | Receive Clock Control: This function is valid only in 100Base-TX mode. When set to '1', the RX_CLK signal will be held low when there is no data being received (to save power). The RX_CLK signal will restart 1 clock cycle before the assertion of RX_DV and be shut off 64 clock cycles after RX_DV goes low. RXCC is disabled when the loopback mode is enabled (MR0.14 is high). This bit should be kept at logic zero when PCS Bypass mode is used. |

**MR17: Interrupt Control/Status Register**

The Interrupt Control/Status Register provides the means for controlling and observing events which trigger an interrupt on the INTR pin. This register can also be used in a polling mode via the MII Serial Interface as a means to observe key events within the PHY via one register address. Bits 0 through 7 are status bits, which are each set to logic one based upon an event. These bits are cleared after the register is read. Bits 8 through 15 of this register, when set to logic one, enable their corresponding bit in the lower byte to signal an interrupt on the INTR pin. The level of this interrupt can be set via the MR16.14 (*INPOL*) bit.

| BIT   | SYMBOL       | TYPE | DEFAULT | DESCRIPTION                                                                                                                              |
|-------|--------------|------|---------|------------------------------------------------------------------------------------------------------------------------------------------|
| 17.15 | JABBER_IE    | R/W  | 0       | Jabber Interrupt Enable                                                                                                                  |
| 17.14 | RXER_IE      | R/W  | 0       | Receive Error Interrupt Enable                                                                                                           |
| 17.13 | PRX_IE       | R/W  | 0       | Page Received Interrupt Enable                                                                                                           |
| 17.12 | PDF_IE       | R/W  | 0       | Parallel Detect Fault Interrupt Enable                                                                                                   |
| 17.11 | LP-ACK_IE    | R/W  | 0       | Link Partner Acknowledge Interrupt Enable                                                                                                |
| 17.10 | LS_CHG_IE    | R/W  | 0       | Link Status Change Interrupt Enable                                                                                                      |
| 17.9  | RFAULT_IE    | R/W  | 0       | Remote Fault Interrupt Enable                                                                                                            |
| 17.8  | ANEG-COMP_IE | R/W  | 0       | Auto-Negotiation Complete Interrupt Enable                                                                                               |
| 17.7  | JAB_INT      | RC   | 0       | Jabber Interrupt: This bit is set high when a Jabber event is detected by the 10Base-T circuitry.                                        |
| 17.6  | RXER_INT     | RC   | 0       | Receive Error Interrupt: This bit is set high when the RX_ER signal transitions high.                                                    |
| 17.5  | PRX_INT      | RC   | 0       | Page Received Interrupt: This bit is set high when a new page has been received from the link partner during auto-negotiation.           |
| 17.4  | PDF_INT      | RC   | 0       | Parallel Detect Fault Interrupt: This bit is set high by the auto-negotiation logic when a parallel detect fault condition is indicated. |

**MR17: Interrupt Control/Status Register (continued)**

| BIT  | SYMBOL        | TYPE | DEFAULT | DESCRIPTION                                                                                                                                       |
|------|---------------|------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| 17.3 | LP-ACK_INT    | RC   | 0       | Link Partner Acknowledge Interrupt: This bit is set high by the auto-negotiation logic when FLP bursts are received with the acknowledge bit set. |
| 17.2 | LS_CHG_INT    | RC   | 0       | Link Status Change Interrupt: This bit is set when the link transitions from an OK status to a FAIL status.                                       |
| 17.1 | RFAULT_INT    | RC   | 0       | Remote Fault Interrupt: This bit is set when a remote fault condition has been indicated by the link partner.                                     |
| 17.0 | ANEG-COMP_INT | RC   | 0       | Auto-Negotiation Complete Interrupt: This bit is set by the auto-negotiation logic upon successful completion of auto-negotiation.                |

**MR18: Diagnostic Register**

| BIT      | SYMBOL  | TYPE | DEFAULT | DESCRIPTION                                                                                                                                                                                                                             |
|----------|---------|------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 18.15:13 | RSVD    | R    | 00h     | Reserved: Must set to '00h'.                                                                                                                                                                                                            |
| 18.12    | ANEGF   | RC   | 0       | Auto-Negotiation Fail Indication: This bit is set when auto-negotiation completes and no common technology was found. It remains set until read.                                                                                        |
| 18.11    | DPLX    | R    | 0       | Duplex Indication: This bit indicates the result of the auto-negotiation for duplex arbitration as follows:<br>0 : Half-duplex was the highest common denominator<br>1 : Full-duplex was the highest common denominator                 |
| 18.10    | RATE    | R    | 0       | Rate Indication: This bit indicates the result of the auto-negotiation for data rate arbitration as follows:<br>0 : 10Base-T was the highest common denominator<br>1 : 100Base-TX was the highest common denominator                    |
| 18.9     | RXSD    | R    | 0       | Receiver Signal Detect Indication: In 10Base-T mode, this bit indicates that Manchester data has been detected. In 100Base-TX mode, it indicates that the receive signal activity has been detected (but not necessarily locked on to). |
| 18.8     | RX_LOCK | R    | 0       | Receive PLL Lock Indication: Indicates that the Receive PLL has locked onto the receive signal for the selected speed of operation (10Base-T or 100Base-TX).                                                                            |
| 18.7:0   | RSVD    | R    | 00h     | Reserved: Must set to '00h'.                                                                                                                                                                                                            |

**MR19: Transceiver Control**

| BIT      | SYMBOL   | TYPE | DEFAULT | DESCRIPTION                                                                                                                                                                                                                                                                                                  |
|----------|----------|------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 19.15:12 | RSVD     | R    | 0100    | Reserved                                                                                                                                                                                                                                                                                                     |
| 19.11:10 | TXO[1:0] | R/W  | 01      | Transmit Amplitude Selection: Sets the transmit output amplitude to account for transmit transformer insertion loss.<br><br>00 : Gain set for 0.0dB of insertion loss<br>01 : Gain set for 0.4dB of insertion loss<br>10 : Gain set for 0.8dB of insertion loss<br>11 : Gain set for 1.2dB of insertion loss |
| 19.9:0   | RSVD     | R    | XXXh    | Reserved                                                                                                                                                                                                                                                                                                     |

**MR20: Reserved**

| BIT     | SYMBOL   | TYPE | DEFAULT | DESCRIPTION |
|---------|----------|------|---------|-------------|
| 20.15:0 | Reserved | na   | XXXXh   | Reserved    |

**MR21: Reserved**

| BIT     | SYMBOL   | TYPE | DEFAULT | DESCRIPTION |
|---------|----------|------|---------|-------------|
| 21.15:0 | Reserved | na   | XXXXh   | Reserved    |

**MR22: Reserved**

| BIT     | SYMBOL   | TYPE | DEFAULT | DESCRIPTION |
|---------|----------|------|---------|-------------|
| 22.15:0 | Reserved | na   | XXXXh   | Reserved    |

## ELECTRICAL SPECIFICATIONS

### ABSOLUTE MAXIMUM RATINGS

Operation above maximum rating may permanently damage the device.

| PARAMETER                                | RATING                |
|------------------------------------------|-----------------------|
| DC Supply Voltage (Vcc)                  | -0.5 to 4.0 VDC       |
| Storage Temperature                      | -65 to 150°C          |
| Pin Voltage (CMOS inputs)                | -0.3 to 5.5 VDC       |
| Pin Voltage (CMOS outputs except TXOP/N) | -0.3 to (Vcc+0.6) VDC |
| Pin Voltage (TXOP/N only)                | -0.3 to (Vcc+1.4) VDC |
| Pin Current                              | ± 120 mA              |

### RECOMMENDED OPERATING CONDITIONS

Unless otherwise noted, all specifications are valid over these temperatures and supply voltage ranges:

| PARAMETER                                      | RATING        |
|------------------------------------------------|---------------|
| DC Voltage Supply (Vcc)                        | 3.3 ± 0.3 VDC |
| Ambient Operating Temperature (Ta)             | 0 to +70°C    |
| Maximum Junction Temperature                   | 125°C         |
| Package Thermal Conductivity ( $\theta_{ja}$ ) | 45°C/W        |

### DC CHARACTERISTICS:

| PARAMETER      | SYMBOL   | CONDITIONS                      | MIN | NOM | MAX | UNIT |
|----------------|----------|---------------------------------|-----|-----|-----|------|
| Supply Current | $I_{CC}$ | Vcc = 3.3V;<br>Auto-Negotiation |     | 48  | 56  | mA   |
|                |          | 10BT (Idle)                     |     | 26  | 32  |      |
|                |          | 10BT (Normal Activity)          |     | 88  | 110 |      |
|                |          | 100BTX                          |     | 88  | 110 |      |
|                |          |                                 |     |     |     |      |
| Supply Current | $I_{CC}$ | Power-down mode                 |     |     | 5   | mA   |

**DIGITAL I/O CHARACTERISTICS:**
Pins of type CI, CIU, CID, CIO:

| PARAMETER            | SYMBOL   | CONDITIONS    | MIN | NOM | MAX | UNIT |
|----------------------|----------|---------------|-----|-----|-----|------|
| Input Voltage Low    | Vil      |               |     |     | 0.8 | V    |
| Input Voltage High   | Vih      |               | 2.0 |     | 5.5 | V    |
| Input Current        | Iil, Iih |               | -1  |     | 1   | μA   |
| Pull-up Resistance   | Rpu      | Type CIU only | 38  | 56  | 78  | kΩ   |
| Pull-down Resistance | Rpd      | Type CID only | 38  | 56  | 78  | kΩ   |
| Input Capacitance    | Cin      |               |     | 8   |     | pF   |

Pins of type CIS:

| PARAMETER             | SYMBOL   | CONDITIONS | MIN  | NOM | MAX  | UNIT |
|-----------------------|----------|------------|------|-----|------|------|
| Low-to-High Threshold | Vt+      |            | 1.3  |     | 1.7  | V    |
| High-to-Low Threshold | Vt-      |            | 0.80 |     | 1.20 | V    |
| Input Current         | Iil, Iih |            | -1   |     | 1    | μA   |
| Input Capacitance     | Cin      |            |      | 8   |      | pF   |

Pins of type COZ:

| PARAMETER                       | SYMBOL | CONDITIONS | MIN | NOM | MAX | UNIT |
|---------------------------------|--------|------------|-----|-----|-----|------|
| Output Voltage Low              | Vol    | Iol = 4mA  |     |     | 0.4 | V    |
| Output Voltage High             | Voh    | Ioh = -4mA | 2.4 |     |     | V    |
| Output Transition Time          | Tt     | CL = 20pF  |     |     | 6   | ns   |
| Tristate Output Leakage Current | Iz     |            | -1  |     | 1   | μA   |

Pins of type CO:


| PARAMETER              | SYMBOL | CONDITIONS | MIN | NOM | MAX | UNIT |
|------------------------|--------|------------|-----|-----|-----|------|
| Output Voltage Low     | Vol    | Iol = 8mA  |     |     | 0.4 | V    |
| Output Voltage High    | Voh    | Ioh = -8mA | 2.4 |     |     | V    |
| Output Transition Time | Tt     | CL = 20pF  |     |     | 6   | ns   |

Pins of type CIO:

| PARAMETER              | SYMBOL | CONDITIONS | MIN | NOM | MAX | UNIT |
|------------------------|--------|------------|-----|-----|-----|------|
| Output Voltage Low     | Vol    | Iol = 4mA  |     |     | 0.4 | V    |
| Output Voltage High    | Voh    | Ioh = -4mA | 2.4 |     |     | V    |
| Output Transition Time | Tt     | CL = 20pF  |     |     | 6   | ns   |

## DIGITAL TIMING CHARACTERISTICS

### RST Characteristics

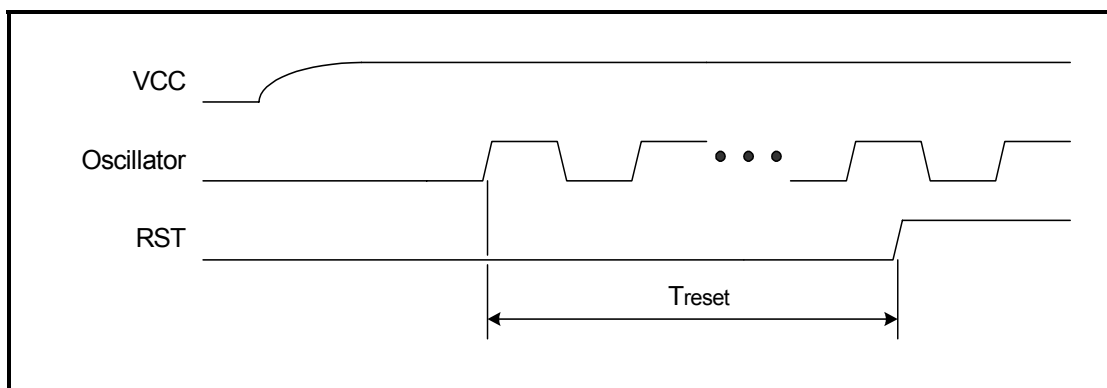


### RST Pulse Duration


| PARAMETER           | SYMBOL | CONDITIONS                           | MIN | NOM | MAX | UNIT                    |
|---------------------|--------|--------------------------------------|-----|-----|-----|-------------------------|
| RST Pulse Assertion | Treset | VCC = 3.3V and oscillator stabilized | 30  |     |     | Oscillator Clock Cycles |

**MII Transmit Interface**

| CHARACTERISTICS                              | SYMBOL            | CONDITIONS | MIN | NOM | MAX | UNIT |
|----------------------------------------------|-------------------|------------|-----|-----|-----|------|
| Setup Time: TX_CLK to TXD[3:0], TX_EN, TX_ER | TX <sub>SU</sub>  |            | 15  |     |     | ns   |
| Hold Time: TX_CLK to TXD[3:0], TX_EN, TX_ER  | TX <sub>HD</sub>  |            | 0   |     |     | ns   |
| CKIN-to-TX_CLK Delay                         | T <sub>CKIN</sub> |            | 0   |     | 40  | ns   |
| TX_CLK Duty-Cycle                            |                   |            | 40  |     | 60  | %    |

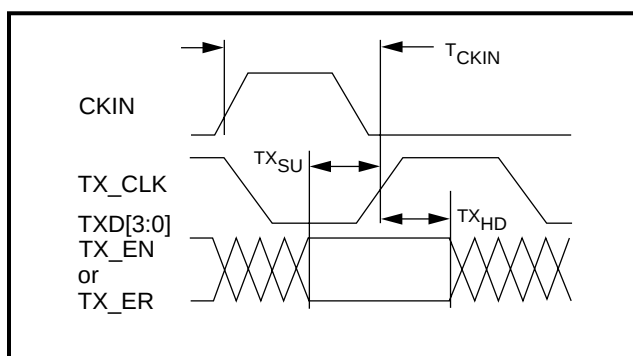

**Transmit Inputs to the 78Q2120C**
**MII Receive Interface**

| CHARACTERISTICS                                        | SYMBOL            | CONDITIONS | MIN | NOM | MAX | UNIT |
|--------------------------------------------------------|-------------------|------------|-----|-----|-----|------|
| Receive Output Delay: RX_CLK to RXD[3:0], RX_DV, RX_ER | RX <sub>DLY</sub> |            | 10  |     | 30  | ns   |
| RX_CLK Duty-Cycle                                      |                   |            | 40  |     | 60  | %    |

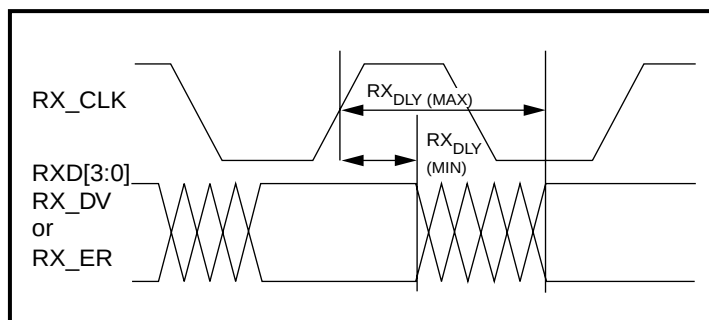

**Receive Outputs from the 78Q2120C**

**MDIO Interface Input Timing**


| CHARACTERISTICS         | SYMBOL            | CONDITIONS | MIN | NOM | MAX | UNIT |
|-------------------------|-------------------|------------|-----|-----|-----|------|
| Setup Time: MDC to MDIO | MIO <sub>SU</sub> |            | 10  |     |     | ns   |
| Hold Time: MDC to MDIO  | MIO <sub>HD</sub> |            | 10  |     |     | ns   |
| Max Frequency: MDC      | F <sub>max</sub>  |            |     |     | 25  | MHz  |

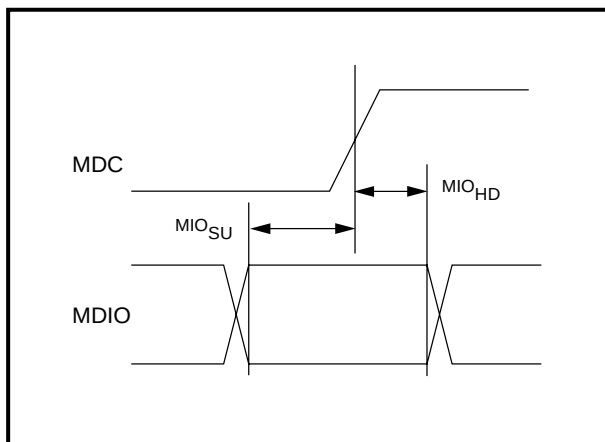
**MDIO as an Input to the 78Q2120C**
**MDIO Interface Output Timing**

| CHARACTERISTICS                             | SYMBOL | CONDITIONS | MIN | NOM | MAX | UNIT |
|---------------------------------------------|--------|------------|-----|-----|-----|------|
| MDC to MDIO data delay                      | MC2D   |            |     |     | 30  | ns   |
| MDIO output from high Z to driven after MDC | MCZ2D  |            |     |     | 30  | ns   |
| MDIO output from driven to high Z after MDC | MCD2Z  |            |     |     | 30  | ns   |

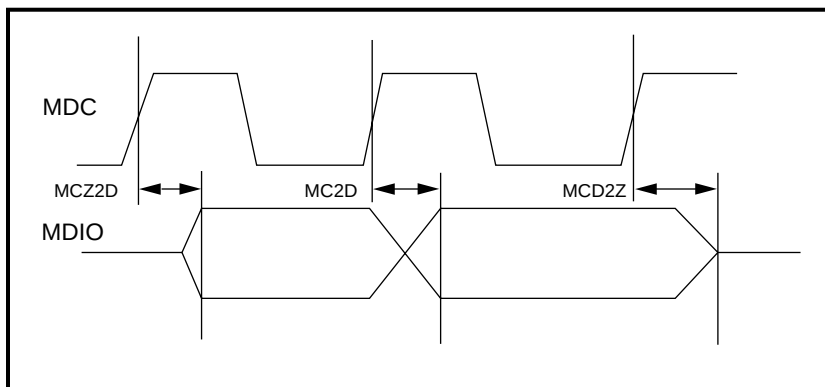
**MDIO as an Output from the 78Q2120C**



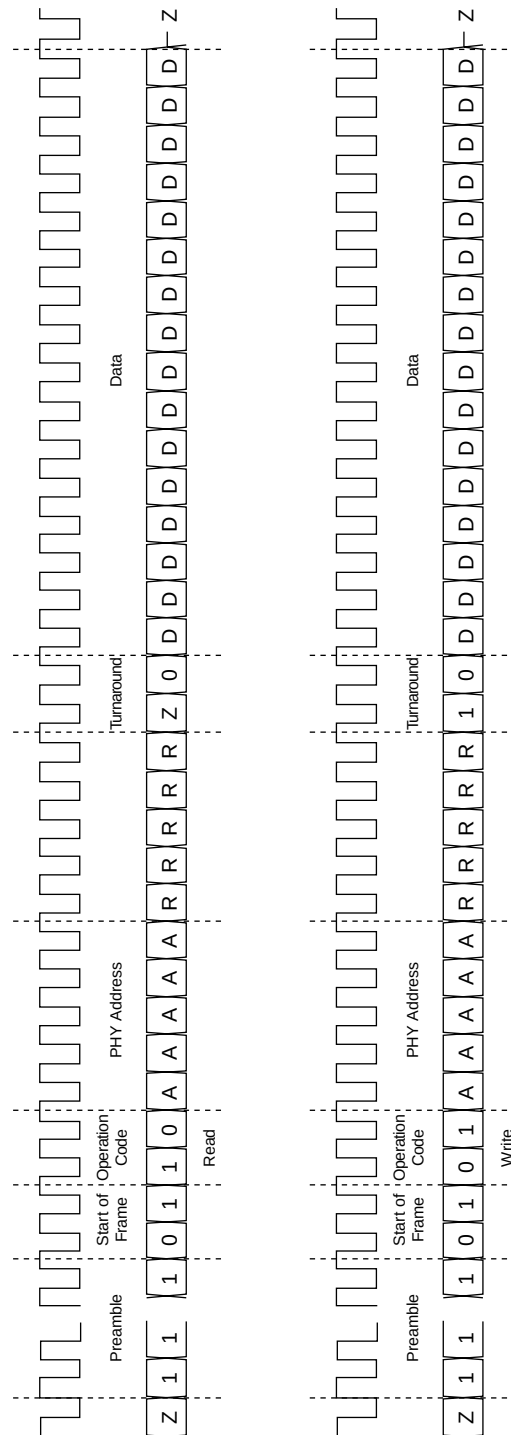

### 100BASE-TX System Timing

System timing requirements for 100BASE-TX operation are listed in Table 24-2 of Clause 24 of IEEE 802.3.

| PARAMETER                                       | CONDITION  | NOM | UNIT |
|-------------------------------------------------|------------|-----|------|
| TX_EN Sampled to first bit of "J" on MDI output |            | 12  | BT   |
| First bit of "J" on MDI input to CRS assert     |            | 16  | BT   |
| First bit of "T" on MDI input to CRS de-assert  |            | 23  | BT   |
| First bit of "J" on MDI input to COL assert     |            | 20  | BT   |
| First bit of "T" on MDI input to COL de-assert  |            | 24  | BT   |
| TX_EN Sampled to CRS assert                     | RPTR = low | 6   | BT   |
| TX_EN sampled to CRS de-assert                  | RPTR = low | 6   | BT   |

### 10BASE-T System Timing

| PARAMETER                | CONDITION | MIN | NOM | MAX | UNIT |
|--------------------------|-----------|-----|-----|-----|------|
| TX_EN (MII) to TD Delay  |           |     |     | 6   | BT   |
| RD to RXD at (MII) Delay |           |     |     | 6   | BT   |
| Collision delay          |           |     |     | 9   | BT   |
| SQE test wait            |           |     | 1   |     | μs   |
| SQE test duration        |           |     | 1   |     | μs   |
| Jabber on-time*          |           | 20  |     | 150 | ms   |
| Jabber off-time*         |           | 250 |     | 750 | ms   |

\* Guarantee by design. The specifications in the following table are included for information only.

**ANALOG ELECTRICAL CHARACTERISTICS**
**100BASE-TX Transmitter**

| PARAMETER                                                             | CONDITION                                                | MIN  | NOM | MAX       | UNIT |
|-----------------------------------------------------------------------|----------------------------------------------------------|------|-----|-----------|------|
| Peak Output Amplitude ( $ V_{p+} $ , $ V_{p-} $ )<br>(see note below) | Best-fit over 14 bit times;<br>0.5 dB Transformer loss   | 950  |     | 1050      | mVpk |
| Output Amplitude Symmetry                                             | $ V_{p+} $<br>$ V_{p-} $                                 | 0.98 |     | 1.02      |      |
| Output Overshoot                                                      | Percent of $V_{p+}$ , $V_{p-}$                           |      |     | 5         | %    |
| Rise/Fall time ( $t_r$ , $t_f$ )                                      | 10-90% of $V_{p+}$ , $V_{p-}$                            | 3    |     | 5         | ns   |
| Rise/Fall time Imbalance                                              | $ t_r - t_f $                                            |      |     | 500       | ps   |
| Duty Cycle Distortion                                                 | Deviation from best-fit time-grid;<br>010101... Sequence |      |     | $\pm 250$ | ps   |
| Jitter                                                                | Scrambled Idle                                           |      |     | 1.4       | ns   |

**Note:** Measured at the line side of the transformer.

Test Condition: Transformer P/N: TLA-6T103

Line Termination:  $100\Omega \pm 1\%$

**100BASE-TX Transmitter (Informative)**

The specifications in the following table are included for information only. They are mainly a function of the external transformer and termination resistors used for measurements.

| PARAMETER               | CONDITION                    | MIN                                                 | MAX | UNIT          |
|-------------------------|------------------------------|-----------------------------------------------------|-----|---------------|
| Return Loss             | $2 < f < 30 \text{ MHz}$     | 16                                                  |     | dB            |
|                         | $30 < f < 60 \text{ MHz}$    | $16 - 20 \log\left(\frac{f}{30 \text{ MHz}}\right)$ |     |               |
|                         | $60 < f < 80 \text{ MHz}$    | 10                                                  |     |               |
| Open-Circuit Inductance | $-8 < I_{in} < 8 \text{ mA}$ | 350                                                 |     | $\mu\text{H}$ |

**100BASE-TX Receiver**

| PARAMETER                            | CONDITION                | MIN | NOM | MAX  | UNIT       |
|--------------------------------------|--------------------------|-----|-----|------|------------|
| Signal Detect Assertion Threshold    |                          | 500 | 600 | 700  | mVppd      |
| Signal Detect De-assertion Threshold |                          | 275 | 350 | 425  | mVppd      |
| Differential Input Resistance        |                          |     | 20  |      | k $\Omega$ |
| Jitter Tolerance (pk-pk)             | Not tested in production | 4   |     |      | ns         |
| Baseline Wander Tracking             |                          | -75 |     | +75  | %          |
| Signal Detect Assertion Time         | Not tested               |     |     | 1000 | $\mu$ s    |
| Signal Detect De-assertion Time      | Not tested               |     |     | 4    | $\mu$ s    |

**10BASE-T Transmitter**

The Manchester-encoded data pulses, the link pulse and the start-of-idle pulse are tested against the templates and using the procedures found in Clause 14 of IEEE 802.3.

| PARAMETER                                           | CONDITION                   | MIN | NOM | MAX | UNIT |
|-----------------------------------------------------|-----------------------------|-----|-----|-----|------|
| Peak Differential Output Signal<br>(see note below) | All data patterns           | 2.2 |     | 2.8 | V    |
| Harmonic Content<br>(dB below fundamental)          | All ones data<br>Not tested | 27  |     |     | dB   |
| Link Pulse Width                                    |                             |     | 100 |     | ns   |
| Start-of-Idle Pulse Width                           | Last bit 0                  |     | 300 |     | ns   |
|                                                     | Last bit 1                  |     | 350 |     | ns   |

Note: Measured at the line side of the transformer.

Test Condition: Transformer P/N: TLA-6T103

Line Termination: 100 $\Omega$   $\pm$ 1%

**10BASE-T Transmitter (Informative)**

The specifications in the following table are included for information only. They are mainly a function of the external transformer and termination resistors used for measurements.

| PARAMETER                       | CONDITION                                                                                       | MIN                                     | NOM | MAX | UNIT |
|---------------------------------|-------------------------------------------------------------------------------------------------|-----------------------------------------|-----|-----|------|
| Output return loss              |                                                                                                 | 15                                      |     |     | dB   |
| Output Impedance Balance        | 1 MHz < freq < 20 MHz                                                                           | $29 - 17 \log\left(\frac{f}{10}\right)$ |     |     | dB   |
| Peak Common-mode Output Voltage |                                                                                                 |                                         |     | 50  | mV   |
| Common-mode rejection           | 15 V <sub>pk</sub> , 10.1 MHz sine wave applied to transmitter common-mode. All data sequences. |                                         |     | 100 | mV   |
| Common-mode rejection jitter    | 15 V <sub>pk</sub> , 10.1 MHz sine wave applied to transmitter common-mode. All data sequences. |                                         |     | 1   | ns   |

**10BASE-T Receiver**

| PARAMETER                     | CONDITION                                    | MIN | NOM               | MAX | UNIT  |
|-------------------------------|----------------------------------------------|-----|-------------------|-----|-------|
| DLL Phase Acquisition Time    |                                              |     | 10                |     | BT    |
| Jitter Tolerance (pk-pk)      |                                              | 30  |                   |     | ns    |
| Input Squelched Threshold     |                                              | 500 | 600               | 700 | mVppd |
| Input Unsquelched Threshold   |                                              | 275 | 350               | 425 | mVppd |
| Differential Input Resistance |                                              |     | 20                |     | kΩ    |
| Bit Error Ratio               |                                              |     | 10 <sup>-10</sup> |     |       |
| Common-mode rejection         | Square wave<br>0 < f < 500 kHz<br>Not tested | 25  |                   |     | V     |



1) Recommend to leave pins 56 and 56 as NC for 78Q2120C09 device.  
Connecting a resistor between these pins as in the 78Q2120C09 will have no effect on this device

Note 2: This application circuit is only valid for the 78Q2120C09 revision. Refer to Ordering Information for revision identification.

C9 and C10 must be calibrated in actual application board for 25.000MHz +/-50ppm.

Note 2: This application circuit is only valid for the 78Q2120C09 revision. Refer to Ordering Information for revision identification.

## ISOLATION TRANSFORMERS

Two simple 1:1 isolation transformers are required at the line interface. Transformers with integrated common-mode choke are recommended for exceeding FCC requirements. This table gives the recommended line transformer characteristics:

| NAME                      | VALUE                | CONDITION       |
|---------------------------|----------------------|-----------------|
| Turns Ratio               | 1 CT : 1 CT $\pm$ 5% |                 |
| Open-Circuit Inductance   | 350 $\mu$ H (min)    | @ 10 mV, 10 kHz |
| Leakage Inductance        | 0.40 $\mu$ H (max)   | @ 1 MHz (min)   |
| Inter-Winding Capacitance | 25 pF (max)          |                 |
| D.C. Resistance           | 0.9 $\Omega$ (max)   |                 |
| Insertion Loss            | 0.4 dB (typ)         | 0 - 65 MHz      |
| HIPO                      | 1500 Vrms            |                 |

**Note:** The 100Base-TX amplitude specifications assume a transformer loss of 0.4 dB. For the transmit line transformer with higher insertion losses, up to 1.2 dB of insertion loss can be compensated by selecting the appropriate setting in the Transmit Amplitude Selection bits in register MR19.11:10.


## REFERENCE CRYSTAL

If the internal crystal oscillator is to be used, a crystal with the following characteristics should be chosen:

| NAME                                            | VALUE                                | UNITS  |
|-------------------------------------------------|--------------------------------------|--------|
| Frequency                                       | 25.00000                             | MHz    |
| Load Capacitance*                               | 4**                                  | pF     |
| Frequency Tolerance                             | ±50                                  | PPM    |
| Aging                                           | ±2                                   | PPM/yr |
| Temperature Stability ( 0 - 70°C)               | ±5                                   | PPM    |
| Oscillation Mode                                | Parallel Resonance, Fundamental Mode |        |
| Parameters at 25°C ± 2°C ; Drive Level = 0.5 mW |                                      |        |
| Drive Level                                     | 50 - 100                             | μW     |
| Shunt Capacitance (max)                         | 8                                    | pF     |
| Motional Capacitance (min)                      | 10                                   | f F    |
| Series Resistance (max)                         | 60                                   | Ω      |
| Spurious Response (max)                         | > 5 dB below main within 500 kHz     |        |

\* Equivalent differential capacitance across the XTLP/XTLN pins.

\*\* If crystal with a larger load is used, external shunt capacitors to ground should be added to make up the equivalent capacitance difference.

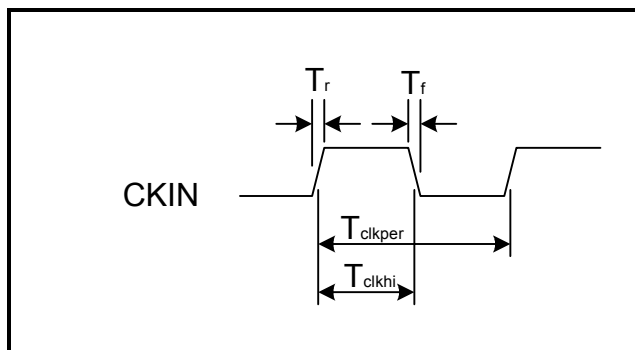

**External CKIN Oscillator Characteristics**

#### EXTERNAL CKIN OSCILLATOR CHARACTERISTICS


| PARAMETER        | SYMBOL  | CONDITION                         | MIN | NOM    | MAX | UNIT |
|------------------|---------|-----------------------------------|-----|--------|-----|------|
| CKIN Frequency   | f       | See Note 1                        |     | 25.000 |     | MHz  |
| CKIN Period      | Tclkper | See Note 1                        |     | 40     |     | ns   |
| CKIN Duty Cycle  |         | Tclkhi / Tclkper                  | 45  |        | 55  | %    |
| Rise / Fall Time | Tr, Tf  |                                   |     |        | 4.0 | ns   |
| Absolute Jitter  |         | Input signaling requirements = CI |     |        | 0.1 | ns   |

Note 1: IEEE 802.3 frequency tolerance  $\pm 50$  ppm




## PACKAGE PIN DESIGNATIONS

(Top View)

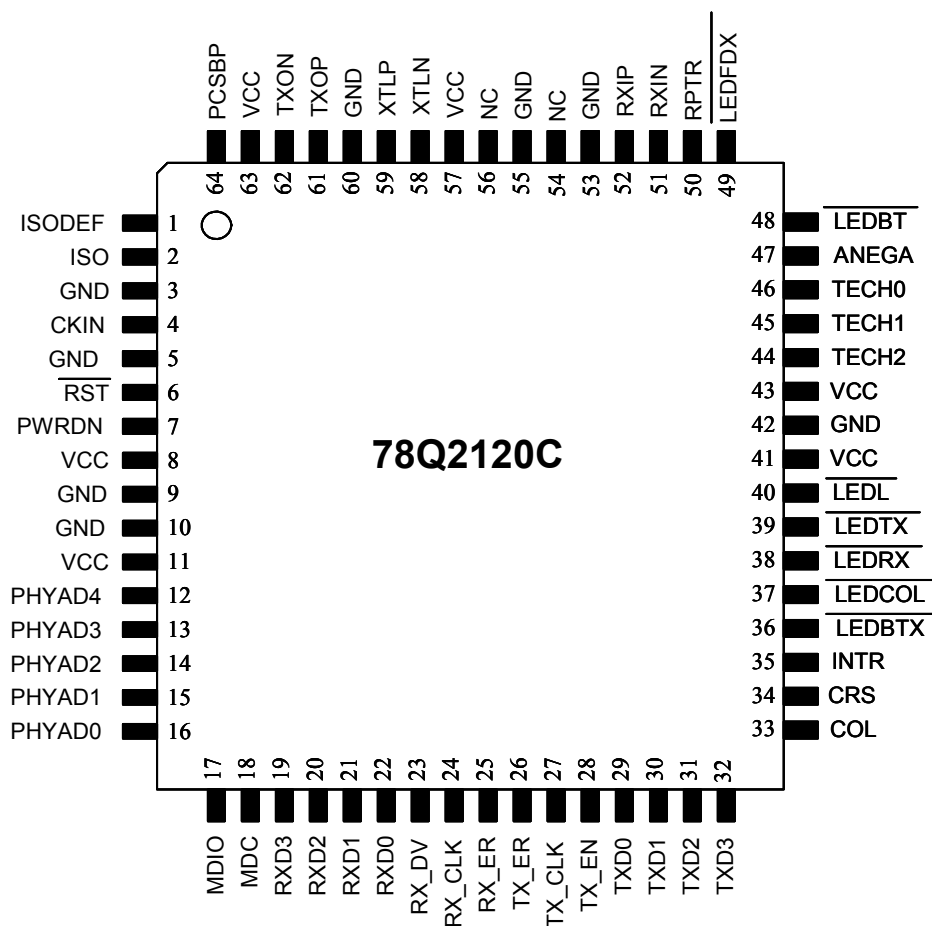

## MECHANICAL SPECIFICATIONS

### 64-LQFP (Top View)

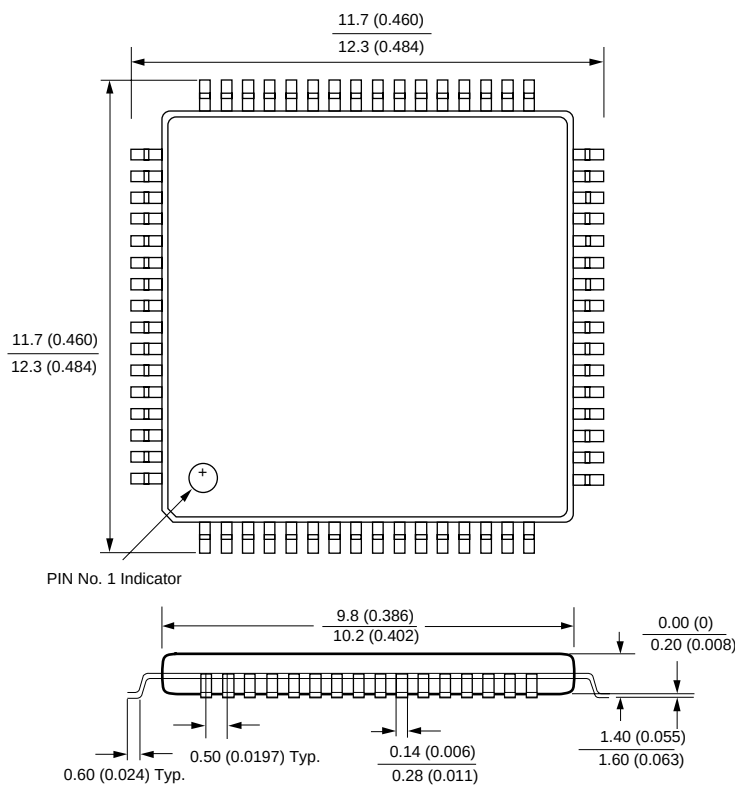

**ORDERING INFORMATION**

| PART DESCRIPTION                              | ORDER NUMBER       | PACKAGE MARK                  |
|-----------------------------------------------|--------------------|-------------------------------|
| 78Q2120C (Revision 9) 64-pin LQFP             | 78Q2120C09-64CGT   | 78Q2120C-CGT<br>xxxxxxxxxxx9  |
| 78Q2120C (Revision 9) 64-pin LQFP - Lead Free | 78Q2120C09-64CGT/F | 78Q2120C-CGT<br>xxxxxxxxxxx9F |

**REVISION HISTORY**

| Rev. # | Date           | Comments                                                             |
|--------|----------------|----------------------------------------------------------------------|
| 1.0    | September 2004 | Final Data Sheet release                                             |
| 1.1    | January 2005   | 1. Revised ordering number (added 64)<br>2. Changed CKIN table title |
| 1.2    | August 2005    | Company name and logo change                                         |
| 1.3    | January 2009   | Revised ordering number (deleted A)                                  |

No responsibility is assumed by Teridian Semiconductor Corporation for use of this product or for any infringements of patents and trademarks or other rights of third parties resulting from its use. No license is granted under any patents, patent rights or trademarks of Teridian Semiconductor Corporation, and the company reserves the right to make changes in specifications at any time without notice. Accordingly, the reader is cautioned to verify that the data sheet is current before placing orders.

Teridian Semiconductor Corporation, 6440 Oak Canyon Rd. Suite 100, Irvine, CA 92618  
(714) 508-8800, FAX: (714) 508-8877, <http://www.teridiansemiconductor.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.