


## Schottky Rectifier, 10 A



D-PAK (TO-252AA)



### FEATURES

- Popular D-PAK outline
- Small foot print, surface mountable
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead (Pb)-free ("PbF" suffix)
- Designed and qualified for AEC Q101 level


RoHS\*  
COMPLIANT

### DESCRIPTION

The 10WQ045FN surface mount Schottky rectifier has been designed for applications requiring low forward drop and small foot prints on PC board. Typical applications are in disk drives, switching power supplies, converters, freewheeling diodes, battery charging, and reverse battery protection.

### PRODUCT SUMMARY

|             |      |
|-------------|------|
| $I_{F(AV)}$ | 10 A |
| $V_R$       | 45 V |

### MAJOR RATINGS AND CHARACTERISTICS

| SYMBOL      | CHARACTERISTICS             | VALUES      | UNITS      |
|-------------|-----------------------------|-------------|------------|
| $I_{F(AV)}$ | Rectangular waveform        | 10          | A          |
| $V_{RRM}$   |                             | 45          | V          |
| $I_{FSM}$   | $t_p = 5 \mu s$ sine        | 400         | A          |
| $V_F$       | 10 Apk, $T_J = 125^\circ C$ | 0.53        | V          |
| $T_J$       | Range                       | - 40 to 175 | $^\circ C$ |

### VOLTAGE RATINGS

| PARAMETER                            | SYMBOL    | 10WQ045FNPbF | UNITS |
|--------------------------------------|-----------|--------------|-------|
| Maximum DC reverse voltage           | $V_R$     | 45           | V     |
| Maximum working peak reverse voltage | $V_{RWM}$ |              |       |

### ABSOLUTE MAXIMUM RATINGS

| PARAMETER                                                            | SYMBOL      | TEST CONDITIONS                                                                                                     | VALUES | UNITS |
|----------------------------------------------------------------------|-------------|---------------------------------------------------------------------------------------------------------------------|--------|-------|
| Maximum average forward current<br>See fig. 5                        | $I_{F(AV)}$ | 50 % duty cycle at $T_C = 157^\circ C$ , rectangular waveform                                                       | 10     | A     |
| Maximum peak one cycle<br>non-repetitive surge current<br>See fig. 7 | $I_{FSM}$   | 5 $\mu s$ sine or 3 $\mu s$ rect. pulse                                                                             | 400    | A     |
|                                                                      |             | 10 ms sine or 6 ms rect. pulse                                                                                      | 75     |       |
| Non-repetitive avalanche energy                                      | $E_{AS}$    | $T_J = 25^\circ C$ , $I_{AS} = 3$ A, $L = 4.4$ mH                                                                   | 20     | mJ    |
| Repetitive avalanche current                                         | $I_{AR}$    | Current decaying linearly to zero in 1 $\mu s$<br>Frequency limited by $T_J$ maximum $V_A = 1.5 \times V_R$ typical | 3.0    | A     |

\* Pb containing terminations are not RoHS compliant, exemptions may apply

| ELECTRICAL SPECIFICATIONS                     |                |                                                                                           |                                     |        |                  |
|-----------------------------------------------|----------------|-------------------------------------------------------------------------------------------|-------------------------------------|--------|------------------|
| PARAMETER                                     | SYMBOL         | TEST CONDITIONS                                                                           |                                     | VALUES | UNITS            |
| Maximum forward voltage drop<br>See fig. 1    | $V_{FM}^{(1)}$ | 10 A                                                                                      | $T_J = 25\text{ }^{\circ}\text{C}$  | 0.63   | V                |
|                                               |                | 20 A                                                                                      |                                     | 0.80   |                  |
|                                               |                | 10 A                                                                                      | $T_J = 125\text{ }^{\circ}\text{C}$ | 0.53   |                  |
|                                               |                | 20 A                                                                                      |                                     | 0.71   |                  |
| Maximum reverse leakage current<br>See fig. 2 | $I_{RM}^{(1)}$ | $T_J = 25\text{ }^{\circ}\text{C}$                                                        | $V_R = \text{Rated } V_R$           | 1      | mA               |
|                                               |                | $T_J = 125\text{ }^{\circ}\text{C}$                                                       |                                     | 15     |                  |
| Threshold voltage                             | $V_{F(TO)}$    | $T_J = T_J \text{ maximum}$                                                               |                                     | 0.255  | V                |
| Forward slope resistance                      | $r_t$          |                                                                                           |                                     | 22     | $\text{m}\Omega$ |
| Typical junction capacitance                  | $C_T$          | $V_R = 5\text{ }V_{DC}$ (test signal range 100 kHz to 1 MHz) $25\text{ }^{\circ}\text{C}$ |                                     | 760    | pF               |
| Typical series inductance                     | $L_S$          | Measured lead to lead 5 mm from package body                                              |                                     | 5.0    | nH               |

**Note**(1) Pulse width < 300  $\mu\text{s}$ , duty cycle < 2 %

| THERMAL - MECHANICAL SPECIFICATIONS             |                      |                                        |             |                      |
|-------------------------------------------------|----------------------|----------------------------------------|-------------|----------------------|
| PARAMETER                                       | SYMBOL               | TEST CONDITIONS                        | VALUES      | UNITS                |
| Maximum junction and storage temperature range  | $T_J^{(1)}, T_{Stg}$ |                                        | - 40 to 175 | $^{\circ}\text{C}$   |
| Maximum thermal resistance, junction to case    | $R_{thJC}$           | DC operation<br>See fig. 4             | 2.0         | $^{\circ}\text{C/W}$ |
| Maximum thermal resistance, junction to ambient | $R_{thJA}$           |                                        | 50          |                      |
| Approximate weight                              |                      |                                        | 0.3         | g                    |
|                                                 |                      |                                        | 0.01        | oz.                  |
| Marking device                                  |                      | Case style D-PAK (similar to TO-252AA) | 10WQ045FN   |                      |

**Note**(1)  $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{thJA}}$  thermal runaway condition for a diode on its own heatsink

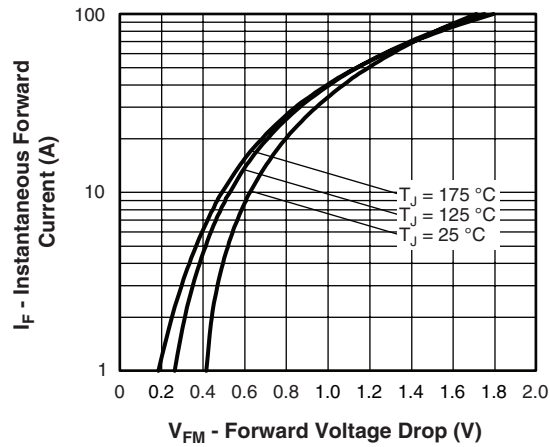


Fig. 1 - Maximum Forward Voltage Drop Characteristics

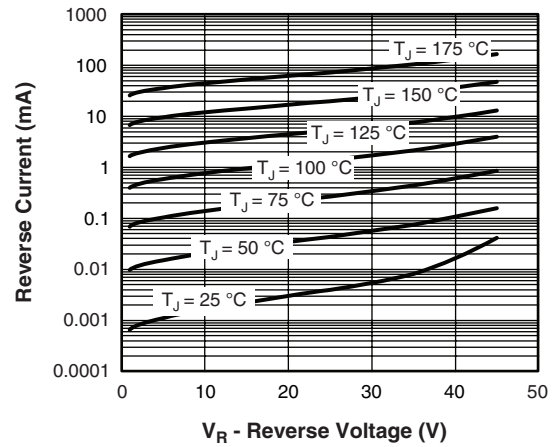


Fig. 2 - Typical Values of Reverse Current vs. Reverse Voltage

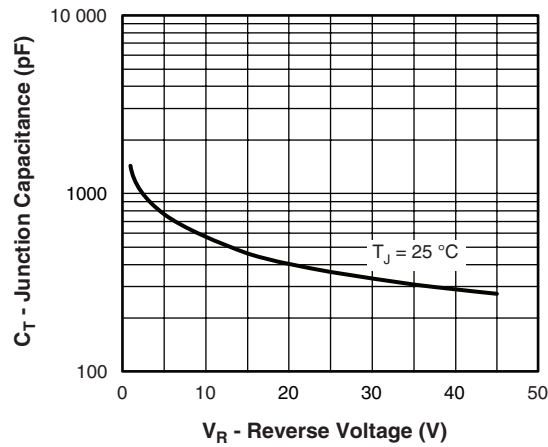
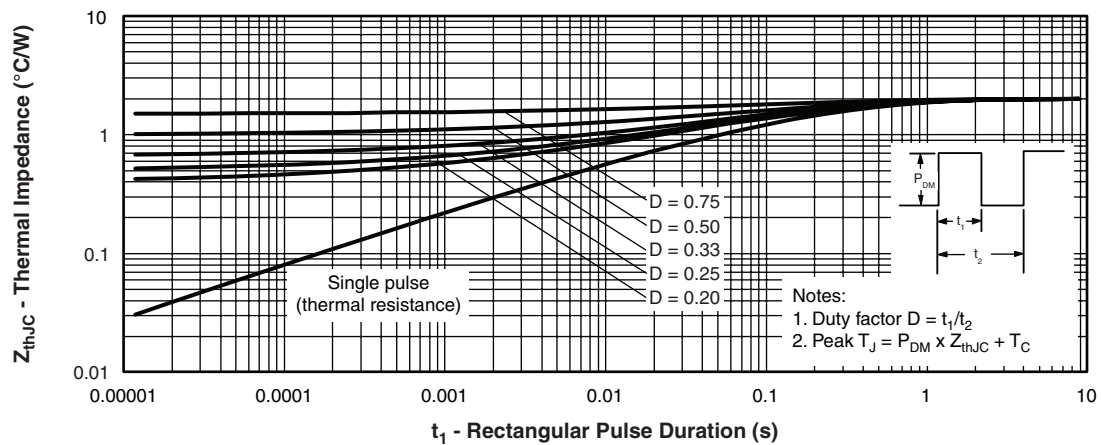


Fig. 3 - Typical Junction Capacitance vs. Reverse Voltage


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

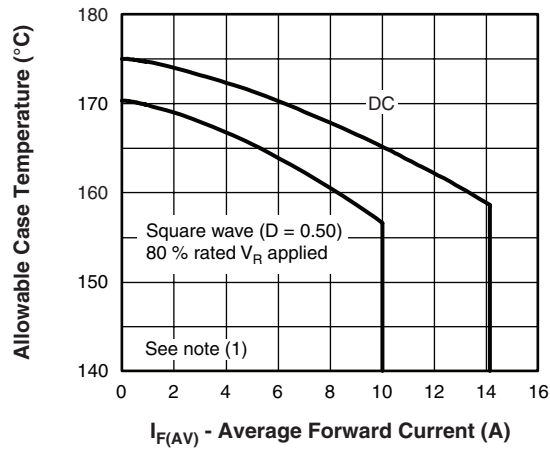


Fig. 5 - Maximum Allowable Case Temperature vs. Average Forward Current

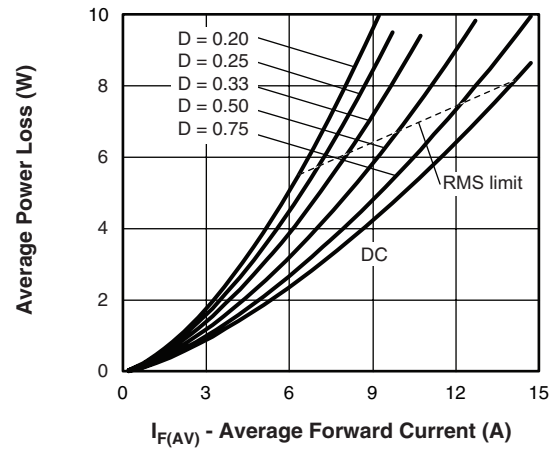


Fig. 6 - Forward Power Loss Characteristics

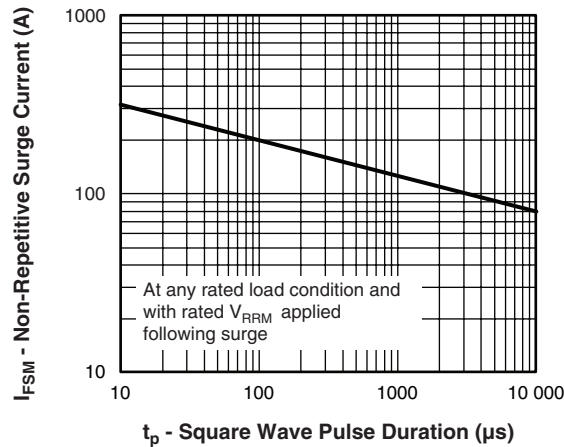


Fig. 7 - Maximum Non-Repetitive Surge Current

## Note

- (1) Formula used:  $T_C = T_J - (P_d + P_{dREV}) \times R_{thJC}$ ;  
 $P_d$  = Forward power loss =  $I_{F(AV)} \times V_{FM}$  at  $(I_{F(AV)}/D)$  (see fig. 6);  
 $P_{dREV}$  = Inverse power loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R$  at  $V_{R1} = 80\%$  rated  $V_R$

**ORDERING INFORMATION TABLE**

|             |           |          |          |            |           |            |            |
|-------------|-----------|----------|----------|------------|-----------|------------|------------|
| Device code | <b>10</b> | <b>W</b> | <b>Q</b> | <b>045</b> | <b>FN</b> | <b>TRL</b> | <b>PbF</b> |
|             | 1         | 2        | 3        | 4          | 5         | 6          | 7          |

- |          |   |                                                                                                                                                                                                     |
|----------|---|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>1</b> | - | Current rating (10 A)                                                                                                                                                                               |
| <b>2</b> | - | Package identifier:<br>W = D-PAK                                                                                                                                                                    |
| <b>3</b> | - | Schottky "Q" series                                                                                                                                                                                 |
| <b>4</b> | - | Voltage rating (045 = 45 V)                                                                                                                                                                         |
| <b>5</b> | - | FN = TO-252AA (D-PAK)                                                                                                                                                                               |
| <b>6</b> | - | <ul style="list-style-type: none"><li>• None = Tube (50 pieces)</li><li>• TR = Tape and reel</li><li>• TRL = Tape and reel (left oriented)</li><li>• TRR = Tape and reel (right oriented)</li></ul> |
| <b>7</b> | - | <ul style="list-style-type: none"><li>• None = Standard production</li><li>• PbF = Lead (Pb)-free</li></ul>                                                                                         |

| LINKS TO RELATED DOCUMENTS |                                                                               |
|----------------------------|-------------------------------------------------------------------------------|
| Dimensions                 | <a href="http://www.vishay.com/doc?95016">http://www.vishay.com/doc?95016</a> |
| Part marking information   | <a href="http://www.vishay.com/doc?95059">http://www.vishay.com/doc?95059</a> |
| Packaging information      | <a href="http://www.vishay.com/doc?95033">http://www.vishay.com/doc?95033</a> |



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.