SPX4041

Precision Micropower 1.24V Shunt Voltage Reference

FEATURES
- Low temperature coefficient 50 ppm/°C
- Operating current range 100µA to 15 mA
- Low power, 250 mW @ I_{IN} =100 mA
- Two terminal "Zener" operation
- Small package: SOT - 23, TO-92, and SO-8
- Fixed reverse breakdown voltage 2.5 Volt
- No output capacitance required
- Output voltage tolerance ± 0.5%

APPLICATIONS
- Constant Current Source
- Digital Voltmeter
- Power Supply Monitor
- Precision Regulators
- Battery-Powered Equipment
- Instrumentation
- Automotive Electronics
- Data Acquisition Systems
- Energy Management

PRODUCT DESCRIPTION
The SPX4041 is a two-terminal, temperature compensated, band-gap voltage reference, which provides a fixed 1.24V output for input currents between 500 µA to 5mA. The bandgap voltage (1.24V) is independently laser trimmed from the output voltage to achieve a very low tempco, then the output voltage is laser trimmed to 1.24 volts. This trimming technique and the low tempco (A grade 50 ppm/ °C) thin film resistor process gives a very stable device over the full temperature range. The SPX4041 is available in the sub-miniature (3mm × 1.3mm) SOT-23, SO-8 surface mount package, or TO-92 package. The operating temperature is -40°C to 85°C.

The SPX4041 advanced design eliminates the need for an external stabilized capacitor while insuring stability with any capacitive load, making them easy to use.

PIN CONNECTIONS

8-Pin Surface Mount (S)



Top View

SOT-23-3 (M)



Top View

TO-92 (N)



Bottom View

ABSOLUTE MAXIMUM RATINGS

Reverse Current 20mA
Forward Current 10mA
Storage Temperature ..... -65°C to +150°C
Lead Temperature (Soldering) ..... 300°C

Power Dissipation at 25°C
M Package 300mW
N Package 550mW
S Package 525mW
Temperature Range ..... -40°C ≤ T_A ≤ +85°C

ELECTRICAL CHARACTERISTICS

Electrical Characteristics at I_{IN} = 1000µA, and T_A = +25°C unless otherwise noted. . **Boldface limits apply over temperature.**

Parameters	Conditions	SPX4041A2 Min	SPX4041A2 Typ	SPX4041A2 Max	SPX4041B2 Min	SPX4041B2 Typ	SPX4041B2 Max	Units
Reverse Breakdown Voltage	I_R=500 µA		1.24			1.24		V
Reverse Breakdown Tolerance	I_R=500 µA			±25 **±49**			±25 **±49**	mV mV
Output Impedance			0.60	2		0.60	2	Ω
Noise Voltage	0.1kHz≤f ≤10Hz		15			15		µV p-p
Tempco	Note 1			50			100	ppm/°C
Turn-on Setting	0.1% of V_{OUT}		30			30		µSec
Operating Current Range	Note 2	0.5		5 15	0.5		5 15	mA
Temp. Range		-40		85	-40		85	°C
Parameters	**Conditions**	**SPX4041A3 Min**	**SPX4041A3 Typ**	**SPX4041A3 Max**	**SPX4041B3 Min**	**SPX4041B3 Typ**	**SPX4041B3 Max**	**Units**
Reverse Breakdown Voltage	I_R=500 µA		1.24			1.24		V
Reverse Breakdown Tolerance	I_R=500 µA			±50 **±74**			±50 **±74**	mV mV
Output Impedance			0.60	2		0.60	2	Ω
Noise Voltage	0.1kHz≤f ≤10Hz		15			15		µV p-p
Tempco	Note 1			50			100	ppm/°C
Turn-on Setting	0.1% of V_{OUT}		30			30		µSec
Operating Current Range	Note 2	0.1		5 15	0.1		5 15	mA
Temp. Range		-40		85	-40		85	°C

Note: 1) Three-point measurement guarantees the error band over the specified temperature range.
2) Optimum performance is obtained at currents below 1000 µA.
3) Limits are 100% production tested at 25°C. Limits over temperature are guaranteed through correlation using statistical quality control.

SPX4041 Applications Hints

This device is designed for stable operation and has no need of an external capacitor between pin 4 and 8. The reference remains stable if a bypass capacitor is used.

SOT-23

The SPX4041 in the SOT-23 package has a parasitic Schottky diode between pin 3 and pin 1. Pin 1 of SOT-23 must float or be connected to pin 3.

Conventional Shunt Regulator

In a conventional shunt regulator application (see Figure 1), an external series resister (R_S) is connected between the supply voltage and the SPX4041. R_S determines the current that flows through the load (I_L) and the reference(I_Q). Since load current and supply voltage may vary, R_S should be small enough to supply at least the minimum acceptable I_Q to the reference even when the supply voltage is at its minimum and the load current is at its maximum value. When the supply voltage is at its maximum and I_L is at its minimum, R_S should be large enough so that the current flowing through the SPX4041-x.x is less than 15mA

R_S is determined by the supply voltage (V_S), the load and operating current (I_L and I_Q), reference's reverse breakdown voltage (V_R).

$$R_S = (V_S - V_R)/(I_L+I_Q)$$

Figure 1. SPX4041 Fixed Shunt Regulator Application



DRAWING PACKAGE
8-PIN SOIC (S)

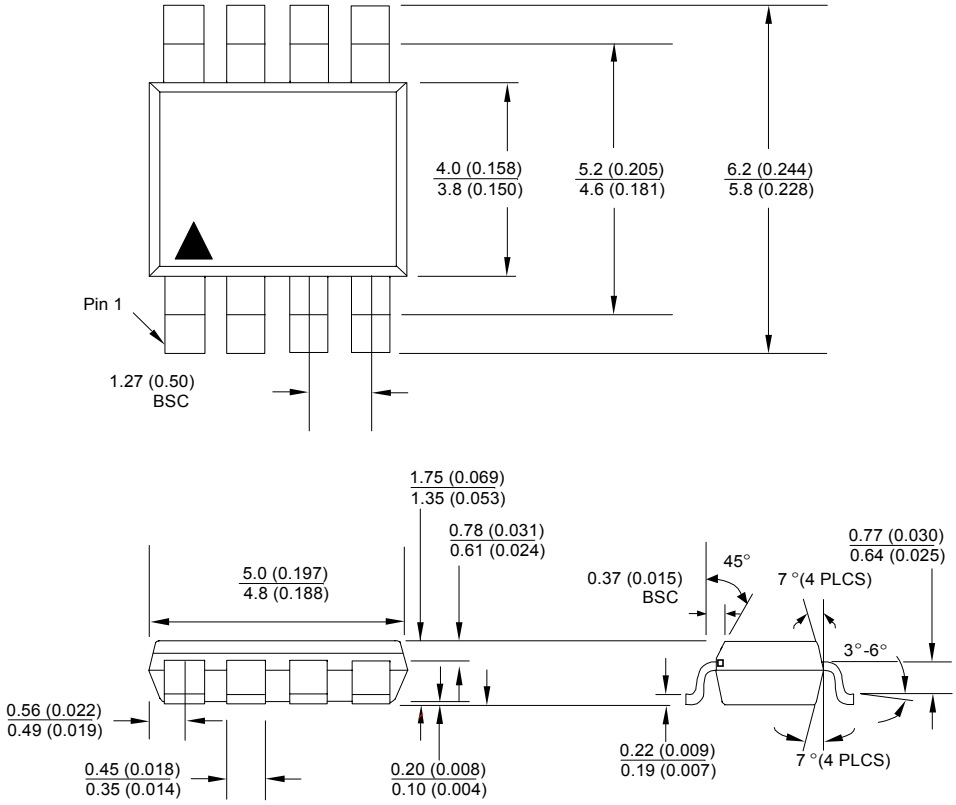

DRAWING PACKAGE
SOT-23-3L (M)

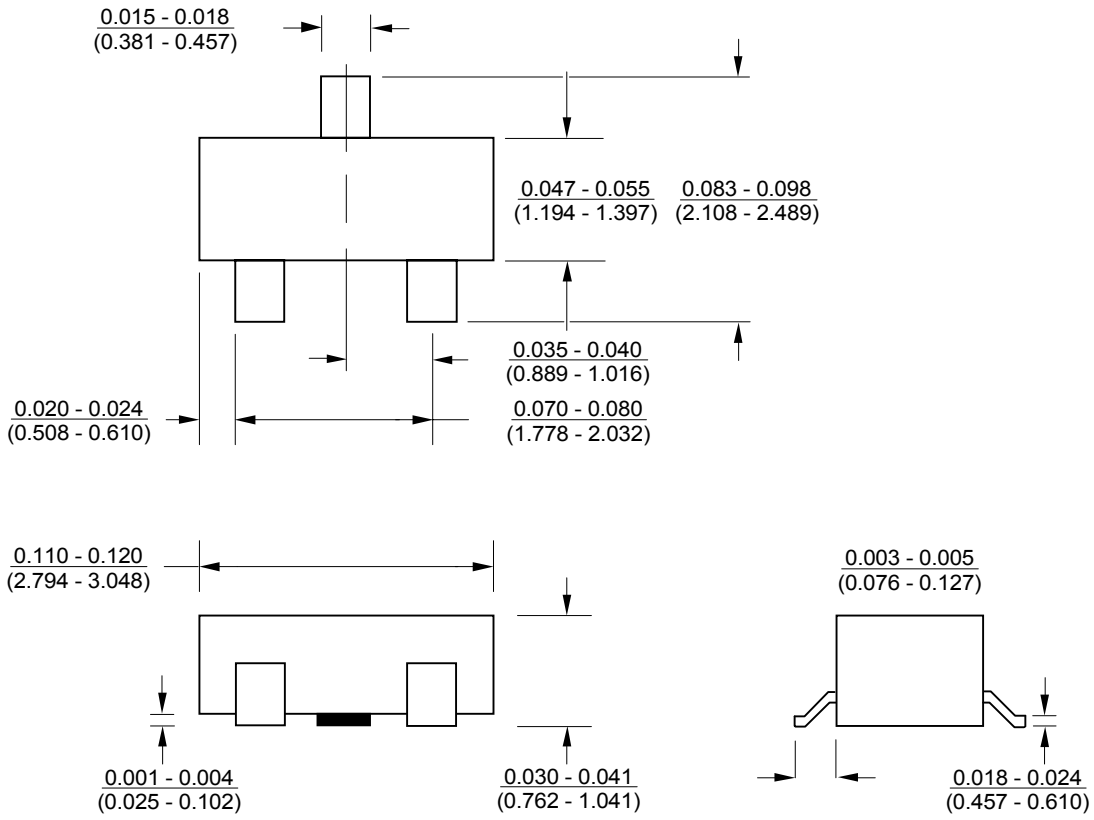

DRAWING PACKAGE
TO-92 (N)

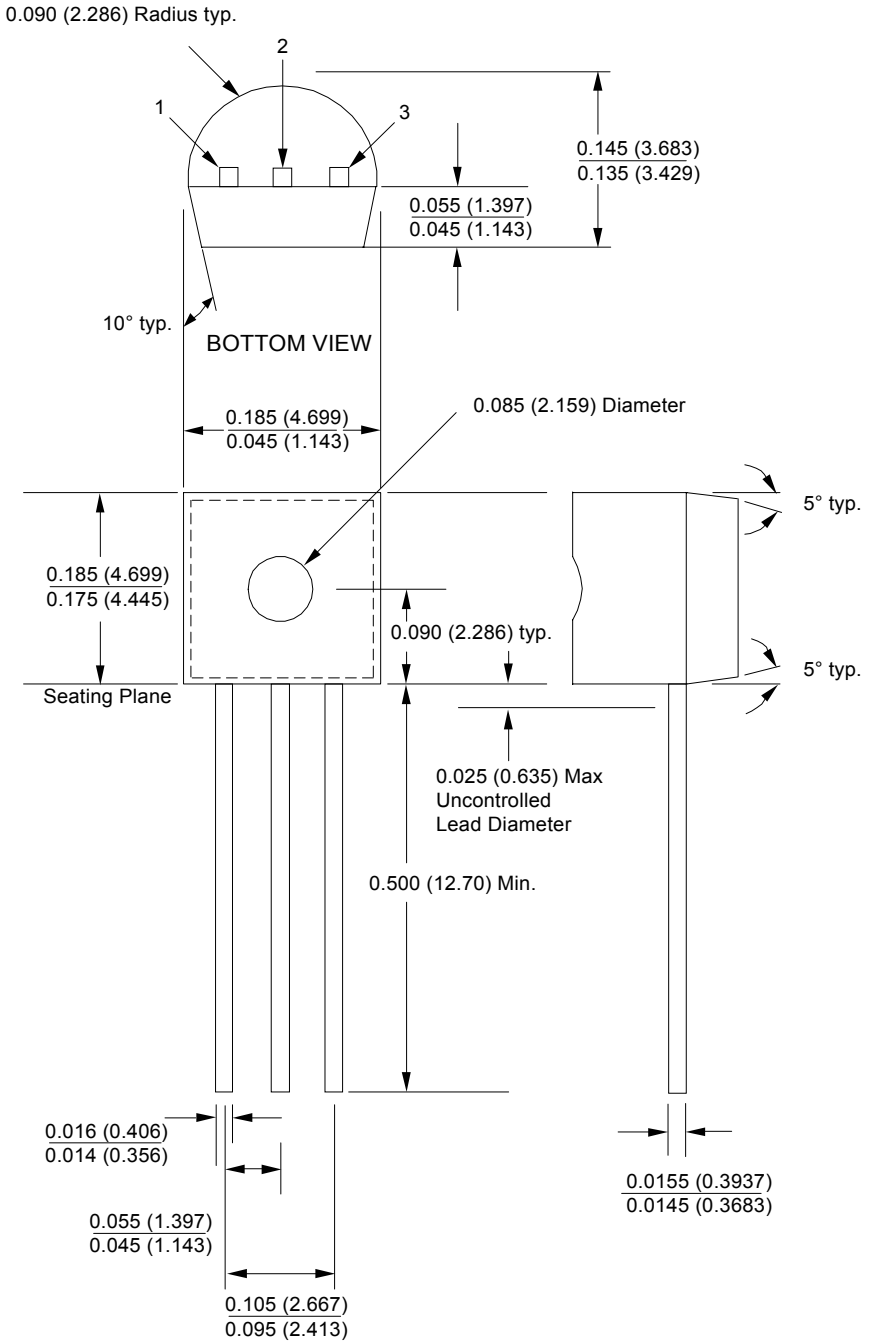

ORDERING INFORMATION

Ordering No.	Temp Coef.	Output Accuracy	Packages
SPX4041AN-2	100ppm	1%	3 Lead TO-92
SPX4041AN-3	100ppm	2%	3 Lead TO-92
SPX4041BN-2	150ppm	1%	3 Lead TO-92
SPX4041BN-3	150ppm	2%	3 Lead TO-92
SPX4041AM-2	100ppm	1%	3 Lead SOT-23
SPX4041AM-3	100ppm	2%	3 Lead SOT-23
SPX4041BM-2	150ppm	1%	3 Lead SOT-23
SPX4041BM-3	150ppm	2%	3 Lead SOT-23
SPX4041AS-2	100ppm	1%	8 Lead SOIC
SPX4041AS-3	100ppm	2%	8 Lead SOIC
SPX4041BS-2	150ppm	1%	8 Lead SOIC
SPX4041BS-3	150ppm	2%	8 Lead SOIC

Sipex Corporation

SIGNAL PROCESSING EXCELLENCE

Sipex Corporation

Headquarters and Main Offices:
22 Linnell Circle
Billerica, MA 01821
TEL: (978) 667-8700
FAX: (978) 670-9001
e-mail: sales@sipex.com

233 South Hillview Drive
Milpitas, CA 95035
TEL: (408) 935-7600
FAX: (408) 934-7500

Sipex Corporation reserves the right to make changes to any products described herein. Sipex does not assume any liability arising out of the application or use of any product or circuit described hereing; neither does it convey any license under its patent rights nor the rights of others.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.