

## ULTRA LOW JITTER CRYSTAL OSCILLATOR (XO)

### Features

- Available with select frequencies from 100 MHz to 312.5 MHz
- 3<sup>rd</sup> generation DSPLL<sup>®</sup> with superior jitter performance and high-power supply noise rejection
- 3x better frequency stability than SAW-based oscillators
- Available with LVPECL and LVDS outputs
- 3.3 and 2.5 V supply options
- Industry-standard 5 x 7 mm package and pinout
- Pb-free/RoHS-compliant


### Applications

- 10/40/100G data centers
- 10G Ethernet switches/routers
- Fibre channel/SAS/storage
- Enterprise servers
- Networking
- Telecommunications

### Description

The Si535/536 XO utilizes Silicon Labs' advanced DSPLL<sup>®</sup> circuitry to provide an ultra low jitter clock at high-speed differential frequencies. Unlike a traditional XO, where a different crystal is required for each output frequency, the Si535/536 uses one fixed crystal to provide a wide range of output frequencies. This IC based approach allows the crystal resonator to provide exceptional frequency stability and reliability. In addition, DSPLL clock synthesis provides superior supply noise rejection, simplifying the task of generating low jitter clocks in noisy environments typically found in communication systems. The Si535/536 IC based XO is factory programmed at time of shipment, thereby eliminating long lead times associated with custom oscillators.

### Functional Block Diagram

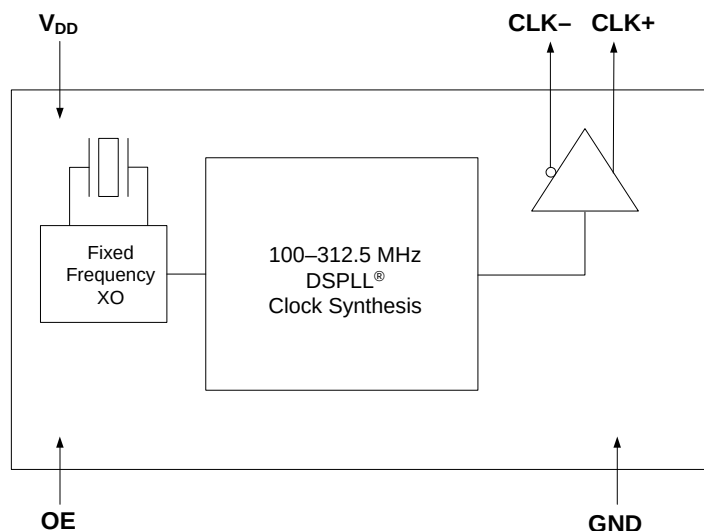


### Ordering Information:

See page 7.


### Pin Assignments:

See page 6.

#### (Top View)



Si535



Si536

## 1. Electrical Specifications

**Table 1. Recommended Operating Conditions**

| Parameter                                                                                                                                                                                                   | Symbol   | Test Condition           | Min                  | Typ | Max  | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------------------------|----------------------|-----|------|------|
| Supply Voltage <sup>1</sup>                                                                                                                                                                                 | $V_{DD}$ | 3.3 V option             | 2.97                 | 3.3 | 3.63 | V    |
|                                                                                                                                                                                                             |          | 2.5 V option             | 2.25                 | 2.5 | 2.75 | V    |
| Supply Current                                                                                                                                                                                              | $I_{DD}$ | Output enabled<br>LVPECL | —                    | 111 | 121  | mA   |
|                                                                                                                                                                                                             |          | LVDS                     | —                    | 90  | 98   | mA   |
|                                                                                                                                                                                                             |          | Tristate mode            | —                    | 60  | 75   | mA   |
| Output Enable (OE) <sup>2</sup>                                                                                                                                                                             |          | $V_{IH}$                 | $0.75 \times V_{DD}$ | —   | —    | V    |
|                                                                                                                                                                                                             |          | $V_{IL}$                 | —                    | —   | 0.5  | V    |
| Operating Temperature Range                                                                                                                                                                                 | $T_A$    |                          | −40                  | —   | 85   | °C   |
| <b>Notes:</b><br>1. Selectable parameter specified by part number. See Section 3. "Ordering Information" on page 7 for further details.<br>2. OE pin includes a 17 k $\Omega$ pullup resistor to $V_{DD}$ . |          |                          |                      |     |      |      |

**Table 2. CLK± Output Frequency Characteristics**

| Parameter                                                                                                                                                                                                           | Symbol    | Test Condition                                             | Min       | Typ    | Max       | Unit |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------|-----------|--------|-----------|------|
| Nominal Frequency <sup>1</sup>                                                                                                                                                                                      | $f_O$     | LVPECL/LVDS                                                | 100       | —      | 312.5     | MHz  |
| Initial Accuracy                                                                                                                                                                                                    | $f_i$     | Measured at +25 °C at time of shipping                     | —         | ±1.5   | —         | ppm  |
| Temperature Stability <sup>1,2</sup>                                                                                                                                                                                |           |                                                            | −7<br>−20 | —<br>— | +7<br>+20 | ppm  |
| Aging                                                                                                                                                                                                               | $f_a$     | Frequency drift over first year                            | —         | —      | ±3        | ppm  |
|                                                                                                                                                                                                                     |           | Frequency drift over 20 year life                          | —         | —      | ±10       | ppm  |
| Total Stability <sup>2</sup>                                                                                                                                                                                        |           | Temp stability = ±20 ppm                                   | —         | —      | ±31.5     | ppm  |
|                                                                                                                                                                                                                     |           | Temp stability = ±7 ppm                                    | —         | —      | 20        |      |
| Powerup Time <sup>3</sup>                                                                                                                                                                                           | $t_{OSC}$ | $T_A = -40^{\circ}\text{C} \text{ — } +85^{\circ}\text{C}$ | —         | —      | 10        | ms   |
| <b>Notes:</b><br>1. See Section 3. "Ordering Information" on page 7 for the list of available frequencies.<br>2. Selectable parameter specified by part number.<br>3. Time from powerup or tristate mode to $f_O$ . |           |                                                            |           |        |           |      |

Table 3. CLK± Output Levels and Symmetry

| Parameter                                                                                                    | Symbol     | Test Condition       | Min             | Typ  | Max             | Unit     |
|--------------------------------------------------------------------------------------------------------------|------------|----------------------|-----------------|------|-----------------|----------|
| LVPECL Output Option <sup>1</sup>                                                                            | $V_O$      | Mid-level            | $V_{DD} - 1.42$ | —    | $V_{DD} - 1.25$ | V        |
|                                                                                                              | $V_{OD}$   | Swing (diff)         | 1.1             | —    | 1.9             | $V_{PP}$ |
|                                                                                                              | $V_{SE}$   | Swing (Single-ended) | 0.55            | —    | 0.95            | $V_{PP}$ |
| LVDS Output Option <sup>2</sup>                                                                              | $V_O$      | Mid-level            | 1.125           | 1.20 | 1.275           | V        |
|                                                                                                              | $V_{OD}$   | Swing (diff)         | 0.5             | 0.7  | 0.9             | $V_{PP}$ |
| Rise/Fall time (20/80%)                                                                                      | $t_R, t_F$ |                      | —               | —    | 350             | ps       |
| Symmetry (duty cycle)                                                                                        | SYM        | Differential         | 45              | —    | 55              | %        |
| <b>Notes:</b><br>1. $50\ \Omega$ to $V_{DD} - 2.0\text{ V}$ .<br>2. $R_{term} = 100\ \Omega$ (differential). |            |                      |                 |      |                 |          |

**Table 4. CLK± Output Phase Jitter**

| Parameter                          | Symbol   | Test Condition                | Min | Typ  | Max  | Unit |
|------------------------------------|----------|-------------------------------|-----|------|------|------|
| LVPECL/LVDS Phase Jitter*<br>(RMS) | $\phi_J$ | 10 kHz to 1 MHz (data center) | —   | 0.19 | 0.35 | ps   |
|                                    |          | 12 kHz to 20 MHz brickwall    | —   | 0.25 | 0.40 | ps   |

**\*Note:** Applies to output frequencies: 156.25 MHz.

**Table 5. CLK± Output Period Jitter**

| Parameter                  | Symbol    | Test Condition | Min | Typ | Max | Unit |
|----------------------------|-----------|----------------|-----|-----|-----|------|
| LVPECL/LVDS Period Jitter* | $J_{PER}$ | RMS            | —   | 2   | —   | ps   |
|                            |           | Peak-to-Peak   | —   | 14  | —   | ps   |

**\*Note:** N = 1000 cycles.



**Figure 1. Si535/536 Typical Phase Noise at 156.25 MHz**

**Table 6. Environmental Compliance**

The Si535/536 meets the following qualification test requirements.

| Parameter                  | Conditions/Test Method   |
|----------------------------|--------------------------|
| Mechanical Shock           | MIL-STD-883, Method 2002 |
| Mechanical Vibration       | MIL-STD-883, Method 2007 |
| Solderability              | MIL-STD-883, Method 2003 |
| Gross & Fine Leak          | MIL-STD-883, Method 1014 |
| Resistance to Solder Heat  | MIL-STD-883, Method 2036 |
| Moisture Sensitivity Level | J-STD-020, MSL1          |
| Contact Pads               | Gold over Nickel         |

**Table 7. Thermal Characteristics**

(Typical values  $T_A = 25\text{ }^{\circ}\text{C}$ ,  $V_{DD} = 3.3\text{ V}$ )

| Parameter                              | Symbol        | Test Condition | Min | Typ  | Max | Unit                 |
|----------------------------------------|---------------|----------------|-----|------|-----|----------------------|
| Thermal Resistance Junction to Ambient | $\theta_{JA}$ | Still Air      | —   | 84.6 | —   | $^{\circ}\text{C/W}$ |
| Thermal Resistance Junction to Case    | $\theta_{JC}$ | Still Air      | —   | 38.8 | —   | $^{\circ}\text{C/W}$ |
| Ambient Temperature                    | $T_A$         |                | −40 | —    | 85  | $^{\circ}\text{C}$   |
| Junction Temperature                   | $T_J$         |                | —   | —    | 125 | $^{\circ}\text{C}$   |

**Table 8. Absolute Maximum Ratings<sup>1</sup>**



| Parameter                                                              | Symbol     | Rating                 | Unit               |
|------------------------------------------------------------------------|------------|------------------------|--------------------|
| Maximum Operating Temperature                                          | $T_{AMAX}$ | 85                     | $^{\circ}\text{C}$ |
| Supply Voltage, 2.5/3.3 V Option                                       | $V_{DD}$   | −0.5 to +3.8           | V                  |
| Input Voltage (any input pin)                                          | $V_I$      | −0.5 to $V_{DD} + 0.3$ | V                  |
| Storage Temperature                                                    | $T_S$      | −55 to +125            | $^{\circ}\text{C}$ |
| ESD Sensitivity (HBM, per JESD22-A114)                                 | ESD        | 2500                   | V                  |
| Soldering Temperature (Pb-free profile) <sup>2</sup>                   | $T_{PEAK}$ | 260                    | $^{\circ}\text{C}$ |
| Soldering Temperature Time @ $T_{PEAK}$ (Pb-free profile) <sup>2</sup> | $t_P$      | 20–40                  | seconds            |

**Notes:**

1. Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Functional operation or specification compliance is not implied at these conditions. Exposure to maximum rating conditions for extended periods may affect device reliability.
2. The device is compliant with JEDEC J-STD-020C. Refer to Si5xx Packaging FAQ available for download at [www.silabs.com/VCXO](http://www.silabs.com/VCXO) for further information, including soldering profiles.

## 2. Pin Descriptions

(Top View)

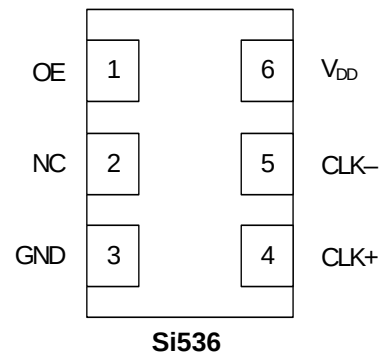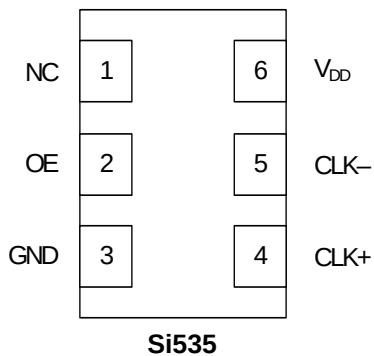

**Table 9. Pinout for Si535 Series**


| Pin                                                                    | Symbol          | Function                                                                                   |
|------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------|
| 1                                                                      | NC              | No connection                                                                              |
| 2                                                                      | OE              | Output enable<br>0 = clock output disabled (outputs tristated)<br>1 = clock output enabled |
| 3                                                                      | GND             | Electrical and Case Ground                                                                 |
| 4                                                                      | CLK+            | Oscillator Output                                                                          |
| 5                                                                      | CLK–            | Complementary Output                                                                       |
| 6                                                                      | V <sub>DD</sub> | Power Supply Voltage                                                                       |
| <b>*Note:</b> OE includes a 17 kΩ pullup resistor to V <sub>DD</sub> . |                 |                                                                                            |

**Table 10. Pinout for Si536 Series**

| Pin                                                                    | Symbol          | Function                                                                                   |
|------------------------------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------|
| 1                                                                      | OE              | Output enable<br>0 = clock output disabled (outputs tristated)<br>1 = clock output enabled |
| 2                                                                      | No connection   | No connection                                                                              |
| 3                                                                      | GND             | Electrical and Case Ground                                                                 |
| 4                                                                      | CLK+            | Oscillator Output                                                                          |
| 5                                                                      | CLK–            | Complementary output                                                                       |
| 6                                                                      | V <sub>DD</sub> | Power Supply Voltage                                                                       |
| <b>*Note:</b> OE includes a 17 kΩ pullup resistor to V <sub>DD</sub> . |                 |                                                                                            |

### 3. Ordering Information

The Si535/536 XO supports a variety of options including frequency, temperature stability, output format, and  $V_{DD}$ . The Si535 and Si536 XO series are supplied in an industry-standard, RoHS compliant, 6-pad, 5 x 7 mm package. The Si536 Series supports an alternate OE pinout (pin #1) for the LVPECL and LVDS output formats. See Tables 9 and 10 for the pinout differences between the Si535 and Si536 series.

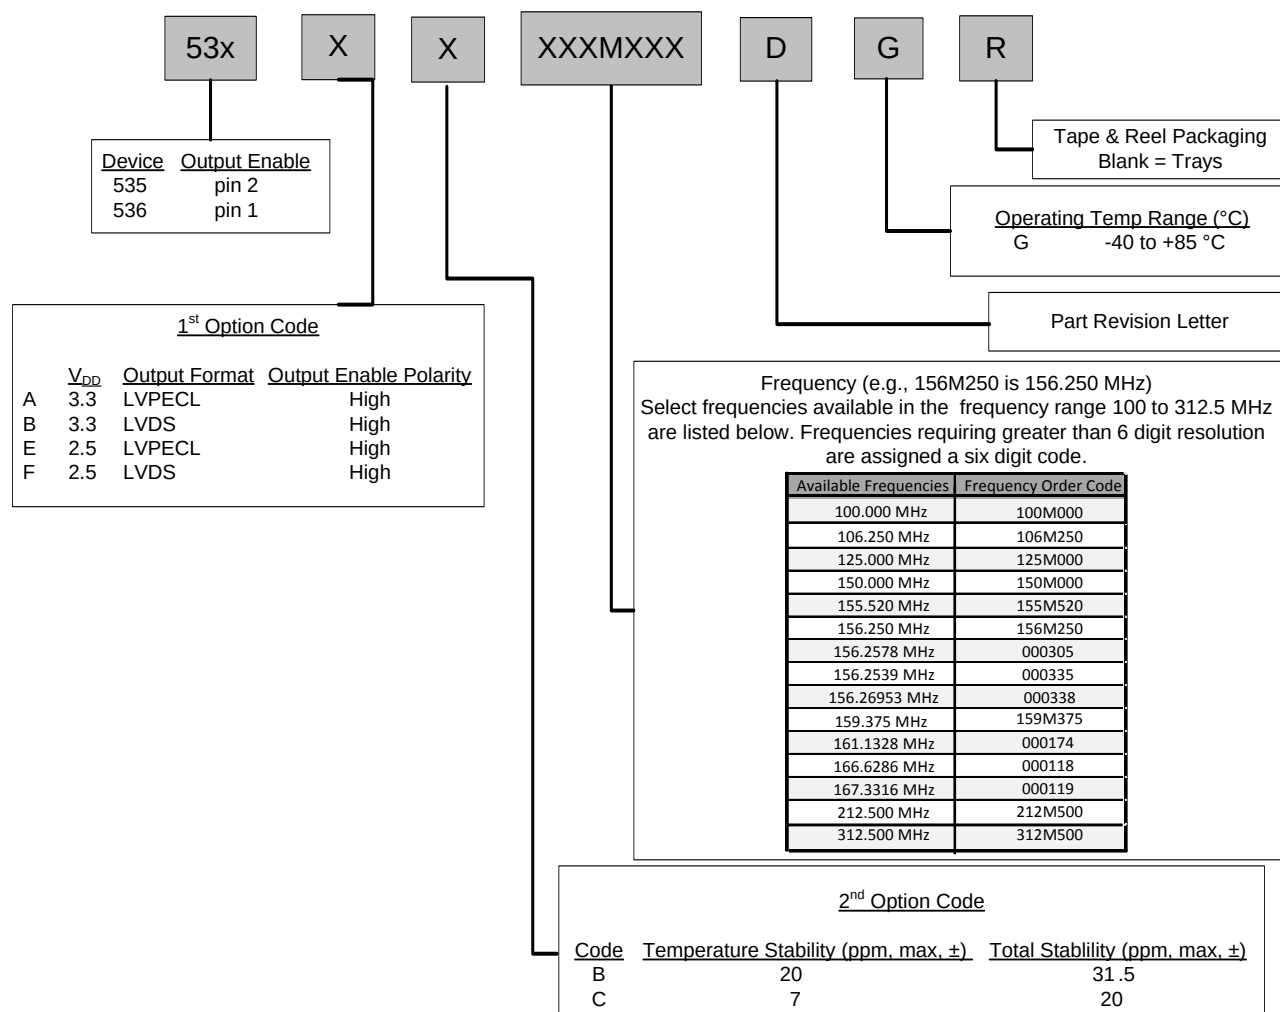

Example P/N: 535AB156M250DGR is a 5 x 7 XO in a 6 pad package. The frequency is 156.250 MHz, with a 3.3 V supply, LVPECL output, and Output Enable active high polarity. Temperature stability is specified as  $\pm 20$  ppm. The part is specified for  $-40$  to  $+85$  °C ambient temperature range operation and is shipped in tape and reel format.

**Figure 2. Part Number Convention**

## 4. Package Outline

Figure 3 illustrates the package details for the Si535/536. Table 11 lists the values for the dimensions shown in the illustration.

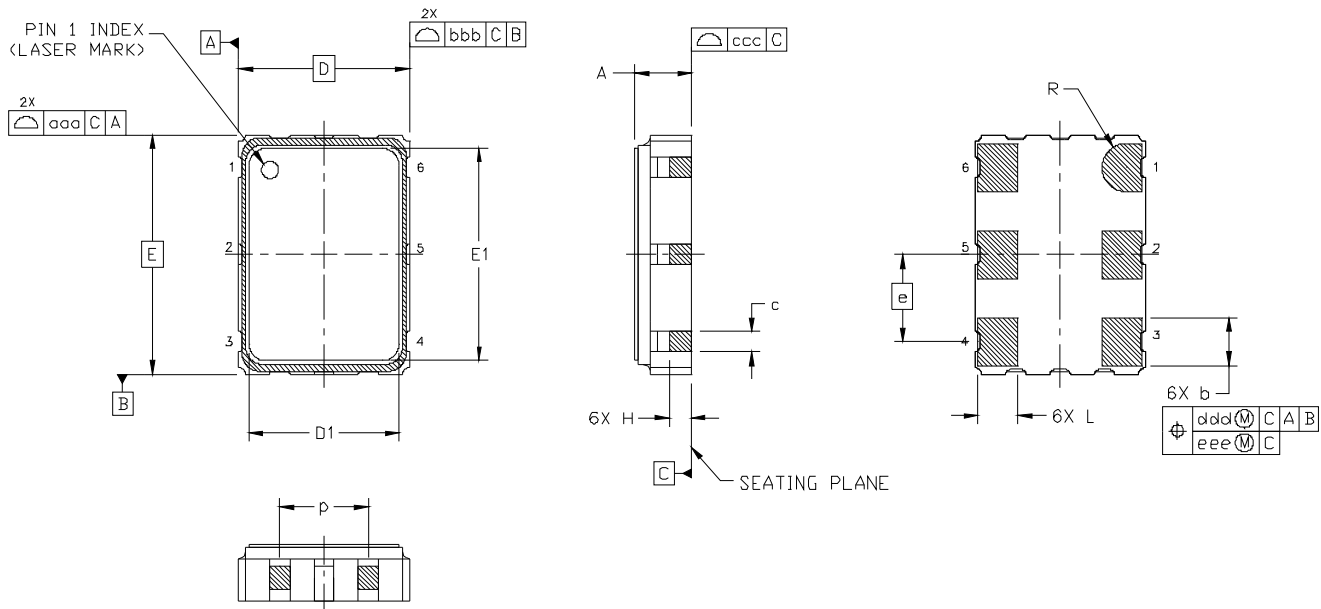


Figure 3. Si535/536 Outline Diagram


Table 11. Package Diagram Dimensions (mm)

| Dimension | Min      | Nom  | Max  |
|-----------|----------|------|------|
| A         | 1.50     | 1.65 | 1.80 |
| b         | 1.30     | 1.40 | 1.50 |
| c         | 0.50     | 0.60 | 0.70 |
| D         | 5.00 BSC |      |      |
| D1        | 4.30     | 4.40 | 4.50 |
| e         | 2.54 BSC |      |      |
| E         | 7.00 BSC |      |      |
| E1        | 6.10     | 6.20 | 6.30 |
| H         | 0.55     | 0.65 | 0.75 |
| L         | 1.17     | 1.27 | 1.37 |
| p         | 1.80     | —    | 2.60 |
| R         | 0.70 REF |      |      |
| aaa       | 0.15     |      |      |
| bbb       | 0.15     |      |      |
| ccc       | 0.10     |      |      |
| ddd       | 0.10     |      |      |
| eee       | 0.05     |      |      |



## 5. 6-Pin PCB Land Pattern

Figure 4 illustrates the 6-pin PCB land pattern for the Si535/536. Table 12 lists the values for the dimensions shown in the illustration.

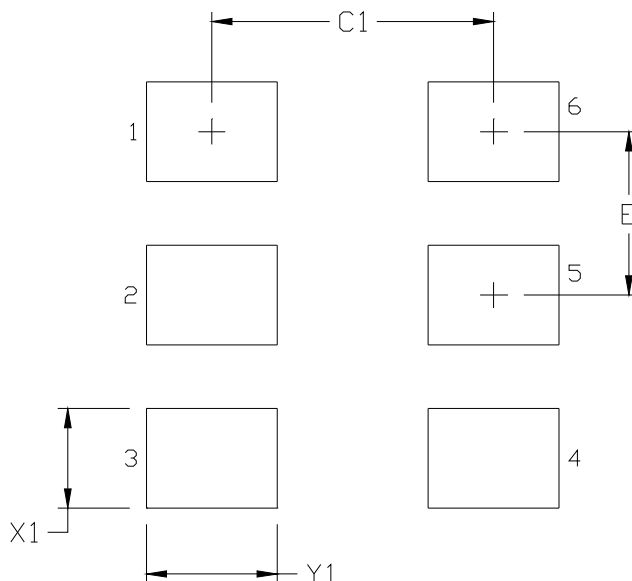

**Figure 4. Si535/536 PCB Land Pattern**

**Table 12. PCB Land Pattern Dimensions (mm)**

| Dimension | Min  |
|-----------|------|
| C1        | 4.20 |
| E         | 2.54 |
| X1        | 1.55 |
| Y1        | 1.95 |

### Notes:

#### General

1. All dimensions shown are in millimeters (mm) unless otherwise noted.
2. Dimensioning and Tolerancing is per the ANSI Y14.5M-1994 specification.
3. This Land Pattern Design is based on the IPC-7351 guidelines.
4. All dimensions shown are at Maximum Material Condition (MMC). Least Material Condition (LMC) is calculated based on a Fabrication Allowance of 0.05 mm.

#### Solder Mask Design

1. All metal pads are to be non-solder mask defined (NSMD). Clearance between the solder mask and the metal pad is to be 60  $\mu$ m minimum, all the way around the pad.

#### Stencil Design

1. A stainless steel, laser-cut and electro-polished stencil with trapezoidal walls should be used to assure good solder paste release.
2. The stencil thickness should be 0.125 mm (5 mils).
3. The ratio of stencil aperture to land pad size should be 1:1.

#### Card Assembly

1. A No-Clean, Type-3 solder paste is recommended.
2. The recommended card reflow profile is per the JEDEC/IPC J-STD-020 specification for Small Body Components.

## 6. Si535/Si536 Mark Specification

Figure 5 illustrates the mark specification for the Si535/Si536. Table 13 lists the line information.

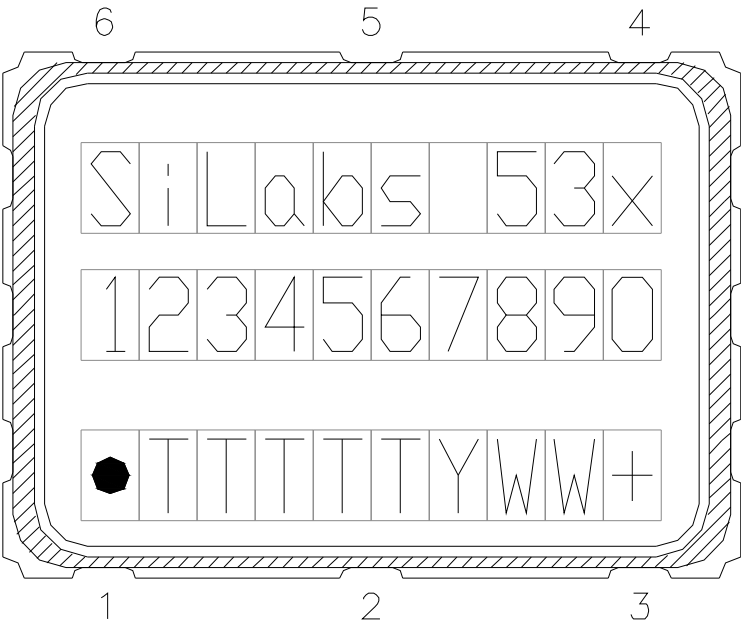


Figure 5. Mark Specification

Table 13. Si53x Top Mark Description

| Line | Position          | Description                                                                                                                                |
|------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 1    | 1–10              | “SiLabs”+ Part Family Number, 53x (First 3 characters in part number where x = 5 indicates a 535 device and x = 6 indicates a 536 device). |
| 2    | 1–10              | Si535, Si536: Option1 + Option2 + Freq(7) + Temp<br>Si535/Si536 w/ 8-digit resolution: Option1 + Option2 + ConfigNum(6) + Temp             |
| 3    | <b>Trace Code</b> |                                                                                                                                            |
|      | Position 1        | Pin 1 orientation mark (dot)                                                                                                               |
|      | Position 2        | Product Revision (D)                                                                                                                       |
|      | Position 3–6      | Tiny Trace Code (4 alphanumeric characters per assembly release instructions)                                                              |
|      | Position 7        | Year (least significant year digit), to be assigned by assembly site (ex: 2013 = 3)                                                        |
|      | Position 8–9      | Calendar Work Week number (1–53), to be assigned by assembly site                                                                          |
|      | Position 10       | “+” to indicate Pb-Free and RoHS-compliant                                                                                                 |

## DOCUMENT CHANGE LIST

### Revision 0.2 to Revision 0.3

- Updated Table 7 on page 5.

### Revision 0.3 to Revision 0.5

- Updated Note 1 in Table 2 on page 2.
- Updated Symmetry Test Condition in Table 3 on page 3.
- Updated Table 4 on page 4.
- Updated Table 5 on page 4.
- Updated XXXMXXX text in Figure 2 on page 7.
- Updated 4. "Package Outline" on page 8.

### Revision 0.5 to Revision 0.6

- Updated Figure 2 on page 7.
- Updated Land Pattern information on page 10.

### Revision 0.6 to Revision 0.7

- Updated Powerup Time's test condition in Table 2 on page 2.
- Added new frequency option to Figure 2 on page 7.

### Revision 0.7 to Revision 1.0

- Updated Table 4 Phase Jitter's test condition and maximum values.

### Revision 1.0 to Revision 1.1

- Added 100 MHz ordering option.

## CONTACT INFORMATION

### Silicon Laboratories Inc.

400 West Cesar Chavez  
Austin, TX 78701  
Tel: 1+(512) 416-8500  
Fax: 1+(512) 416-9669  
Toll Free: 1+(877) 444-3032

Please visit the Silicon Labs Technical Support web page:  
<https://www.silabs.com/support/pages/contacttechnicalsupport.aspx>  
and register to submit a technical support request.

### Patent Notice

Silicon Labs invests in research and development to help our customers differentiate in the market with innovative low-power, small size, analog-intensive mixed-signal solutions. Silicon Labs' extensive patent portfolio is a testament to our unique approach and world-class engineering team.

The information in this document is believed to be accurate in all respects at the time of publication but is subject to change without notice. Silicon Laboratories assumes no responsibility for errors and omissions, and disclaims responsibility for any consequences resulting from the use of information included herein. Additionally, Silicon Laboratories assumes no responsibility for the functioning of undescribed features or parameters. Silicon Laboratories reserves the right to make changes without further notice. Silicon Laboratories makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Silicon Laboratories assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Silicon Laboratories products are not designed, intended, or authorized for use in applications intended to support or sustain life, or for any other application in which the failure of the Silicon Laboratories product could create a situation where personal injury or death may occur. Should Buyer purchase or use Silicon Laboratories products for any such unintended or unauthorized application, Buyer shall indemnify and hold Silicon Laboratories harmless against all claims and damages.

Silicon Laboratories and Silicon Labs are trademarks of Silicon Laboratories Inc.  
Other products or brandnames mentioned herein are trademarks or registered trademarks of their respective holders



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.