

PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION

**Part Number:** [0752374153](#)  
**Status:** **Active**  
**Overview:** [gbx\\_backplane\\_connector\\_system](#)  
**Description:** 1.85mm by 1.85mm (.073 by .073") Pitch 5-Pair GbX® Backplane Connector System, Right Guide Header, 100 Circuits, Gold (Au) 0.76µm (30µ"), Pin Length 3.55mm (.140")

**Documents:**  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-75221-999 \(PDF\)](#)

**Agency Certification**

UL E29179

**General**

Product Family Backplane Connectors  
Series [75237](#)  
Application Backplane  
Application Tooling Documents <a href="http://www.molex.com/pdm\_docs/ats/TM-622022099.pdf">Tooling Manual</a>  
Comments Right Guide Header, Keying Position E  
Component Type PCB Header  
Overview [gbx\\_backplane\\_connector\\_system](#)  
Product Name GbX®  
Style N/A

**Physical**

Circuits (Loaded) 100  
Circuits (maximum) 100  
Color - Resin Gray (Dark)  
Durability (mating cycles max) 200  
First Mate / Last Break No  
Flammability 94V-0  
Guide to Mating Part Yes  
Keying to Mating Part Yes  
Material - Metal High Performance Alloy (HPA), Stainless Steel  
Material - Plating Mating Gold  
Material - Plating Termination Tin-Lead  
Material - Resin High Temperature Thermoplastic  
Number of Columns 10  
Number of Pairs 5  
Number of Rows 10  
Orientation Vertical  
PC Tail Length (in) 0.091 In  
PC Tail Length (mm) 2.30 mm  
PCB Locator No  
PCB Retention Yes  
PCB Thickness Recommended (in) 0.063 In  
PCB Thickness Recommended (mm) 1.60 mm  
Packaging Type Tray  
Pitch - Mating Interface (in) 0.073 In  
Pitch - Mating Interface (mm) 1.85 mm  
Pitch - Term. Interface (in) 0.073 In  
Pitch - Term. Interface (mm) 1.85 mm  
Plating min: Mating (µin) 30  
Plating min: Mating (µm) 0.76  
Plating min: Termination (µin) 30



Series

image - Reference only

**EU RoHS**  
**RoHS Compliant by Exemption**  
**REACH SVHC**  
Not Reviewed  
**Halogen-Free**  
**Status**  
**Not Reviewed**

**China RoHS**



Pb

**Need more information on product environmental compliance?**  
  
Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
For a multiple part number RoHS Certificate of Compliance, [click here](#)  
  
Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**  
[75237Series](#)

**Mates With**  
[75360 GbX® Daughtercard](#)

| Application Tooling   FAQ                                                                                                                                                       |                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document. |                            |
| Global                                                                                                                                                                          |                            |
| Description                                                                                                                                                                     | Product #                  |
| Insertion Tool, GbX®                                                                                                                                                            | <a href="#">0622022030</a> |
| 5 pair by 10 wide                                                                                                                                                               |                            |
| Insertion Tool, GbX®                                                                                                                                                            | <a href="#">0622022040</a> |
| 5 pair by 20 wide                                                                                                                                                               |                            |
| GbX® Single Pin                                                                                                                                                                 | <a href="#">0622022090</a> |
| Repair Tool                                                                                                                                                                     |                            |
| GbX® Shield                                                                                                                                                                     | <a href="#">0622022100</a> |
| Removal Tool                                                                                                                                                                    |                            |

|                                |                              |
|--------------------------------|------------------------------|
| Plating min: Termination (μm)  | 0.76                         |
| Polarized to PCB               | No                           |
| Stackable                      | No                           |
| Surface Mount Compatible (SMC) | Yes                          |
| Temperature Range - Operating  | 105°C                        |
| Termination Interface: Style   | Through Hole - Compliant Pin |

**Electrical**

|                               |                     |
|-------------------------------|---------------------|
| Current - Maximum per Contact | 1A                  |
| Data Rate                     | 8.0 Gbps            |
| Real Signals (per 25mm)       | 135                 |
| Shield Type                   | Ground Plane Shield |
| Shielded                      | Yes                 |
| Voltage - Maximum             | 120V AC (RMS)/DC    |

**Material Info**

**Reference - Drawing Numbers**

|                       |              |
|-----------------------|--------------|
| Product Specification | PS-75221-999 |
| Sales Drawing         | SD-75237-410 |

GbX is a registered trademark of Amphenol Corporation.

This document was generated on 05/13/2010  
**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

20 19 18 17 16 15 14 13 12 11 75237 9 8 7 6 5 4 3 2 1

L  
K  
J  
I  
H  
G  
F  
E  
D  
C  
B  
A





- NOTES:
1. MATERIAL: HOUSING - LIQUID CRYSTAL POLYMER (LCP) GLASS-FILLED, UL 94V-0. COLOR - GRAY. SIGNAL CONTACT AND GROUND BLADE - HIGH PERFORMANCE COPPER ALLOY.
  2. FINISHES: SELECTIVE GOLD (Au) ON CONTACT AREA, SELECTIVE TIN/LEAD (Sn/Pb) ON PCB TAILS, NICKEL (Ni) OVERALL.
  3. THIS PART CONFORMS TO MOLEX PRODUCT SPECIFICATION PS-75221-999.
  4. FOR MIXED CONTACT MATING LENGTHS CONSULT MOLEX FOR AVAILABILITY. CONTACT PAIRS MUST BE THE SAME LENGTH.
  5. FOR SPECIFIC PART NUMBER AND MATING INFORMATION PLEASE REFER TO CHART.
  6. PACKAGE PER PK-70873-505.
  7. EITHER MARK PART NUMBER AND DATE CODE APPROXIMATELY WHERE SHOWN, ON EITHER SIDE OF THE PART, OR PLACE A LABEL ON THE TUBE.
  8. OPTIONAL HOLE LOCATION FOR GROUNDED GUIDE PIN OR ADDITIONAL GUIDE PIN SUPPORT, FOR GROUNDED GUIDE PIN, HOLE TO BE PLATED, DRILL SIZE  $\varnothing 2.58$ , PAD SIZE  $\varnothing 5.50$
  9. THESE PARTS CONFORM TO MOLEX COSMETIC SPECIFICATION PS-45499-002 CLASS B.



| PART NUMBER TABLE |    |       |       |                                 |
|-------------------|----|-------|-------|---------------------------------|
| ASSY PART NO.     | K  | L     | P     | TOTAL NO. OF DIFFERENTIAL PAIRS |
| 75237-41**        | 9  | 16.65 | 24.78 | 50                              |
| 75237-42**        | 24 | 44.40 | 52.53 | 125                             |

75237 9 8 7 6 5 4 3 2 1

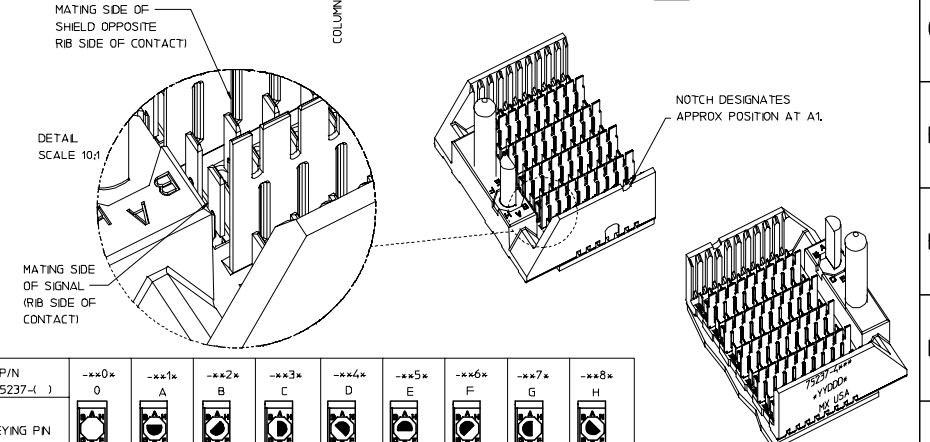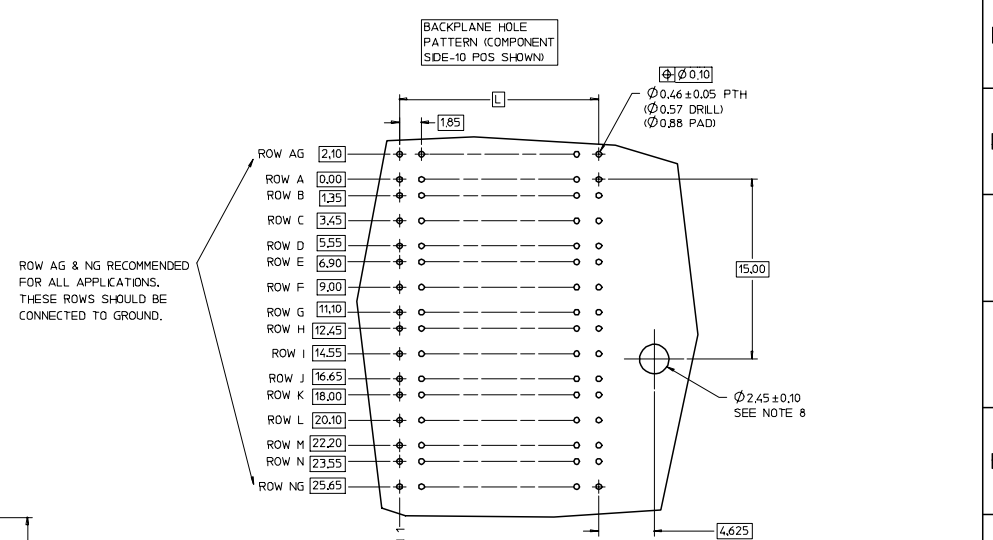

| P/N                    | -xx0* | -xx1* | -xx2* | -xx3* | -xx4* | -xx5* | -xx6* | -xx7* | -xx8* |
|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 75237-( )              | 0     | A     | B     | C     | D     | E     | F     | G     | H     |
| KEYING PIN ORIENTATION |       |       |       |       |       |       |       |       |       |

|         |             |                 |                                       |       |       |                     |                                                                                                                                  |                                                     |                                                                                       |                                                                                       |                    |   |              |                     |
|---------|-------------|-----------------|---------------------------------------|-------|-------|---------------------|----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------|---|--------------|---------------------|
| REVISED | DESCRIPTION | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) |       |       |                     | SCALE<br>5:1                                                                                                                     | DESIGN UNITS<br>METRIC                              |  | THIRD ANGLE<br>PROJECTION                                                             | REVISE ON CAD ONLY | B |              |                     |
|         |             |                 | mm                                    |       | INCH  |                     | DIMENSION STYLE<br>MM ONLY                                                                                                       |                                                     |                                                                                       | TITLE                                                                                 |                    |   |              |                     |
|         |             |                 | 4 PLACES                              | ± --- | ± --- | DRAWN BY<br>NMARTIN | DATE<br>2004/03/16                                                                                                               | GBX 5-PAIR<br>RIGHT END BACKPLANE<br>SALES ASSEMBLY |                                                                                       |                                                                                       |                    |   |              |                     |
|         |             |                 | 3 PLACES                              | ± --- | ± --- |                     |                                                                                                                                  |                                                     |                                                                                       |                                                                                       |                    |   |              |                     |
|         |             |                 | 2 PLACES                              | ± --- | ± --- |                     |                                                                                                                                  |                                                     |                                                                                       |                                                                                       |                    |   |              |                     |
|         |             |                 | 1 PLACE                               | ± --- | ± --- |                     |                                                                                                                                  |                                                     |                                                                                       |                                                                                       |                    |   |              |                     |
|         |             |                 | ANGULAR ± ---°                        |       |       |                     | CHECKED BY<br>SREED                                                                                                              | DATE<br>2004/03/16                                  |                                                                                       |  | MOLEX INCORPORATED |   |              |                     |
|         |             |                 | DRAFT WHERE APPLICABLE                |       |       |                     | APPROVED BY<br>CBIXLER                                                                                                           | DATE<br>2004/03/16                                  |                                                                                       |                                                                                       | MATERIAL NO.       |   | DOCUMENT NO. | SHEET NO.<br>1 OF 1 |
|         |             |                 | MUST REMAIN<br>WITHIN DIMENSIONS      |       |       |                     | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX<br>INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |                                                     |                                                                                       |                                                                                       |                    |   |              |                     |
|         |             |                 | REV                                   |       |       |                     |                                                                                                                                  |                                                     |                                                                                       |                                                                                       |                    |   |              |                     |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.