
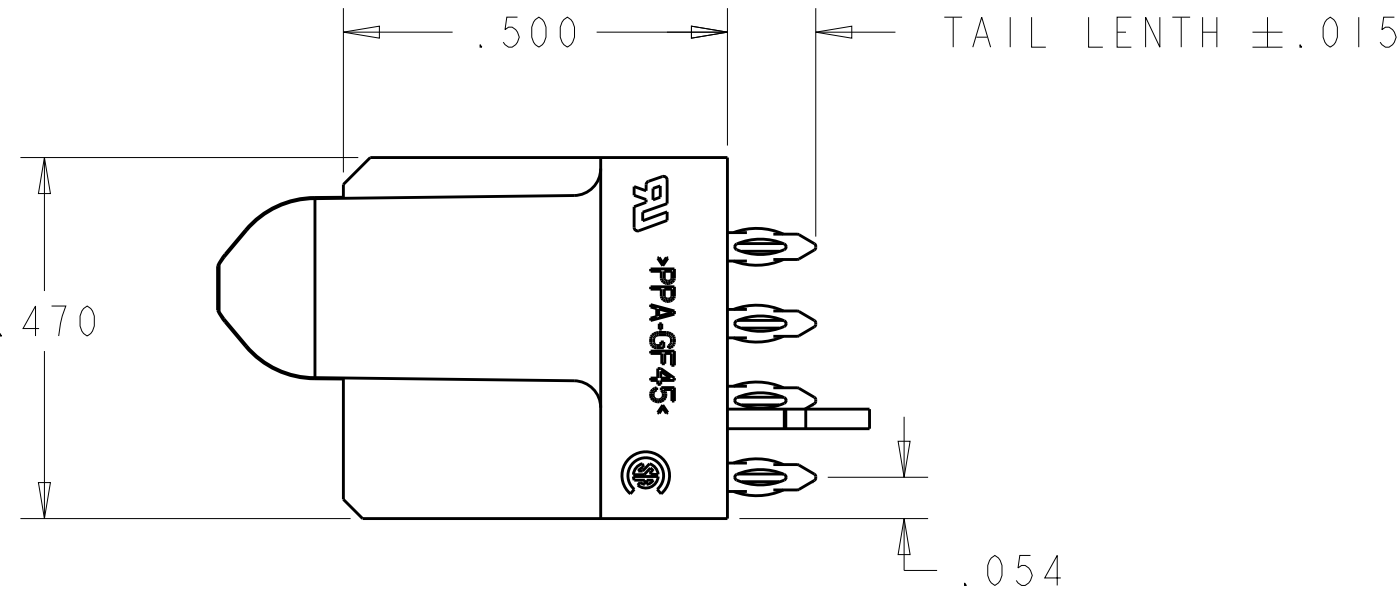
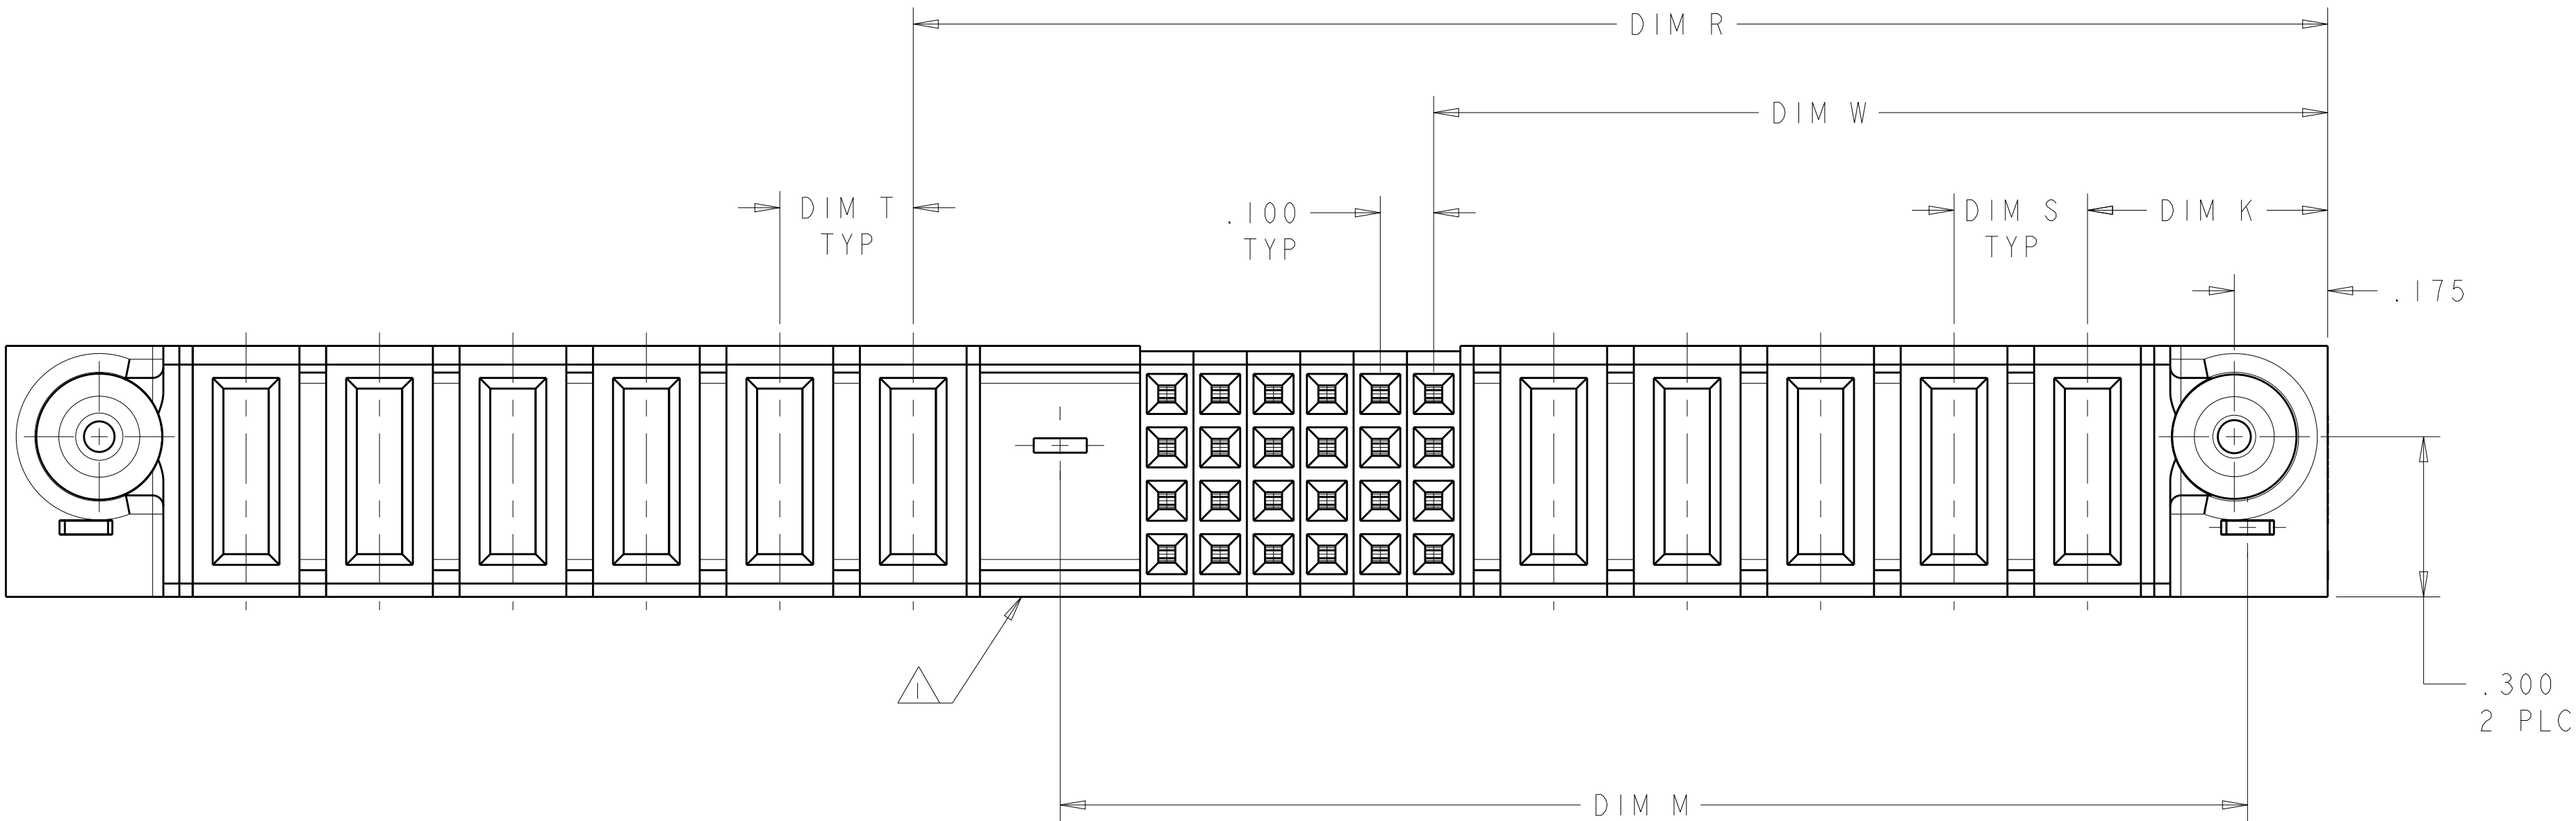
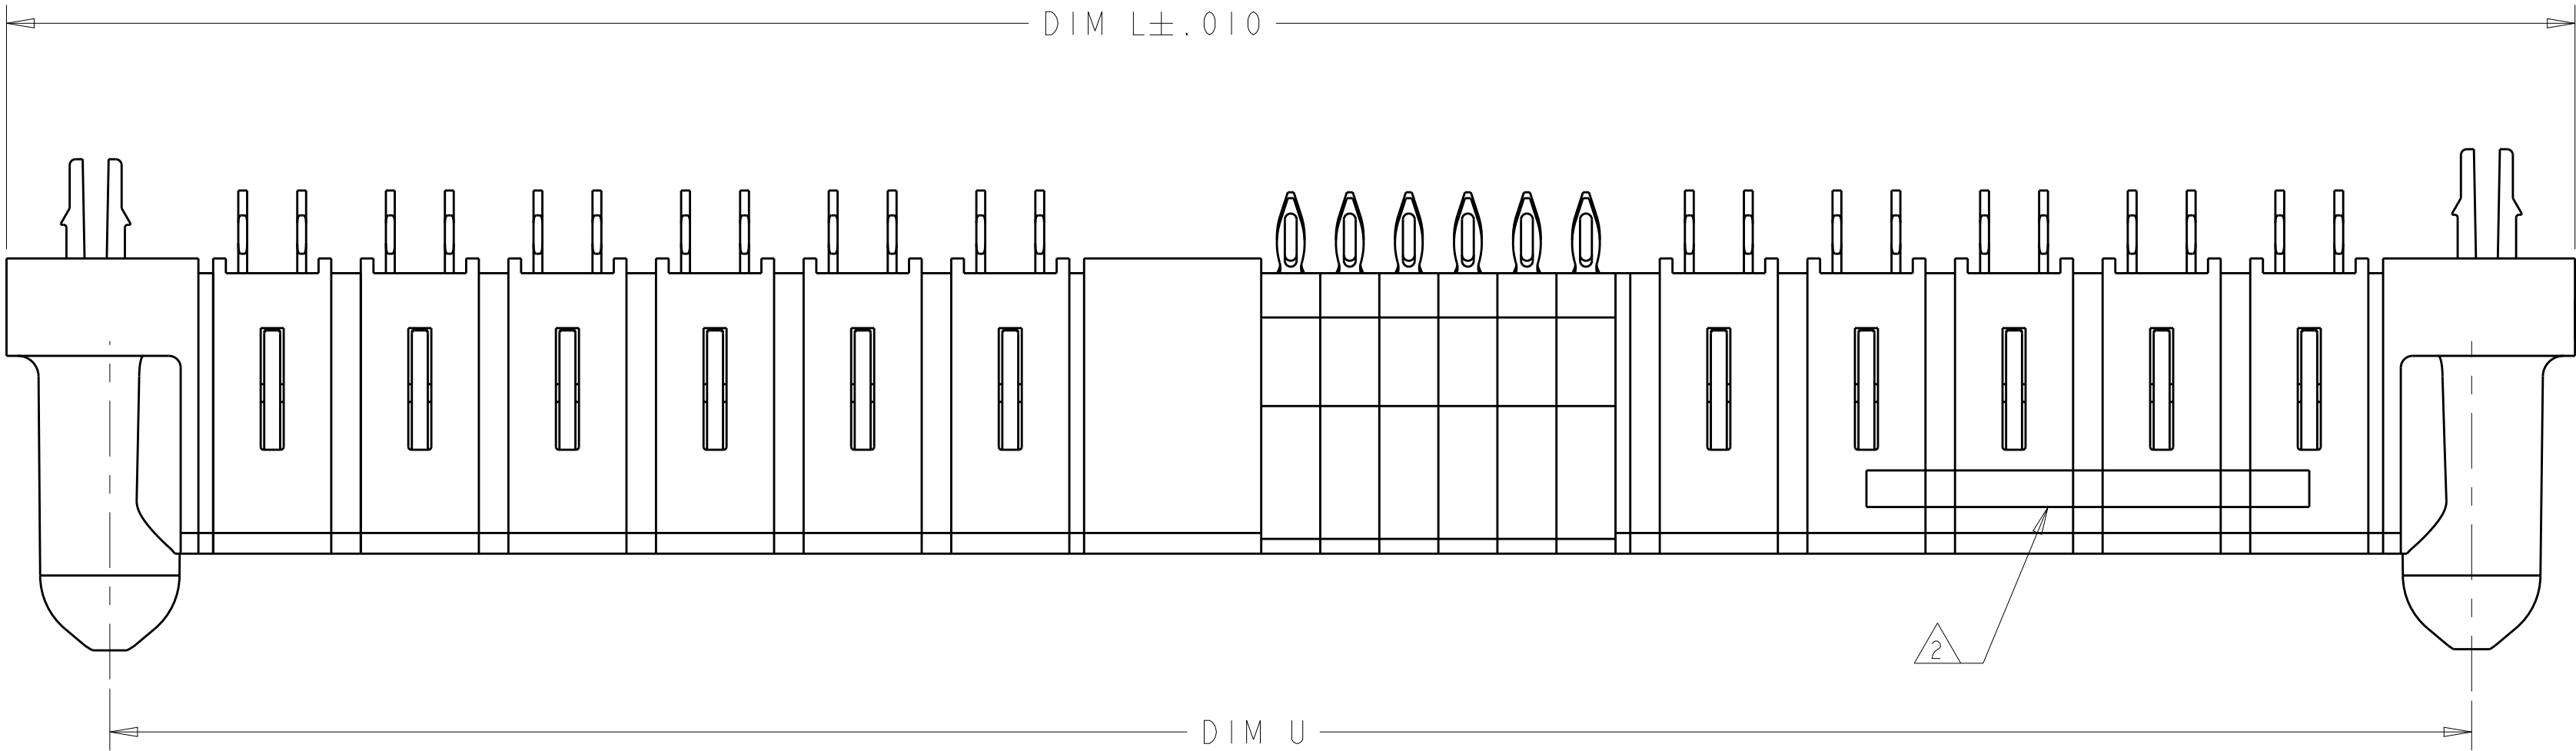


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		K9		REV PER ECR-12-018831	30OCT2012	AY	SZ	

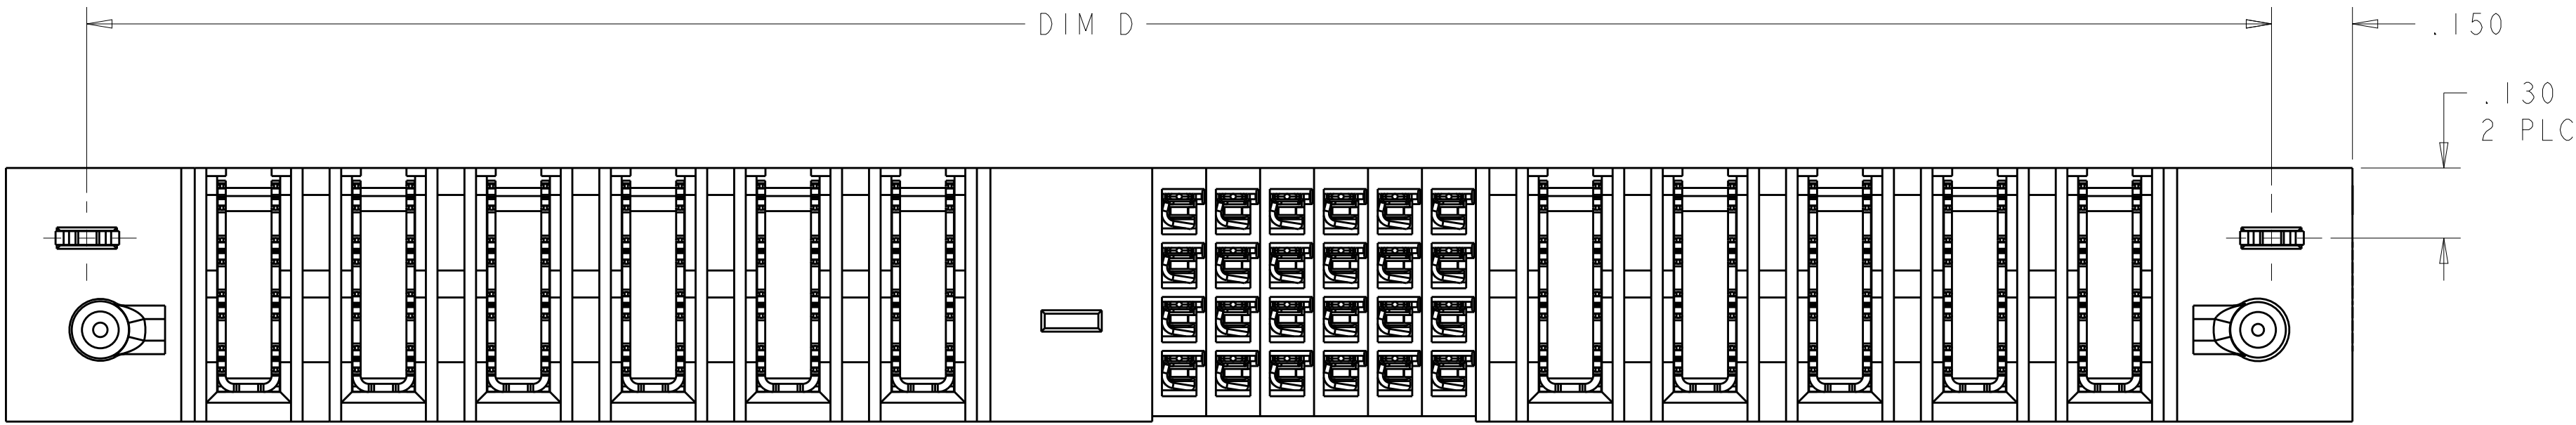

- 1
- OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2
- "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3
- MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4
- CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER CONTACTS AND SIGNAL CONTACTS.
- 5
- MECHANICAL CONNECTOR KEEP OUT ZONE
- 6
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8
- PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 9
- VARAIBLE DIMENSION SHOWN VIEW (SHEET 6)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI CHK M.PERCHERKE APVD M.PERCHERKE	29APR05 29APR05 -
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
	0 PLC ±" 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH	APPLY TO ALL DIMENSIONS 114-13038	SIZE A1
MATERIAL		WEIGHT -	CAGE CODE 6450540
		CUSTOMER DRAWING	RESTRICTED TO -
		SCALE 2:1	SHEET 1 OF 19
			REV K9

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

K9	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-6
	2.550	2.500	.250	.250	1.650	1.375	-	2.85	.450	4P + 8S + 4P	6-6450540-5
	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-2
	-	3.300	.200	.200	2.200	1.625	-	3.650	.450	6P + 20S + 6P	6-6450540-1
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	6-6450540-0
	2.050	2.000	.250	.250	1.650	.925	-	2.350	.450	2P + 24S + 2P	5-6450540-9
	2.050	2.000	.250	.250	1.400	1.125	-	2.350	.450	3P + 8S + 3P	5-6450540-5
	2.500	2.450	.250	.250	1.850	1.375	-	2.800	.450	4P + 16S + 3P	5-6450540-4
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	5-6450540-3
	1.350	1.300	-	-	1.200	.675	-	1.650	.450	1P + 16S + 1P	5-6450540-2
	1.750	1.700	.250	.250	1.350	.875	-	2.050	.450	2P + 16S + 2P	5-6450540-1
	5.950	5.900	.250	.250	3.550	2.8750	-	6.250	.450	10P + 24S + 10P	5-6450540-0
	5.150	5.100	.250	.250	3.250	2.375	-	5.450	.450	8P + 32S + 8P	4-6450540-9
	1.250	1.200	-	-	1.100	.625	-	1.550	.450	1P + 16S + 1P	4-6450540-8
	2.150	2.100	.250	.250	1.500	1.175	-	2.450	.450	3P + 8S + 3P	4-6450540-7
	1.150	1.100	-	-	1.000	.675	-	1.450	.450	1P + 8S + 1P	4-6450540-6
	-	-	-	.200	-	-	-	2.820	.450	12HDP	4-6450540-5
	-	-	.200	.200	2.600	1.625	-	3.970	.450	6HDP + 36S + 7HDP	4-6450540-4
	2.65	2.60	.250	.250	2.250	1.625	-	2.950	.450	5P + 20S + 2P	(E)4-6450540-3
	-	-	-	.200	-	-	-	2.620	.450	11HDP	(E)4-6450540-2
	-	-	.200	.200	2.600	1.625	-	3.770	.450	6P + 36S + 6P	4-6450540-1
	-	-	.200	.200	4.500	3.425	-	7.470	.450	15P + 40S + 15P	4-6450540-0
	-	-	.200	.200	-	-	-	7.470	-	15P + 40S + 15P	(D)3-6450540-9
	4.650	4.600	.250	.250	3.250	1.875	-	4.950	.450	6P + 52S + 6P	(D)2-6450540-7
	1.950	1.900	-	-	1.550	.875	-	2.250	.450	2P + 24S + 2P	(D)2-6450540-5
	2.450	2.400	.250	.250	1.800	1.125	-	2.750	.450	3P + 24S + 3P	(D)2-6450540-0
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	(E)1-6450540-8
	-	5.450			3.075	2.425	-	5.800	.425	10P + 24S + 12P	1-6450540-4
	3.250	3.200	.200	.200	2.125	1.575	-	3.550	.425	6P + 20S + 6P	1-6450540-2
	-	2.850	.250	.250	2.000	1.125	-	3.200	.450	3P + 32S + 4P	1-6450540-1
	1.950	1.900	.250	.250	1.550	.875	-	2.250	.450	2P + 24S + 2P	1-6450540-0
	-	1.400	.250	.250	1.300	.625	-	1.750	.450	1P + 24S + 1P	6450540-7
	-	2.400	.250	.250	2.050	1.375	-	2.750	.450	4P + 24S + 2P	6450540-6
	-	3.100	.250	.250	2.000	1.625	-	3.450	.450	5P + 12S + 5P	6450540-5
	-	3.400	.250	.250	2.050	1.375	-	3.750	.450	4P + 24S + 6P	6450540-4
	-	7.400	.250	.250	5.050	2.875	-	7.750	.450	10P + 84S + 10P	6450540-3
	-	4.000	.250	.250	2.650	1.675	2.225	4.350	.450	5P+24S+1M+6P	6450540-2
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	6450540-1
	D	U	T	S	R	W	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES

MATERIAL

DWN
R. GRZYBOWSKI

CHK
M. PERCHERKE

APVD
M. PERCHERKE

PRODUCT SPEC
108-1973

APPLICATION SPEC
114-13038

WEIGHT
-

CUSTOMER DRAWING

29APR05

29APR05

-

NAME

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450540

RESTRICTED TO
-

SCALE
2:1

SHEET
2


OF
19

REV
K9

TE Connectivity

VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P4	P3	6	5	4	3	2	1	P2	P1			
2-6450540-5	D C B A				AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
2P + 24S + 2P															

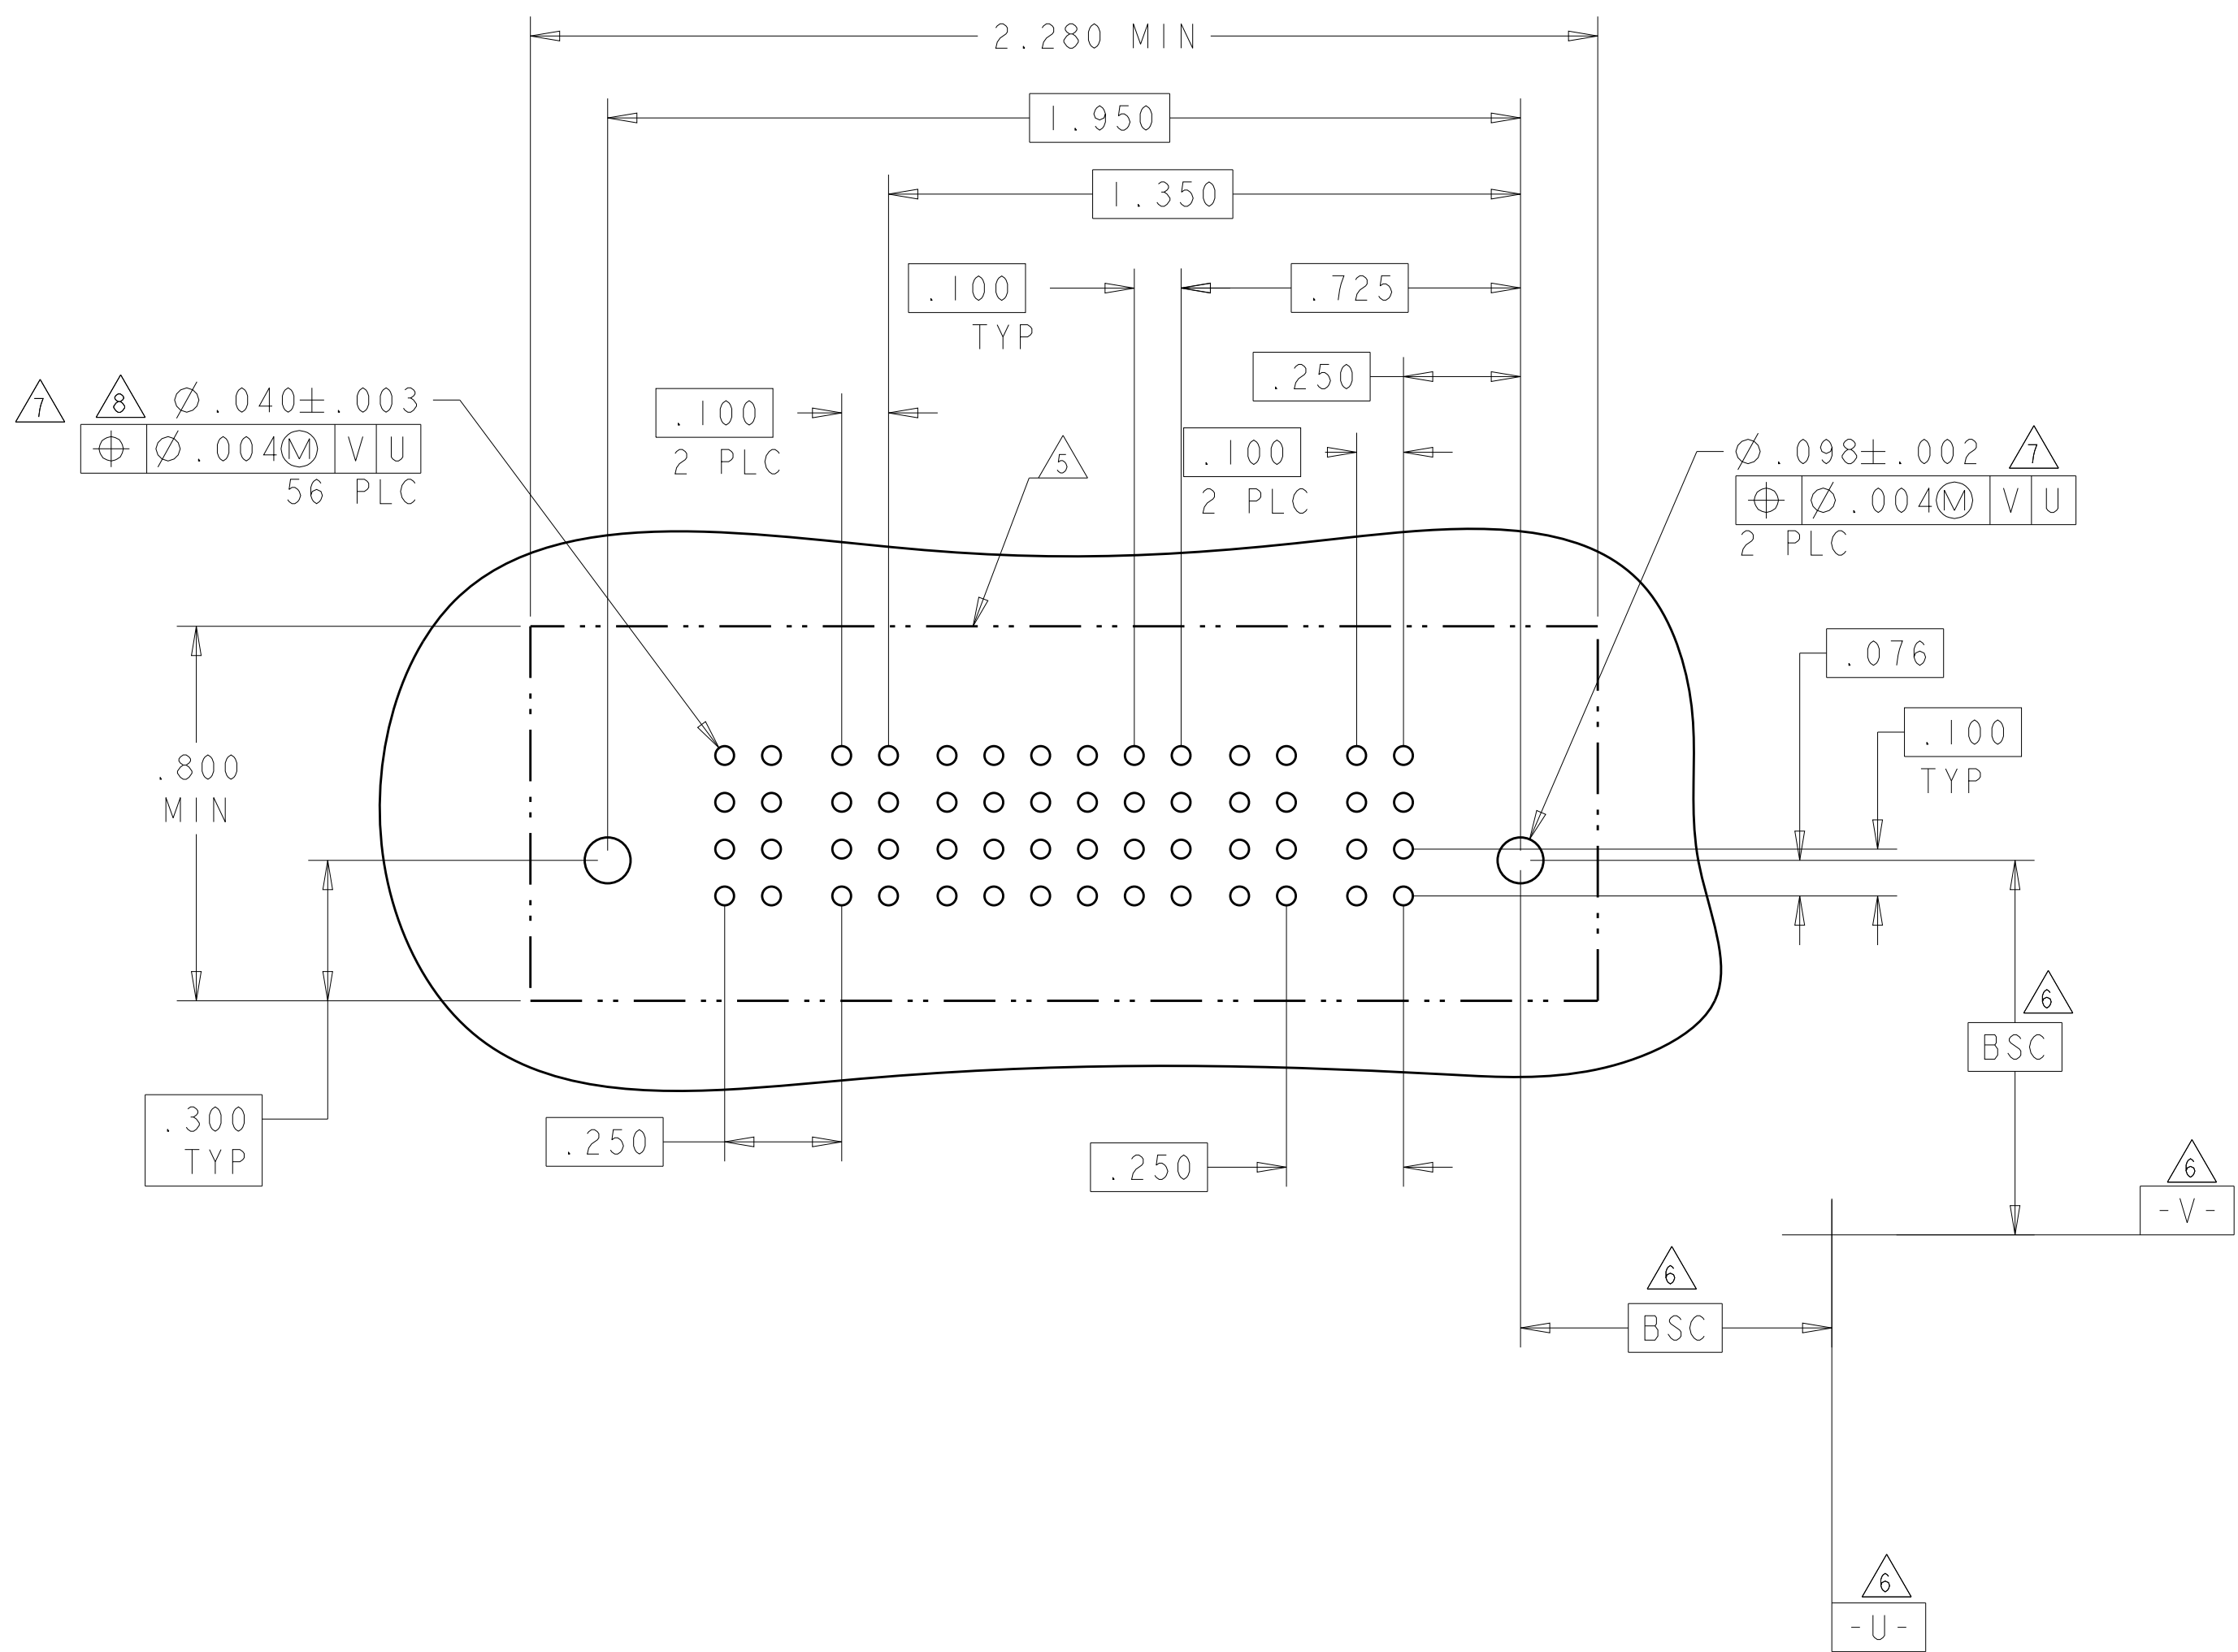


VS	STD POWER PRESSFIT CONTACT .115 LG
VP	MFBL POWER PRESSFIT CONTACT .115 LG
GS	STD POWER PRESSFIT CONTACT .135 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
P	SIGNAL PRESSFIT CONTACT .115 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH

4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-





PART NUMBER	ROWS		POWER										SIGNAL																				POWER											
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2		P1
6450540-3	D C B A																																											
10P + 84S + 10P																																												

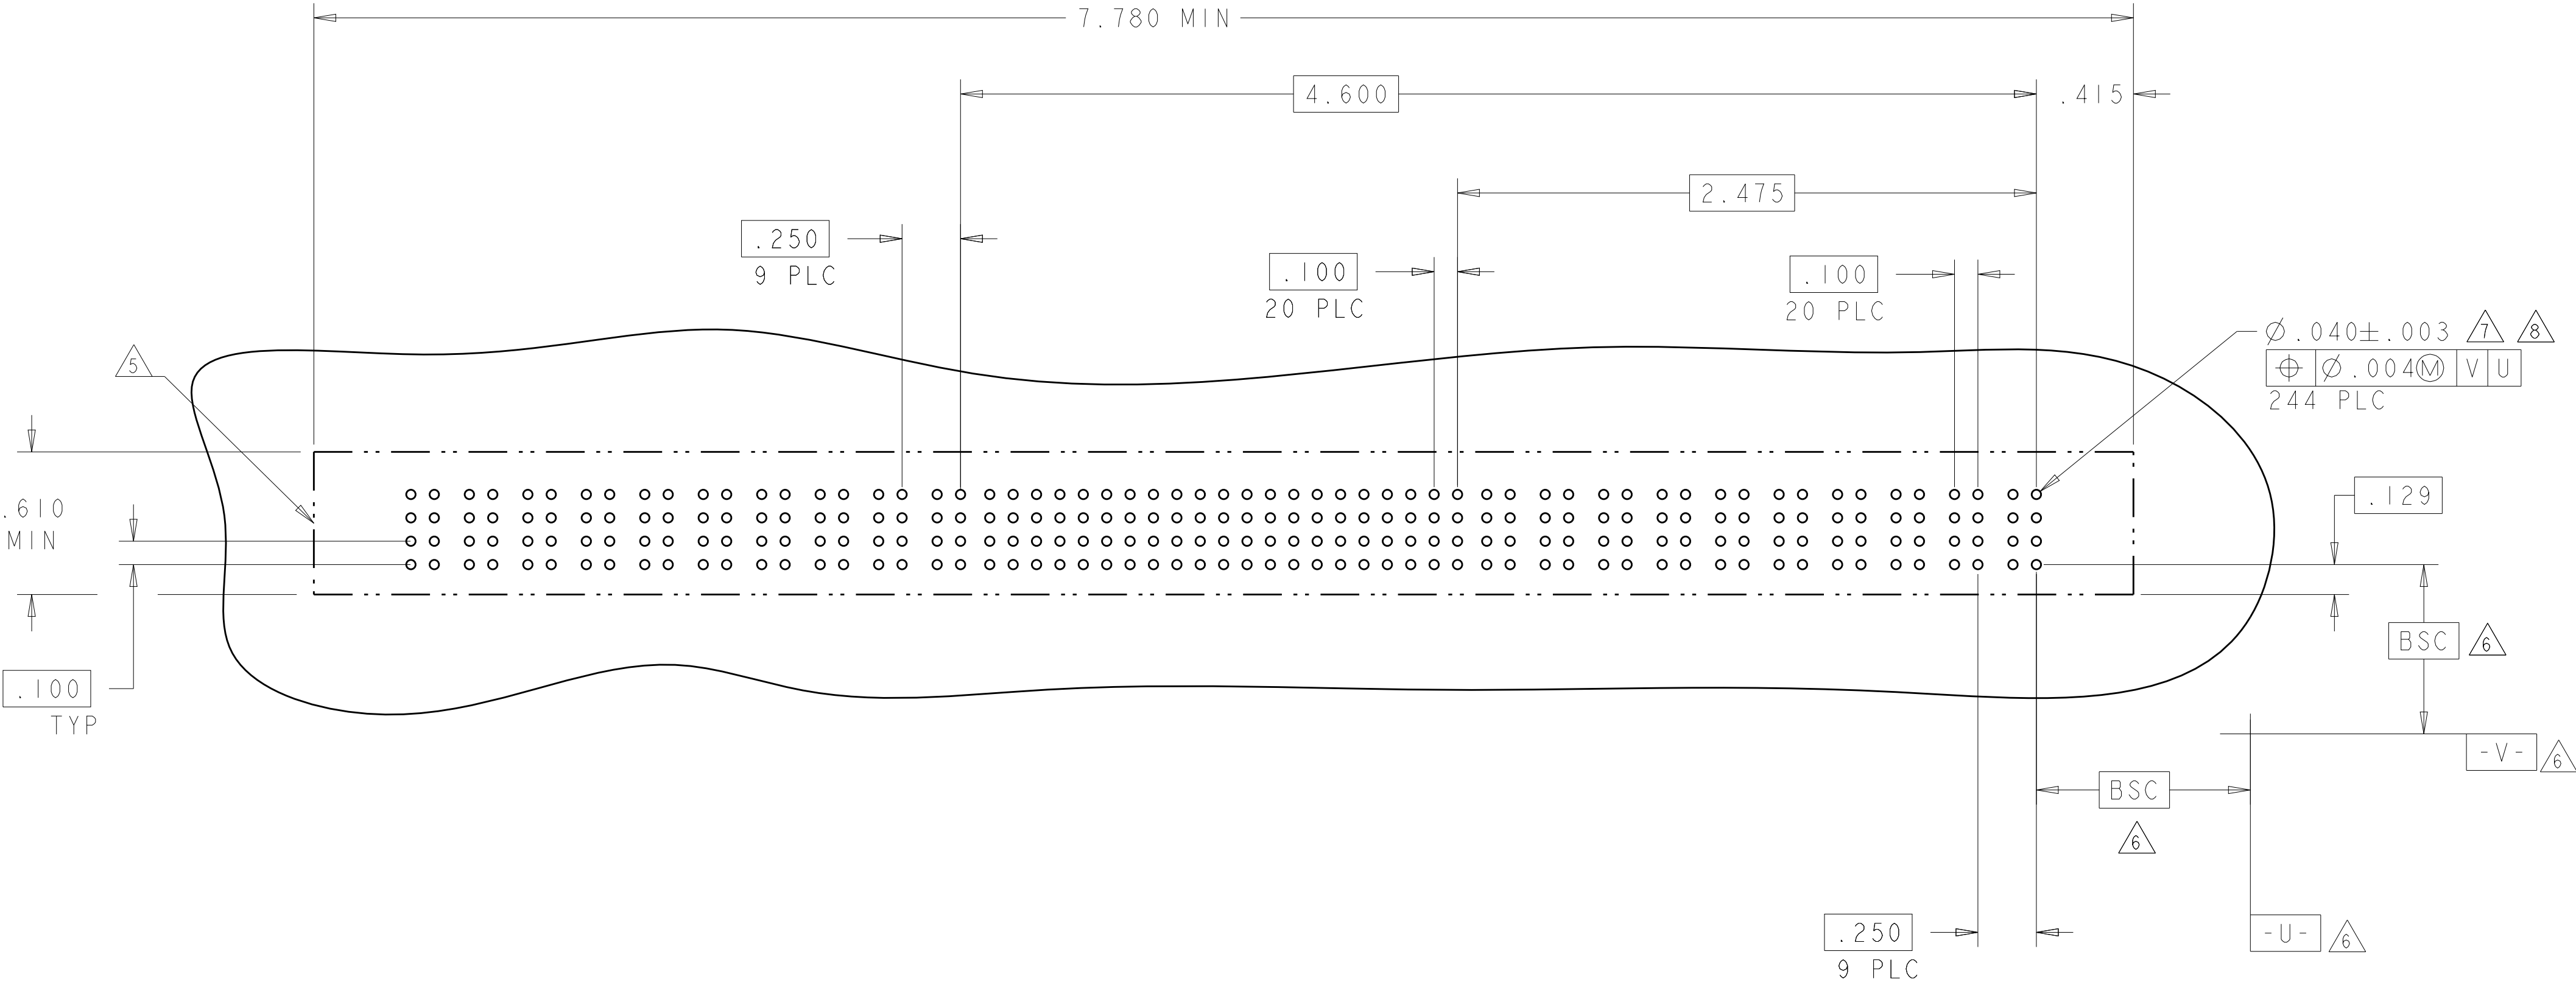



HP	MFBL POWER PRESSFIT CONTACT .165 LG
BP	SIGNAL PRESSFIT CONTACT .165 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH
CONTACT TABLE	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI CHK M.PERCHERKE APVD M.PERCHERKE	29APR05 29APR05 -
DIMENSIONS: INCHES		PRODUCT SPEC	NAME
		108-1973	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
		APPLICATION SPEC	
MATERIAL		114-13038	SIZE
		FINISH	CAGE CODE
			DRAWING NO
			RESTRICTED TO
			A100779
			C=6450540
			-
			SCALE
			2:1
			SHEET
			4
			OF 19
			REV
			K9

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

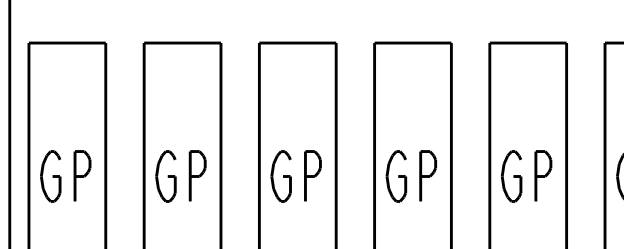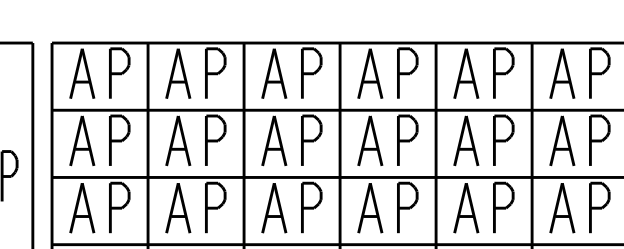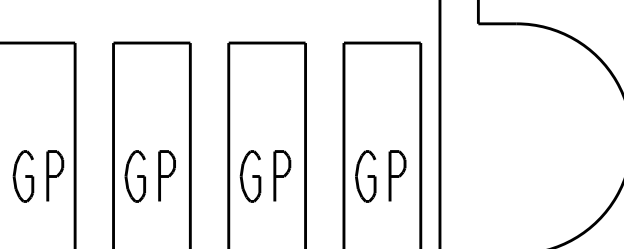PART NUMBER	ROWS		POWER						SIGNAL						POWER				
			P10	P9	P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
6450540-4	D C B A																		
4P + 24S + 6P																			

PART NUMBER	ROWS		POWER					SIGNAL			POWER																																																																																										
			P10	P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1																																																																																						
6450540-5	D C B A																																																																																																				

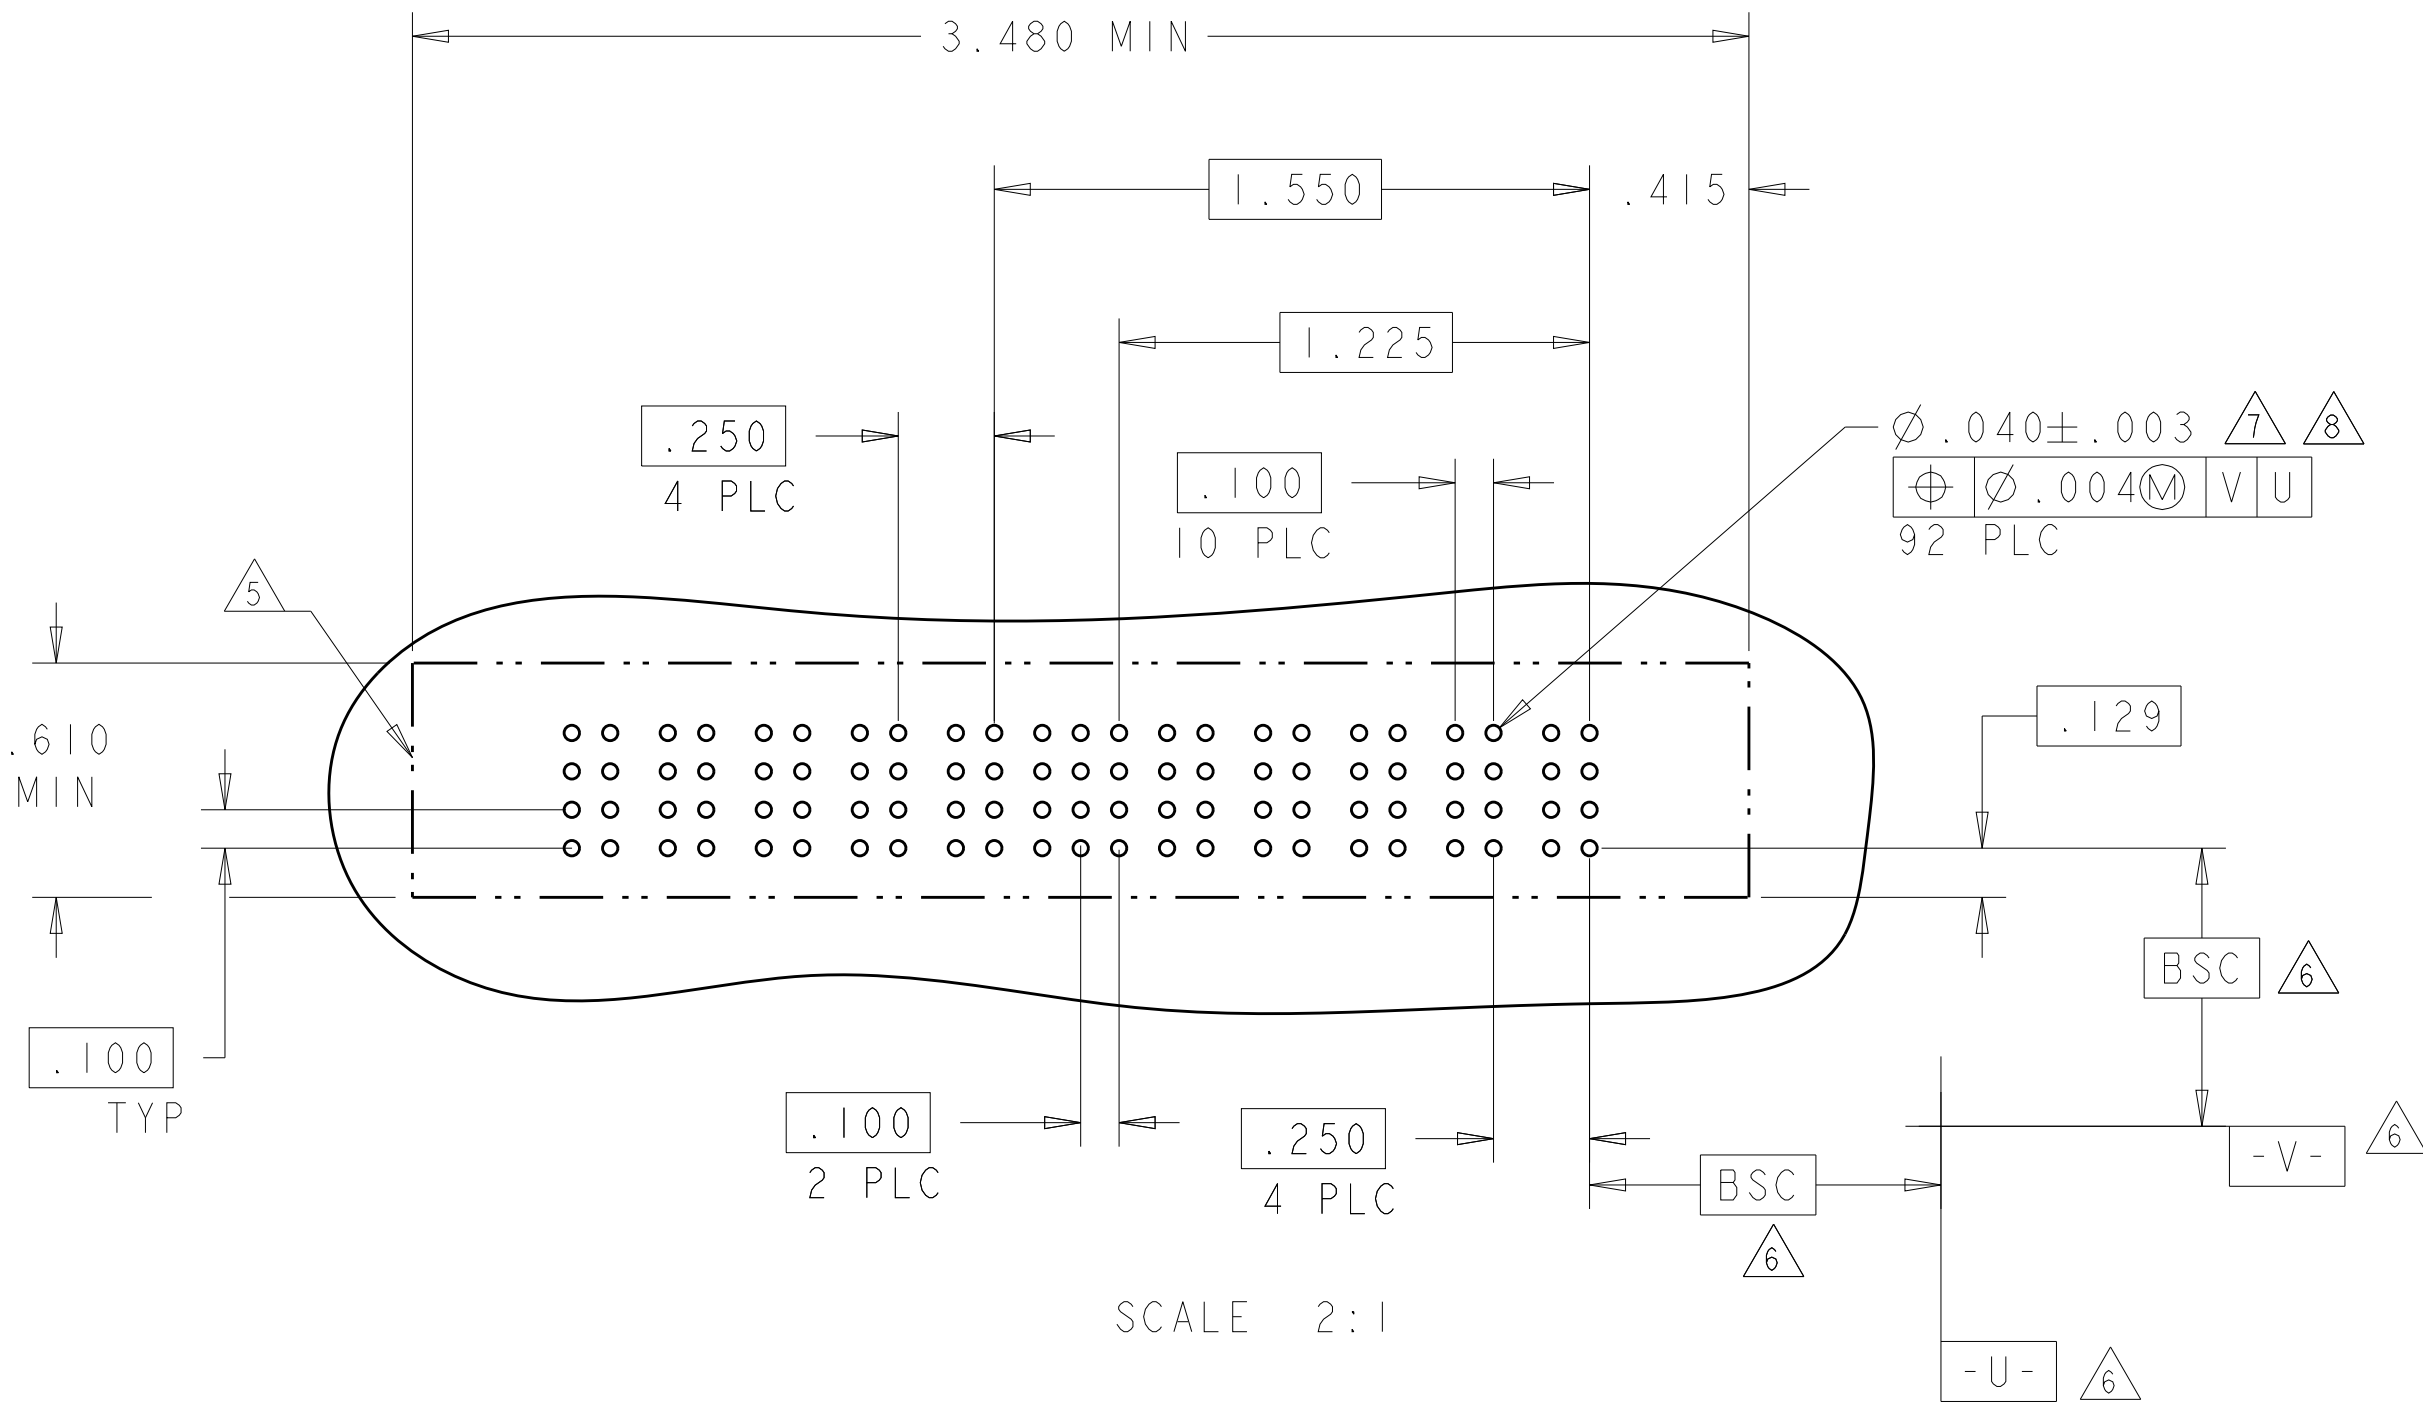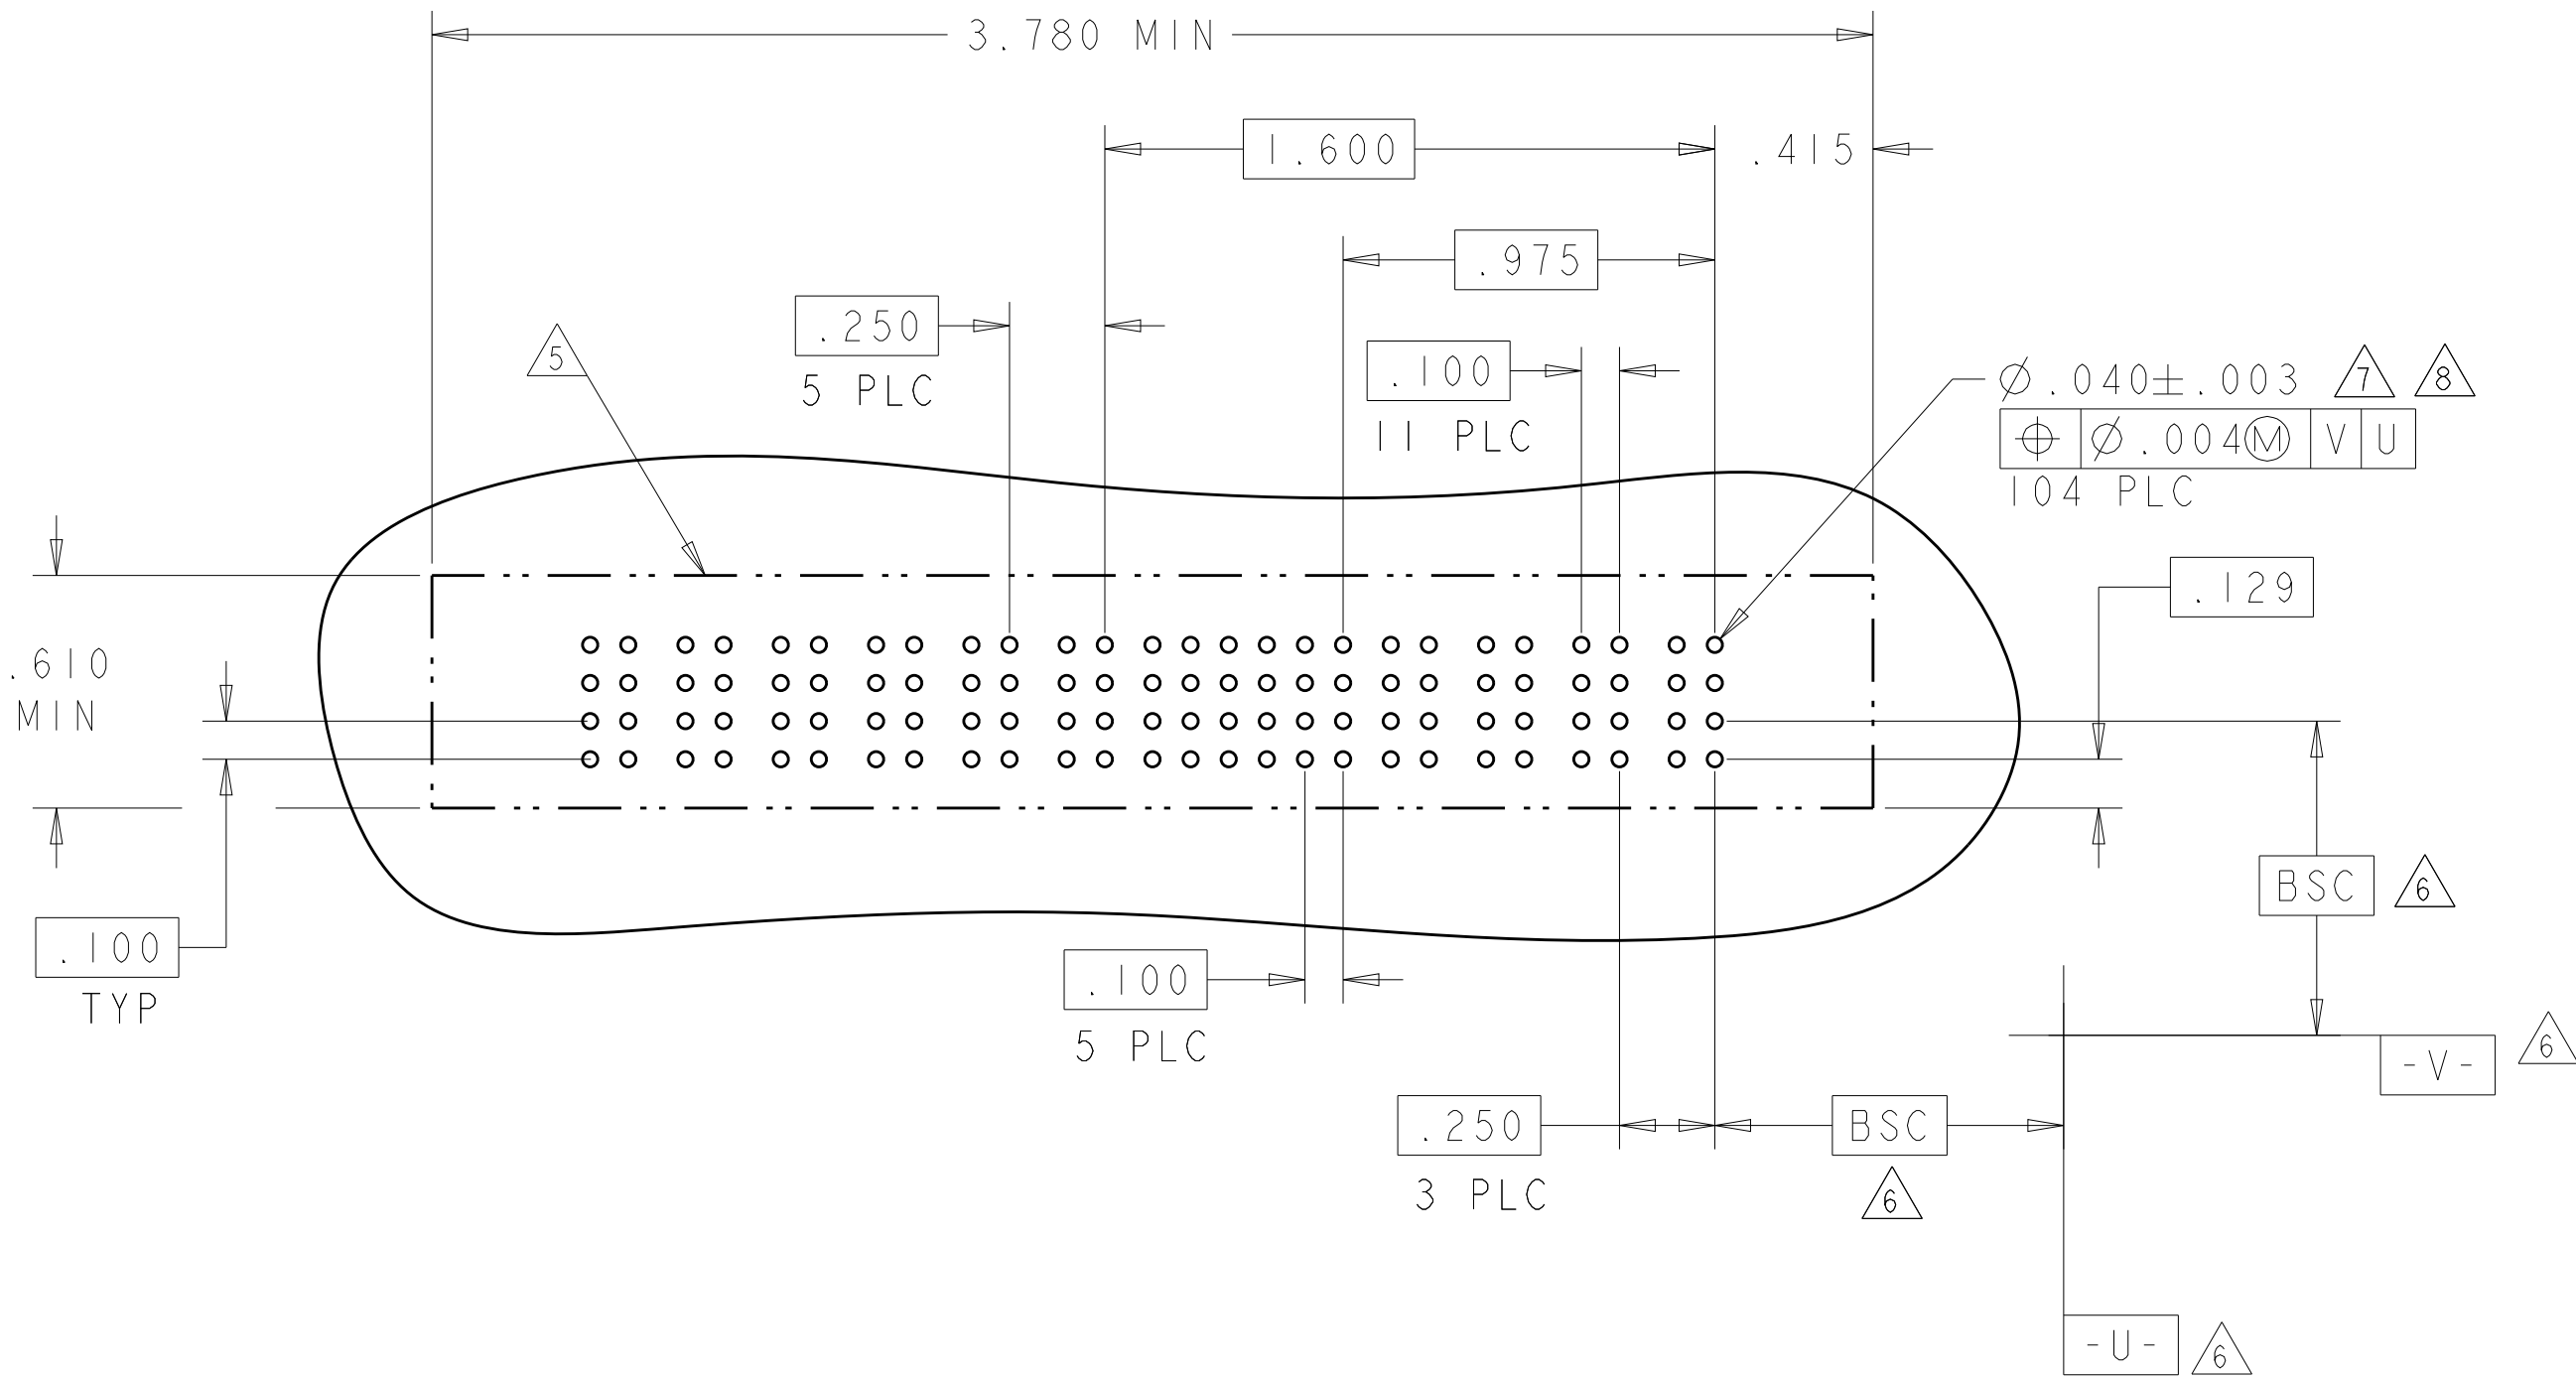

GP	MFBL POWER PRESSFIT CONTACT .135 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH
CONTACT TABLE	


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	29APR05 29APR05 -
DIMENSIONS: INCHES		PRODUCT SPEC	NAME
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE
0 PLC ±.01		114-13038	CAGE CODE
1 PLC ±.01		WEIGHT	DRAWING NO
2 PLC ±.01		CUSTOMER DRAWING	RESTRICTED TO
3 PLC ±.005		SCALE	SHEET
4 PLC ±.0020		2:1	5 OF 19
ANGLES ±.0020		REV	K9
FINISH			




TE TE Connectivity

VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL


A100779C=6450540

PART NUMBER	ROWS		POWER	SIGNAL							POWER																					
			P2	6	5	4	3	2	1	P1																						
6450540-7	D C B A		GP <table><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table> GP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	
AP	AP	AP	AP	AP	AP	AP																										
AP	AP	AP	AP	AP	AP	AP																										
AP	AP	AP	AP	AP	AP	AP																										
AP	AP	AP	AP	AP	AP	AP																										
1P + 24S + 1P																																

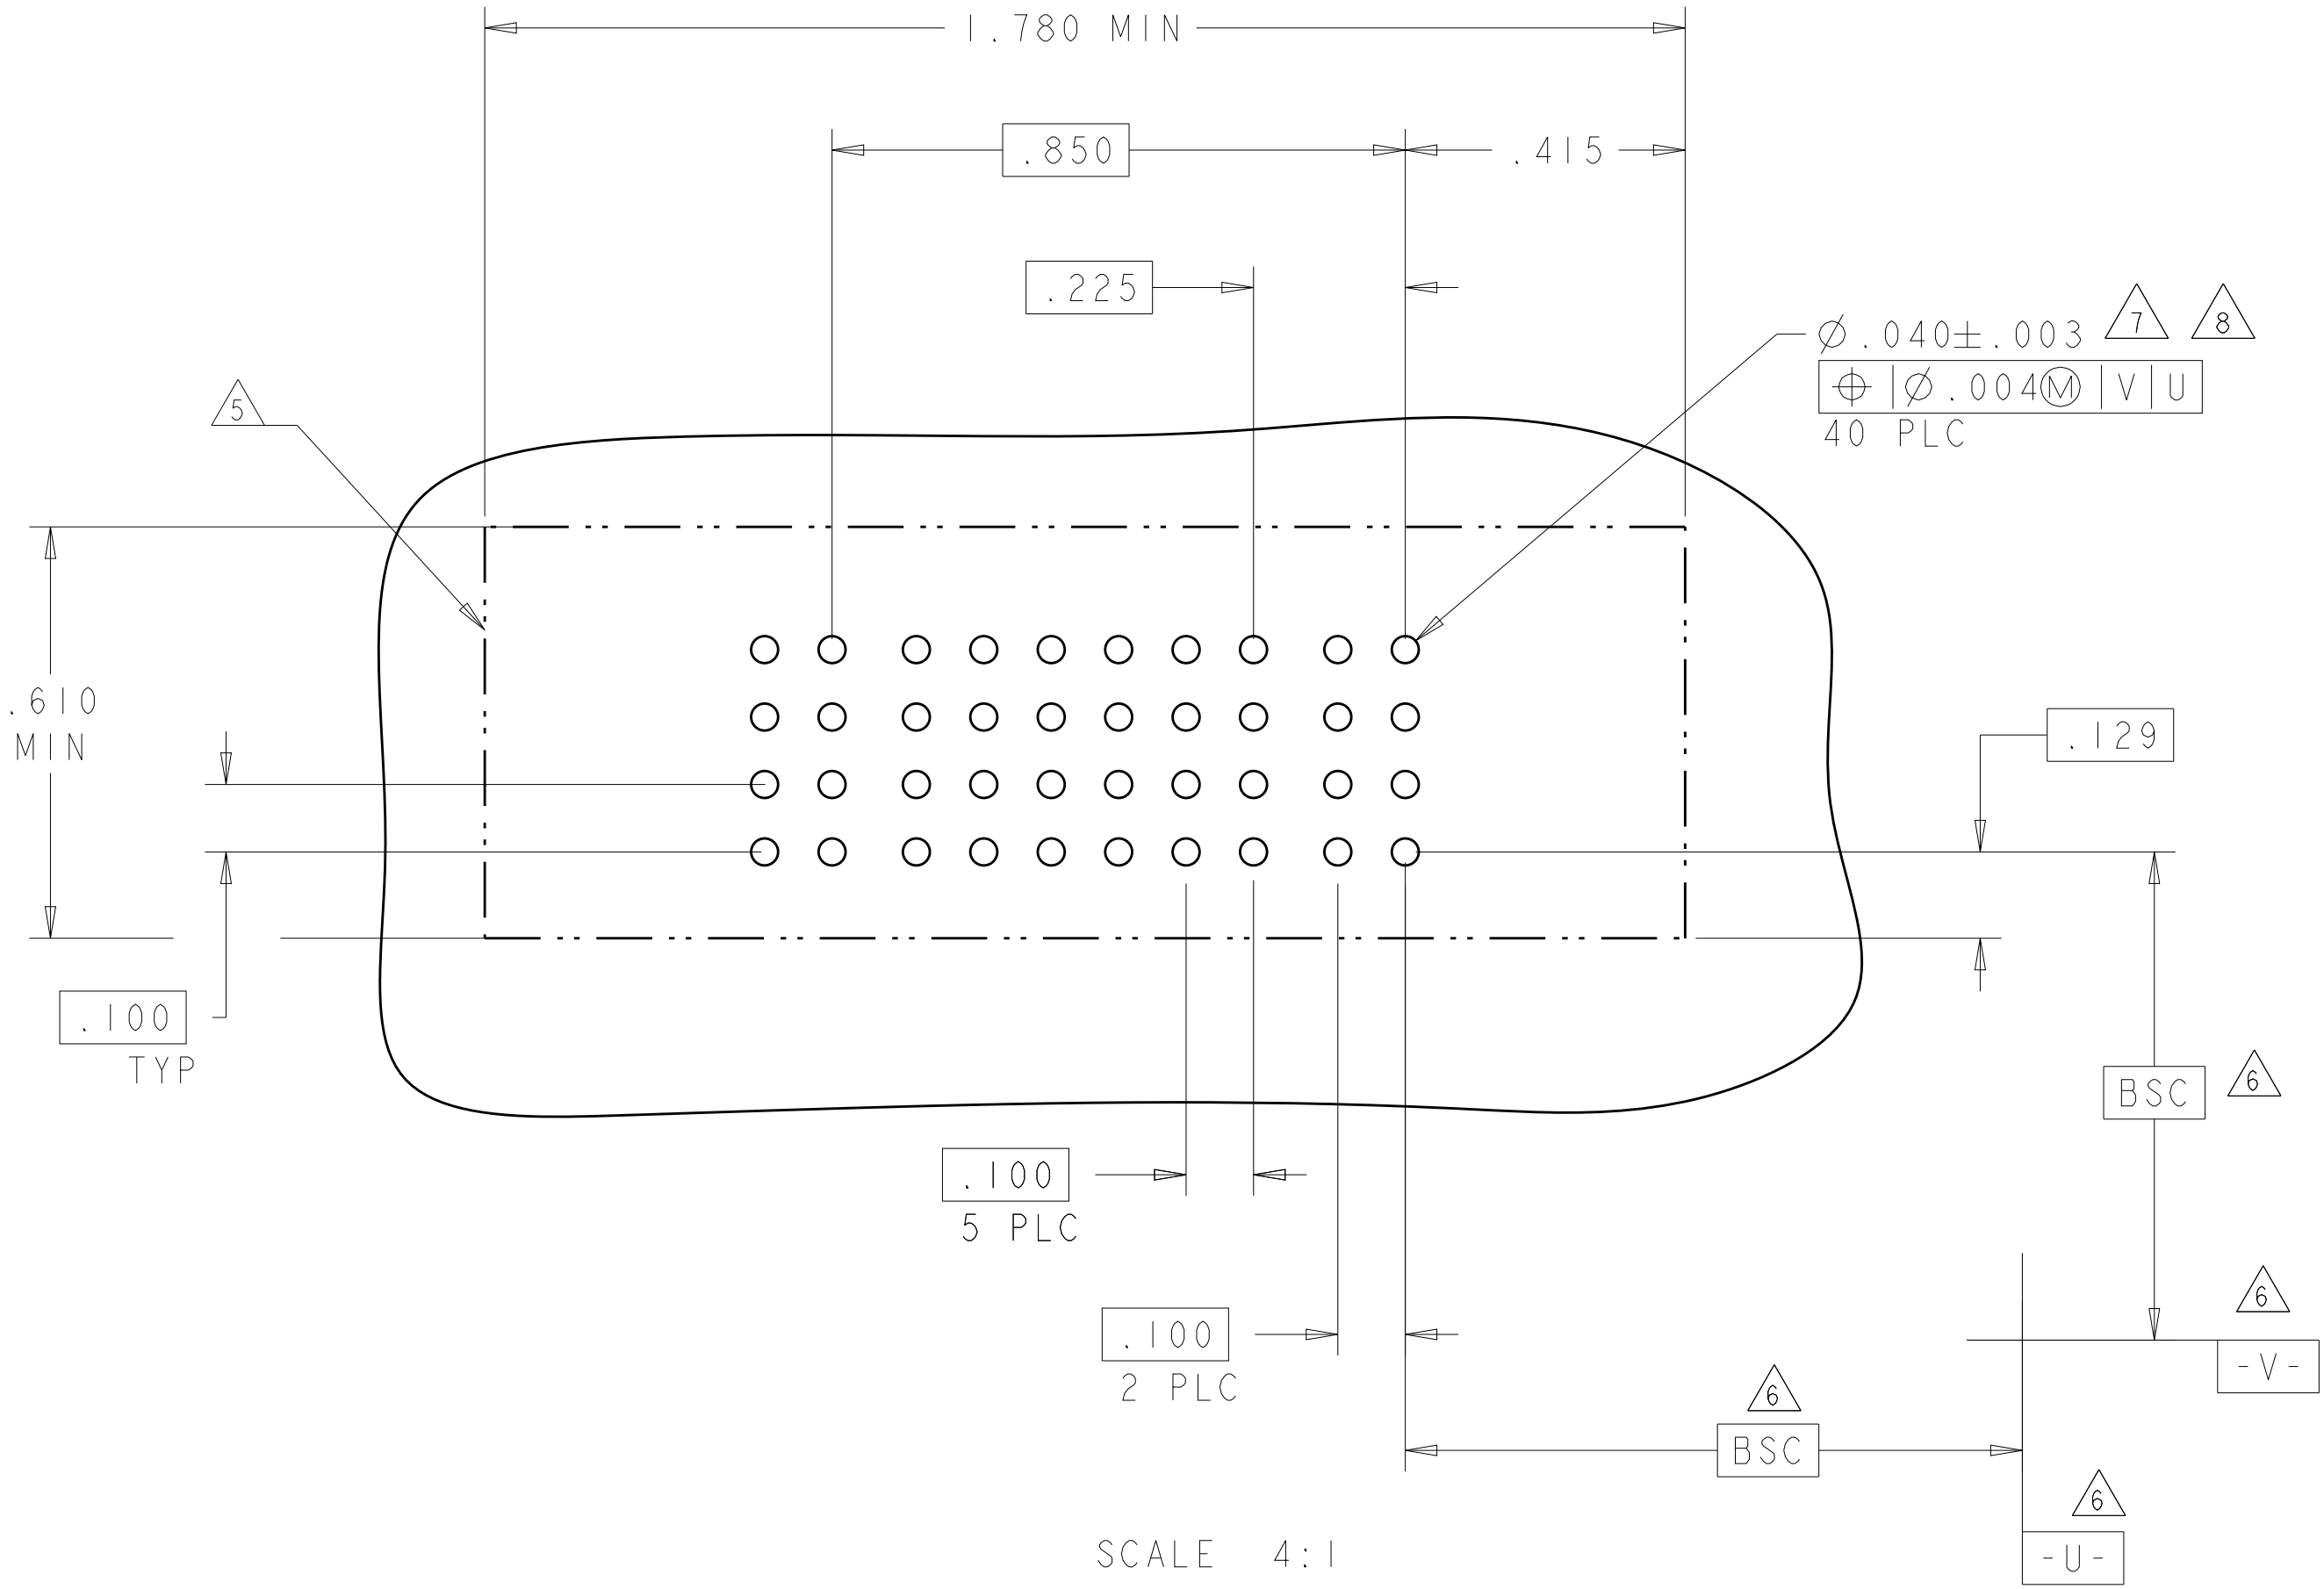

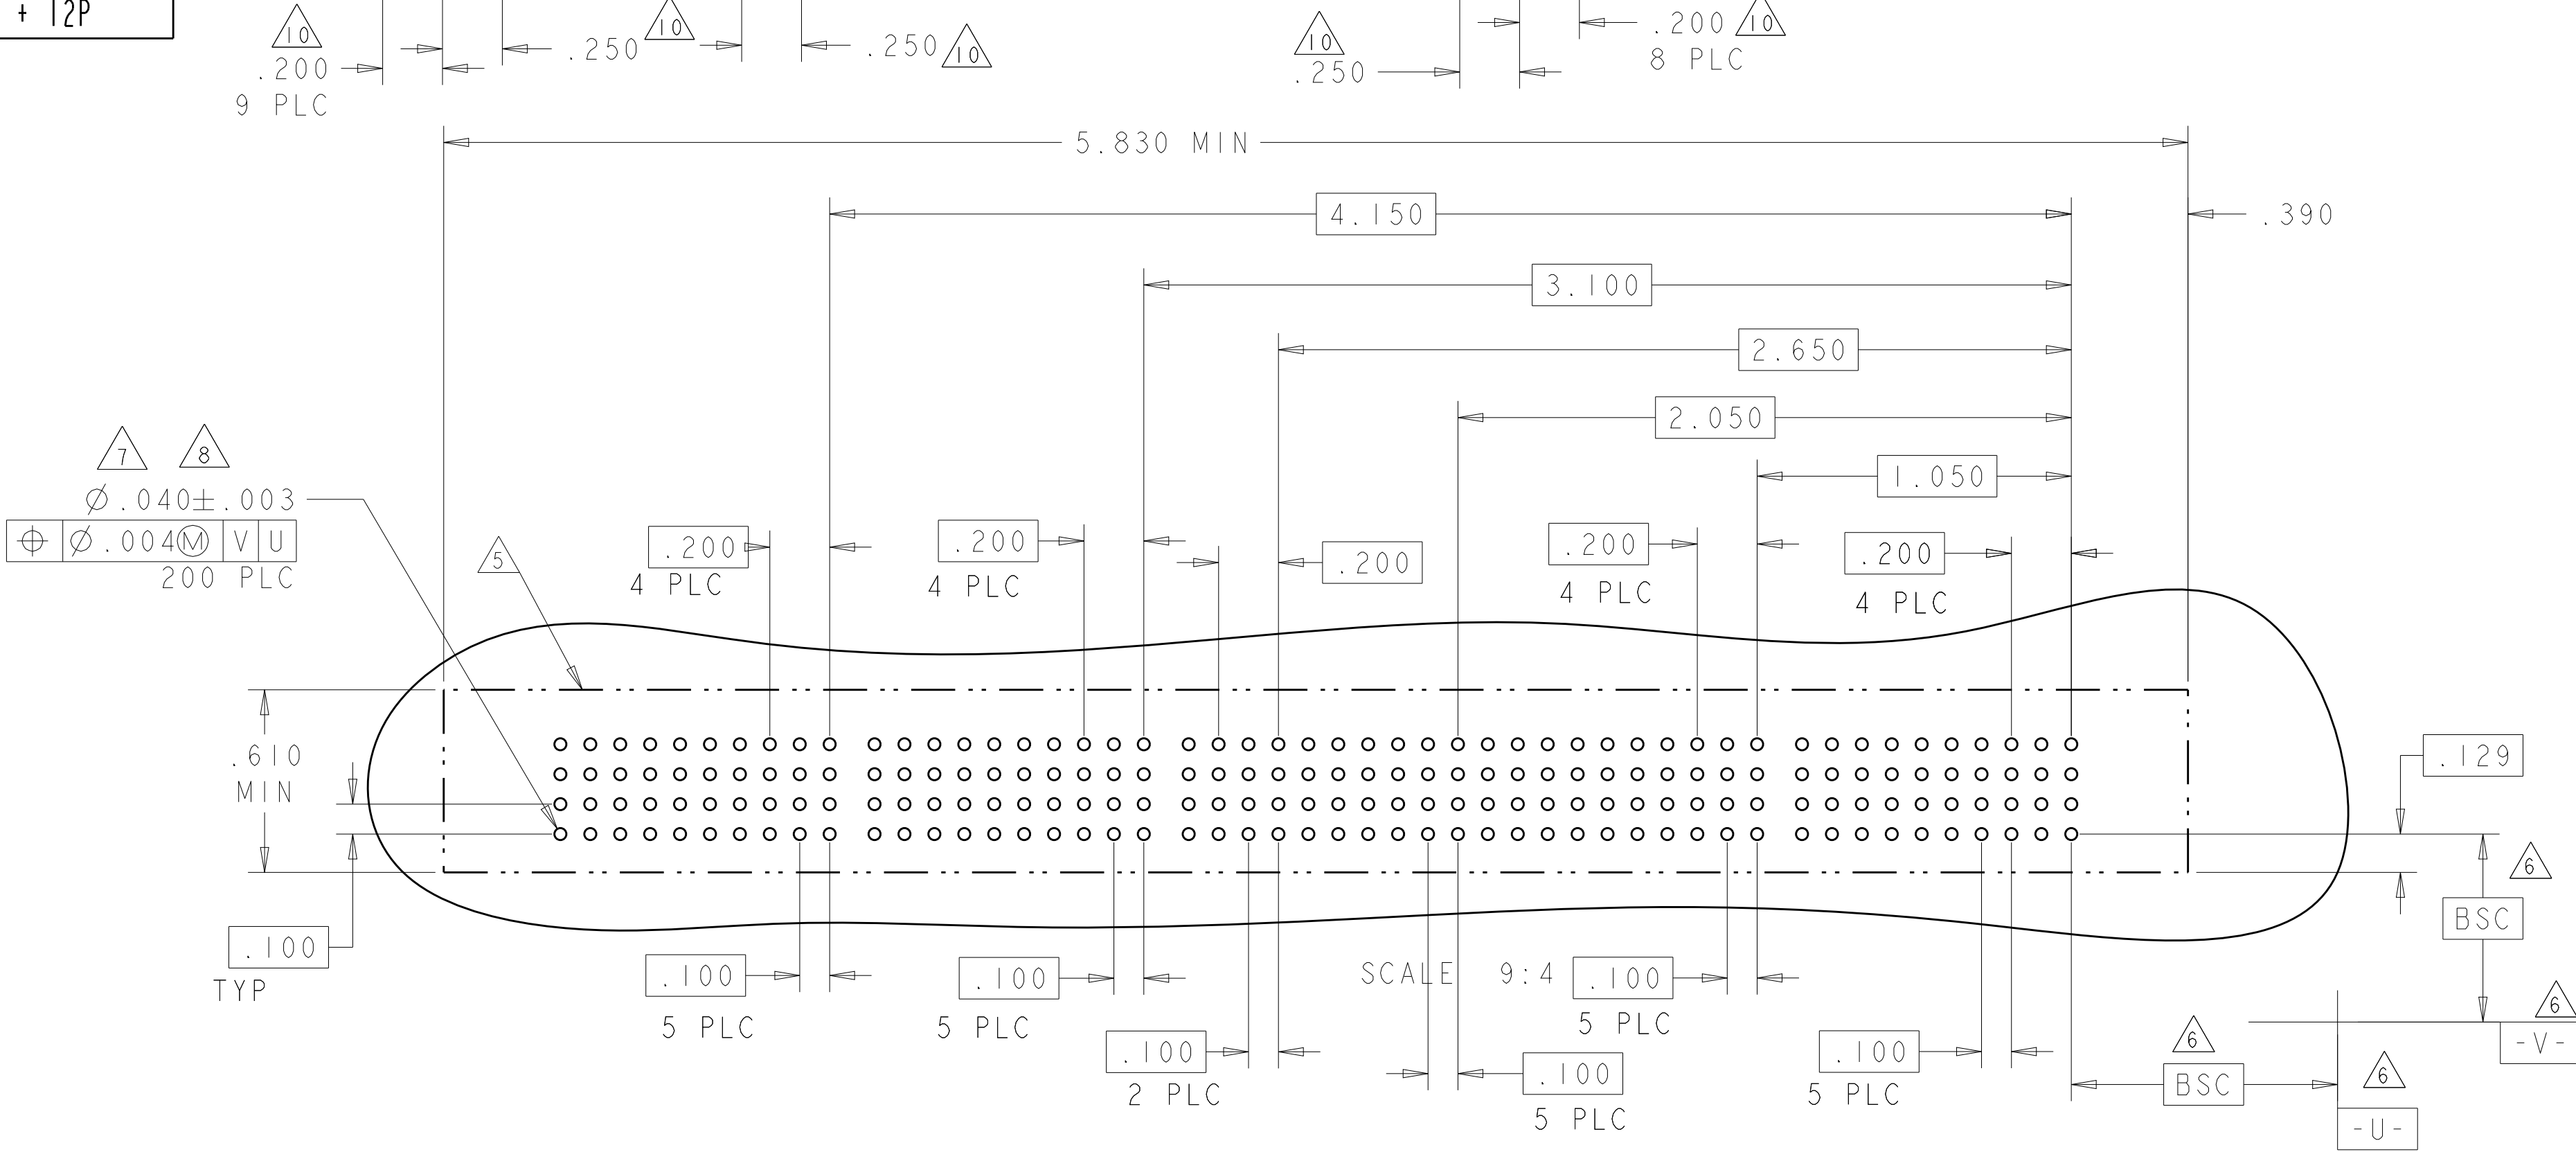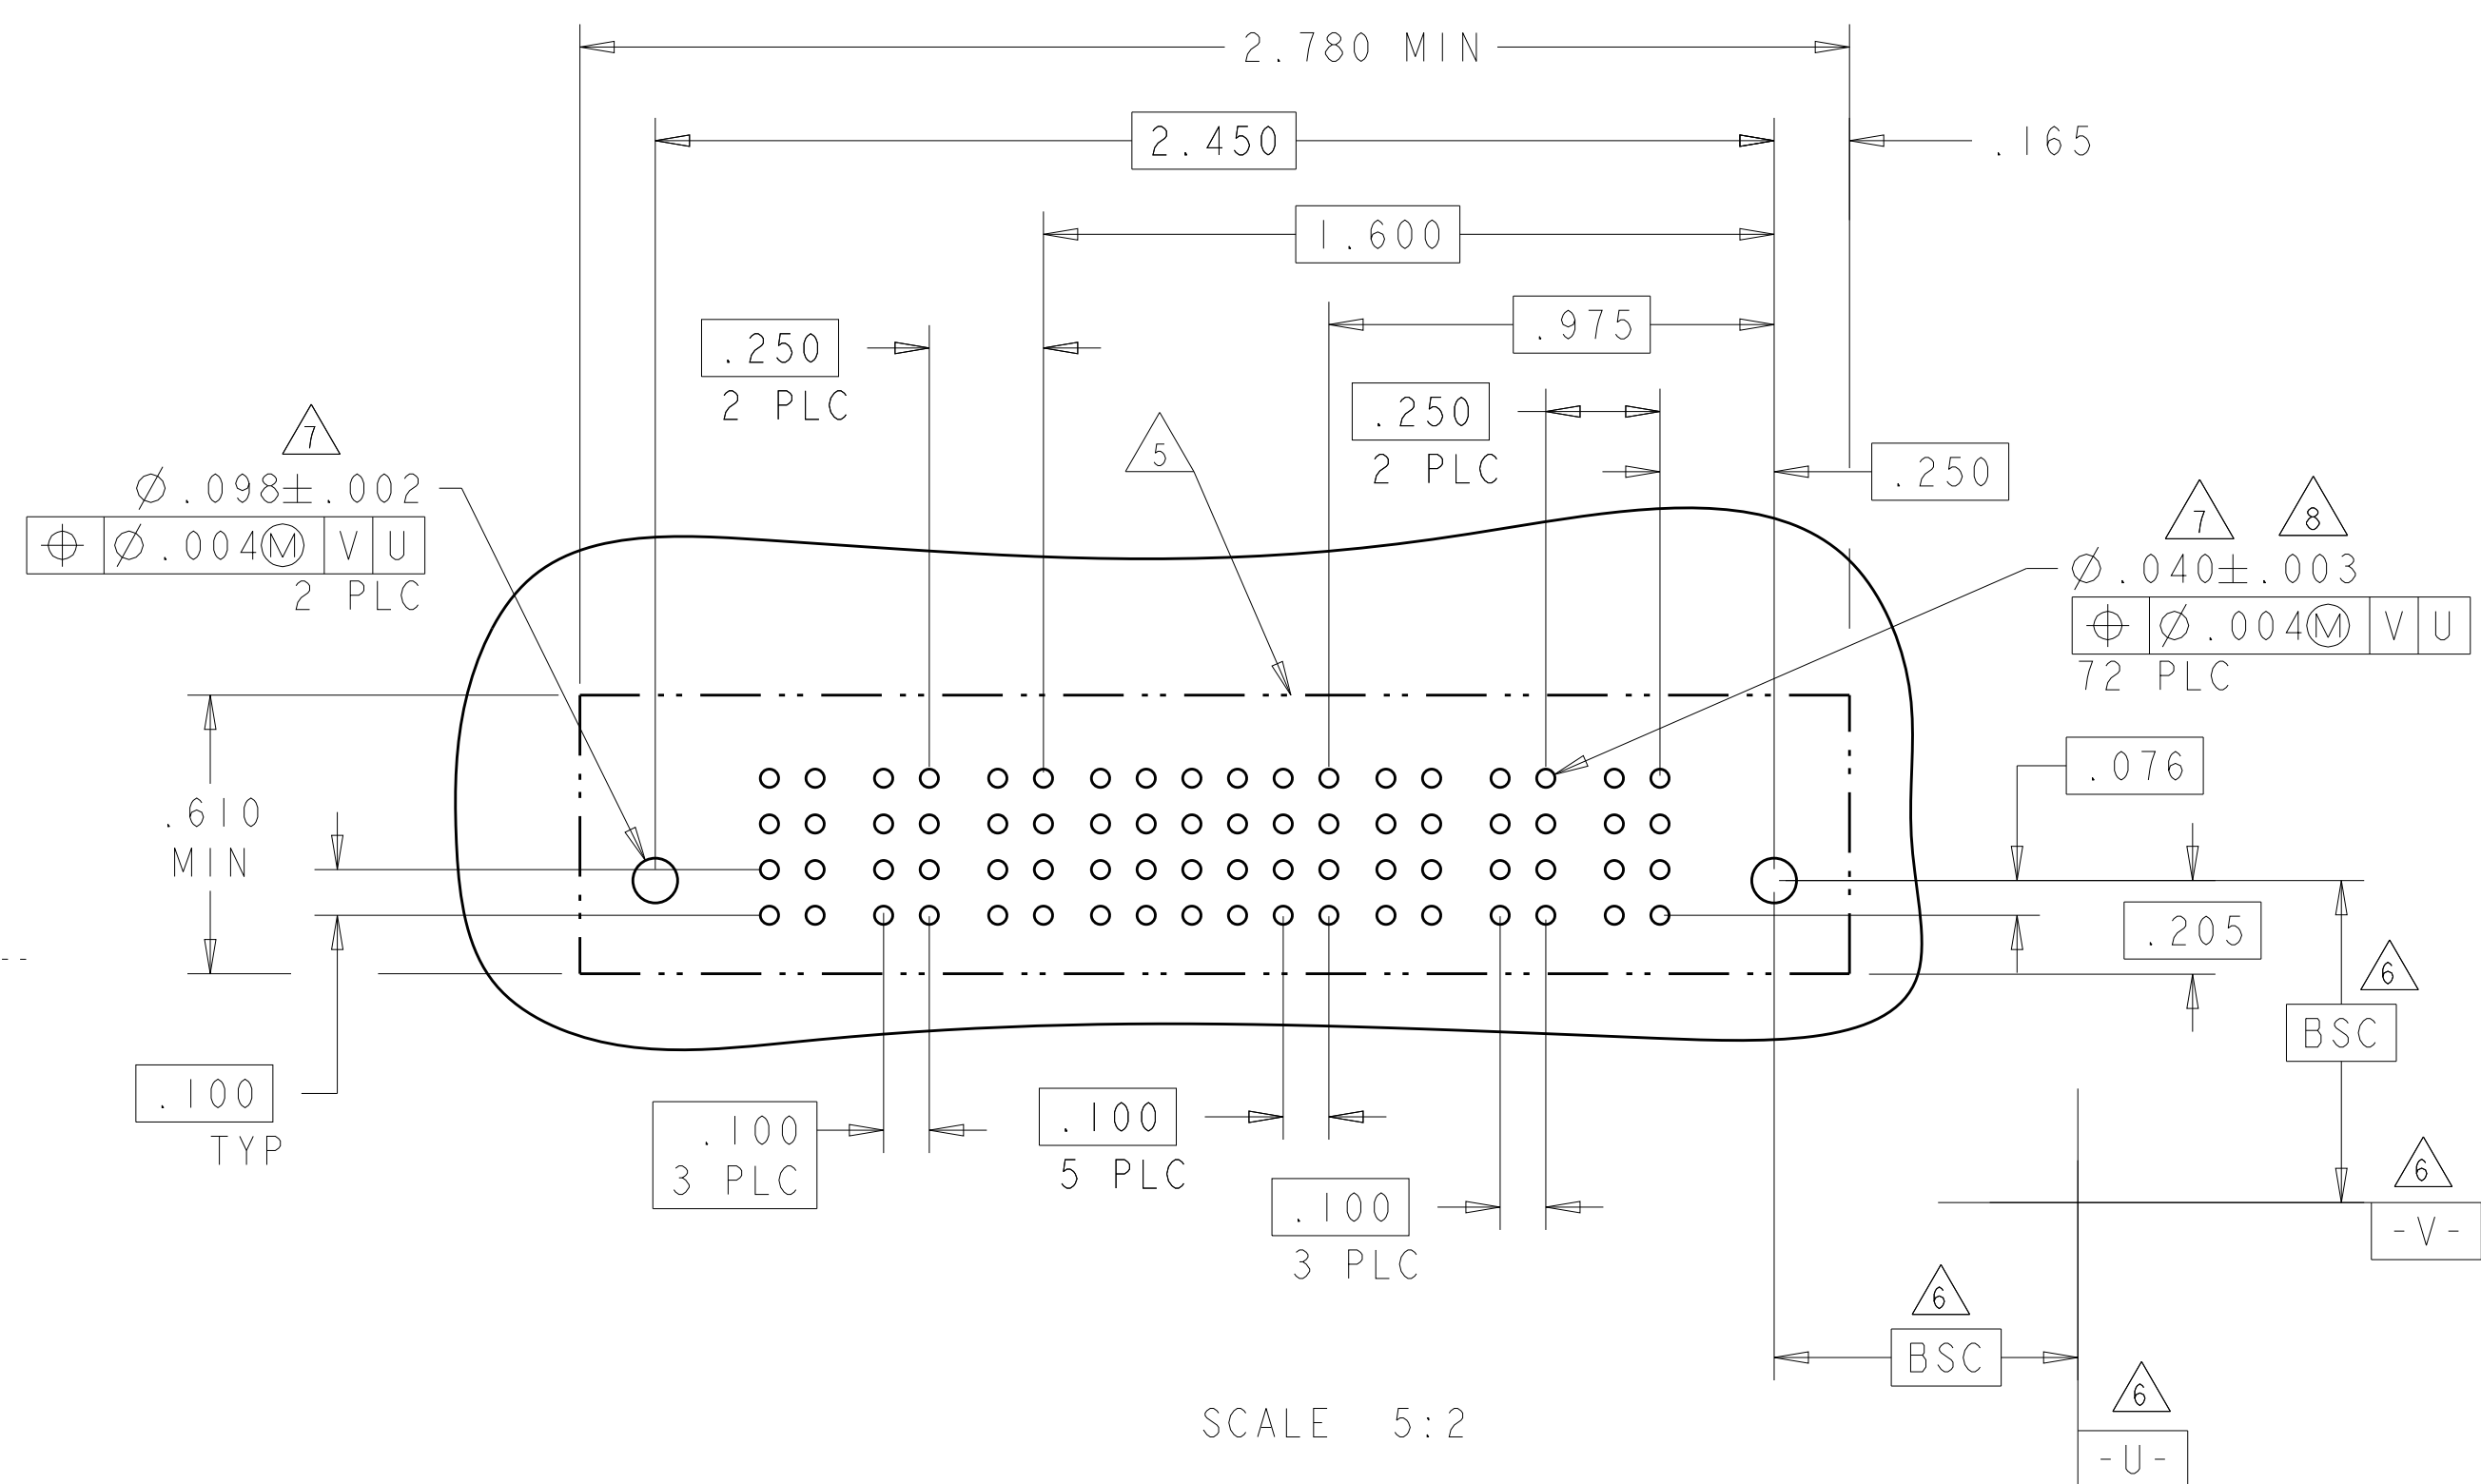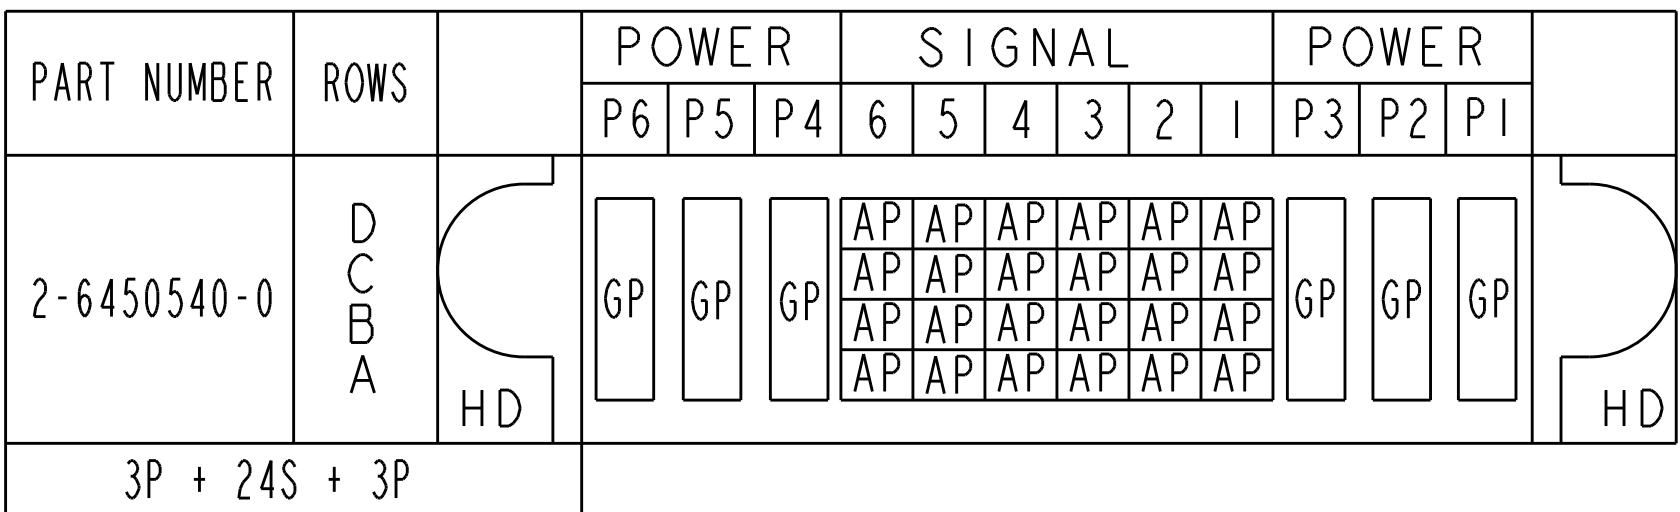

PART NUMBER	ROWS		POWER		SIGNAL					POWER						
			P7	P6	5	4	3	2	1	P5	P4	P3	P2	P1		
4-6450540-3	D C B A	 HD			AP	AP	AP	AP	AP	AP						 HD
5P + 20S + 2P																

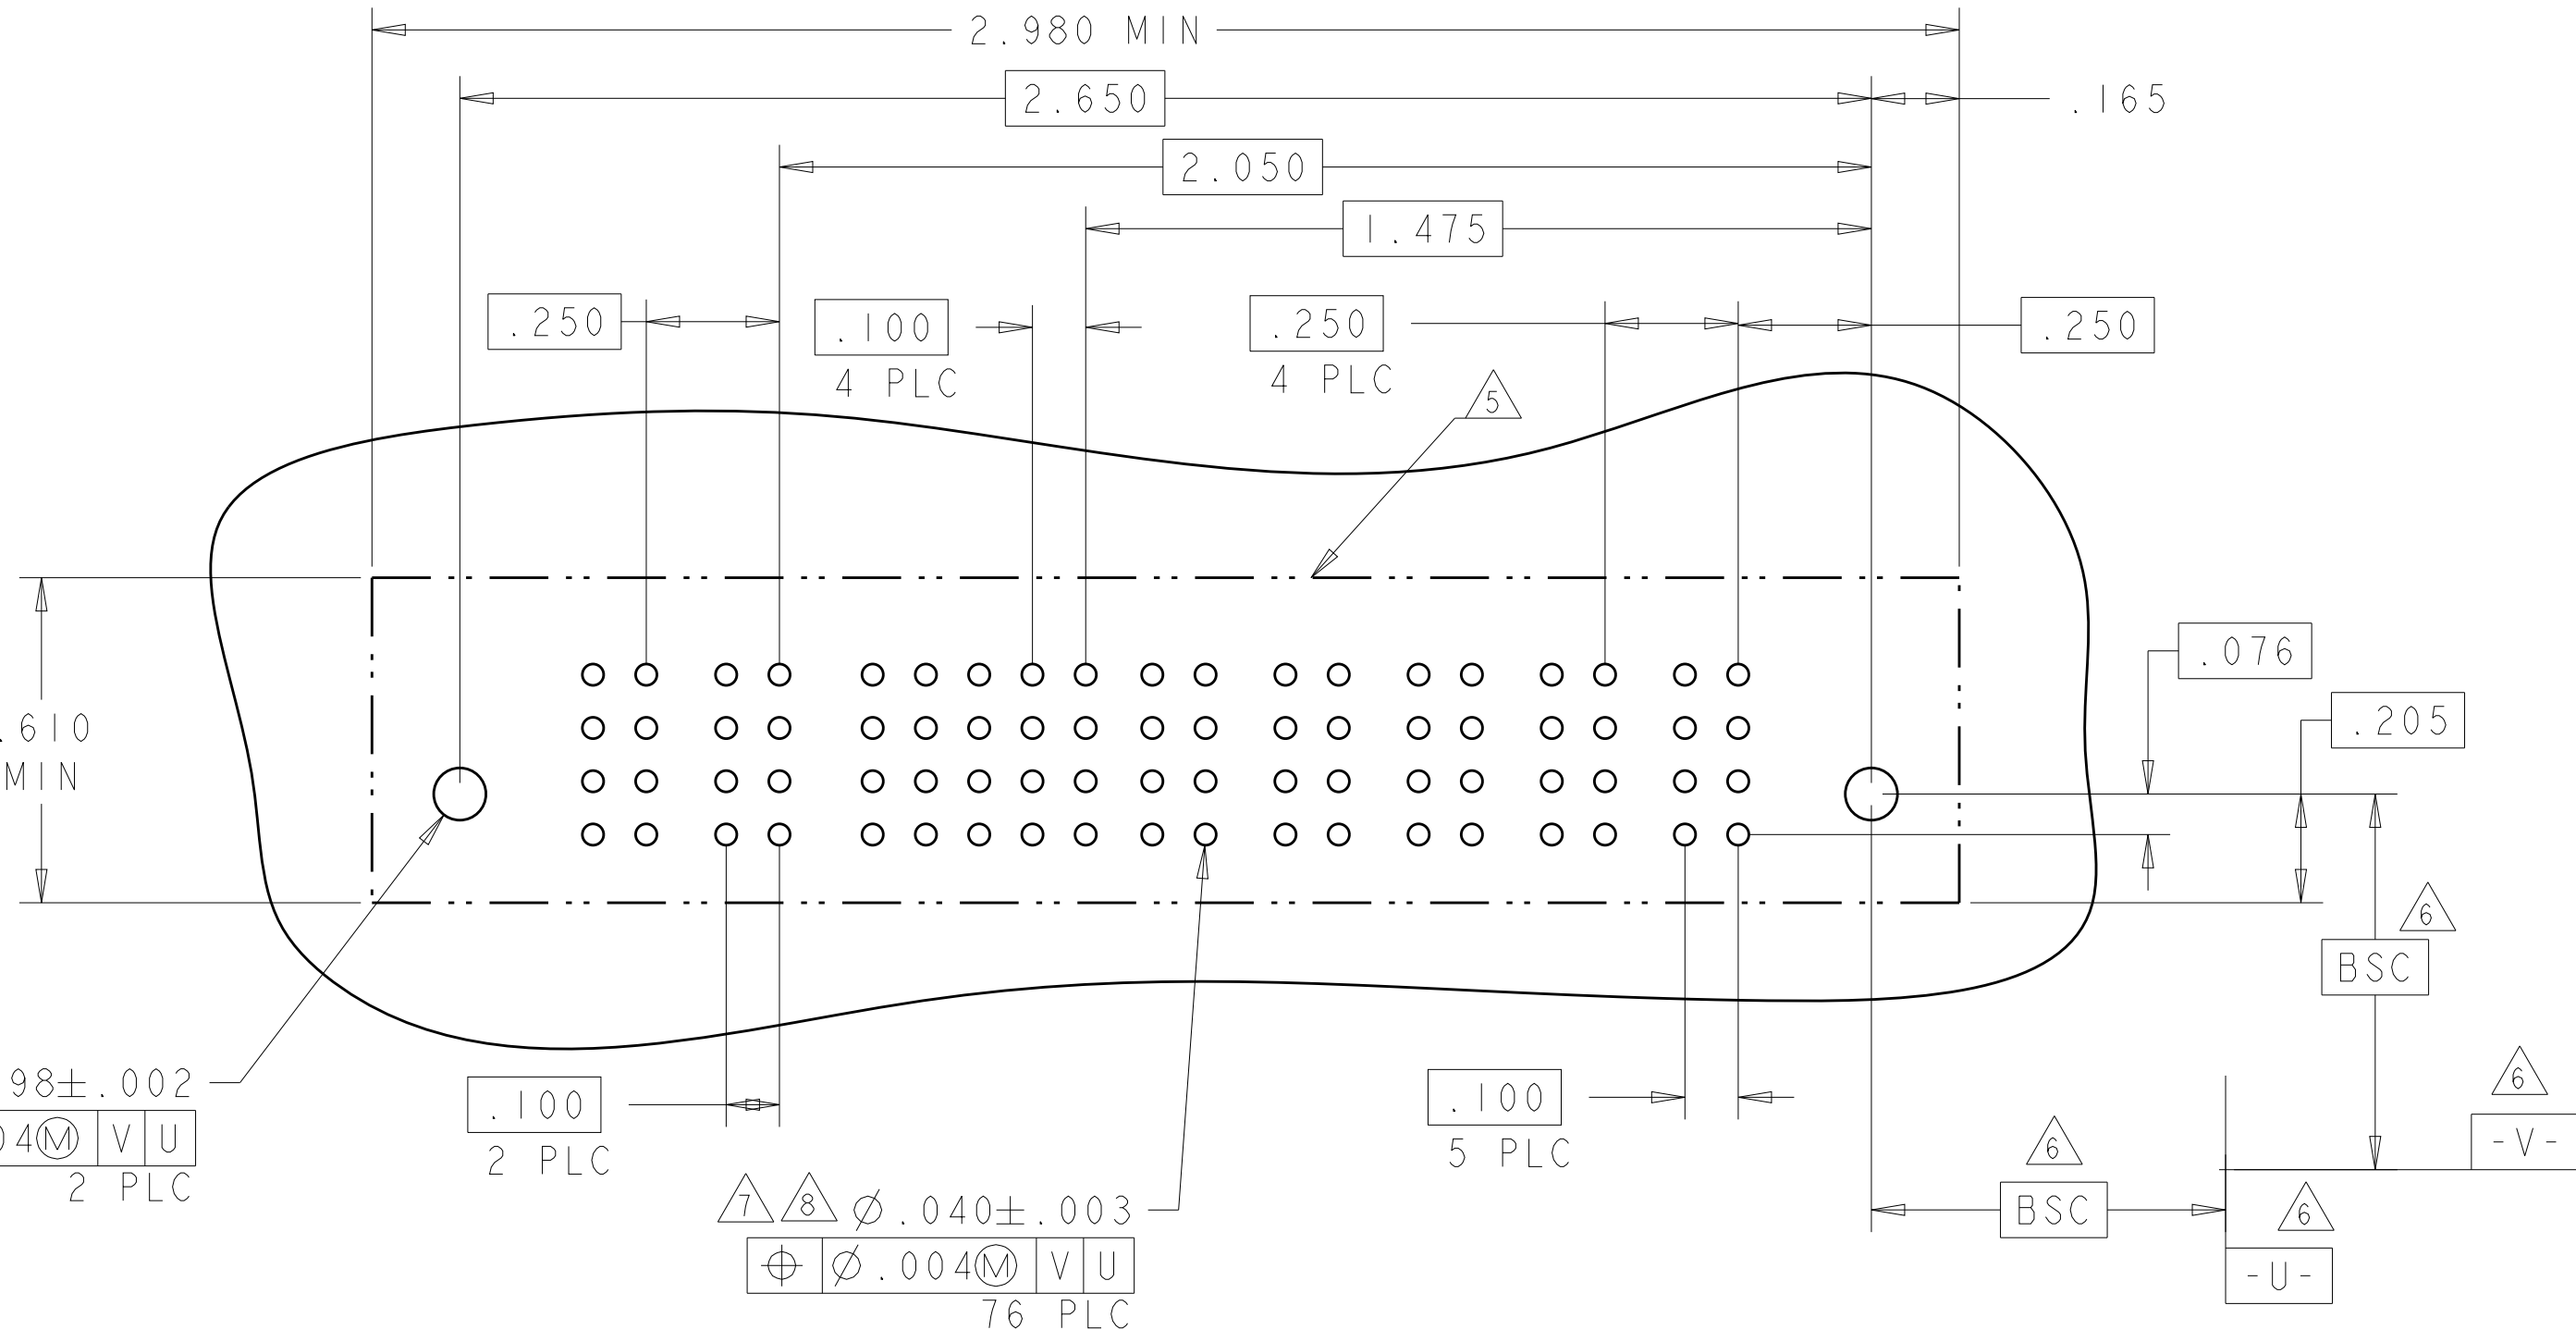

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG R. GRZYBOWSKI 29APR05		 TE Connectivity	
		CHK M. PERCHERKE 29APR05			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 2 PLC ±.01 4 PLC ±.005 4 PLC ±.0020 ANGLES ±°		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		PRODUCT SPEC		SIZE	
		108-1973		CASE CODE	
		APPLICATION SPEC		DRAWING NO	
MATERIAL		114-13038		RESTRICTED TO	
FINISH		WEIGHT		A1 00779 © 6450540	
		CUSTOMER DRAWING		SCALE 2:1	
				SHEET 8 OF 19	
				REV K9	


Technical drawing of a mechanical part, likely a filter or screen, showing dimensions and tolerances. The part is cylindrical with a central hole and a series of small holes (PLC) along its length. The drawing includes various dimension lines and callouts for tolerances and features.

Key dimensions and features:

- Overall length: 7.500 MIN.
- Inner diameter: $\varnothing .098 \pm .003$ (Feature 6)
- Outer diameter: $\varnothing .004$ (Feature 4)
- Feature 4: $\varnothing .004$ (M) V U
- Feature 6: $\varnothing .098 \pm .003$ (M) V U
- Feature 8: $\varnothing .040 \pm .003$ (M) V U
- Feature 8: 280 PLC
- Feature 9: BSD (5)
- Feature 10: -V- (5)
- Feature 11: -U- (5)
- Feature 12: BSD (5)
- Feature 13: .100 TYP.
- Feature 14: .100 (29 PLC)
- Feature 15: .100 (9 PLC)
- Feature 16: .100 (29 PLC)
- Feature 17: .100 (29 PLC)
- Feature 18: .100 (29 PLC)
- Feature 19: .100 (29 PLC)
- Feature 20: .100 (29 PLC)
- Feature 21: .100 (29 PLC)
- Feature 22: .100 (29 PLC)
- Feature 23: .100 (29 PLC)
- Feature 24: .100 (29 PLC)
- Feature 25: .100 (29 PLC)
- Feature 26: .100 (29 PLC)
- Feature 27: .100 (29 PLC)
- Feature 28: .100 (29 PLC)
- Feature 29: .100 (29 PLC)
- Feature 30: .100 (29 PLC)
- Feature 31: .100 (29 PLC)
- Feature 32: .100 (29 PLC)
- Feature 33: .100 (29 PLC)
- Feature 34: .100 (29 PLC)
- Feature 35: .100 (29 PLC)
- Feature 36: .100 (29 PLC)
- Feature 37: .100 (29 PLC)
- Feature 38: .100 (29 PLC)
- Feature 39: .100 (29 PLC)
- Feature 40: .100 (29 PLC)
- Feature 41: .100 (29 PLC)
- Feature 42: .100 (29 PLC)
- Feature 43: .100 (29 PLC)
- Feature 44: .100 (29 PLC)
- Feature 45: .100 (29 PLC)
- Feature 46: .100 (29 PLC)
- Feature 47: .100 (29 PLC)
- Feature 48: .100 (29 PLC)
- Feature 49: .100 (29 PLC)
- Feature 50: .100 (29 PLC)
- Feature 51: .100 (29 PLC)
- Feature 52: .100 (29 PLC)
- Feature 53: .100 (29 PLC)
- Feature 54: .100 (29 PLC)
- Feature 55: .100 (29 PLC)
- Feature 56: .100 (29 PLC)
- Feature 57: .100 (29 PLC)
- Feature 58: .100 (29 PLC)
- Feature 59: .100 (29 PLC)
- Feature 60: .100 (29 PLC)
- Feature 61: .100 (29 PLC)
- Feature 62: .100 (29 PLC)
- Feature 63: .100 (29 PLC)
- Feature 64: .100 (29 PLC)
- Feature 65: .100 (29 PLC)
- Feature 66: .100 (29 PLC)
- Feature 67: .100 (29 PLC)
- Feature 68: .100 (29 PLC)
- Feature 69: .100 (29 PLC)
- Feature 70: .100 (29 PLC)
- Feature 71: .100 (29 PLC)
- Feature 72: .100 (29 PLC)
- Feature 73: .100 (29 PLC)
- Feature 74: .100 (29 PLC)
- Feature 75: .100 (29 PLC)
- Feature 76: .100 (29 PLC)
- Feature 77: .100 (29 PLC)
- Feature 78: .100 (29 PLC)
- Feature 79: .100 (29 PLC)
- Feature 80: .100 (29 PLC)
- Feature 81: .100 (29 PLC)
- Feature 82: .100 (29 PLC)
- Feature 83: .100 (29 PLC)
- Feature 84: .100 (29 PLC)
- Feature 85: .100 (29 PLC)
- Feature 86: .100 (29 PLC)
- Feature 87: .100 (29 PLC)
- Feature 88: .100 (29 PLC)
- Feature 89: .100 (29 PLC)
- Feature 90: .100 (29 PLC)
- Feature 91: .100 (29 PLC)
- Feature 92: .100 (29 PLC)
- Feature 93: .100 (29 PLC)
- Feature 94: .100 (29 PLC)
- Feature 95: .100 (29 PLC)
- Feature 96: .100 (29 PLC)
- Feature 97: .100 (29 PLC)
- Feature 98: .100 (29 PLC)
- Feature 99: .100 (29 PLC)
- Feature 100: .100 (29 PLC)
- Feature 101: .100 (29 PLC)
- Feature 102: .100 (29 PLC)
- Feature 103: .100 (29 PLC)
- Feature 104: .100 (29 PLC)
- Feature 105: .100 (29 PLC)
- Feature 106: .100 (29 PLC)
- Feature 107: .100 (29 PLC)
- Feature 108: .100 (29 PLC)
- Feature 109: .100 (29 PLC)
- Feature 110: .100 (29 PLC)
- Feature 111: .100 (29 PLC)
- Feature 112: .100 (29 PLC)
- Feature 113: .100 (29 PLC)
- Feature 114: .100 (29 PLC)
- Feature 115: .100 (29 PLC)
- Feature 116: .100 (29 PLC)
- Feature 117: .100 (29 PLC)
- Feature 118: .100 (29 PLC)
- Feature 119: .100 (29 PLC)
- Feature 120: .100 (29 PLC)
- Feature 121: .100 (29 PLC)
- Feature 122: .100 (29 PLC)
- Feature 123: .100 (29 PLC)
- Feature 124: .100 (29 PLC)
- Feature 125: .100 (29 PLC)
- Feature 126: .100 (29 PLC)
- Feature 127: .100 (29 PLC)
- Feature 128: .100 (29 PLC)
- Feature 129: .100 (29 PLC)
- Feature 130: .100 (29 PLC)
- Feature 131: .100 (29 PLC)
- Feature 132: .100 (29 PLC)
- Feature 133: .100 (29 PLC)
- Feature 134: .100 (29 PLC)
- Feature 135: .100 (29 PLC)
- Feature 136: .100 (29 PLC)
- Feature 137: .100 (29 PLC)
- Feature 138: .100 (29 PLC)
- Feature 139: .100 (29 PLC)
- Feature 140: .100 (29 PLC)
- Feature 141: .100 (29 PLC)
- Feature 142: .100 (29 PLC)
- Feature 143: .100 (29 PLC)
- Feature 144: .100 (29 PLC)
- Feature 145: .100 (29 PLC)
- Feature 146: .100 (29 PLC)
- Feature 147: .100 (29 PLC)
- Feature 148: .100 (29 PLC)
- Feature 149: .100 (29 PLC)
- Feature 150: .100 (29 PLC)
- Feature 151: .100 (29 PLC)
- Feature 152: .100 (29 PLC)
- Feature 153: .100 (29 PLC)
- Feature 154: .100 (29 PLC)
- Feature 155: .100 (29 PLC)
- Feature 156: .100 (29 PLC)
- Feature 157: .100 (29 PLC)
- Feature 158: .100 (29 PLC)
- Feature 159: .100 (29 PLC)
- Feature 160: .100 (29 PLC)
- Feature 161: .100 (29 PLC)
- Feature 162: .100 (29 PLC)
- Feature 163: .100 (29 PLC)
- Feature 164: .100 (29 PLC)
- Feature 165: .100 (29 PLC)
- Feature 166: .100 (29 PLC)
- Feature 167: .100 (29 PLC)
- Feature 168: .100 (29 PLC)
- Feature 169: .100 (29 PLC)
- Feature 170: .100 (29 PLC)
- Feature 171: .100 (29 PLC)
- Feature 172: .100 (29 PLC)
- Feature 173: .100 (29 PLC)
- Feature 174: .100 (29 PLC)
- Feature 175: .100 (29 PLC)
- Feature 176: .100 (29 PLC)
- Feature 177: .100 (29 PLC)
- Feature 178: .100 (29 PLC)
- Feature 179: .100 (29 PLC)
- Feature 180: .100 (29 PLC)
- Feature 181: .100 (29 PLC)
- Feature 182: .100 (29 PLC)
- Feature 183: .100 (29 PLC)
- Feature 184: .100 (29 PLC)
- Feature 185: .100 (29 PLC)
- Feature 186: .100 (29 PLC)
- Feature 187: .100 (29 PLC)
- Feature 188: .100 (29 PLC)
- Feature 189: .100 (29 PLC)
- Feature 190: .100 (29 PLC)
- Feature 191: .100 (29 PLC)
- Feature 192: .100 (29 PLC)
- Feature 193: .100 (29 PLC)
- Feature 194: .100 (29 PLC)
- Feature 195: .100 (29 PLC)
- Feature 196: .100 (29 PLC)
- Feature 197: .100 (29 PLC)
- Feature 198: .100 (29 PLC)
- Feature 199: .100 (29 PLC)
- Feature 200: .100 (29 PLC)
- Feature 201: .100 (29 PLC)
- Feature 202: .100 (29 PLC)
- Feature 203: .100 (29 PLC)
- Feature 204: .100 (29 PLC)
- Feature 205: .

[illegible]4805 (3/11)



PART NUMBER	ROWS	POWER										
		P11	P10	P9	P8	P7	P6	P5	P3	P2	P1	
4-6450540-2	D C B A	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	
11HDP												

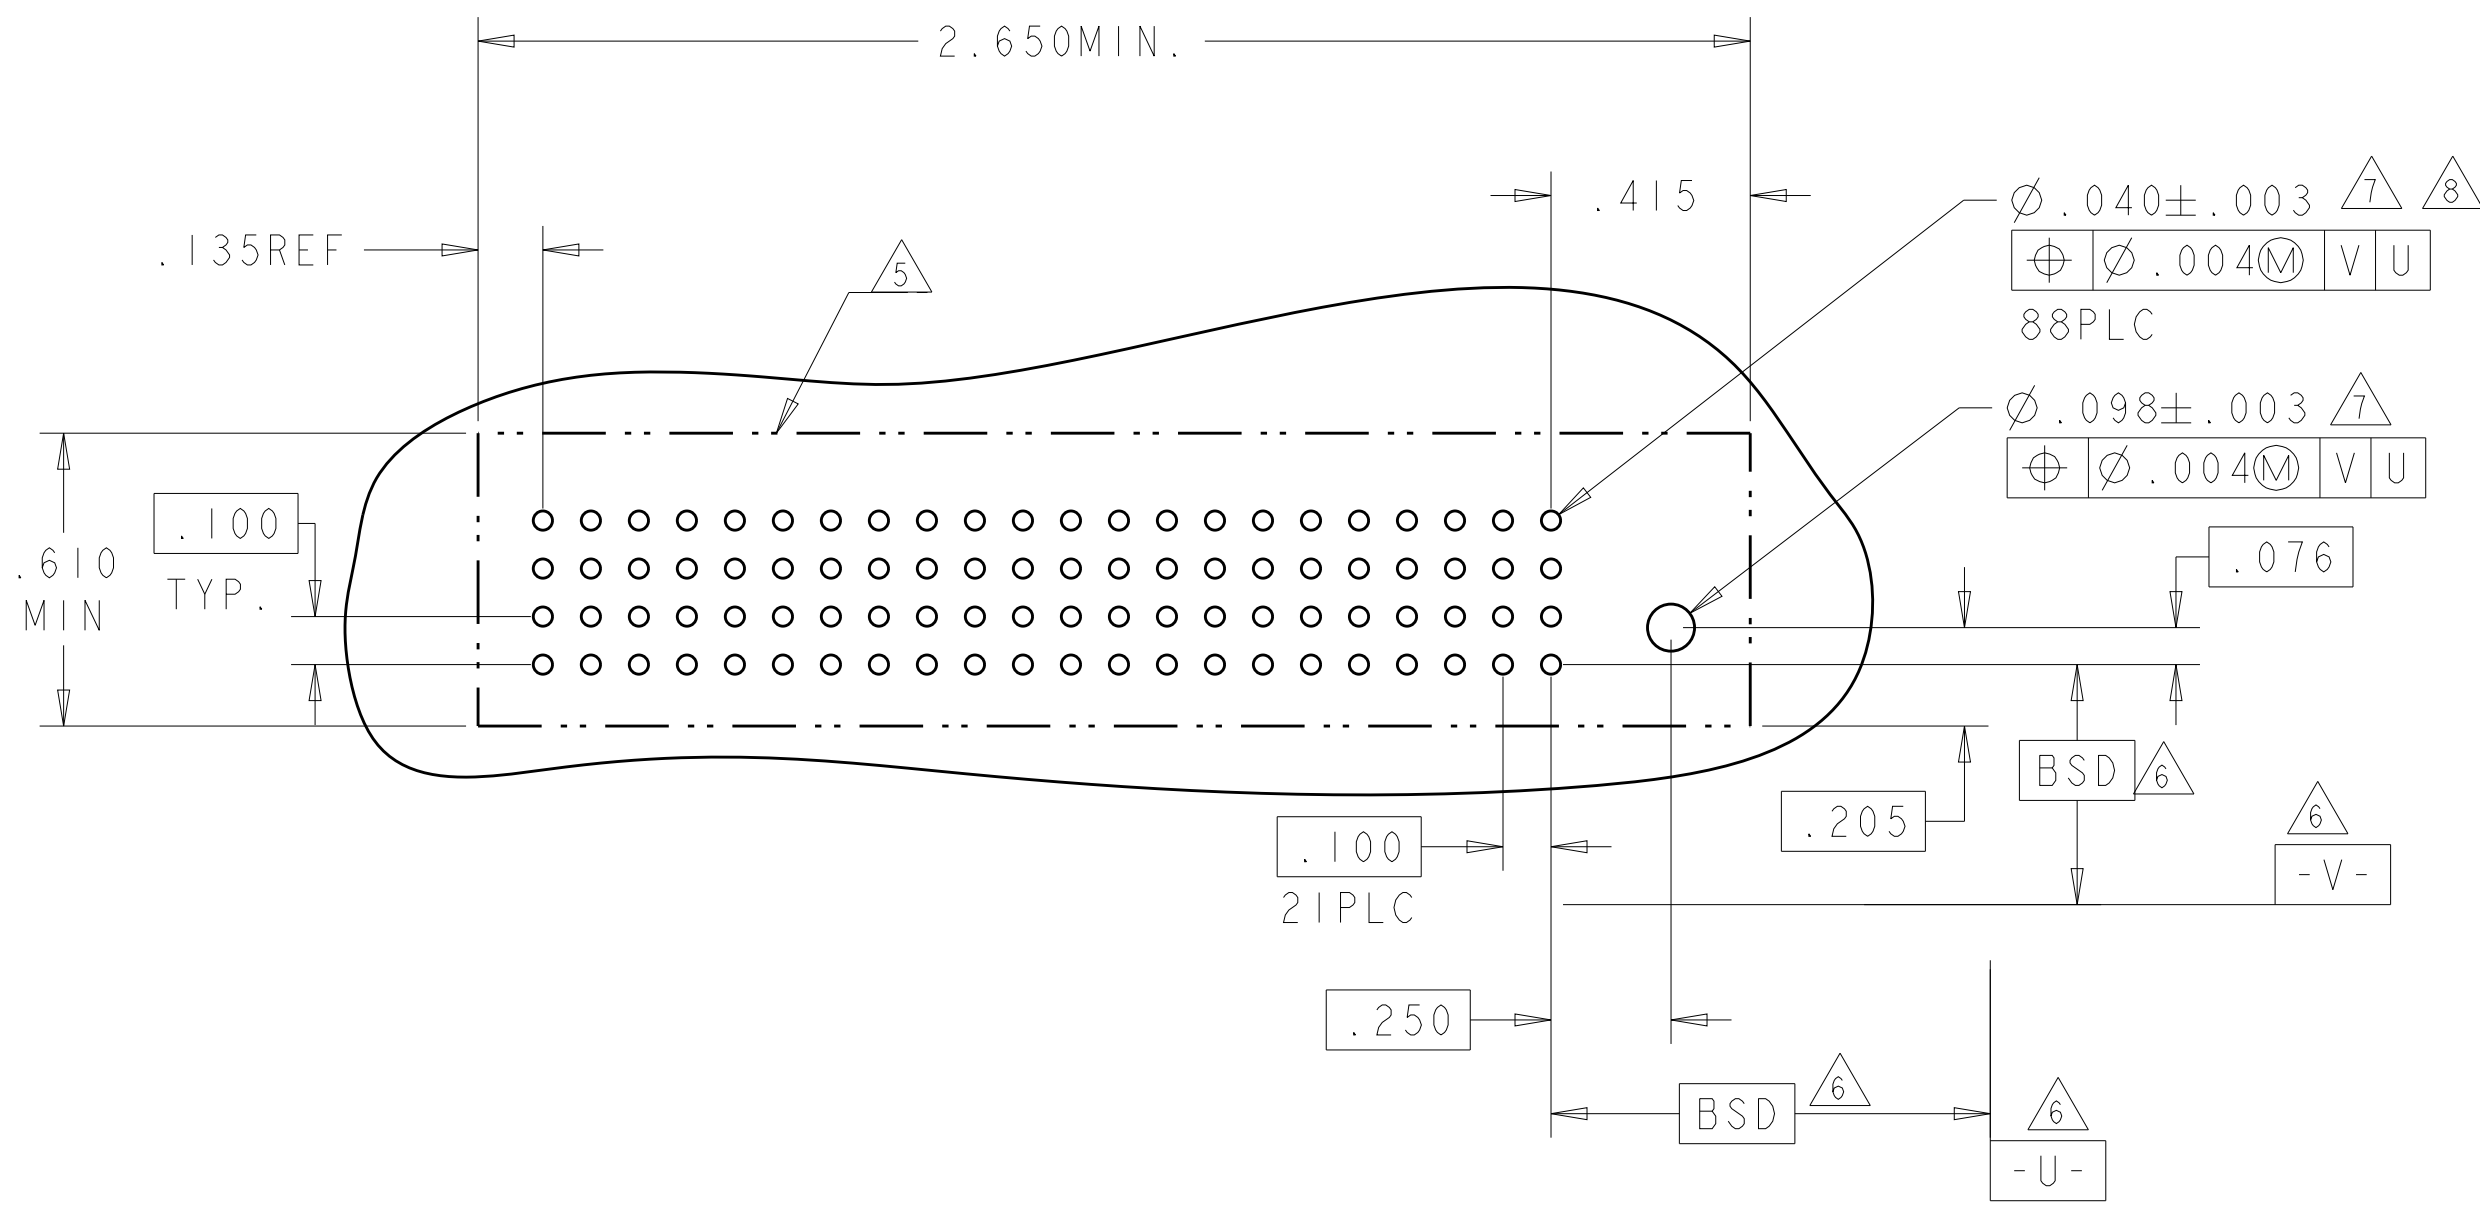4805 (3/11)

LOC		DIST		REVISONS			
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-



PART NUMBER	ROWS	POWER						SIGNAL								POWER											
		P13	P12	P11	P10	P9	P8	P7	9	8	7	6	5	4	3	2	1	P6	P5	P4	P3		P2	P1			
4-6450540-4	D C B A	GS	GS	GS	GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS	GS	GS	HD			
									AP	AP	AP	AP	AP	AP	AP	AP	AP								AP	AP	
									AP	AP	AP	AP	AP	AP	AP	AP	AP								AP	AP	AP
									AP	AP	AP	AP	AP	AP	AP	AP	AP								AP	AP	AP
6HDP + 36S + 7HDP																											


PART NUMBER	ROWS	POWER											
		P12	P11	P10	P9	P8	P7	P6	P5	P3	P2		P1
4-6450540-5	D C B A	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	HD
12HDP													

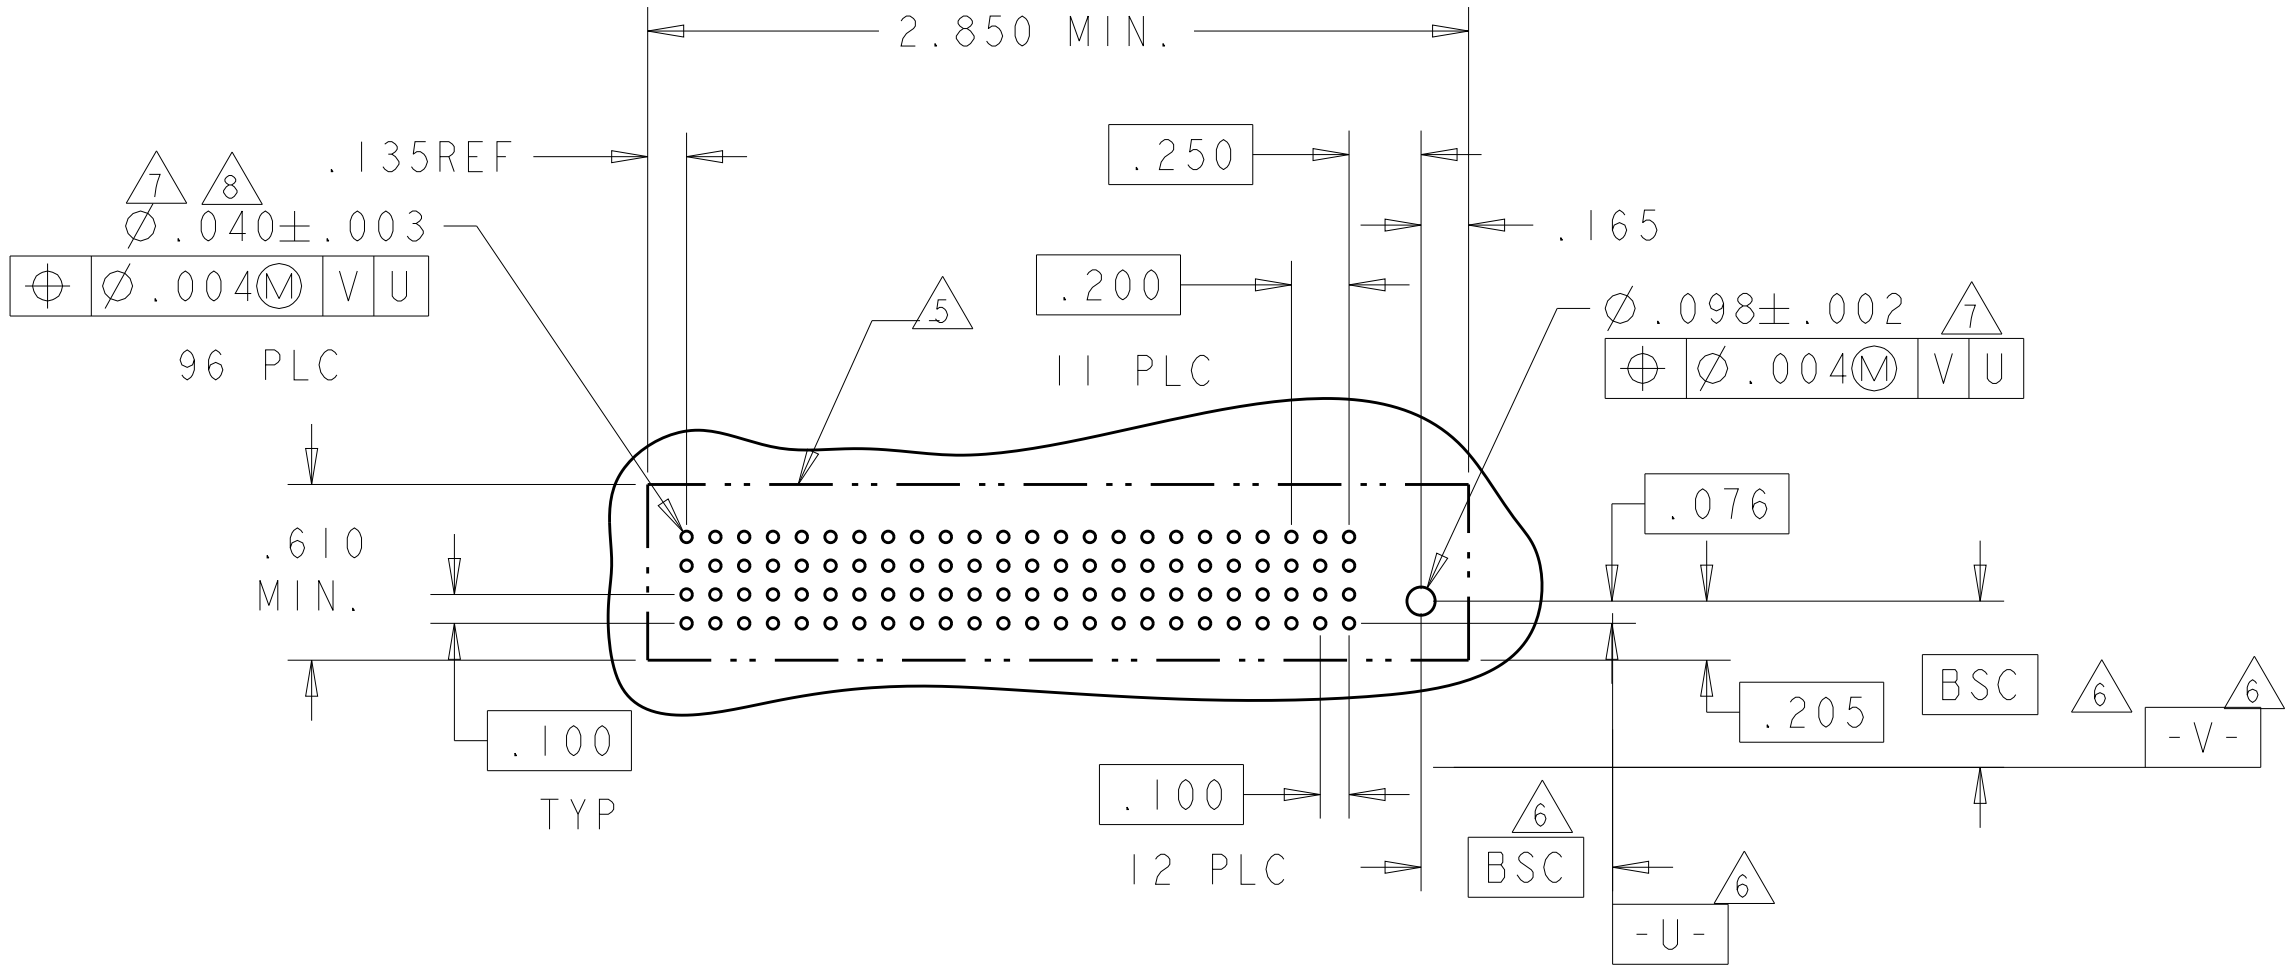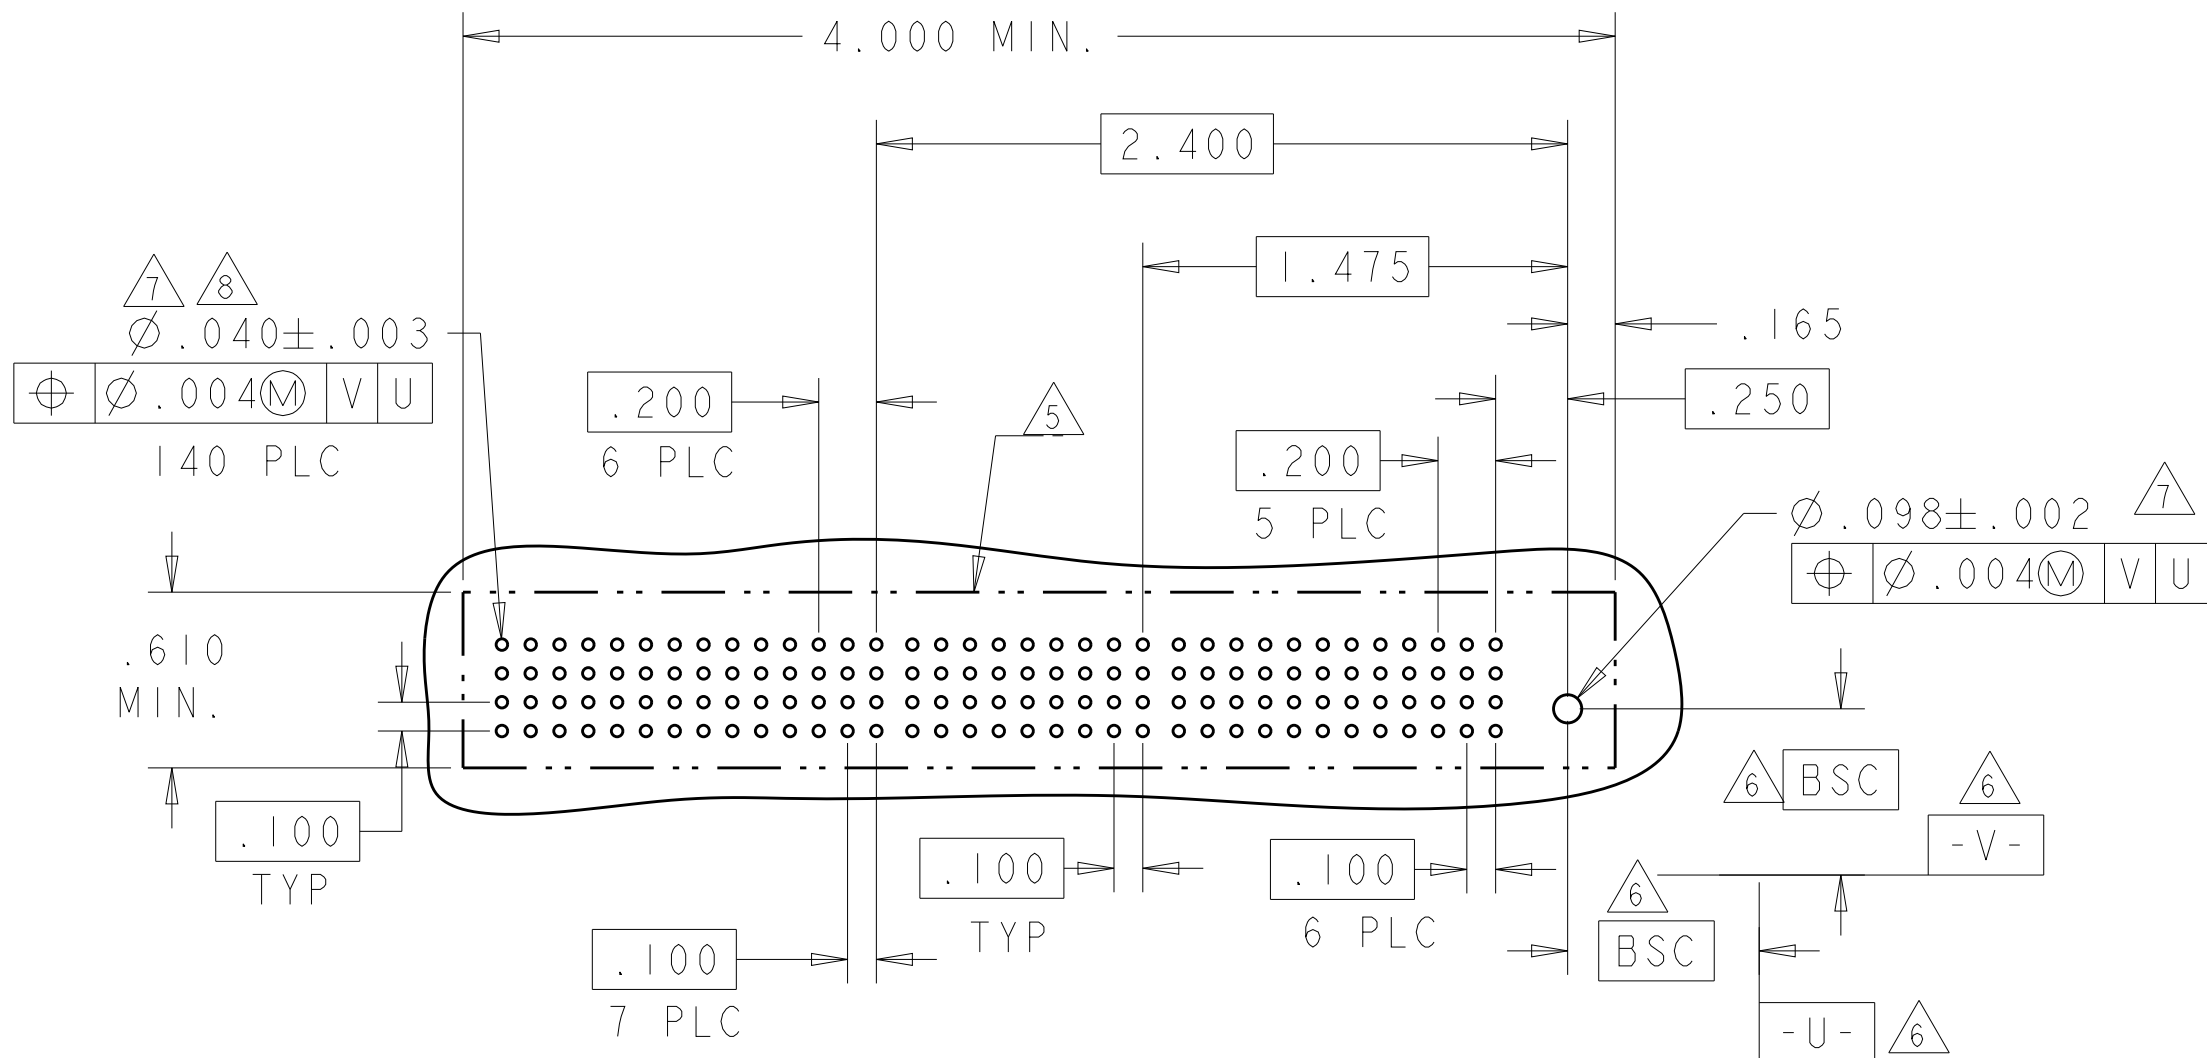



PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
4-6450540-7	D C B A	HD	HP	HP	HP	BP	BP	HP	HP	HP	HD
						BP	BP				
						BP	BP				
						BP	BP				
3P + 8S + 3P											

PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P2	2	1	P1			
4-6450540-6	D C B A	HD	GS	AP	AP	GS	HD		
				AP	AP				
				AP	AP				
				AP	AP				
1P + 8S + 1P									


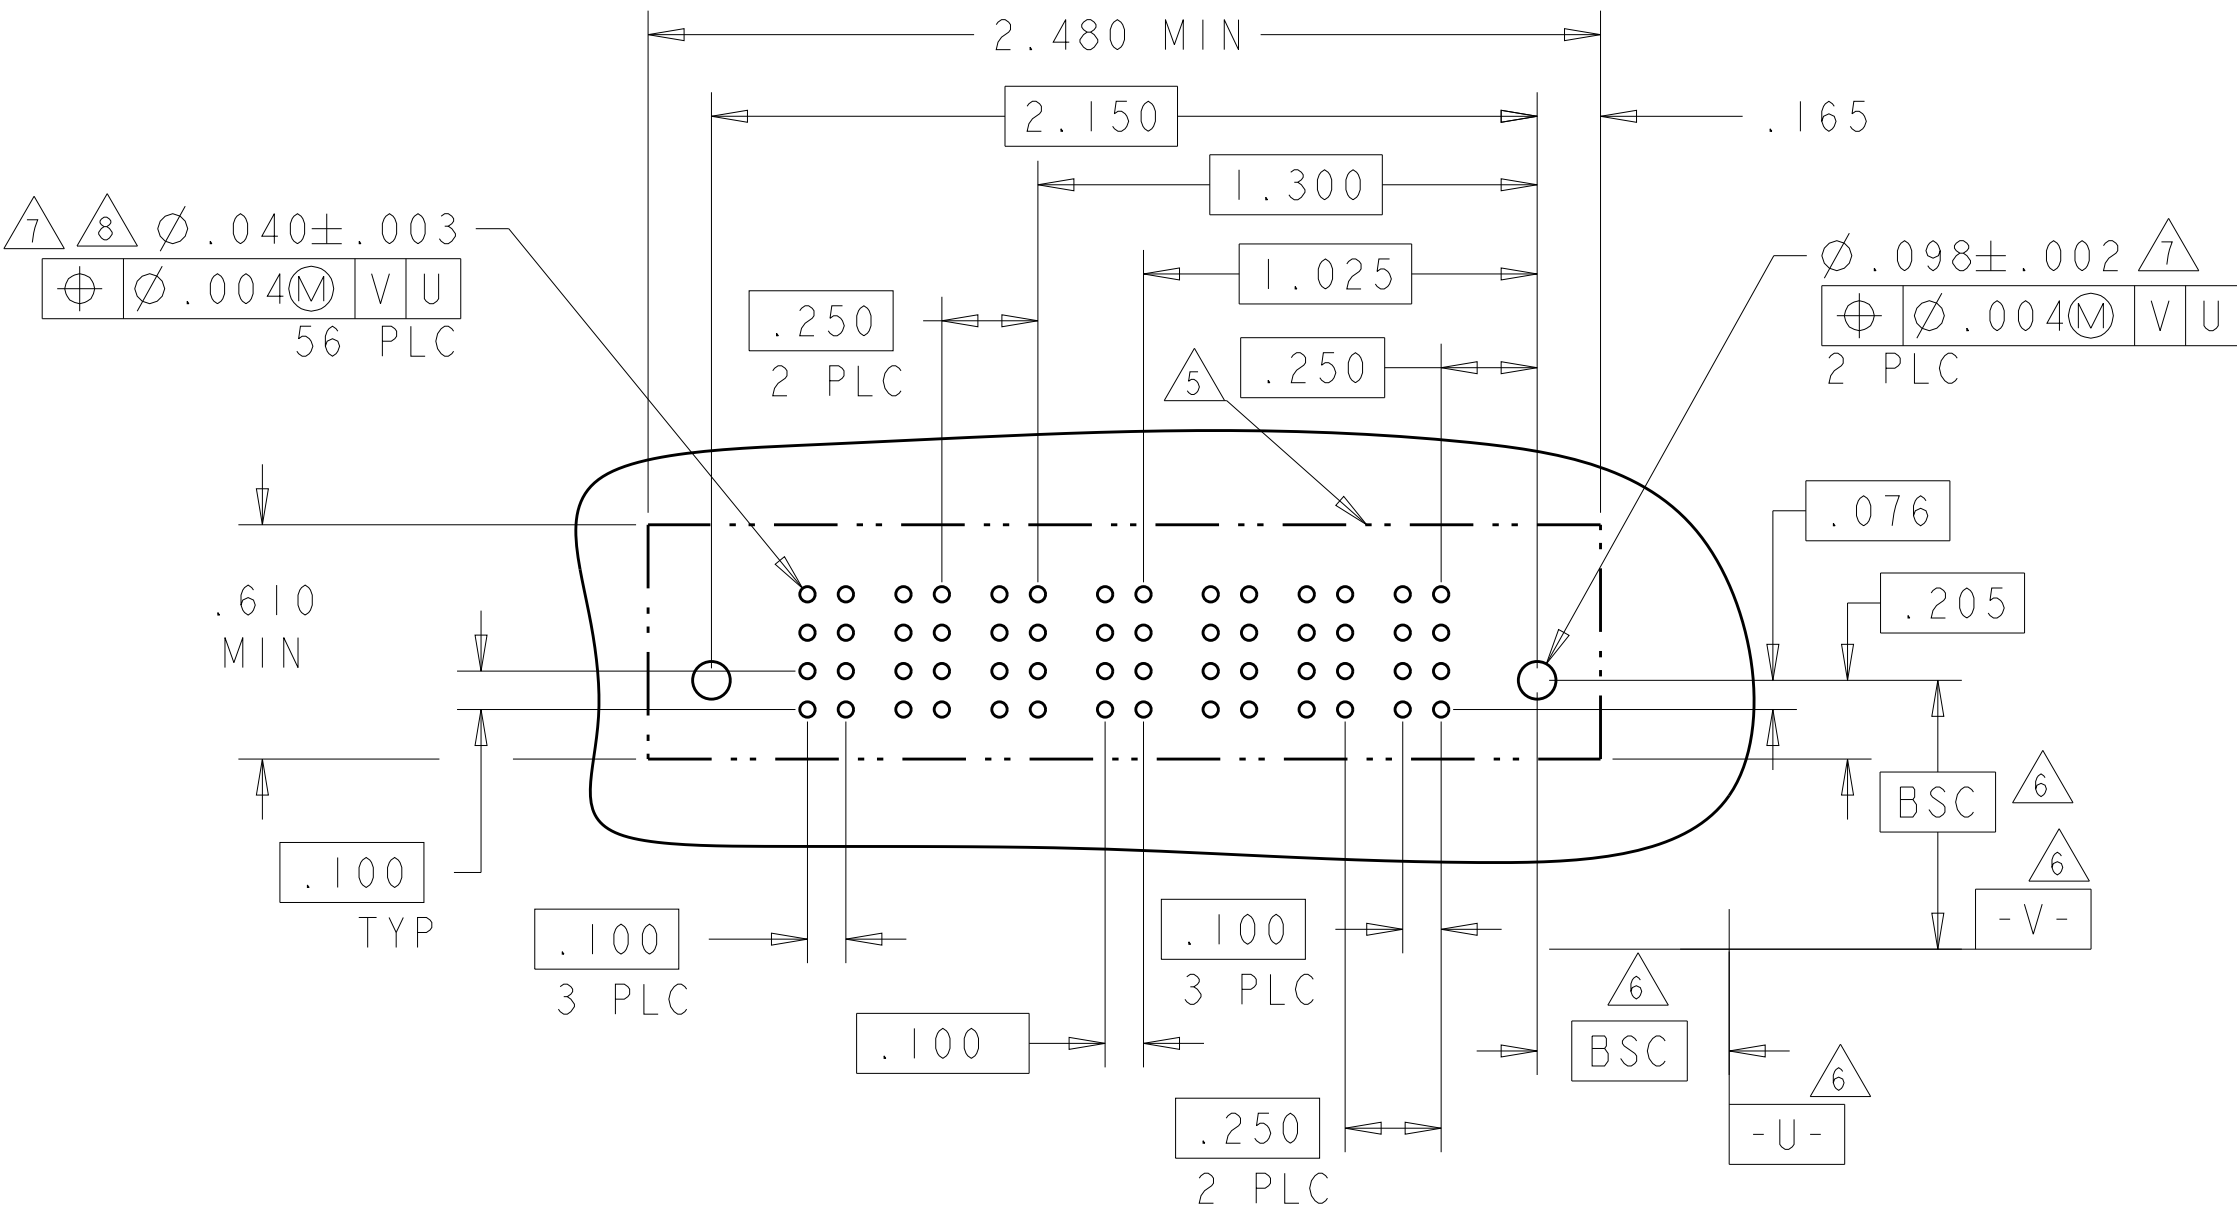
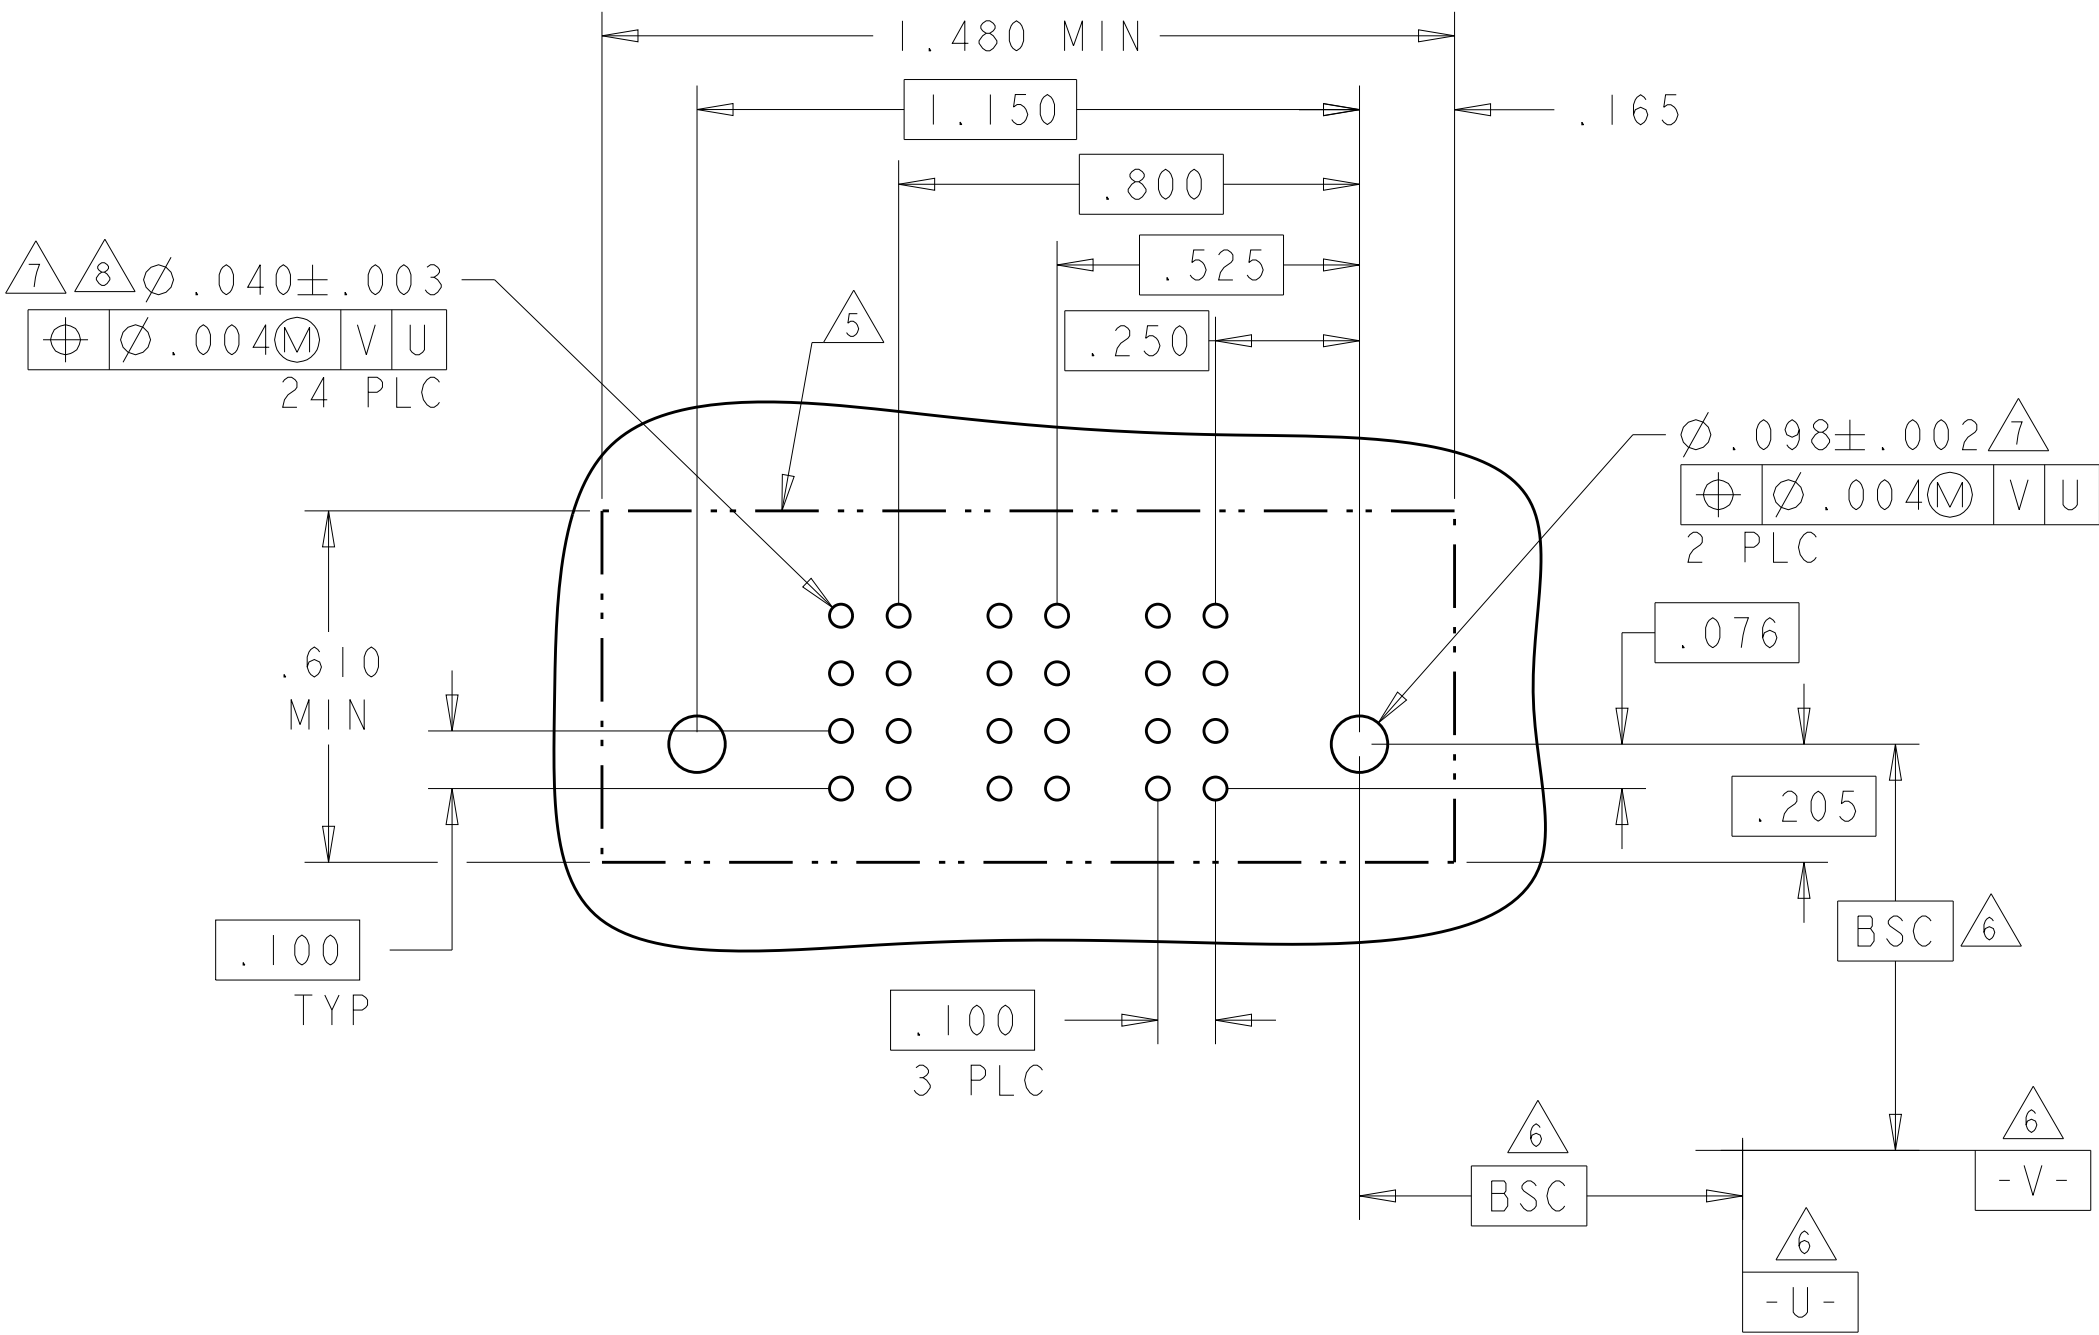


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	29APR05	 TE Connectivity	
		CHK M. PERCHERKE	29APR05		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC		PRODUCT SPEC	
		1 PLC		108-1973	
		2 PLC		APPLICATION SPEC	
		3 PLC		114-13038	
MATERIAL		FINISH		WEIGHT	
				CUSTOMER DRAWING	
				SCALE 2:1	
				SHEET 11 OF 19	
				REV K9	

LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	DWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
4-6450540-8	D C B A		GS	AP	AP	AP	AP	GS	AP	AP	
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
IP + 16S + 1P											

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
5-6450540-1	D C B A				AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
2P + 16S + 2P											

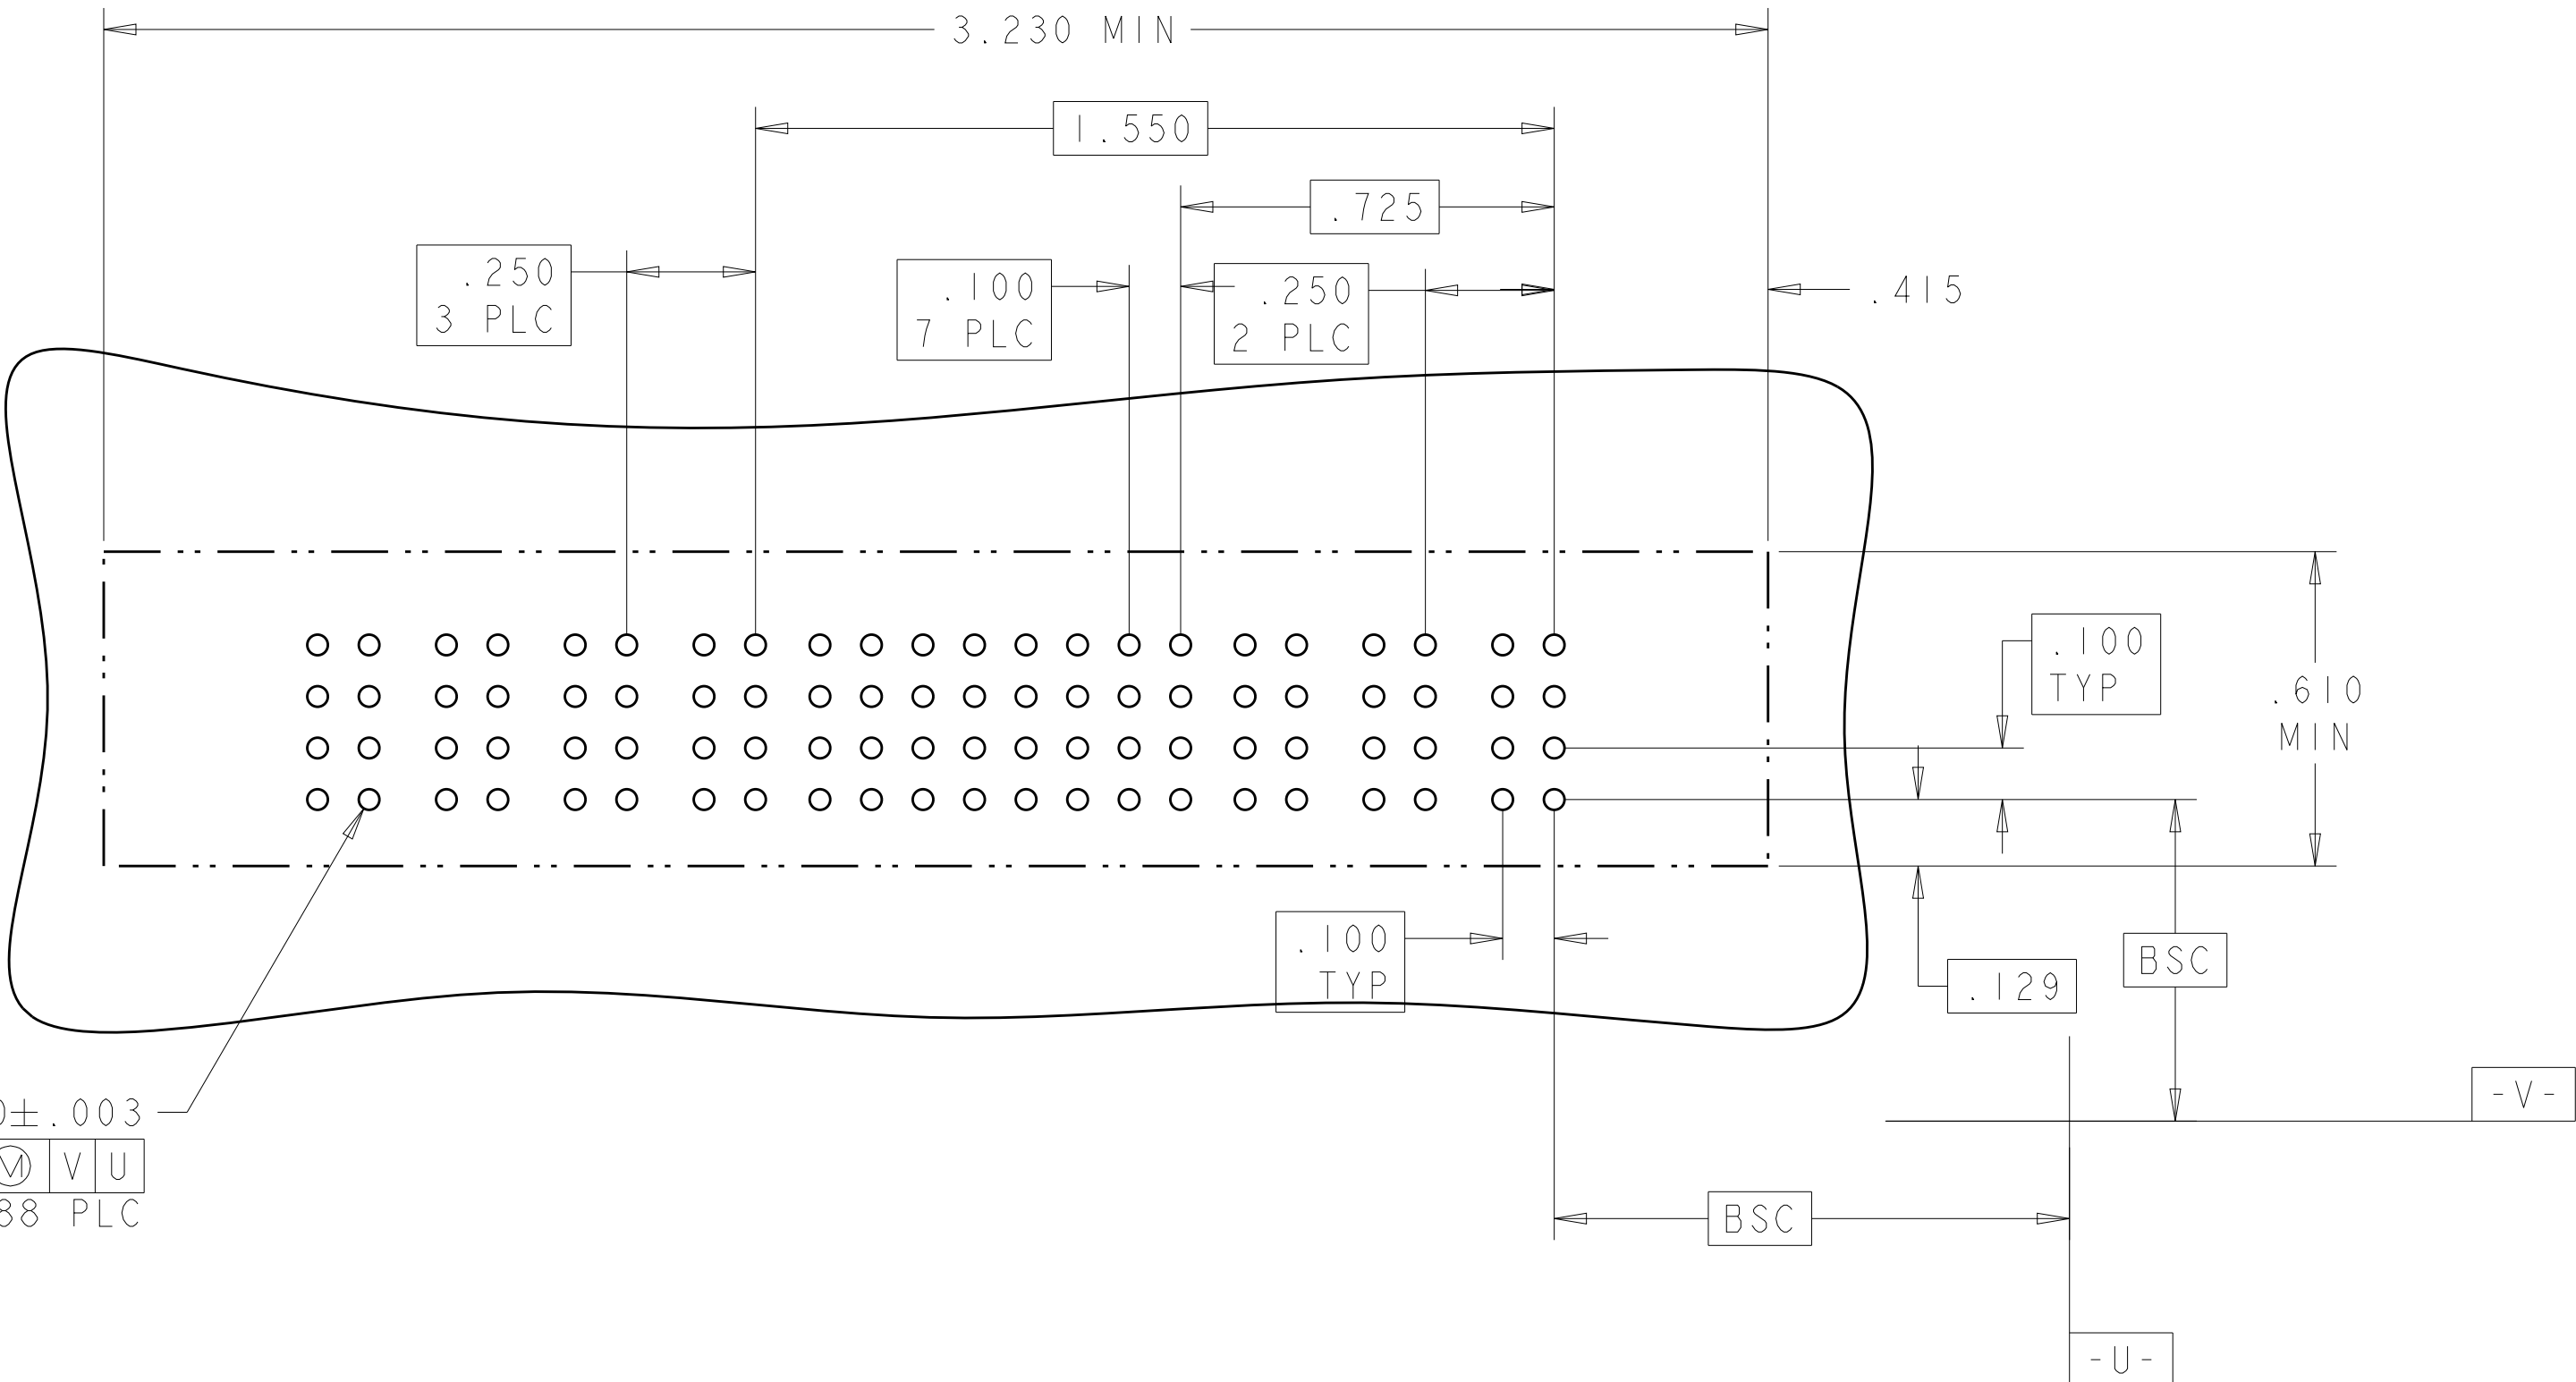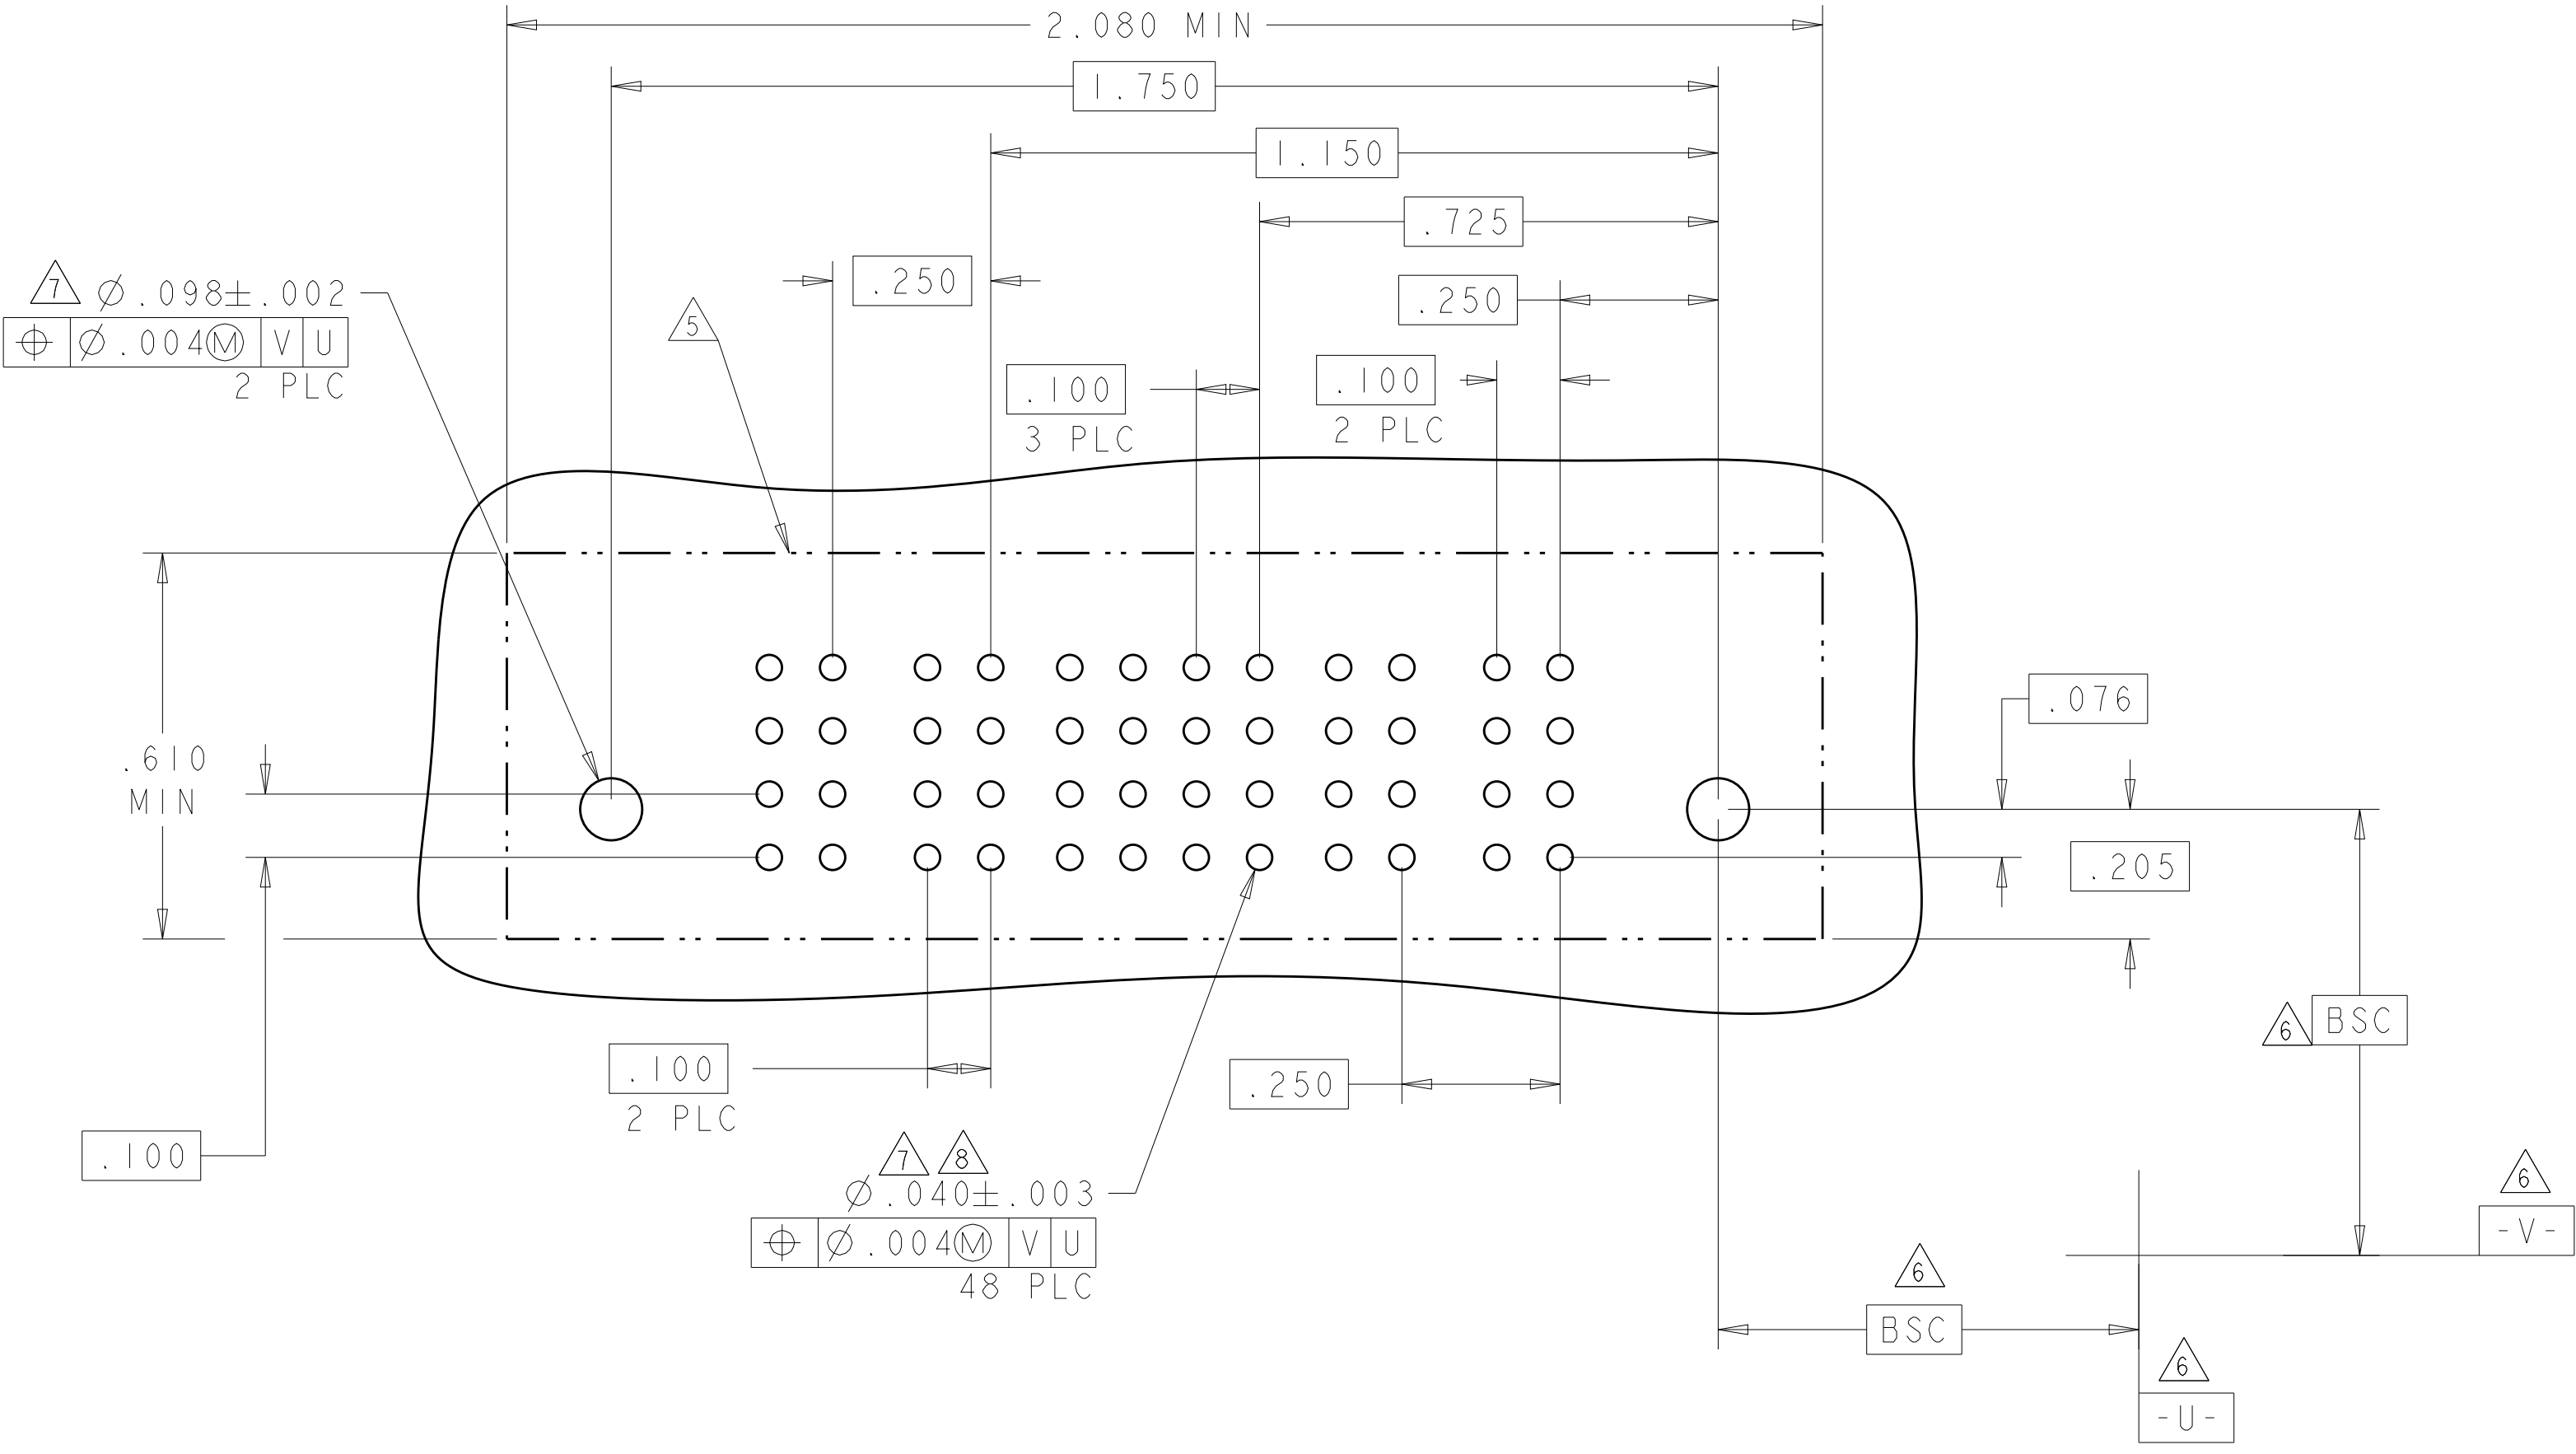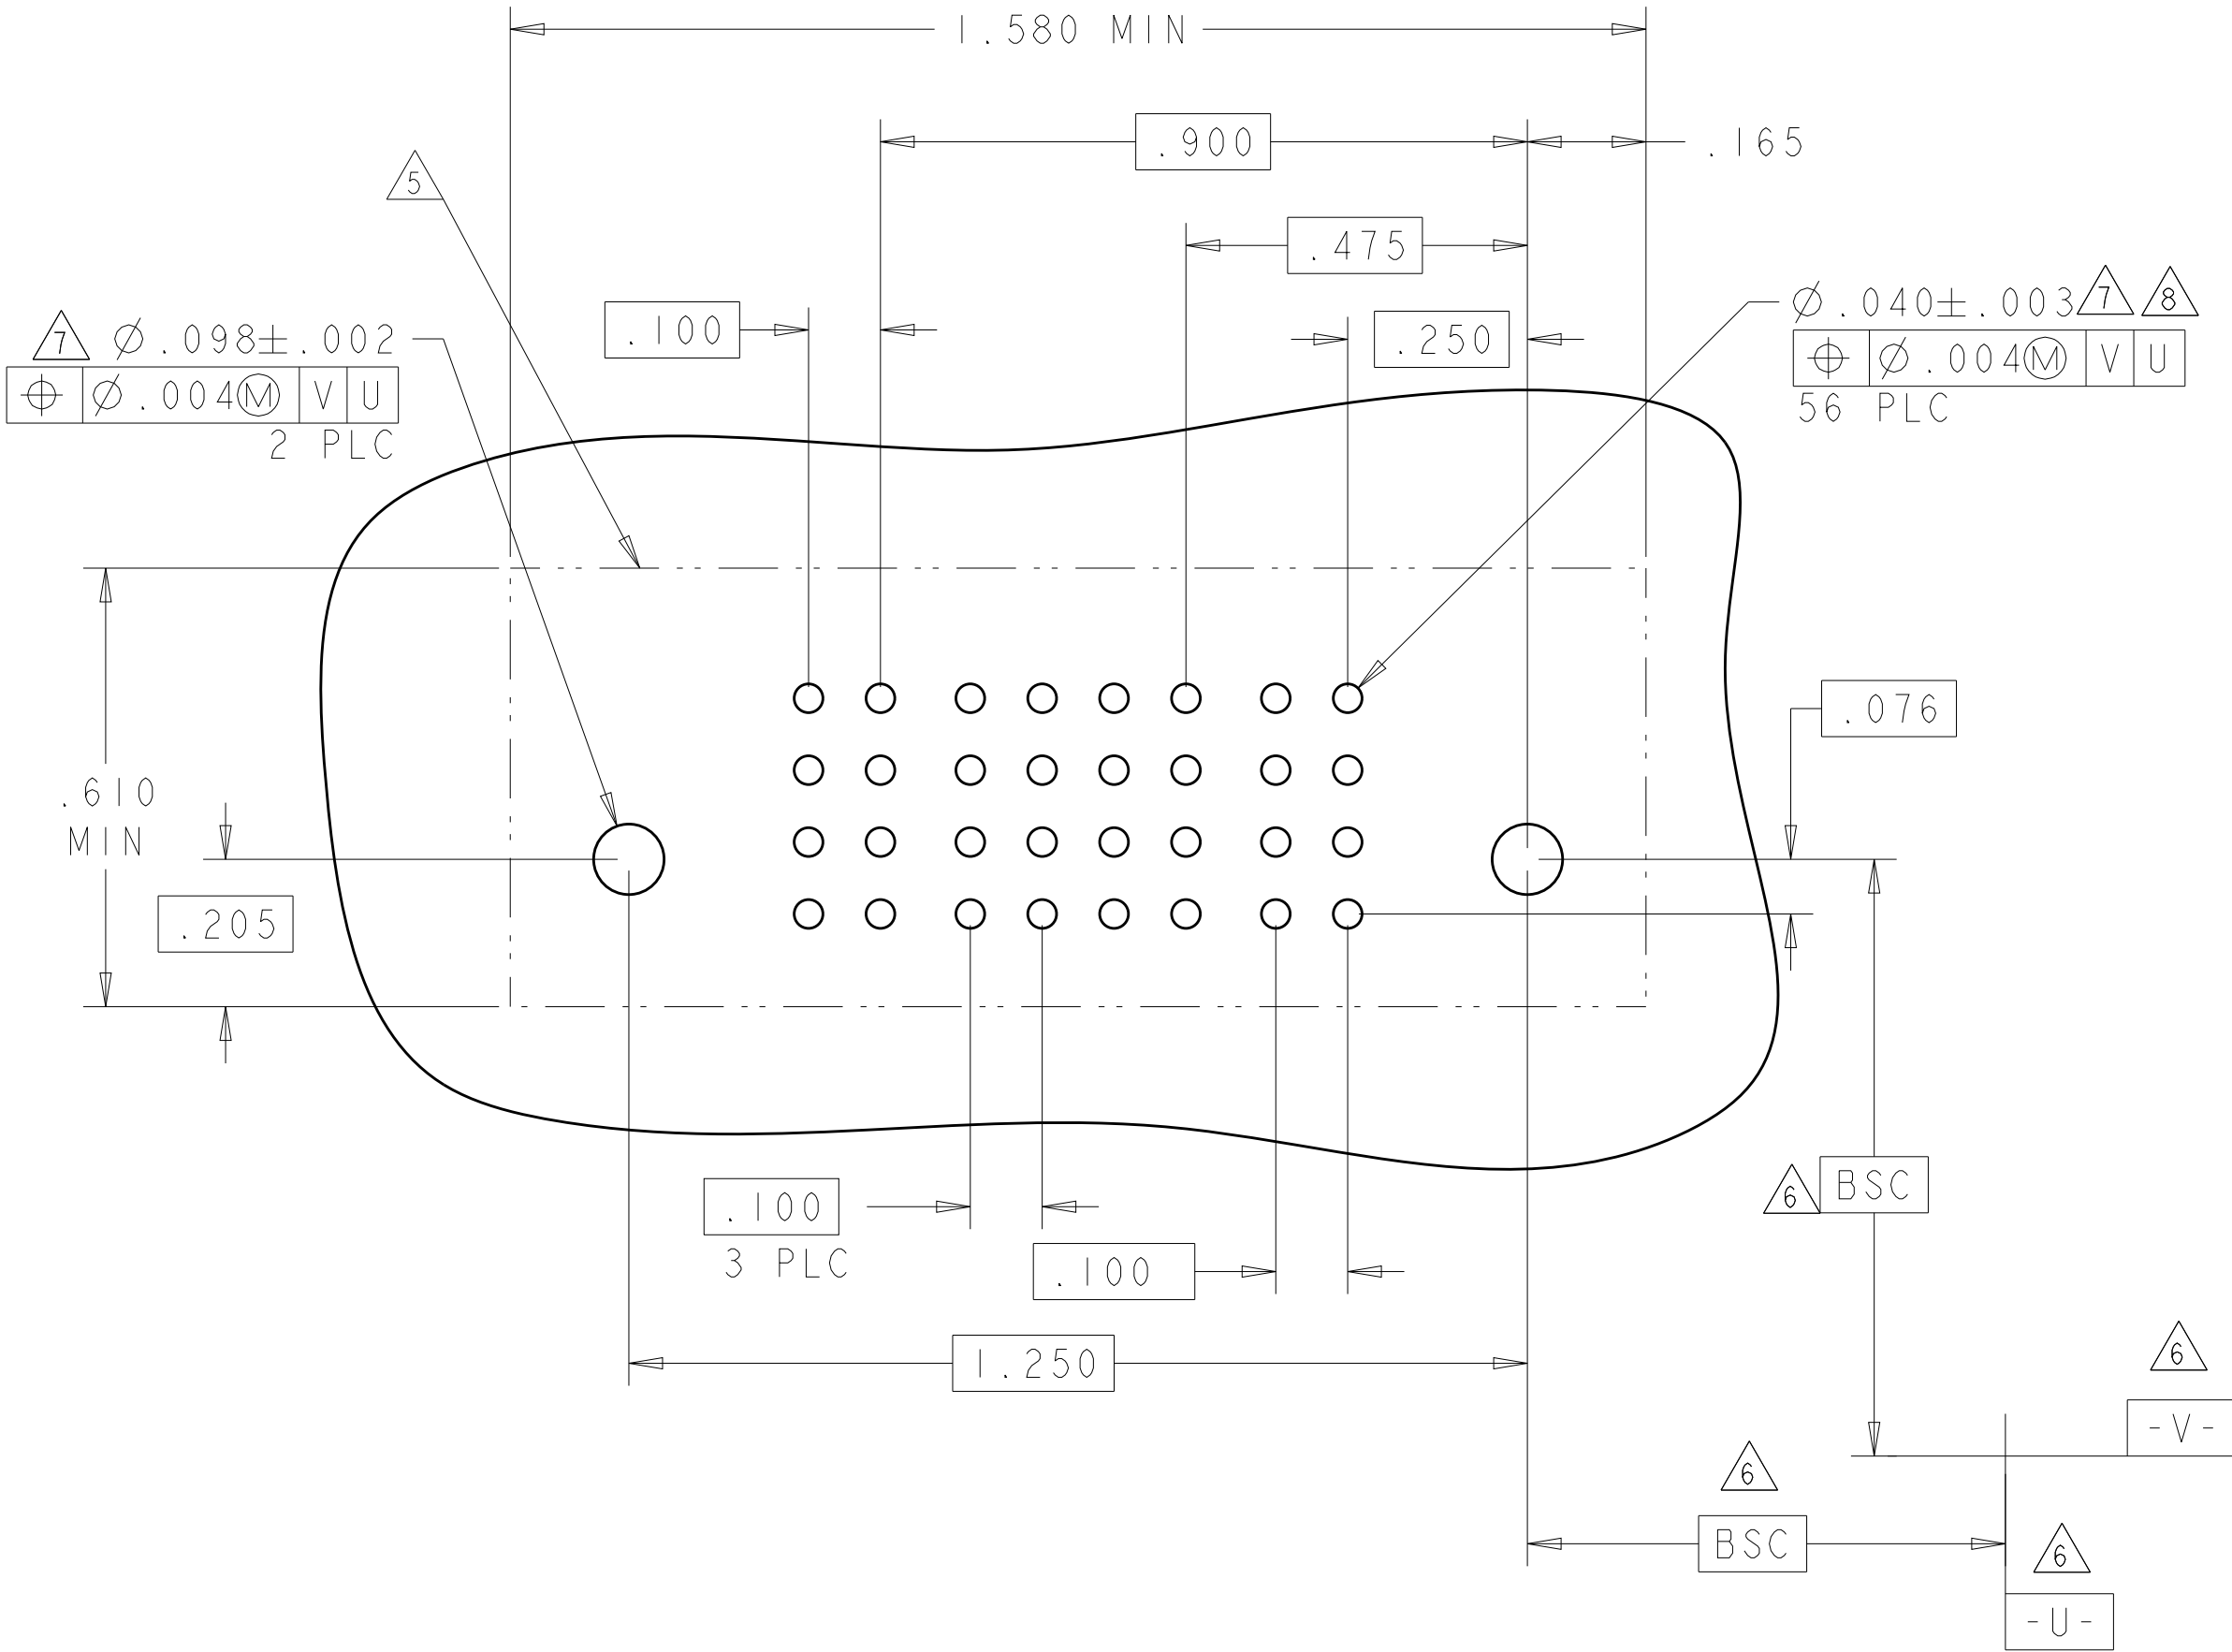


PART NUMBER	ROWS		POWER				SIGNAL								POWER			
			P7	P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
1-6450540-1	D C B A						P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
3P + 32S + 4P																		


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05	 TE Connectivity	
DIMENSIONS: INCHES		CHK M. PERCHERKE 29APR05		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. PERCHERKE	NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
			PRODUCT SPEC	
			108-1973	
			APPLICATION SPEC	
			114-13038	
MATERIAL	FINISH	0 PLC #:		SIZE CAGE CODE DRAWING NO
		2 PLC # 01		
		3 PLC # 005		
		4 PLC # 0020		
		ANGLES	#°	
			WEIGHT	A100779C6450540
		CUSTOMER DRAWING		SCALE 2:1
				SHEET 12 OF 19
				REV K9

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER										SIGNAL						POWER																																																						
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1																																													
5-6450540-0	D C B A		GS GS GS GS GS GS GS GS GS GS GS	AP AP AP AP AP AP AP AP AP AP AP	GS GS GS GS GS GS GS GS GS GS GS	AP AP AP AP AP AP AP AP AP AP AP	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS GS GS GS	GS GS GS GS GS GS GS GS

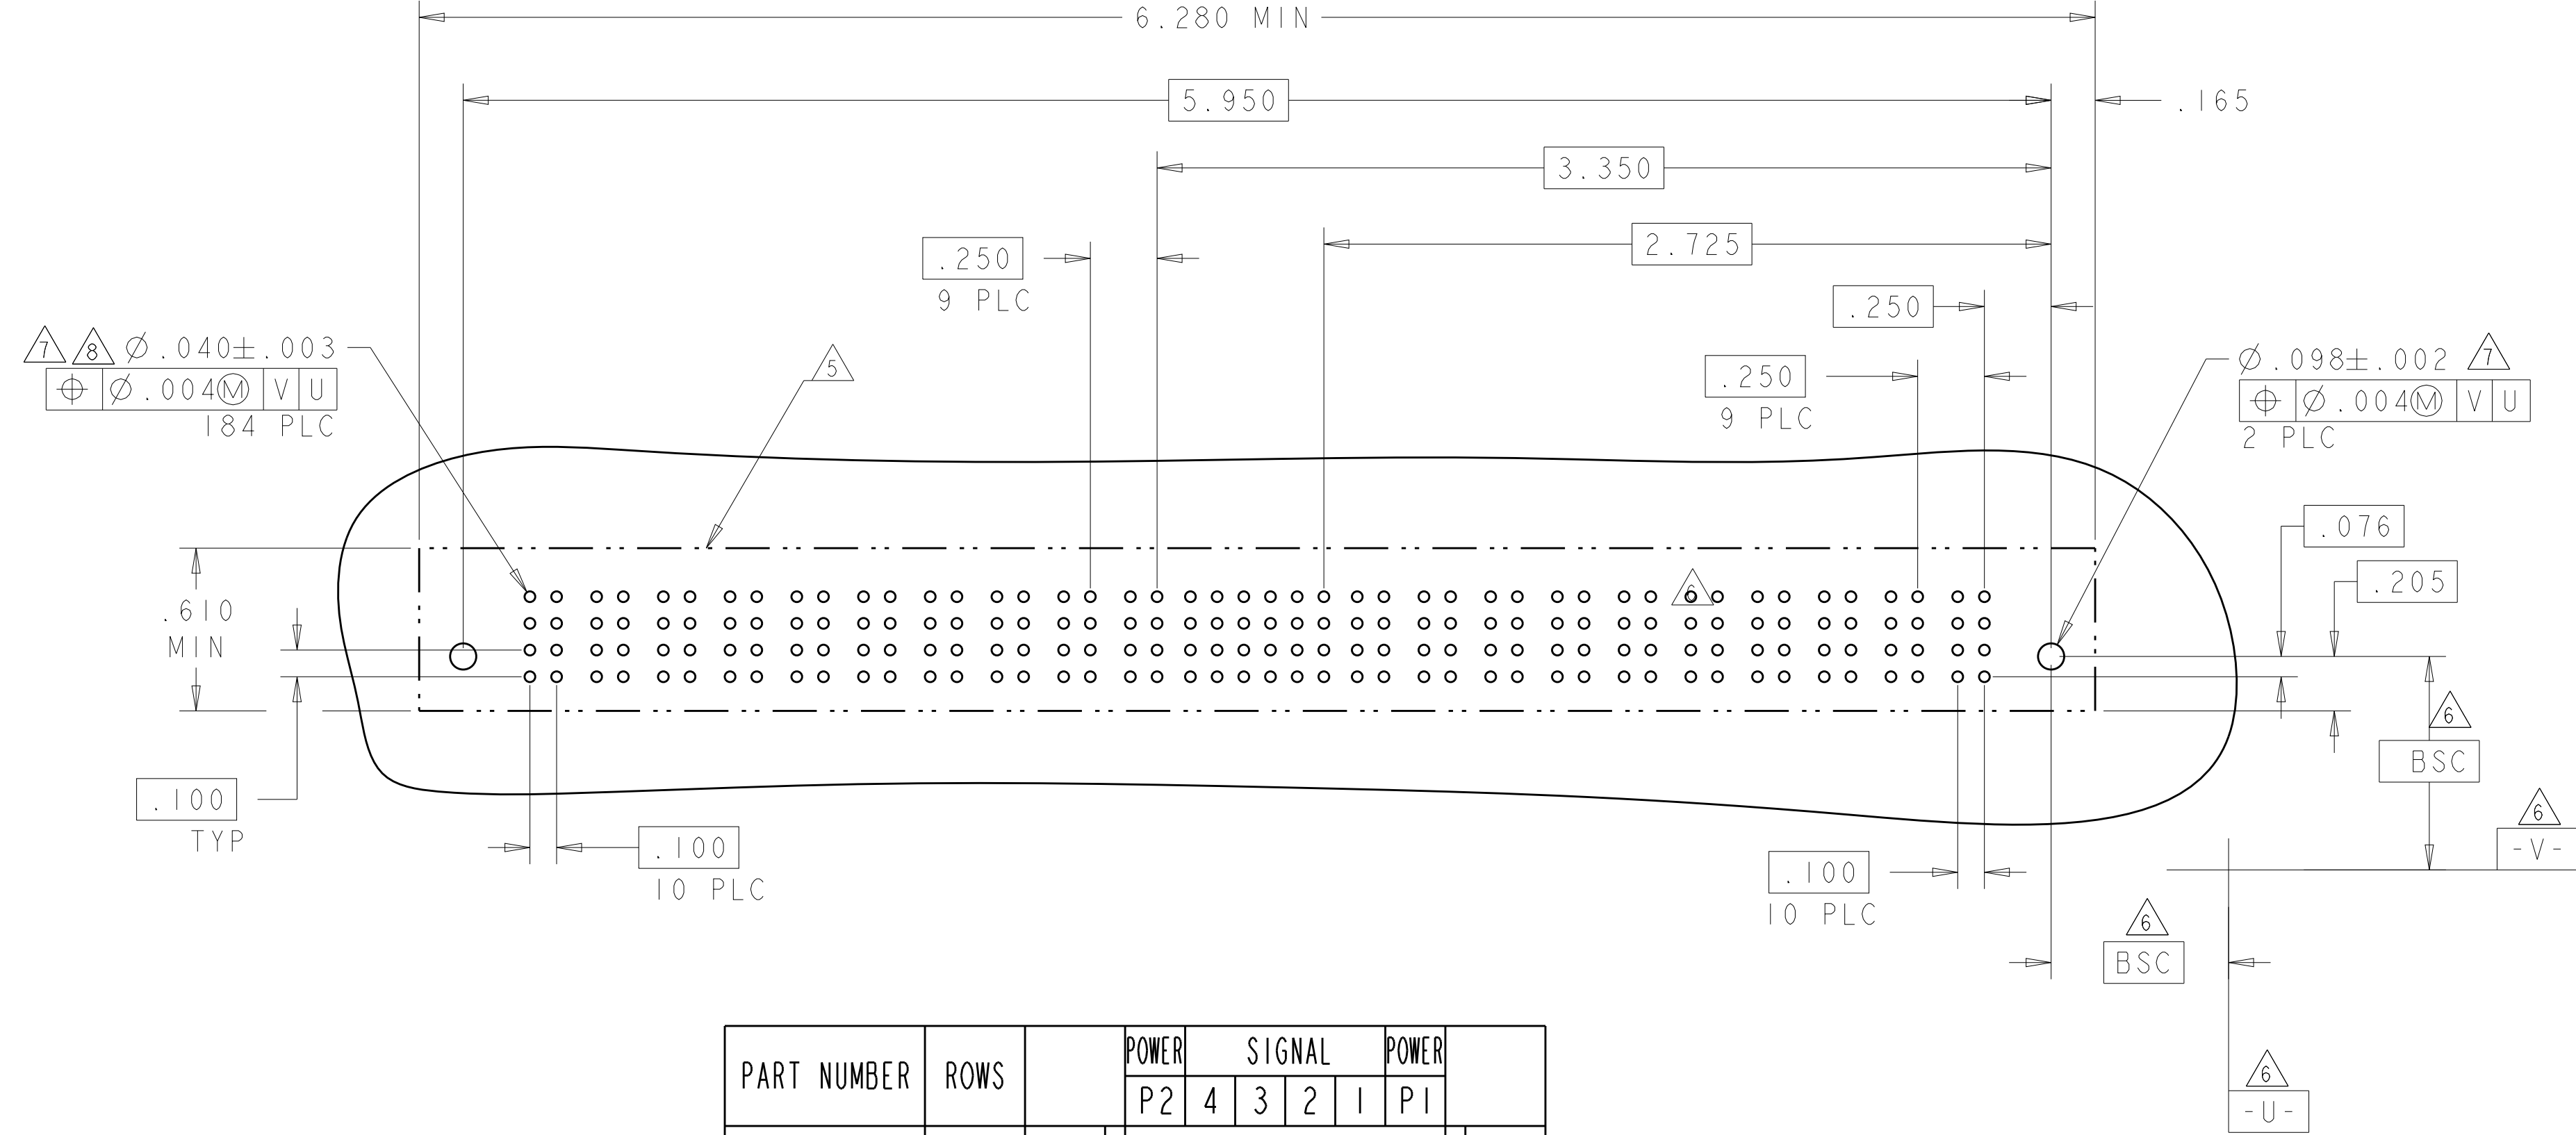

PART NUMBER	ROWS		POWER		SIGNAL				POWER	
			P2	4	3	2	1	P1		
5-6450540-2	D C B A			AP	AP	AP	AP			
				AP	AP	AP	AP			
				AP	AP	AP	AP			
				AP	AP	AP	AP			
				AP	AP	AP	AP			
1P + 16S + 1P										


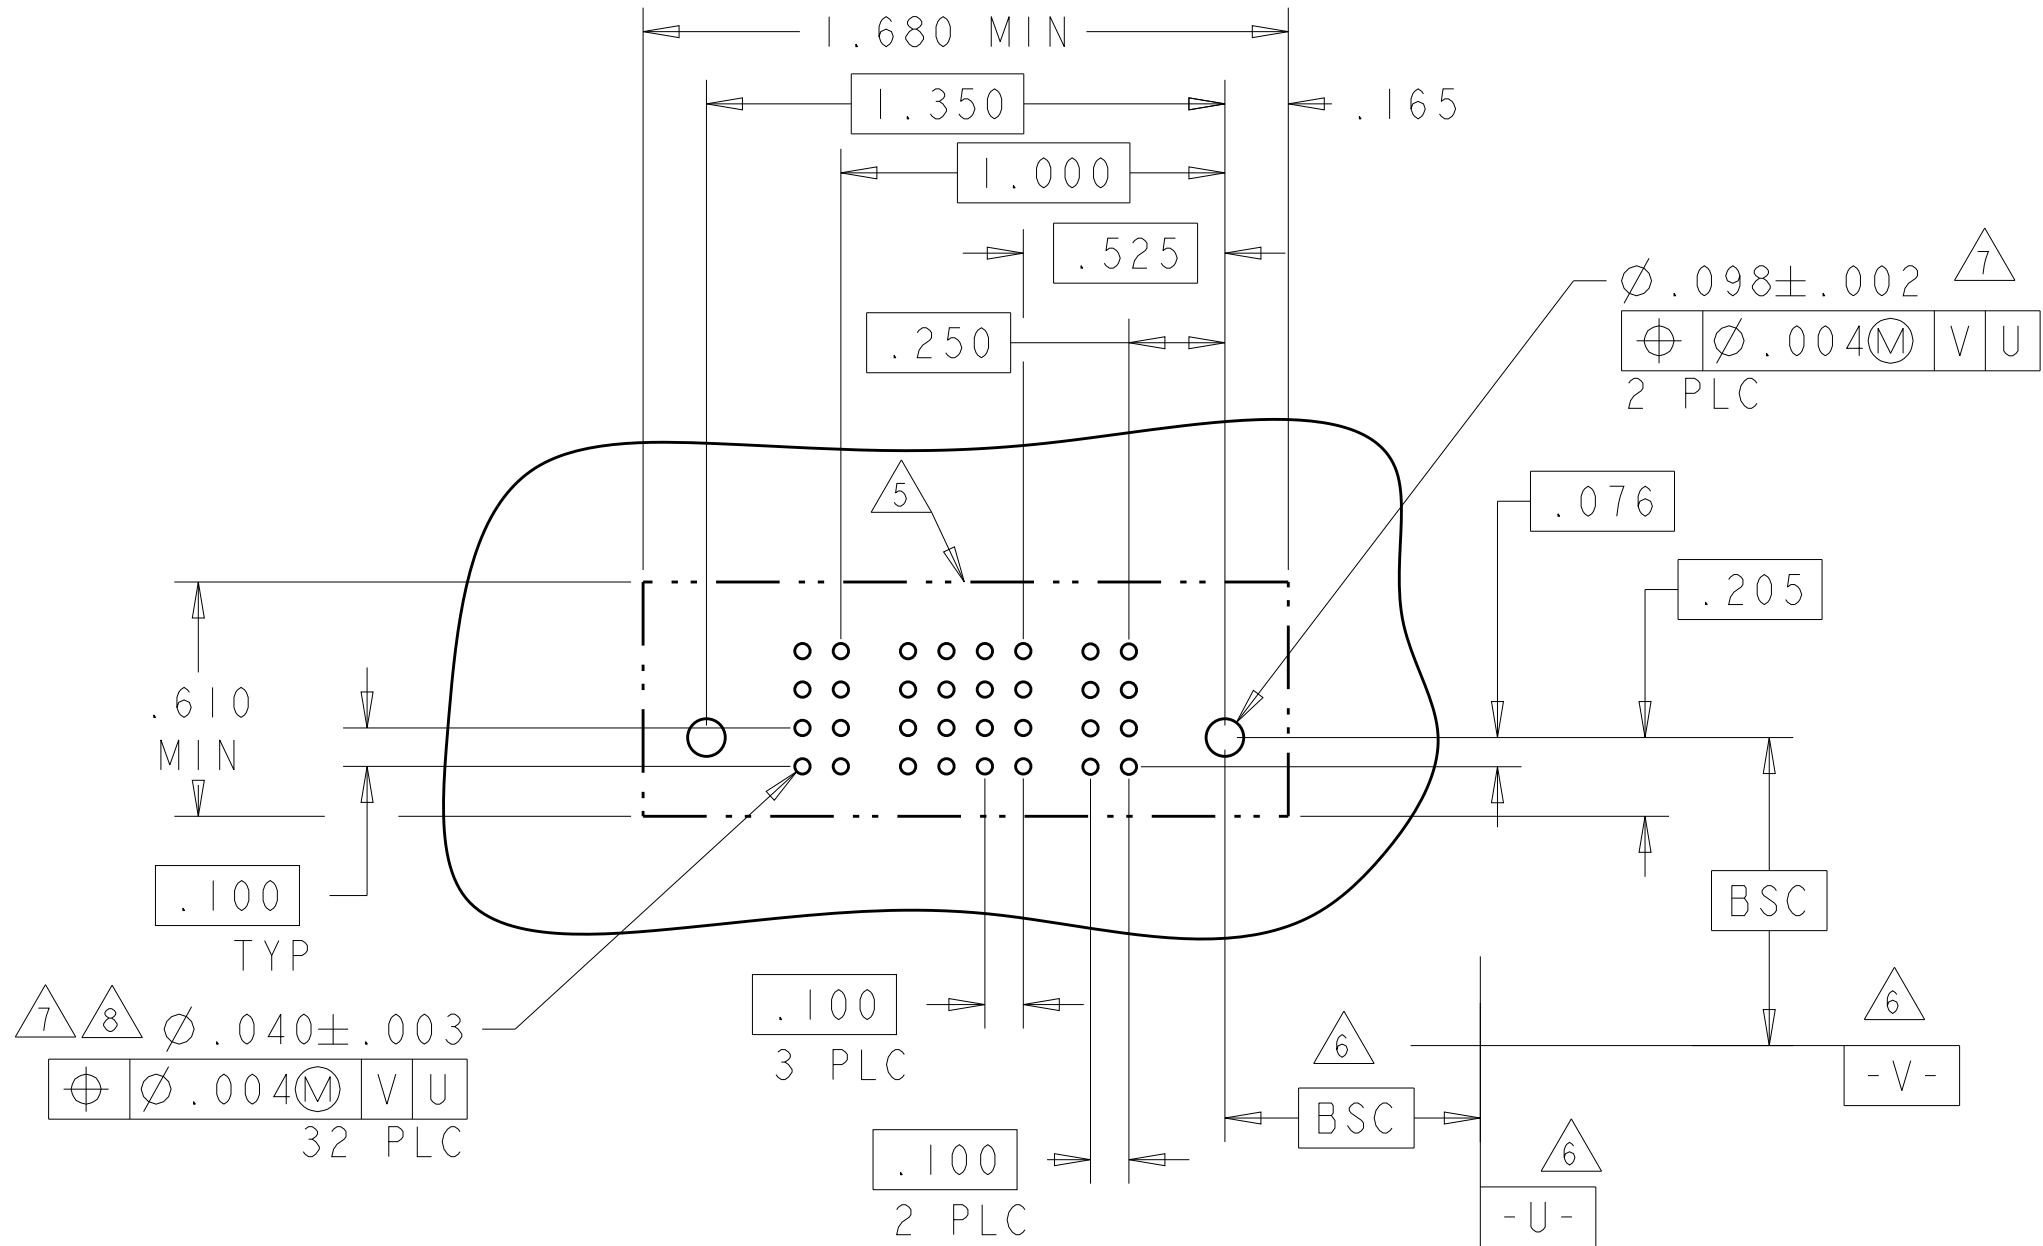


PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
5-6450540-3	D C B A		GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS	
							AP	AP	AP	AP	AP	AP					
							AP	AP	AP	AP	AP	AP					
							AP	AP	AP	AP	AP	AP					
4P + 24S + 4P																	

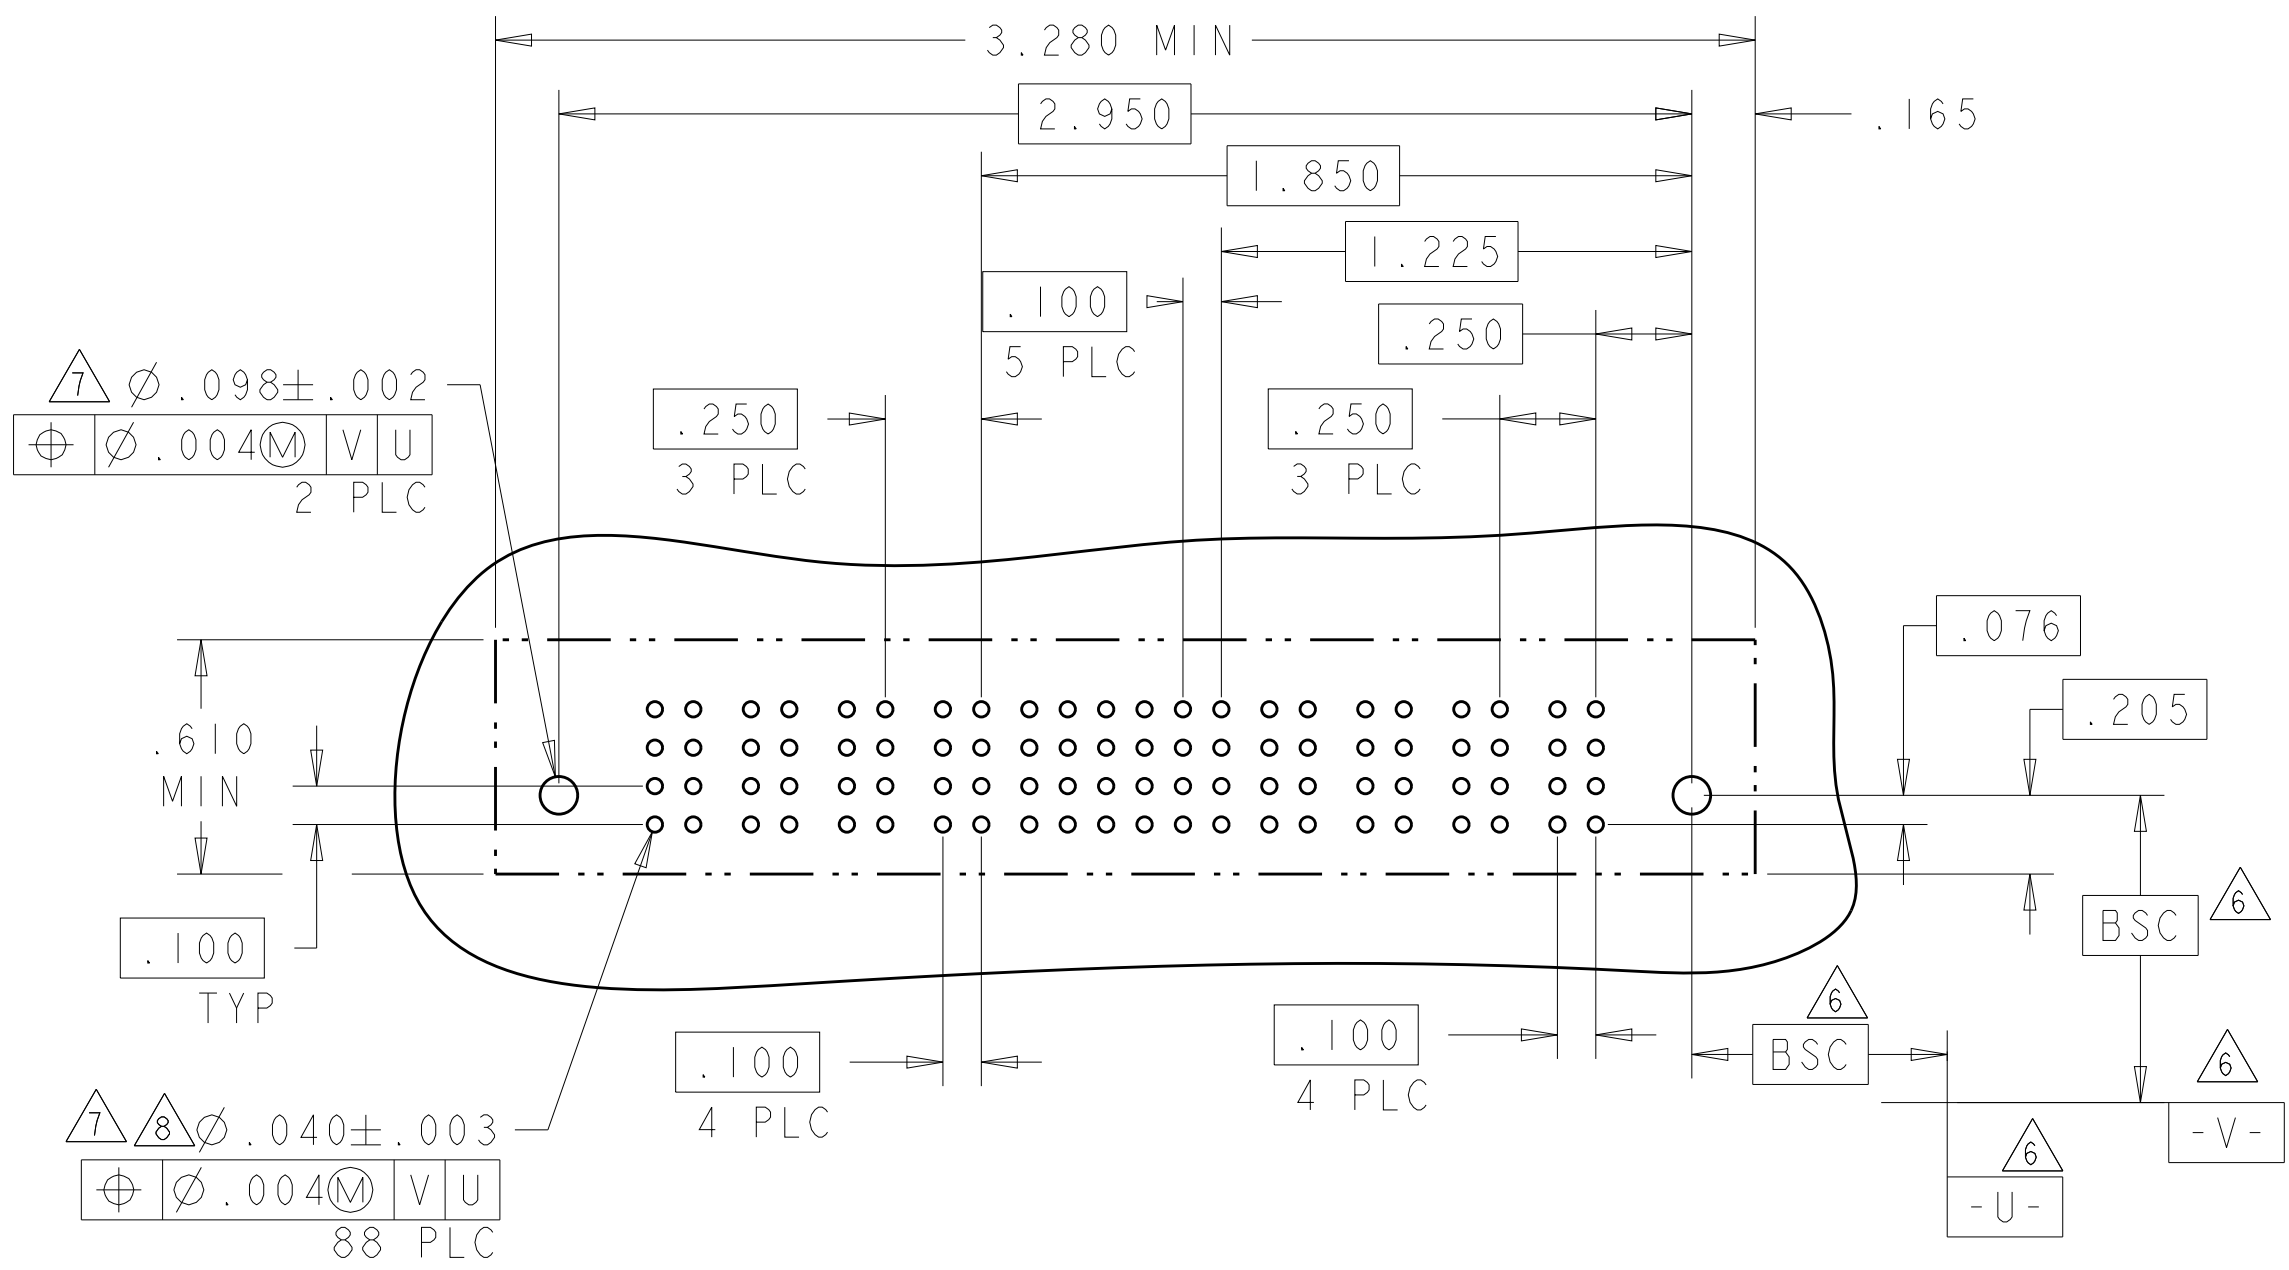


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	29APR05 29APR05	NAME	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2° FINISH		108-1973	
MATERIAL		WEIGHT		APPLICATION SPEC	
		CUSTOMER DRAWING		114-13038	
				SIZE	
				CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				A100779	
				C=6450540	
				SCALE	
				2:1	
				SHEET	
				13 OF 19	
				REV	
				K9	

PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
5-6450540-5	D C B A	HD	GS	GS	GS	AP	AP	GS	GS	GS	HD
3P + 8S + 3P											

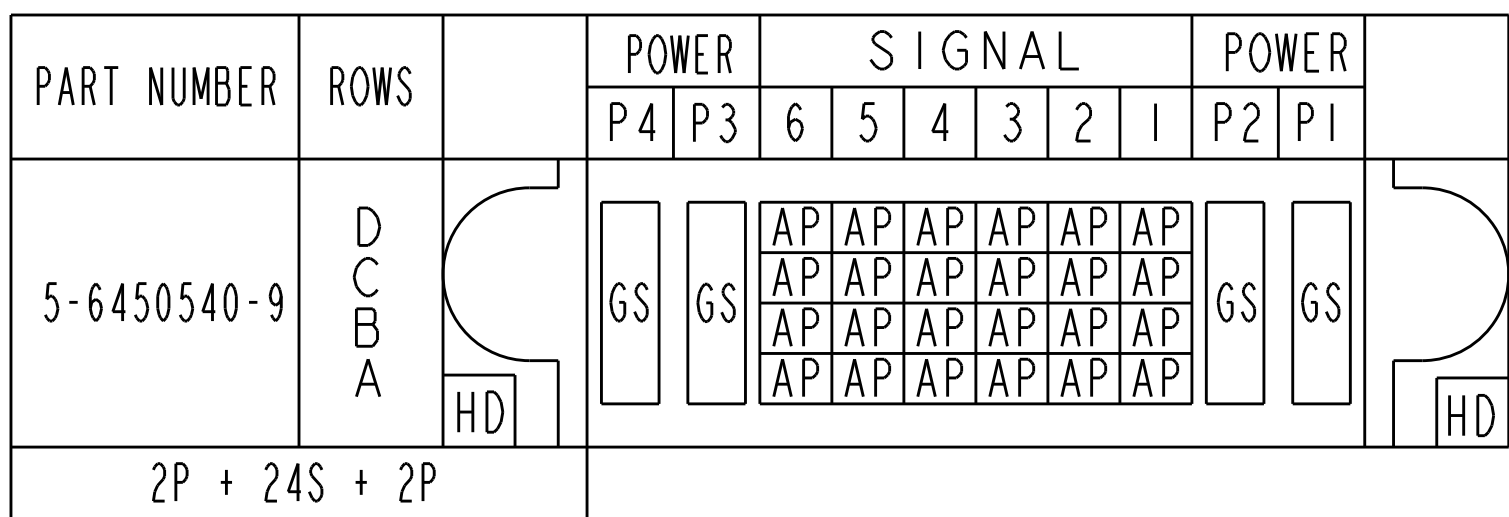
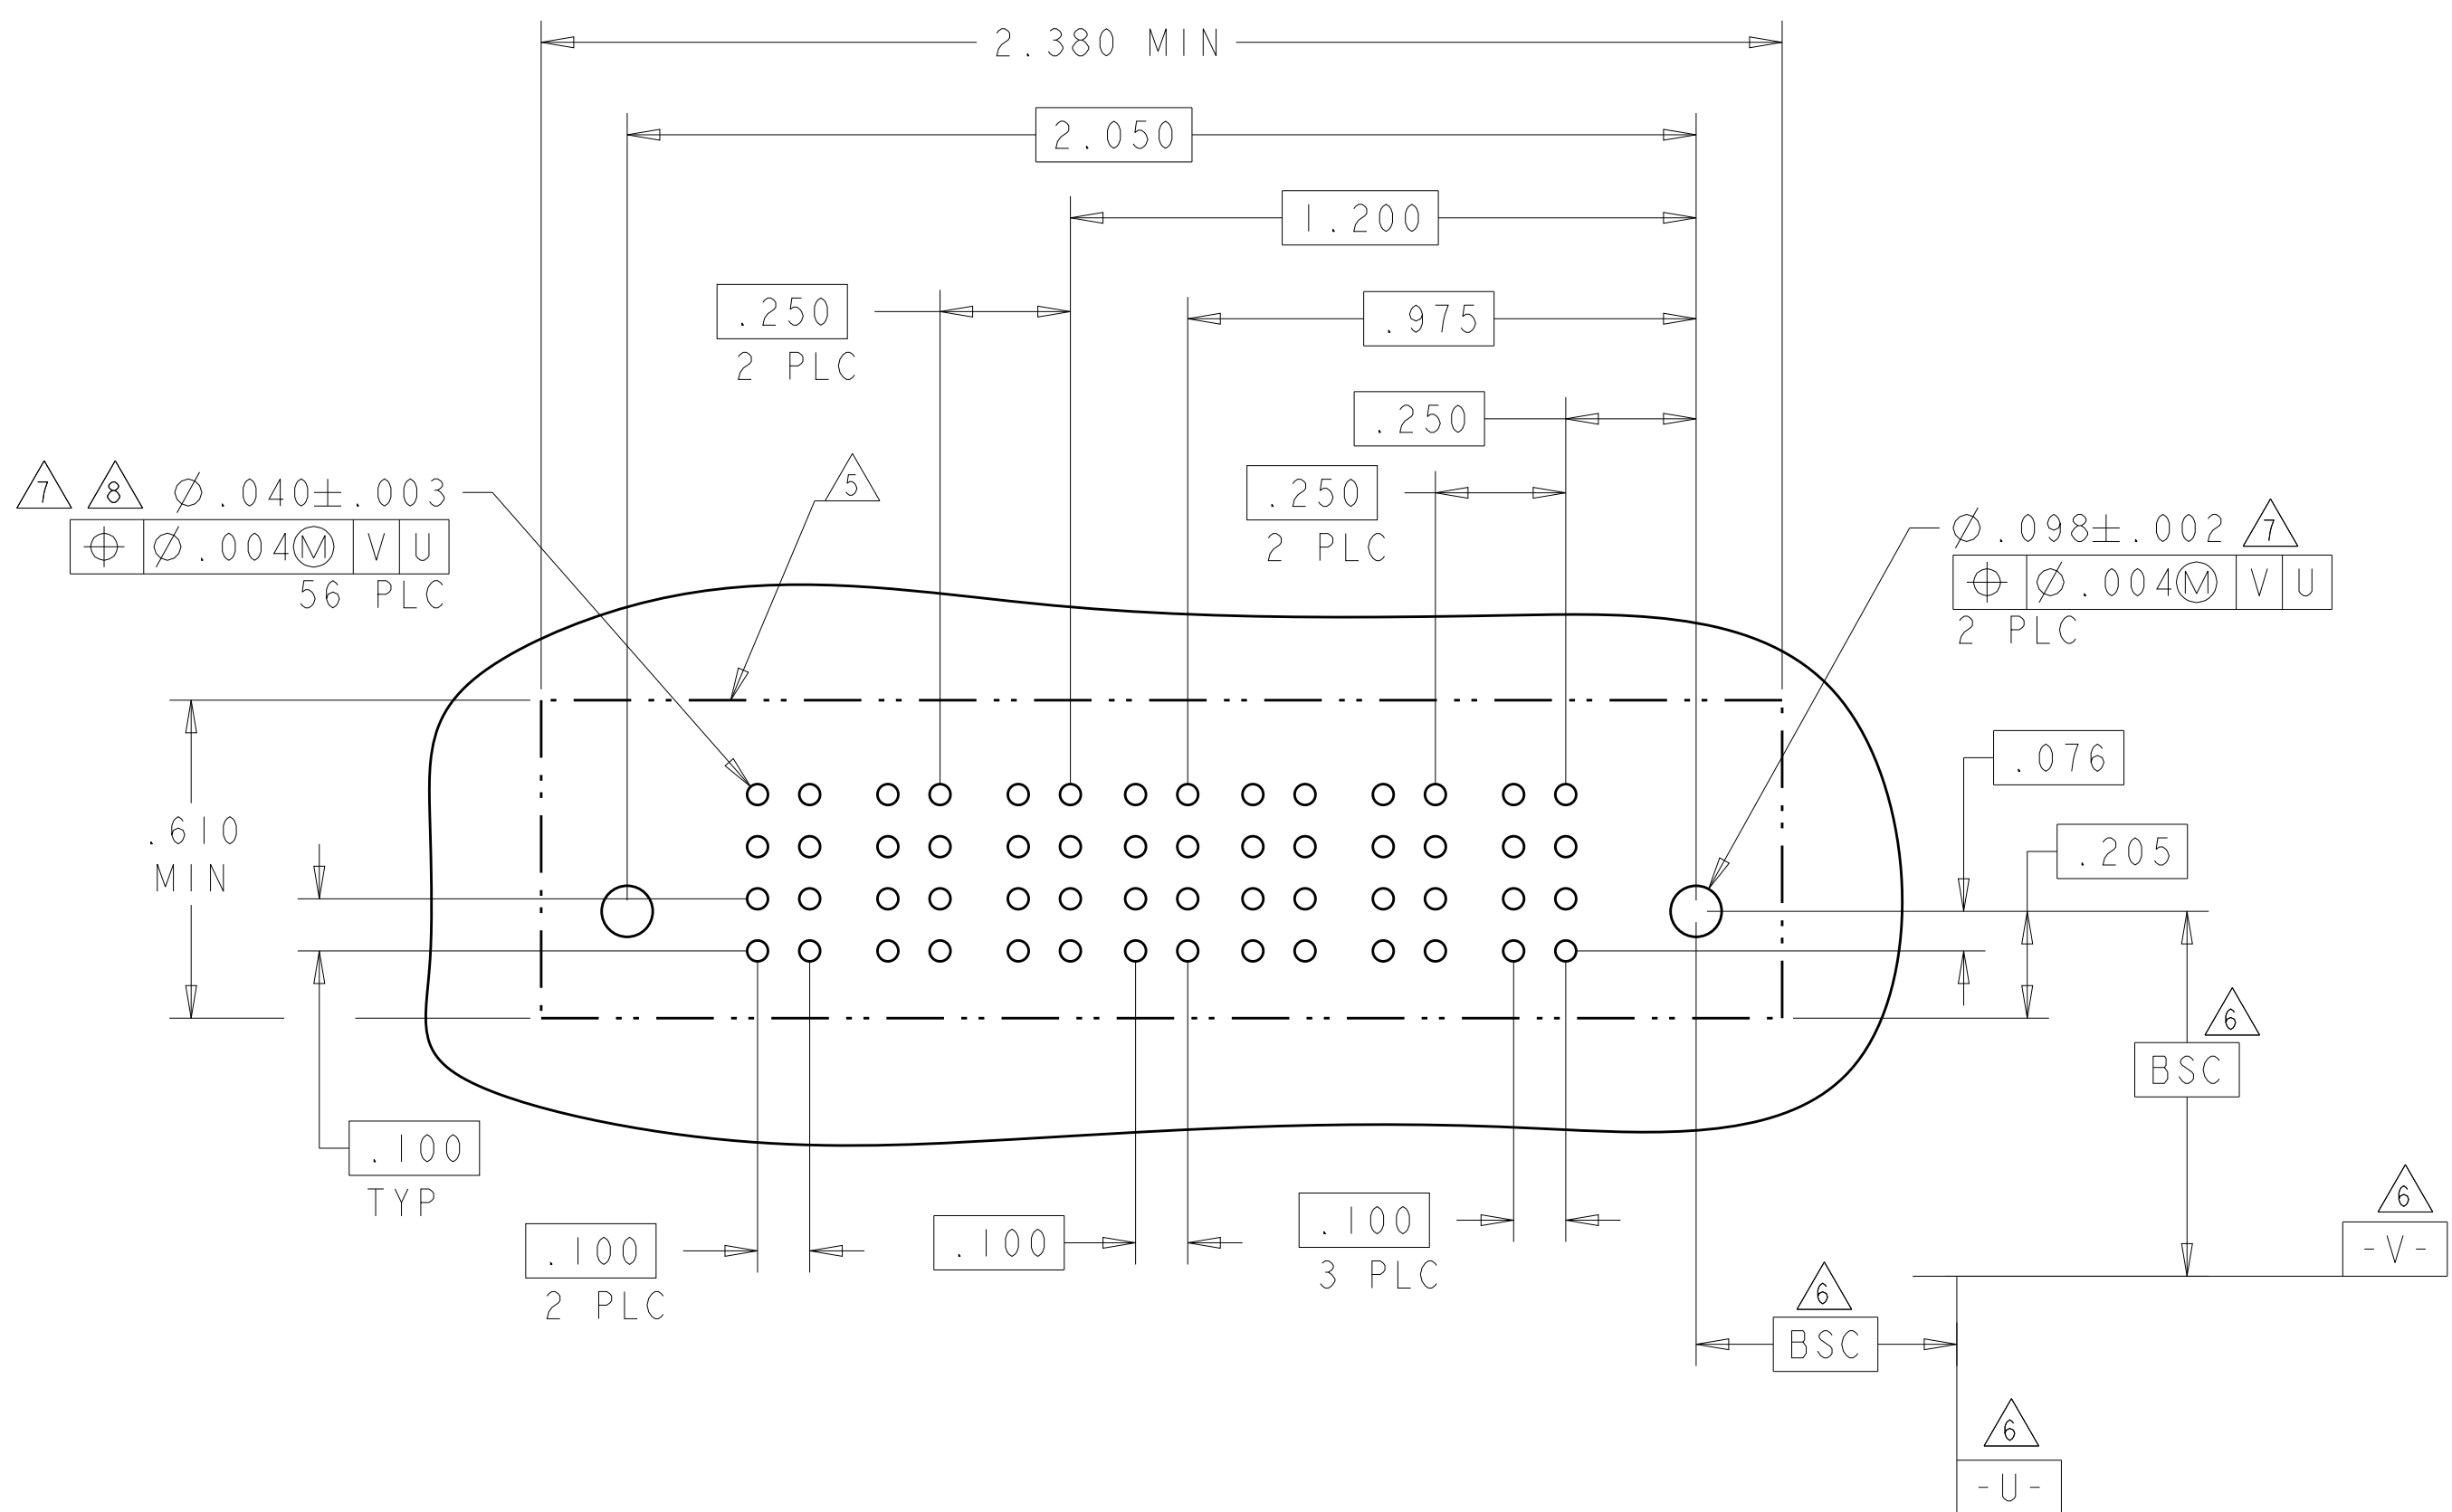
4805 (3/11)


Ⓚ

4805 (3/11)

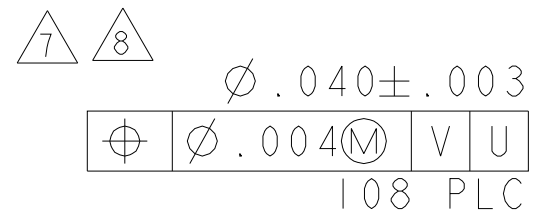
-NO SIGNAL CONTACTS4805 (3/11)


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P2	5	4	3	2	1	PI				
6-6450540-2	D C B A	 				AP	AP	AP				 	
						AP	AP	AP					
						AP	AP	AP					
						AP	AP	AP					
IP + 20S + IP													

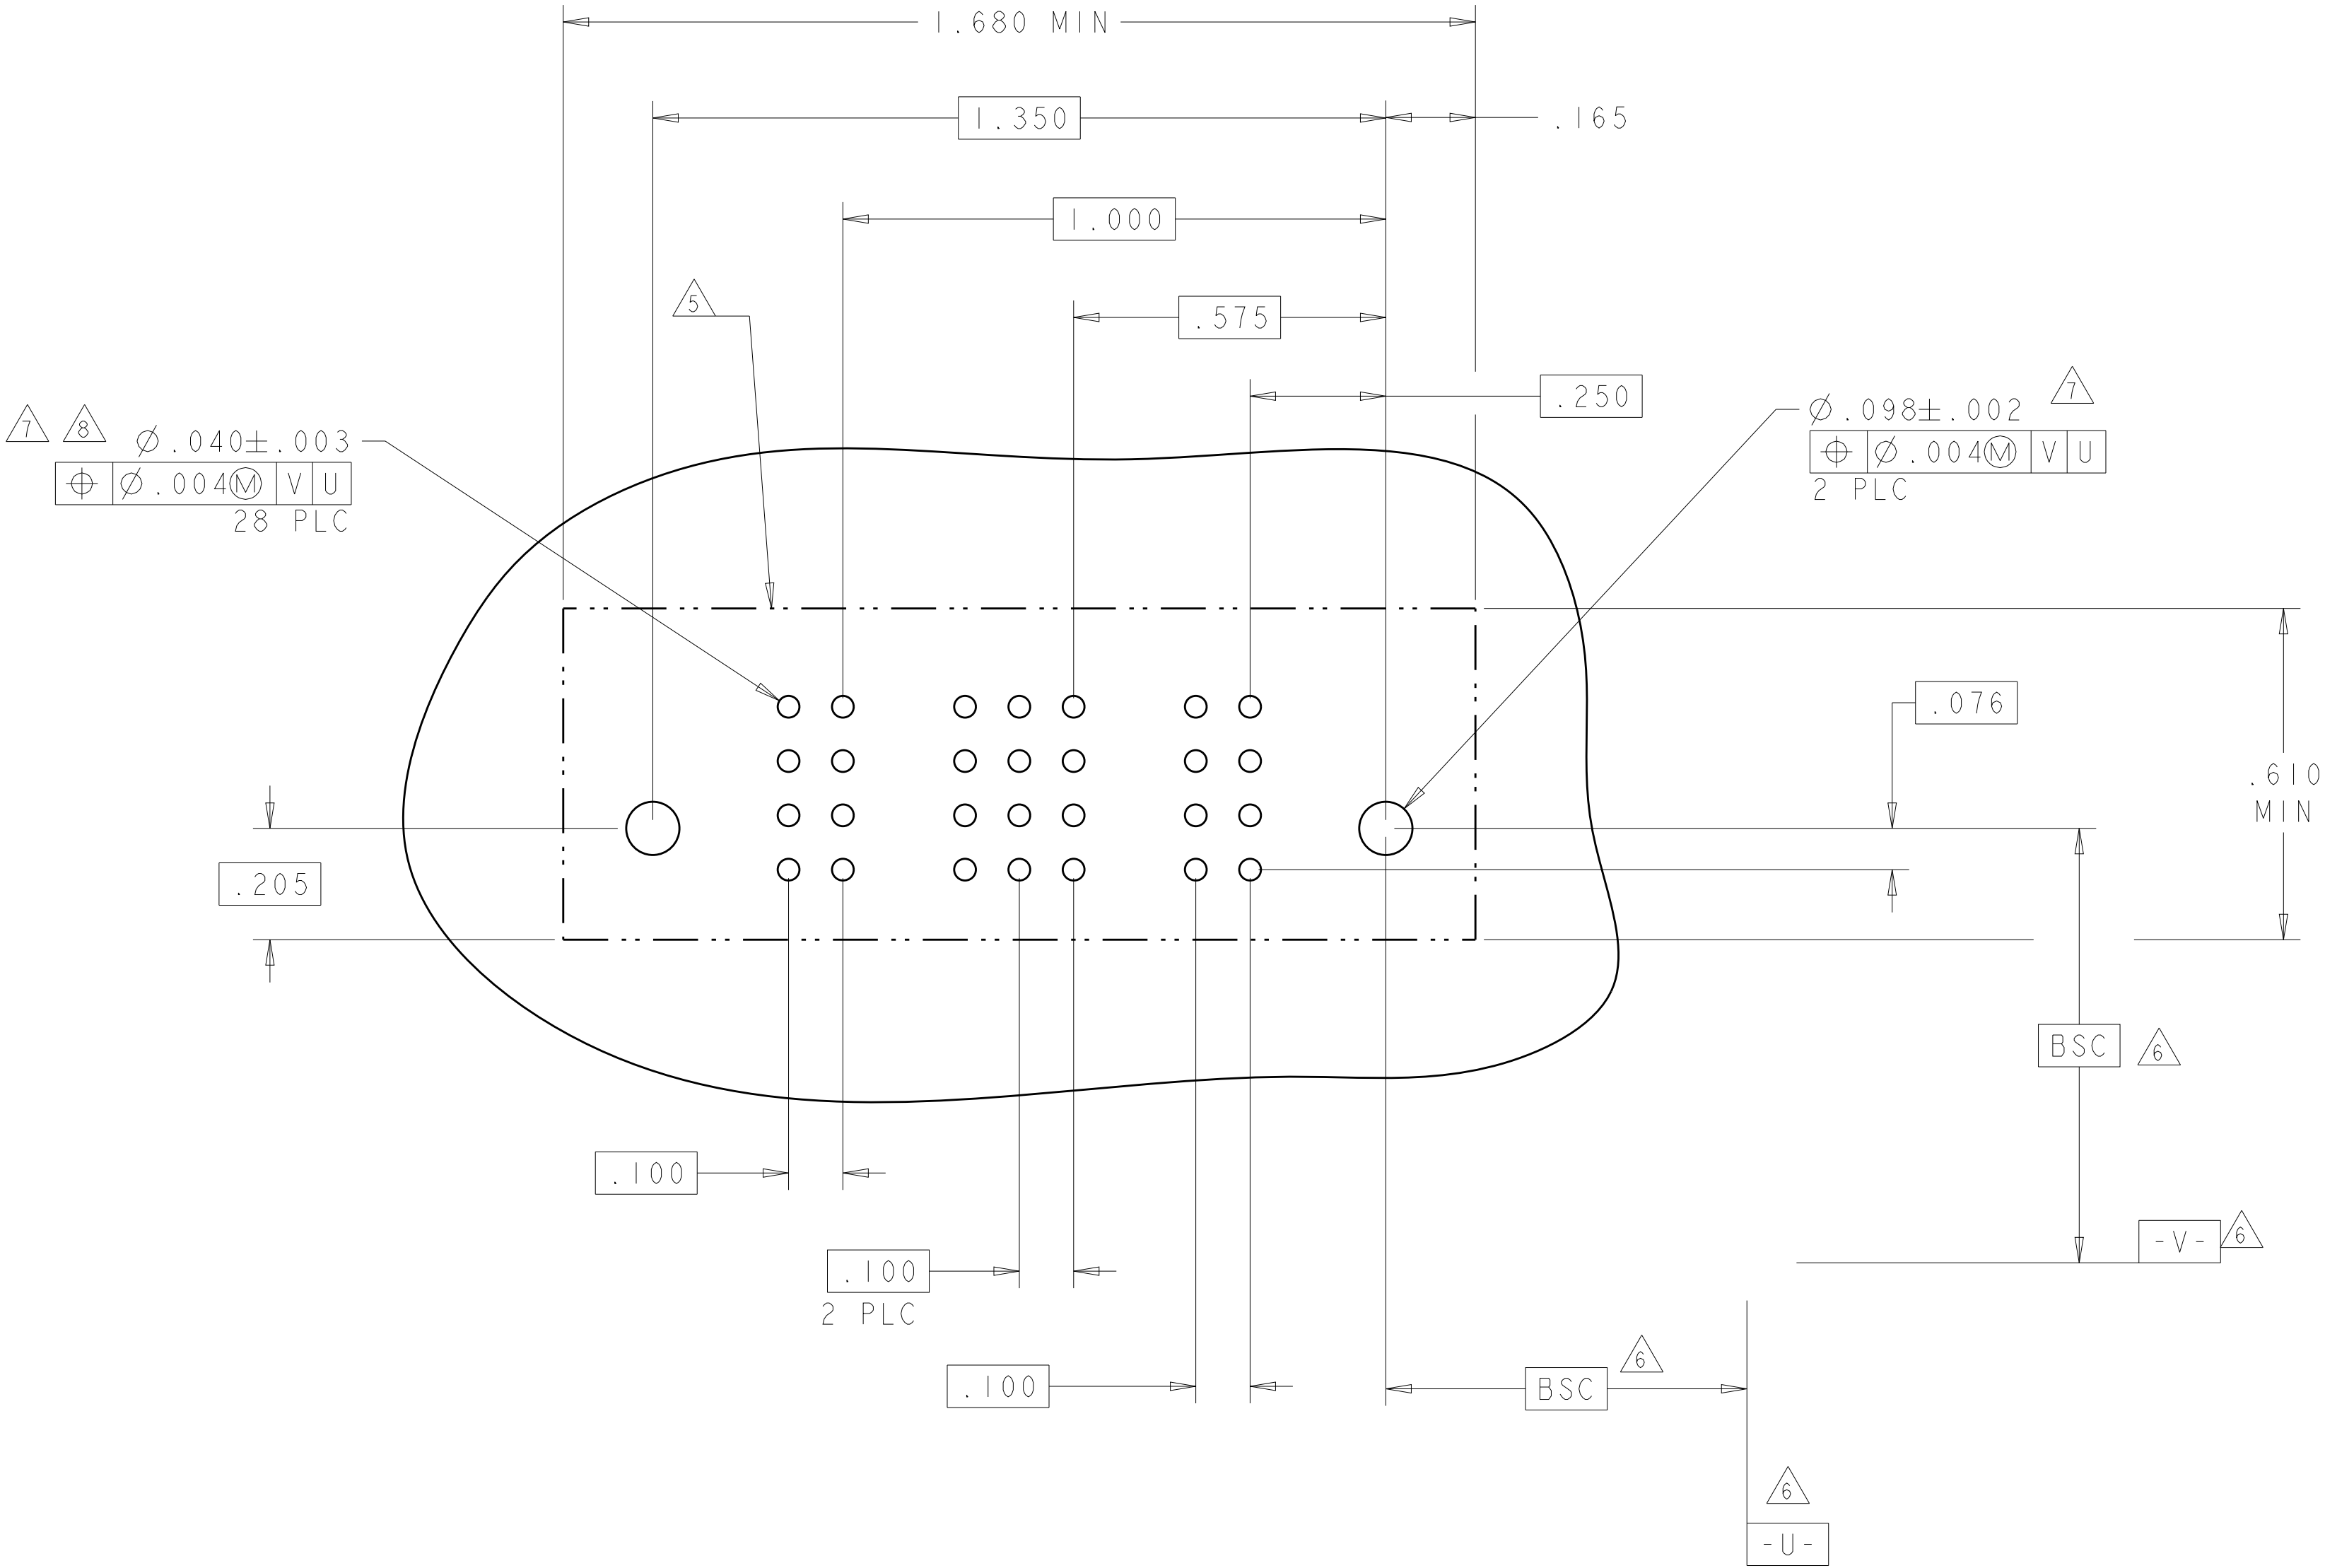

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI CHK M.PERCHEKKE APVD M.PERCHEKKE	29APR05 29APR05 -
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2° FINISH	
MATERIAL		WEIGHT -	
CUSTOMER DRAWING		SCALE 2:1	
SHEET 17		OF 19	
REV K9			

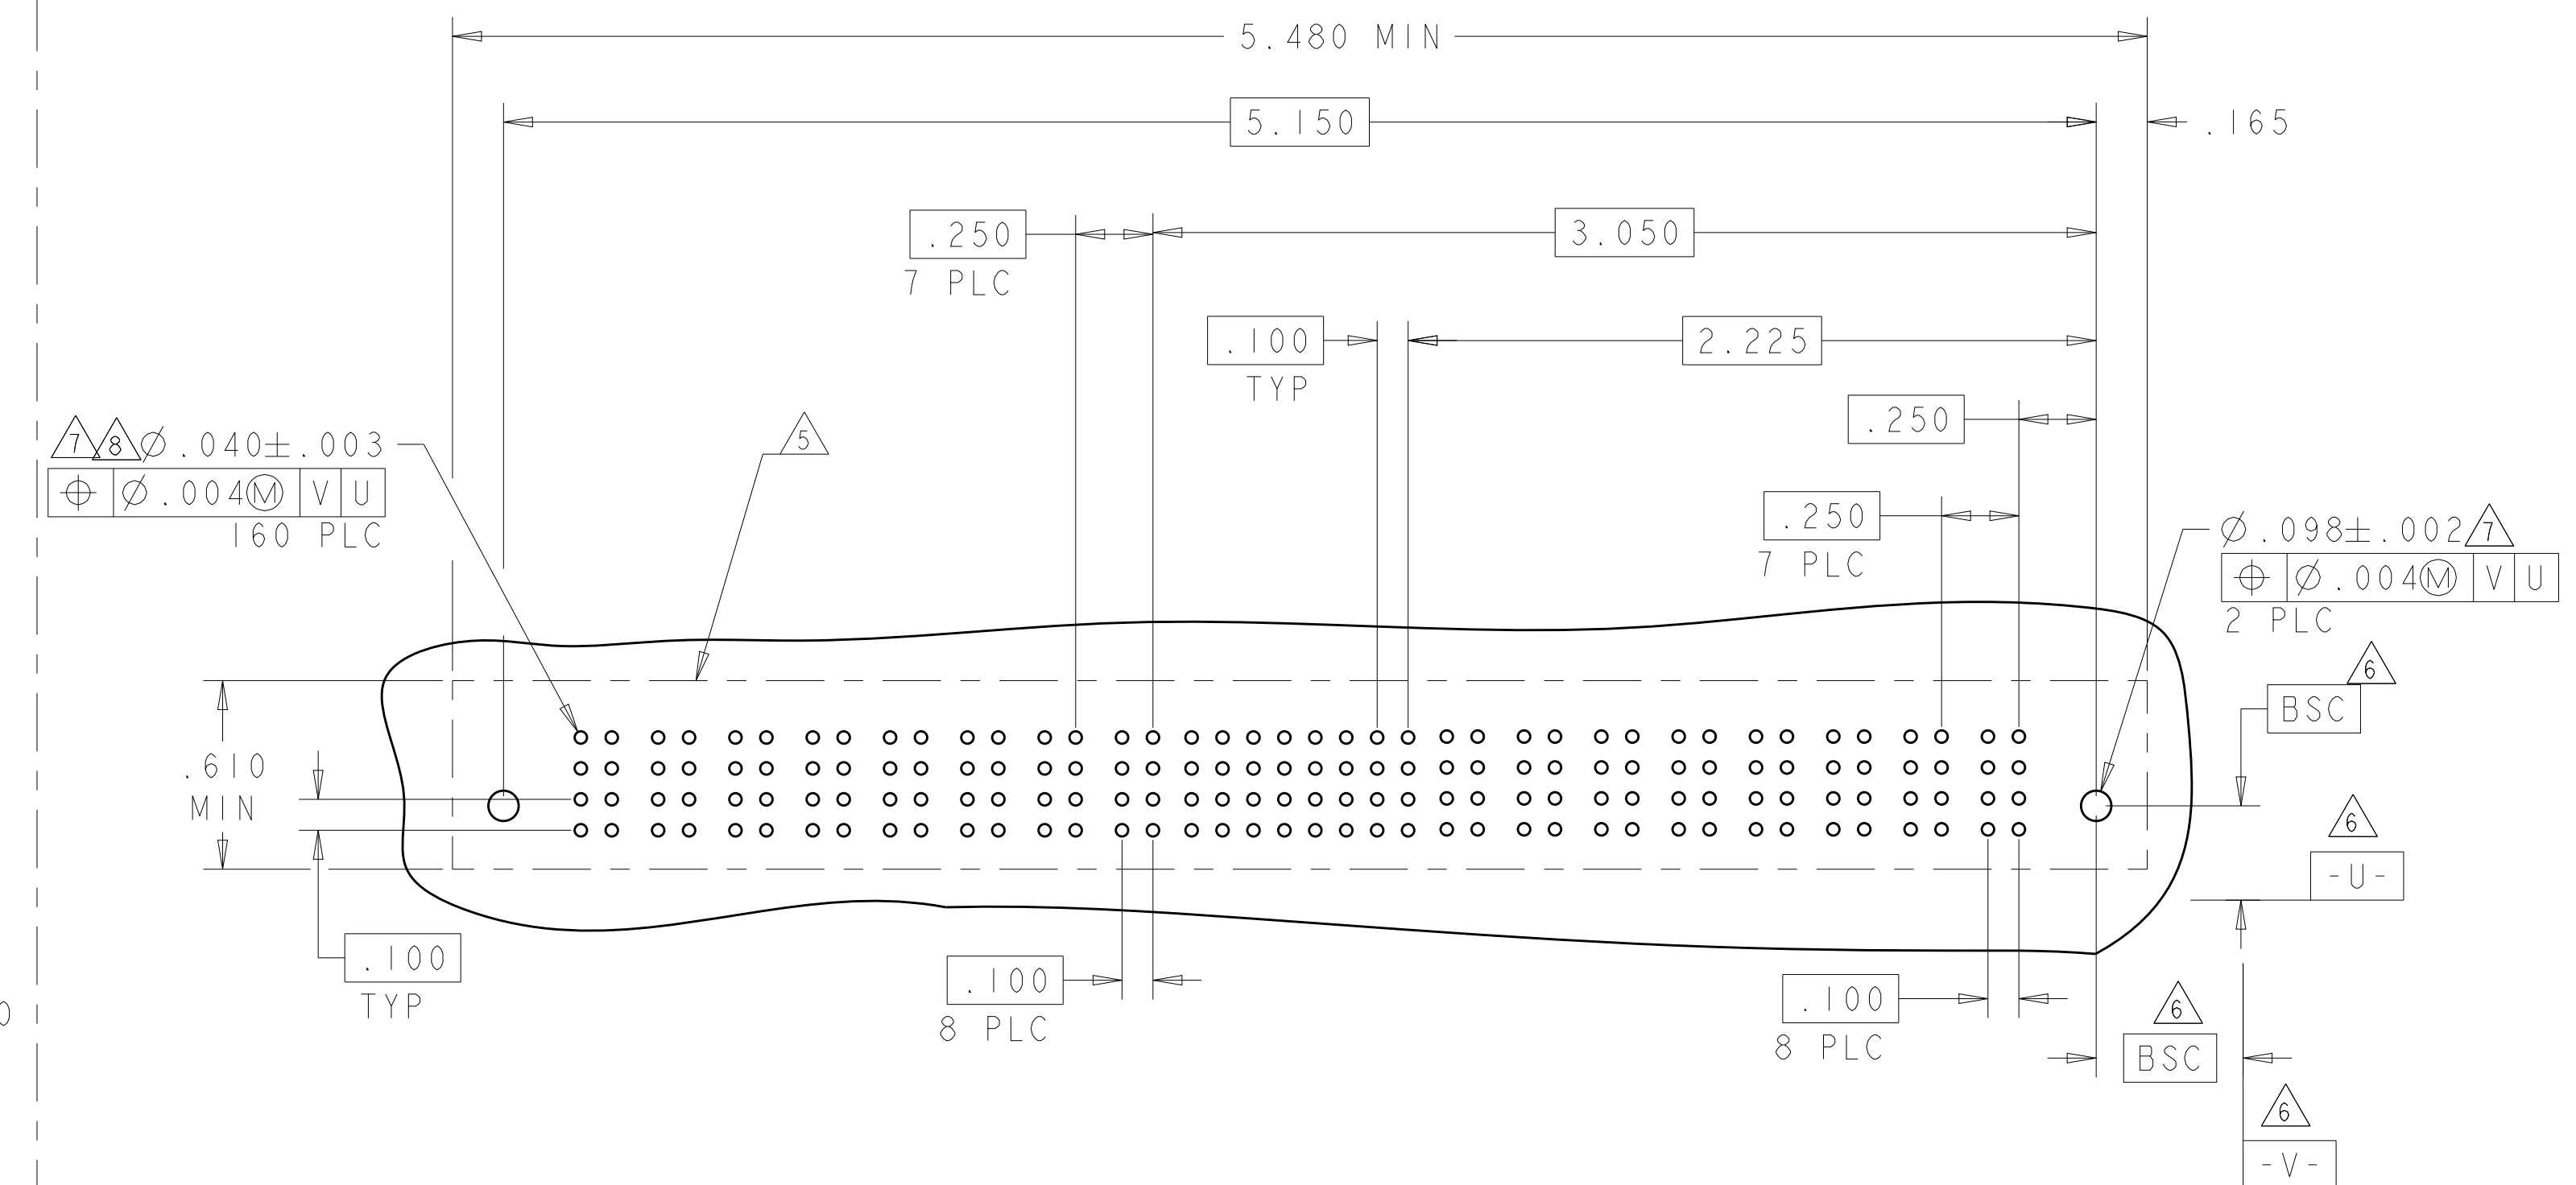[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER	S I G N A L						POWER	
			P2	5	4	3	2	1	P1		
6-6450540-6	D C B A		GS	AP	AP	AP	AP	AP	AP	GS	
IP + 20S + IP											

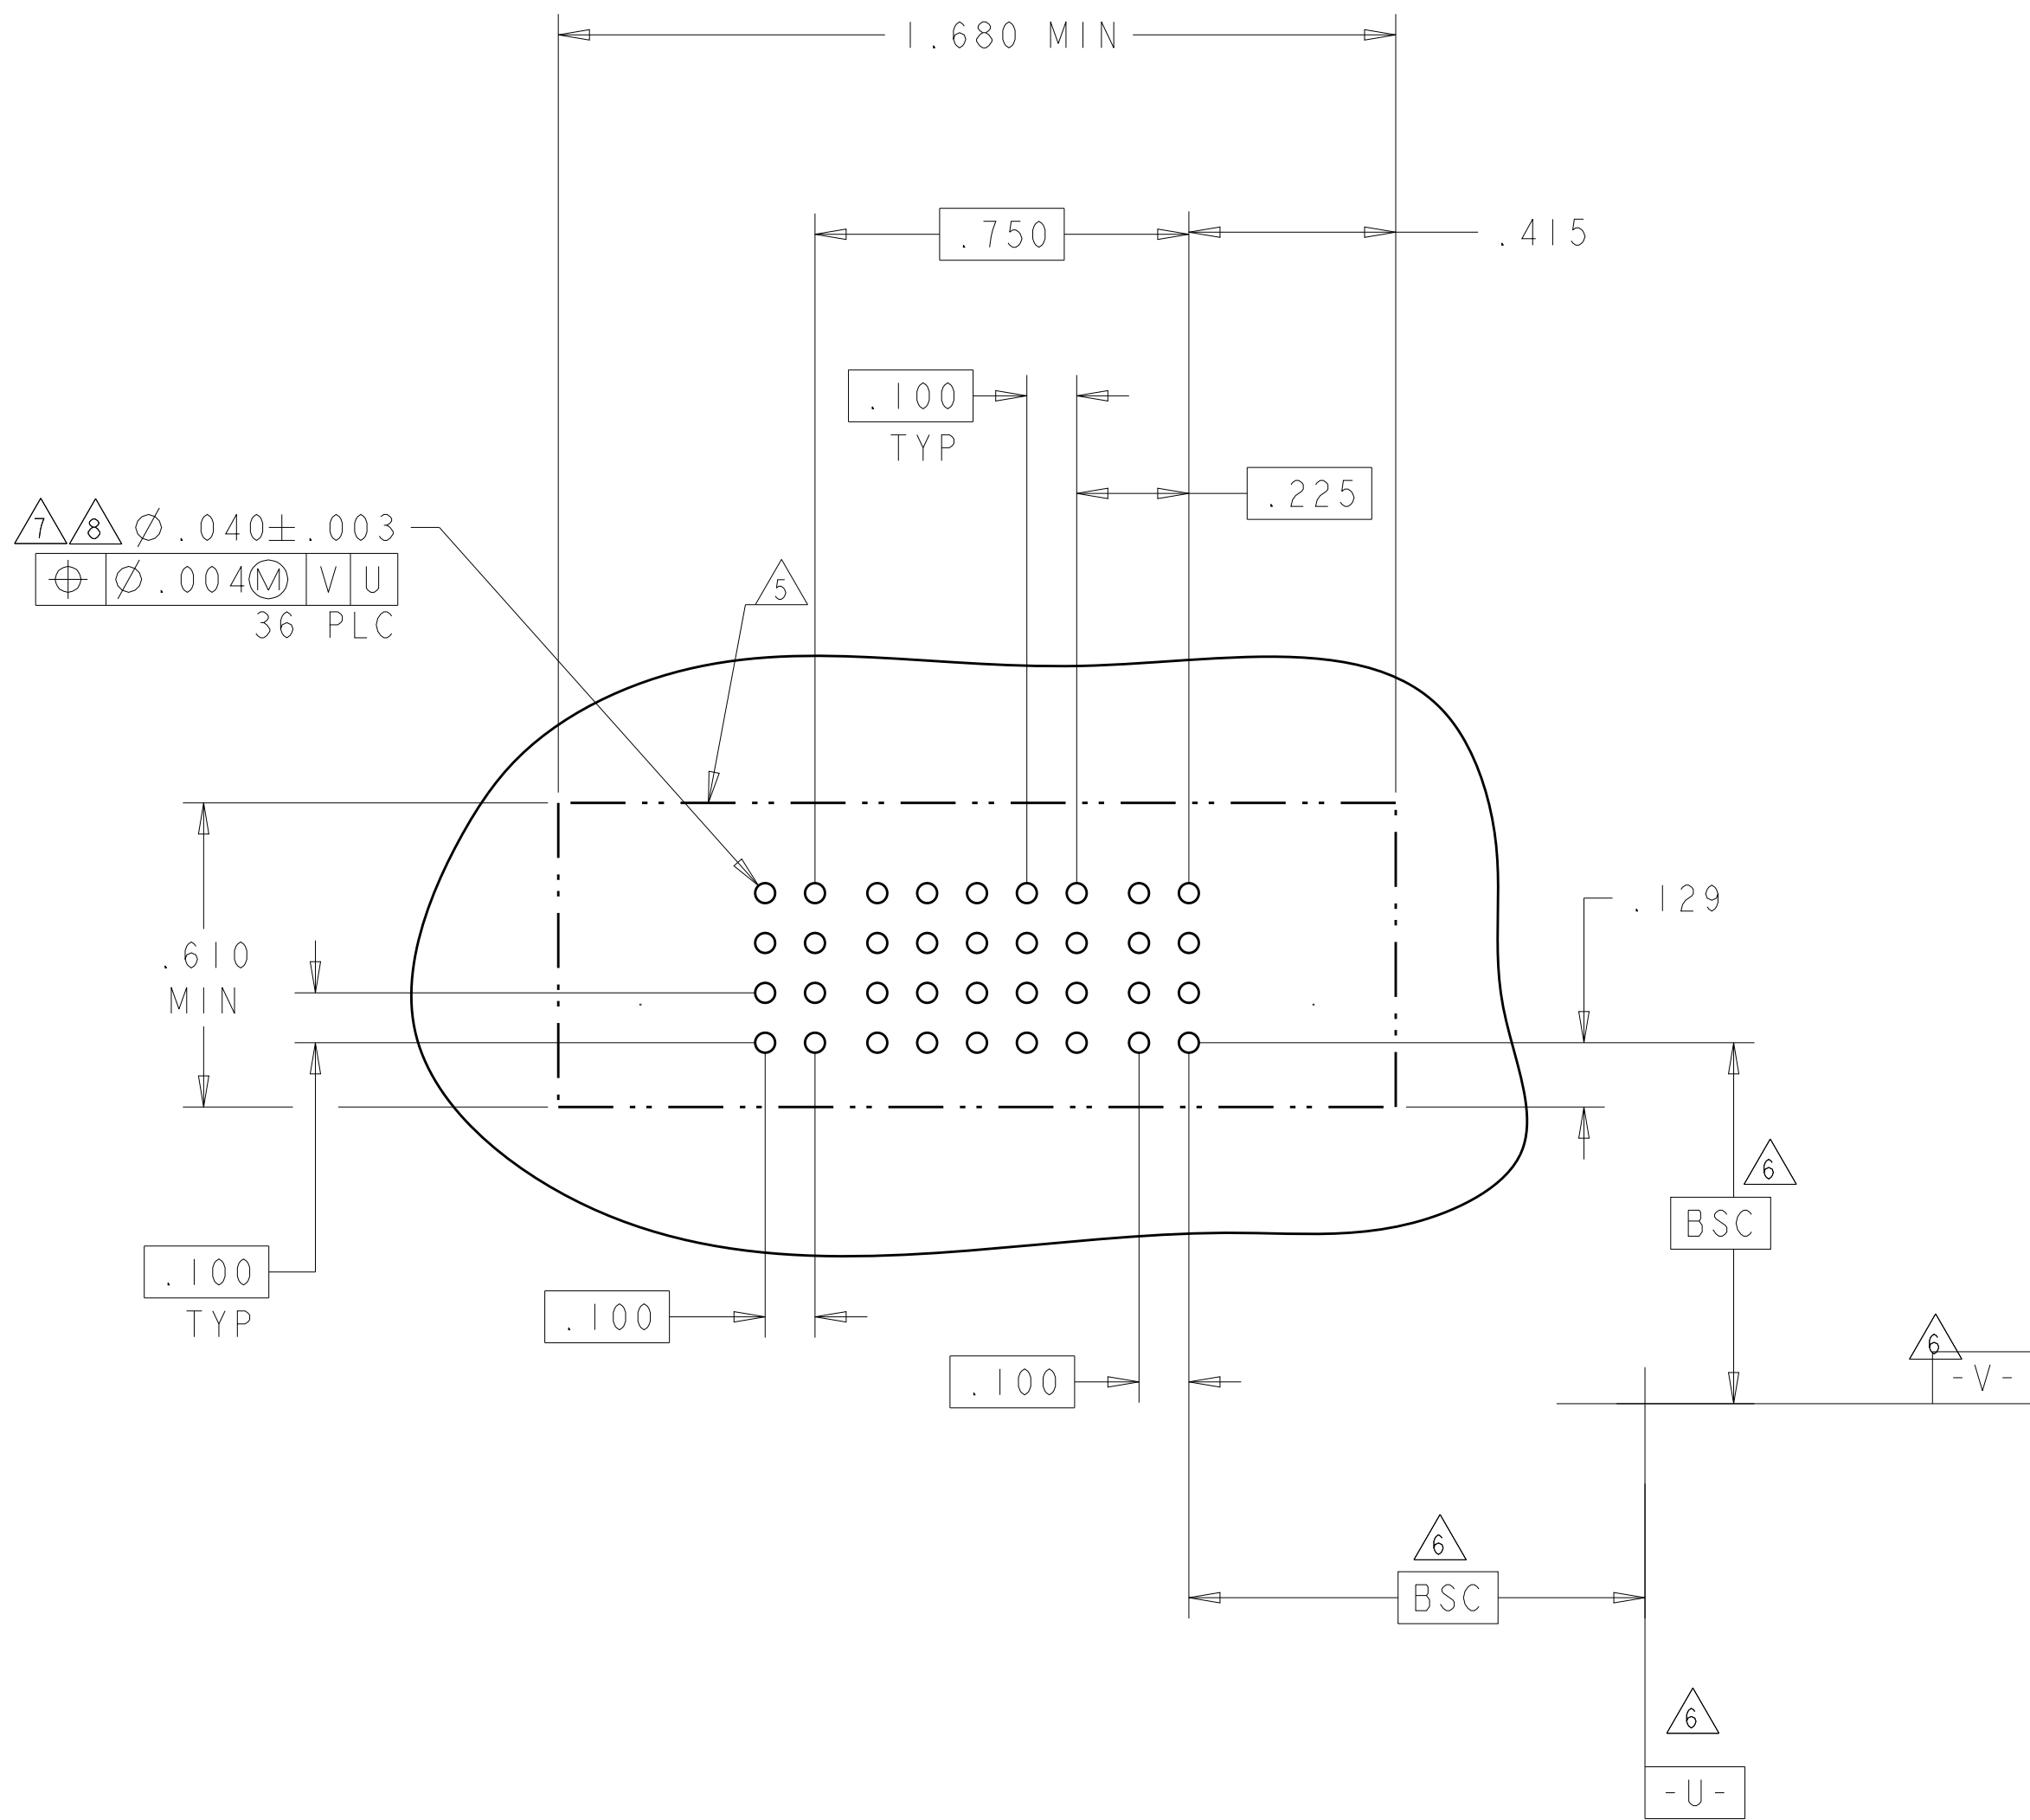4805 (3/11)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.