

## MOS FET Relays

G3VM-351AY/DY

**Compact, General-purpose, Analog-switching MOS FET Relays, with Dielectric Strength of 5 kVAC between I/O Using Optical Isolation.**

- Trigger LED forward current of 2 mA (maximum) facilitates power saving designs.
- Switches minute analog signals.
- Continuous load current of 100 mA.



**NEW**

**Note:** The actual product is marked differently from the image shown here.

**RoHS compliant**

⚠ Refer to "Common Precautions".

### Application Examples

- Power meter
- Measurement devices
- Security systems
- Industrial equipment

### List of Models


| Contact form | Terminals                  | Load voltage (peak value)<br>(See the note.) | Model          | Number per stick | Number per tape |
|--------------|----------------------------|----------------------------------------------|----------------|------------------|-----------------|
| SPST-NO      | PCB terminals              | 350 V                                        | G3VM-351AY     | 100              | ---             |
|              | Surface-mounting terminals |                                              | G3VM-351DY     |                  |                 |
|              |                            |                                              | G3VM-351DY(TR) | ---              | 1,500           |

**Note:** The AC peak and DC value are given for the load voltage.

### Dimensions


**Note:** All units are in millimeters unless otherwise indicated.

#### G3VM-351AY

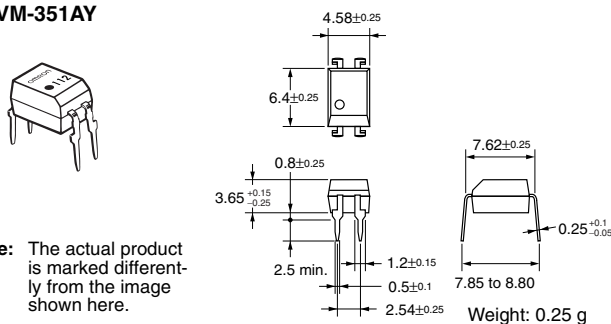

**Note:** The actual product is marked differently from the image shown here.


#### G3VM-351DY

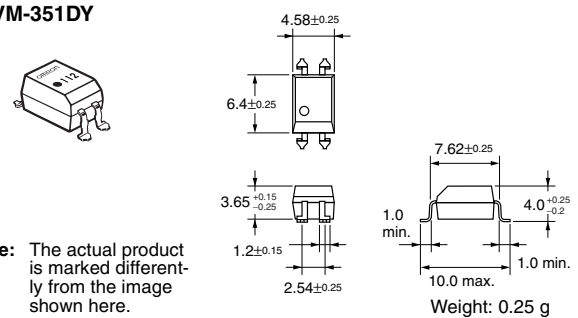



**Note:** The actual product is marked differently from the image shown here.

### Terminal Arrangement/Internal Connections (Top View)

#### G3VM-351AY




#### G3VM-351DY

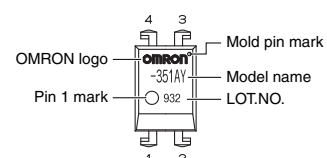

**Note:** The actual product is marked differently from the image shown here.


### PCB Dimensions (Bottom View)

#### G3VM-351AY



### Actual Mounting Pad Dimensions (Recommended Value, Top View)

#### G3VM-351DY



## Absolute Maximum Ratings (Ta = 25°C)

| Item                                                       |                                      | Symbol                      | Rating      | Unit                 | Measurement Conditions        |
|------------------------------------------------------------|--------------------------------------|-----------------------------|-------------|----------------------|-------------------------------|
| Input                                                      | LED forward current                  | $I_F$                       | 30          | mA                   |                               |
|                                                            | Repetitive peak LED forward current  | $I_{FP}$                    | 1           | A                    | 100 $\mu$ s pulses, 100 pps   |
|                                                            | LED forward current reduction rate   | $\Delta I_F/^\circ\text{C}$ | -0.3        | mA/ $^\circ\text{C}$ | Ta $\geq$ 25°C                |
|                                                            | LED reverse voltage                  | $V_R$                       | 5           | V                    |                               |
|                                                            | Connection temperature               | $T_j$                       | 125         | $^\circ\text{C}$     |                               |
| Output                                                     | Load voltage (AC peak/DC)            | $V_{OFF}$                   | 350         | V                    |                               |
|                                                            | Continuous load current (AC peak/DC) | $I_O$                       | 100         | mA                   |                               |
|                                                            | ON current reduction rate            | $\Delta I_O/^\circ\text{C}$ | -1.0        | mA/ $^\circ\text{C}$ | Ta $\geq$ 25°C                |
|                                                            | Pulse ON current                     | $I_{op}$                    | 0.3         | A                    | t = 100 ms, Duty = 1/10       |
|                                                            | Connection temperature               | $T_j$                       | 125         | $^\circ\text{C}$     |                               |
| Dielectric strength between input and output (See note 1.) |                                      | $V_{I-O}$                   | 5,000       | Vrms                 | AC for 1 min                  |
| Operating temperature                                      |                                      | $T_a$                       | -40 to +85  | $^\circ\text{C}$     | With no icing or condensation |
| Storage temperature                                        |                                      | $T_{stg}$                   | -55 to +125 | $^\circ\text{C}$     | With no icing or condensation |
| Soldering temperature (10 s)                               |                                      | ---                         | 260         | $^\circ\text{C}$     | 10 s                          |

**Note:** 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## Electrical Characteristics (Ta = 25°C)

| Item                           |                                        | Symbol     | Minimum | Typical | Maximum | Unit          | Measurement conditions                                                |
|--------------------------------|----------------------------------------|------------|---------|---------|---------|---------------|-----------------------------------------------------------------------|
| Input                          | LED forward voltage                    | $V_F$      | 1.45    | 1.63    | 1.75    | V             | $I_F = 10$ mA                                                         |
|                                | Reverse current                        | $I_R$      | ---     | ---     | 10      | $\mu\text{A}$ | $V_R = 5$ V                                                           |
|                                | Capacity between terminals             | $C_T$      | ---     | 40      | ---     | pF            | V = 0, f = 1 MHz                                                      |
|                                | Trigger LED forward current            | $I_{FT}$   | ---     | 0.3     | 2       | mA            | $I_O = 100$ mA                                                        |
| Output                         | Maximum resistance with output ON      | $R_{ON}$   | ---     | 25      | 35      | $\Omega$      | $I_F = 5$ mA,<br>$I_O = 100$ mA, t < 1 s                              |
|                                |                                        |            | ---     | 35      | 50      |               | $I_F = 5$ mA,<br>$I_O = 100$ mA                                       |
|                                | Current leakage when the relay is open | $I_{LEAK}$ | ---     | ---     | 1.0     | $\mu\text{A}$ | $V_{OFF} = 350$ V                                                     |
| Capacity between terminals     |                                        | $C_{OFF}$  | ---     | 30      | ---     | pF            | V = 0, f = 1 MHz                                                      |
| Capacity between I/O terminals |                                        | $C_{I-O}$  | ---     | 0.8     | ---     | pF            | f = 1 MHz, $V_s = 0$ V                                                |
| Insulation resistance          |                                        | $R_{I-O}$  | 1,000   | ---     | ---     | M $\Omega$    | $V_{I-O} = 500$ VDC,<br>$RoH \leq 60\%$                               |
| Turn-ON time                   |                                        | tON        | ---     | 0.1     | 1       | ms            | $I_F = 5$ mA, $R_L = 200$ $\Omega$ ,<br>$V_{DD} = 20$ V (See note 2.) |
| Turn-OFF time                  |                                        | tOFF       | ---     | 0.2     | 1       | ms            |                                                                       |

**Note:** 2. Turn-ON and Turn-OFF Times



## Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

| Item                                 | Symbol   | Minimum | Typical | Maximum | Unit             |
|--------------------------------------|----------|---------|---------|---------|------------------|
| Load voltage (AC peak/DC)            | $V_{DD}$ | ---     | ---     | 280     | V                |
| Operating LED forward current        | $I_F$    | 3       | 5       | 20      | mA               |
| Continuous load current (AC peak/DC) | $I_O$    | ---     | ---     | 100     | mA               |
| Operating temperature                | $T_a$    | -20     | ---     | 65      | $^\circ\text{C}$ |

## Engineering Data

### Load Current vs. Ambient Temperature

G3VM-351AY(DY)

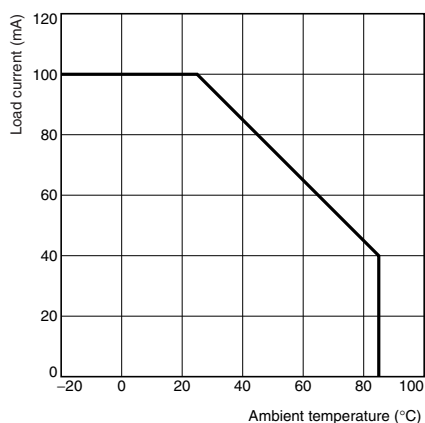

## Safety Precautions

Refer to "Common Precautions" for all G3VM models.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.