
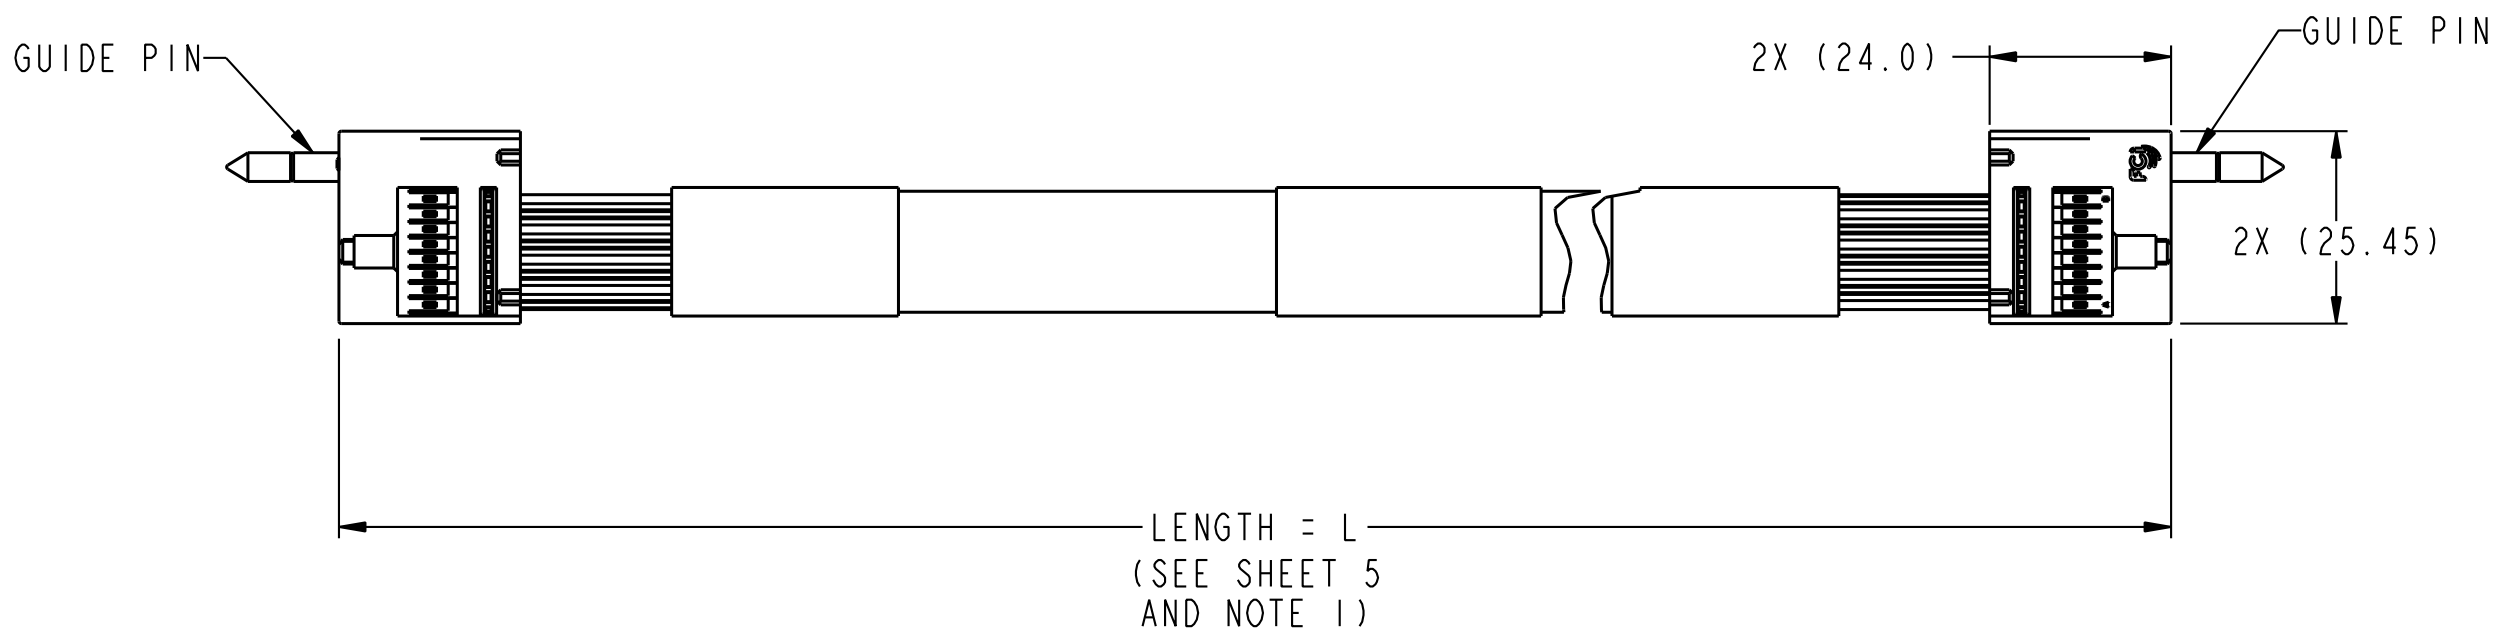



FCI PART NUMBER	DESCRIPTION
10126226-TXXXXYYLF	EXaMAX IO 2.0mm 4-PAIR 8-COLUMN SINGLE PAIR CABLE ASSEMBLY

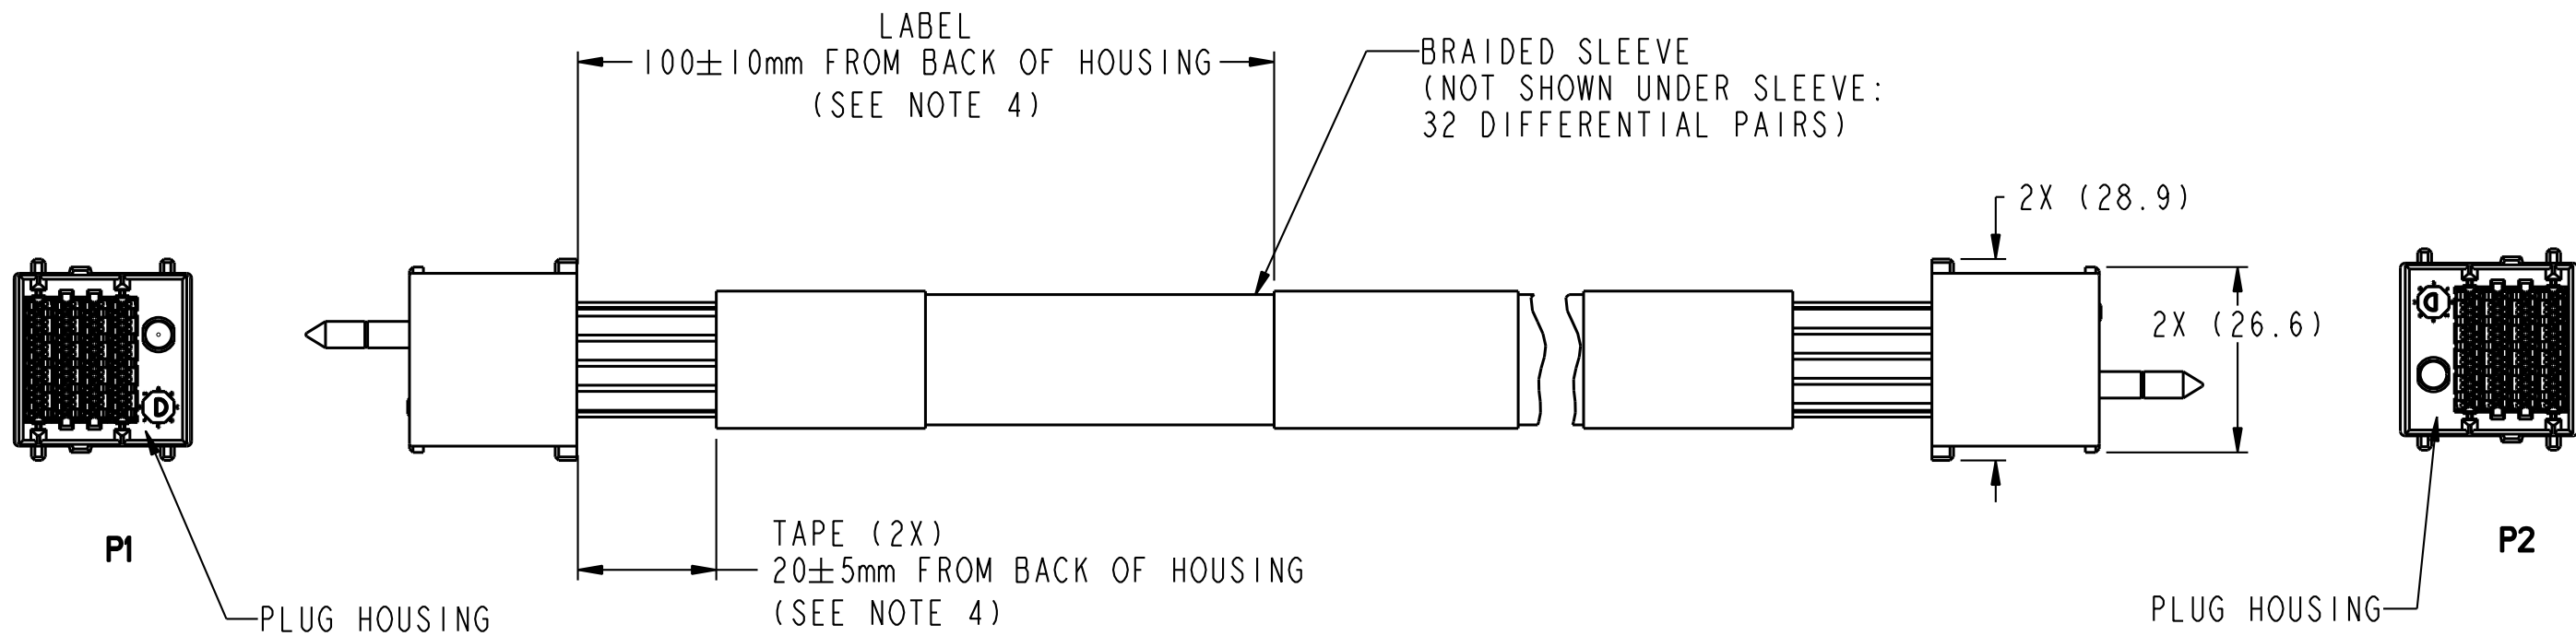

10126226-TXXXX2GLF AS SHOWN


spec ref	-	dr	J. WINEY	2014-09-19	projection	mm	size	A3	scale	1:1																		
tolerance std	ASME Y14.5	eng	K. WEBER	2014-09-19			ecn no	rel level	In Work	rev																		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	K. WEBER	2014-09-19																								
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±</td> </tr> <tr> <td>angular</td> <td>0°</td> <td>±°</td> </tr> </table>	linear	0.X	±		0.XX	±		0.XXX	±	angular	0°	±°		<table border="1"> <tr> <td>title</td> <td>EXAMAX IO 2.0mm PITCH</td> <td>dwg no</td> <td>10126226</td> </tr> <tr> <td></td> <td>PASSIVE LATCH BACK PLANE CABLE ASSY</td> <td></td> <td>7</td> </tr> </table>	title	EXAMAX IO 2.0mm PITCH	dwg no	10126226		PASSIVE LATCH BACK PLANE CABLE ASSY		7	<table border="1"> <tr> <td>cat. no.</td> <td>-</td> <td>Product - Customer Drw</td> <td>sheet 1 of 6</td> </tr> </table>	cat. no.	-	Product - Customer Drw	sheet 1 of 6
linear	0.X	±																										
	0.XX	±																										
	0.XXX	±																										
angular	0°	±°																										
title	EXAMAX IO 2.0mm PITCH	dwg no	10126226																									
	PASSIVE LATCH BACK PLANE CABLE ASSY		7																									
cat. no.	-	Product - Customer Drw	sheet 1 of 6																									

FCI PART NUMBER	DESCRIPTION
10126226-TXXXXYYLF	EXaMAX IO 2.0mm 4-PAIR 8-COLUMN SINGLE PAIR CABLE ASSEMBLY

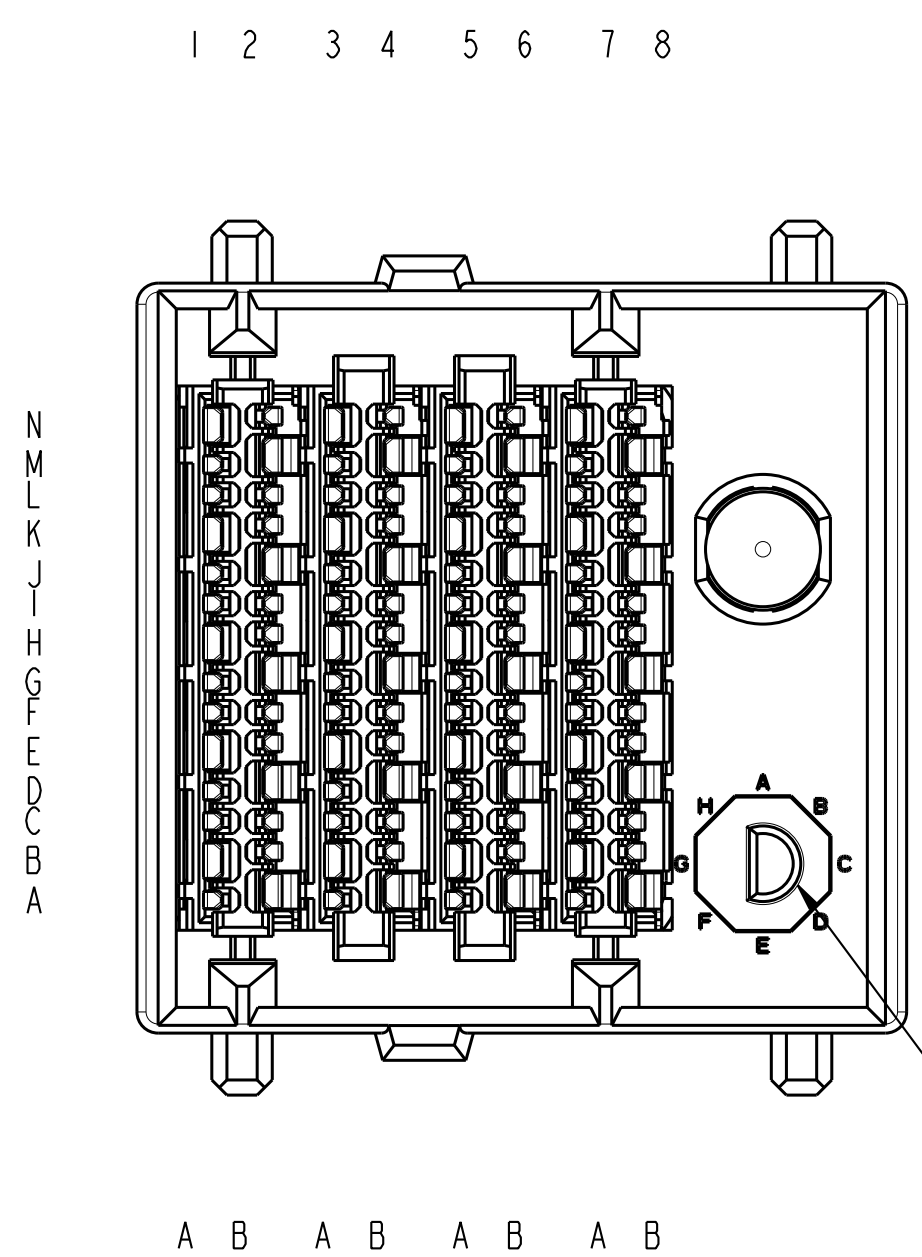

P1
SCALE 4:1

KEY PIN
(OPTIONAL)
SEE NOTE 13

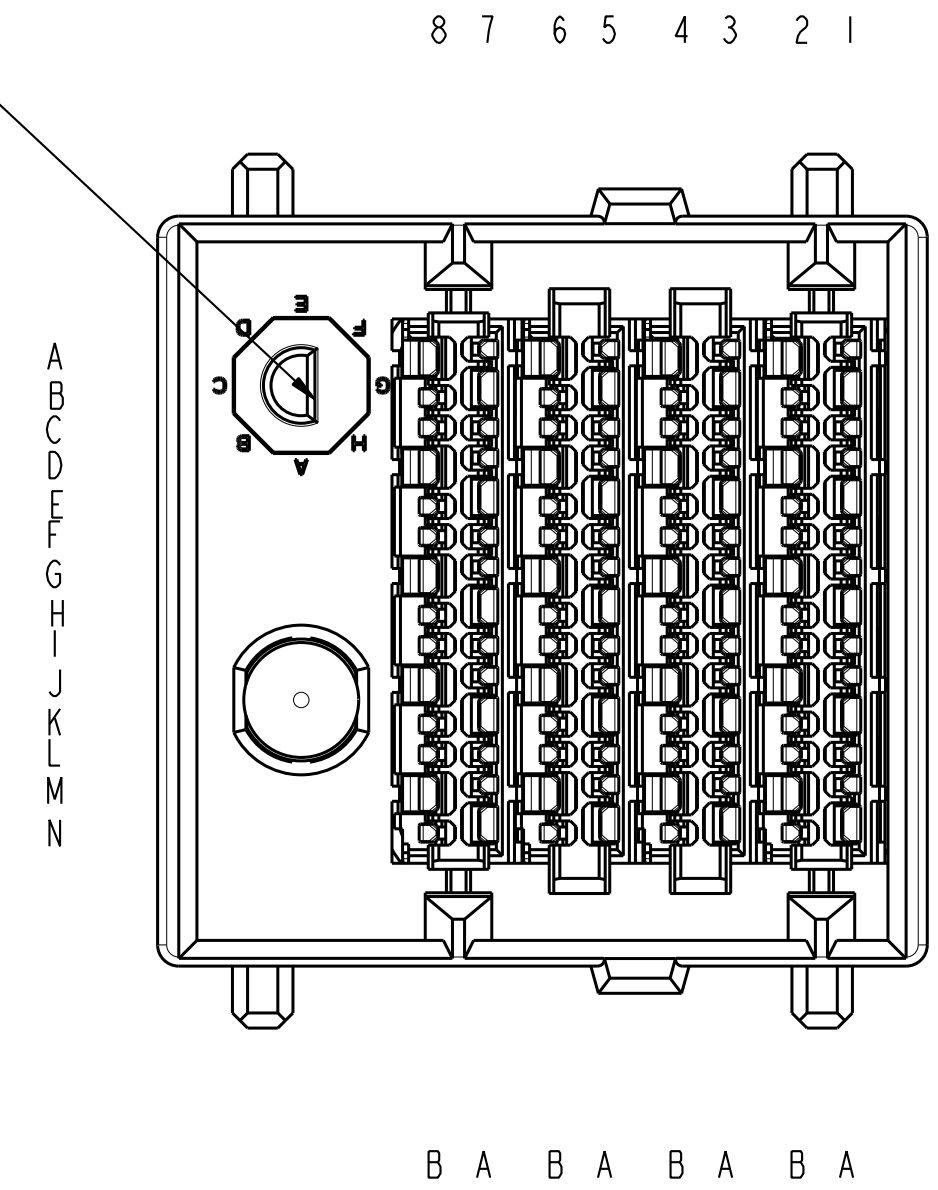

P2
SCALE 4:1

10126226-TXXXX2GLF AS SHOWN

spec ref	-	dr	J. WINEY	2014-09-19	projection	mm	size	A3	scale	1:1
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	K. WEBER	2014-09-19		←→	ecn no	rel level	In Work	rev
ASME Y14.5		chr	K. WEBER	2014-09-19						
surface		linear	0.X	±		product family	-	10126226	7	
✓	0.XX	±	www.fci.com							
	0.XXX	±		cat. no.						-
angular	0°	±°								



Copyright FCI.

FCI PART NUMBER	DESCRIPTION
10126226-TXXXXYYLF	EXaMAX IO 2.0mm 4-PAIR 8-COLUMN SINGLE PAIR CABLE ASSEMBLY

PIN-OUT CONFIGURATION (P1 & P2)

1	2	3	4	5	6	7	8	
GND	LS2	GND	LS4	GND	LS6	GND	LS8	N
TX1+	GND	TX5+	GND	TX9+	GND	TX13+	GND	M
TX1-	TX3+	TX5-	TX7+	TX9-	TX11+	TX13-	TX15+	L
GND	TX3-	GND	TX7-	GND	TX11-	GND	TX15-	K
TX2+	GND	TX6+	GND	TX10+	GND	TX14+	GND	J
TX2-	TX4+	TX6-	TX8+	TX10-	TX12+	TX14-	TX16+	I
GND	TX4-	GND	TX8-	GND	TX12-	GND	TX16-	H
RX2-	GND	RX6-	GND	RX10-	GND	RX14-	GND	G
RX2+	RX4-	RX6+	RX8-	RX10+	RX12-	RX14+	RX16-	F
GND	RX4+	GND	RX8+	GND	RX12+	GND	RX16+	E
RX1-	GND	RX5-	GND	RX9-	GND	RX13-	GND	D
RX1+	RX3-	RX5+	RX7-	RX9+	RX11-	RX13+	RX15-	C
GND	RX3+	GND	RX7+	GND	RX11+	GND	RX15+	B
LS1	GND	LS3	GND	LS5	GND	LS7	GND	A
A	B	A	B	A	B	A	B	

spec ref	-	dr	J. WINEY	2014-09-19	projection	mm	size	A3	scale	1:1
tolerance std	ASME Y14.5	eng	K. WEBER	2014-09-19			ecn no			
	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	K. WEBER	2014-09-19			rel level	In Work		
surface	✓	appr			product family	-	rel level	In Work		
	linear	0.X	±		EXAMAX IO 2.0mm PITCH	PASSIVE LATCH BACK PLANE CABLE ASSY	dwg no	10126226	rev	7
		0.XX	±							
		0.XXX	±							
	angular	0°	±°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 3 of 6		



A

A

B

B

C

C

D

D

IMLA WIRING LIST		
P1 END		P2 END
IMLA COLUMN		IMLA COLUMN
1		1
2		2
3		3
4		4
5		5
6		6
7		7
8		8

DETAILED WIRING LIST for COLUMN 1 (A IMLA) (SEE NOTE 16)				
P1 END			P2 END	
POSITION	SYMBOL		POSITION	SYMBOL
NI	GND	-----	BI	GND
MI	TX1+		CI	RX1+
LI	TX1-		DI	RX1-
KI	GND	-----	EI	GND
JI	TX2+		FI	RX2+
II	TX2-		GI	RX2-
HI	GND	-----	HI	GND
GI	RX2-		II	TX2-
FI	RX2+		JI	TX2+
EI	GND	-----	KI	GND
DI	RX1-		LI	TX1-
CI	RX1+		MI	TX1+
BI	GND	-----	NI	GND
AI	LSI	=====	AI	LSI

DETAILED WIRING LIST for COLUMN 2 (B IMLA) (SEE NOTE 16)				
P1 END			P2 END	
POSITION	SYMBOL		POSITION	SYMBOL
N2	LS2	=====	N2	LS2
M2	GND	-----	A2	GND
L2	TX3+		B2	RX3+
K2	TX3-		C2	RX3-
J2	GND	-----	D2	GND
I2	TX4+		E2	RX4+
H2	TX4-		F2	RX4-
G2	GND	-----	G2	GND
F2	RX4-		H2	TX4-
E2	RX4+		I2	TX4+
D2	GND	-----	J2	GND
C2	RX3-		K2	TX3-
B2	RX3+		L2	TX3+
A2	GND	-----	M2	GND

spec ref	-	dr	J. WINEY	2014-09-19	projection		size	A3	scale	1:1	
tolerance std	ASME Y14.5	eng	K. WEBER	2014-09-19	mm		ecn no				
	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	K. WEBER	2014-09-19	product family	-	rel level	In Work			
surface		appr									
	linear	0.X	±			title	EXAMAX 10 2.0mm PITCH	dwg no	10126226	rev	7
		0.XX	±		www.fci.com		PASSIVE LATCH BACK PLANE CABLE ASSY				
		0.XXX	±		cat. no.		Product - Customer Drw				
	angular	0°	±°								sheet 4 of 6



Copyright FCI.

10126226-TXXXXYYLF

CABLE IDENTIFICATION INFORMATION		
"T"	WIRE SIZE	DESCRIPTION
A	30 AWG	30AWG, HIGH SPEED SINGLE PAIR, CABLE
B	26 AWG	26AWG, HIGH SPEED SINGLE PAIR, CABLE

30AWG PART NUMBERS		
LENGTH (DIM "L") = METERS		
CABLE ASSEMBLY PART NUMBER	=	METER(S)
10126226-A0050YYLF	=	0.50
10126226-A0100YYLF	=	1.00
10126226-A0150YYLF	=	1.50
10126226-A0200YYLF	=	2.00
10126226-A0250YYLF	=	2.50
10126226-A0300YYLF	=	3.00
10126226-A0350YYLF	=	3.50
10126226-A0400YYLF	=	4.00
10126226-A0450YYLF	=	4.50
10126226-A0500YYLF	=	5.00
10126226-A0550YYLF	=	5.50
10126226-A0600YYLF	=	6.00

26AWG PART NUMBERS		
LENGTH (DIM "L") = METERS		
CABLE ASSEMBLY PART NUMBER	=	METER(S)
10126226-B0050YYLF	=	0.50
10126226-B0100YYLF	=	1.00
10126226-B0150YYLF	=	1.50
10126226-B0200YYLF	=	2.00
10126226-B0250YYLF	=	2.50
10126226-B0300YYLF	=	3.00
10126226-B0350YYLF	=	3.50
10126226-B0400YYLF	=	4.00
10126226-B0450YYLF	=	4.50
10126226-B0500YYLF	=	5.00
10126226-B0550YYLF	=	5.50
10126226-B0600YYLF	=	6.00

MODULE DESCRIPTION	DESIGNATION REPRESENTED IN DASH NUMBER									
W/O END GUIDE MODULE	01									
RIGHT GUIDANCE MODULE	1A	1B	1C	1D	1E	1F	1G	1H	1J (NO KEY)	
LEFT GUIDANCE MODULE	2A	2B	2C	2D	2E	2F	2G	2H	2J (NO KEY)	

spec ref	-	dr	J. WINEY	2014-09-19	projection	mm	size	A3	scale	1:1
tolerance std	ASME Y14.5	eng	K. WEBER	2014-09-19			ecn no	rel level	In Work	rev
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	K. WEBER	2014-09-19						
surface	✓	appr			product family	-	rel level	In Work	rev	7
	linear	0.X	±		FCj		10126226		EXAMAX IO 2.0mm PITCH	
		0.XX	±		www.fci.com		cat. no.		Product - Customer Drw	
		0.XXX	±		cat. no.		Product - Customer Drw		sheet 5 of 6	
	angular	0°	±°		cat. no.		Product - Customer Drw		sheet 5 of 6	



FCI PART NUMBER	DESCRIPTION
10126226-TXXXXYYLF	EXAMAX IO 2.0mm 4-PAIR 8-COLUMN SINGLE PAIR CABLE ASSEMBLY

NOTES:

- ASSEMBLED LENGTH TOLERANCE: $\pm 2\%$ OF LENGTH
- CONNECTOR MATERIALS:
HOUSING: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
CONTACT: COPPER ALLOY
RETENTION BAR: HIGH TEMP THERMOPLASTIC, BLACK, UL94-V0
PLASTIC WOVEN BRAID: PET
TAPE: TBD
LABEL: TBD
- CONTACT PLATING:
SEPARABLE INTERFACE:
PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-1096 INCLUDING TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE TEST SEQUENCE
- LABEL DETAILS:
MANUFACTURE CODE OR NAME
FCI PART NUMBER - REVISION
DATA CODE (YYYY/MM/DD FORMAT) - SERIAL #
COUNTRY OF ORIGIN

FONT SHALL BE CLEARLY VISIBLE AND BLACK IN COLOR
- CABLE PACKAGING PER FCI GLOBAL STANDARD: GS-14-1272
- PACKAGING MEETS GS-14-920 LEAD FREE LABELING SPECIFICATION
- LEAD FREE PRODUCTS MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-47-0004
- REFERENCE APPLICATION SPEC: GS-20-0412
- ALL CABLE ASSEMBLIES SHALL BE TESTED 100% FOR CONTINUITY AS DEFINED IN WIRING LIST
- UNLESS OTHERWISE SPECIFIED ALL CABLE ASSEMBLIES SHALL BE 100% HI-POT TESTED BY APPLYING 300V DC FOR MINIMUM OF 10ms, UNLESS ACTIVE COMPONENTS ARE USED IN THE ASSEMBLY
- A " \triangle " SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION. THE CURRENT REVISION WILL BE SHOWN IN THE SYMBOL
- MATING BOARD CONNECTOR P/N: 10121056-12JLF
- UNLESS OTHERWISE SPECIFIED, KEY/KEY BUSHING IS NOT INCLUDED
- CONNECTOR ASSEMBLIES SHOWN ARE FOR REFERENCE ONLY AND MAY NOT SHOW ALL PART DETAIL. REFERENCE CONNECTOR ASSEMBLY DRAWINGS FOR COMPLETE DETAILS
- FINISHED ASSEMBLY SHALL BE IN A SUITABLY SIZED POLY BAG OR EQUIVALENT
- WIRING LIST IS SHOWN FOR COLUMNS 1 AND 2. ALL OTHER COLUMNS FOLLOW THE SAME PATTERN AS SHOWN IN THE IMLA WIRING LIST
- APPLICABLE PANEL MOUNTING BRACKET PART NUMBERS:
SINGLE PORT: 10127037-101
DUAL PORT: 10127037-102
FOUR PORT: 10127037-104

spec ref	-	dr	J. WINEY	2014-09-19	projection	mm	size	A3	scale	3:10			
tolerance std	ASME Y14.5	eng	K. WEBER	2014-09-19		\longleftrightarrow	ecn no		rel level				
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	K. WEBER	2014-09-19			-		In Work				
surface	linear	appr			product family	-	rel level	In Work					
	0.X					EXAMAX IO 2.0mm PITCH	10126226	7					
	0.XX								PASSIVE LATCH BACK PLANE CABLE ASSY	10126226	7		
	0.XXX												
	angular				www.fci.com	cat. no.	-	Product - Customer Drw	sheet 6 of 6				





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.