

10119187 - X0J - XXXLF

4-COLUMN
DIFFERENTIAL
SIGNAL

LEAD-FREE DESIGNATION
ONLY WITH APPLICABLE
PLATING CODES

LETTER	PERFORMANCE-BASED PLATING (SEE NOTE 2)	
	TARGET APPLICATION	LEAD-FREE (LF)
B	TELCORDIA CO	NO
C	TELCORDIA UE	NO
D	TELCORDIA CO	YES
E	TELCORDIA UE	YES

NUMBER	GUIDE PIN STYLE, HEIGHT
0	STANDARD GUIDE PIN MACHINED, 31.6mm
4	STANDARD GUIDE PIN MACHINED, 25.7mm

NUMBER	CONTACT MATING WIPE LENGTH		COMPLIANT PIN DRILL SIZE
	SIGNAL	GROUND	
1	2	4	Ø0.55 [0.0217"]
2	3	4	Ø0.55 [0.0217"]
3	2	4	Ø0.45 [0.0177"]
4	3	4	Ø0.45 [0.0177"]
5	2	3	Ø0.55 [0.0217"]
6	3	3	Ø0.55 [0.0217"]
7	2	3	Ø0.45 [0.0177"]
8	3	3	Ø0.45 [0.0177"]

TABLE 1: OPTIONAL PCB HOLE SIZE (SEE NOTE 11)

	GROUNDED	UNGROUNDED
FINISHED	Ø2.35-2.55	Ø2.35-2.55
PAD	Ø5.50	N/A
PLATED	YES	NO
DRILL (mm/in)	2.58/.1015	2.44/.096

TABLE 2: OPTIONAL SCREW TYPE (SEE NOTE 10)

SCREW P/N	DESCRIPTION	BOARD THICKNESS
10091790-002LF	#2.56 X .375" PHILIPS PANHEAD W/SQ CONICAL WASHER	1.60 - 5.00
10091790-003LF	#2.56 X .500" PHILIPS PANHEAD W/SQ CONICAL WASHER	5.00 - 10.00

MODULE DESCRIPTION	LETTER DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 3)	J	A	B	C	D	E	F	G	H		
RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 4)	Y	P	Q	R	S	T	U	V	W		
OPEN MODULE (TWO WALL) (SEE SHEET 2)	0 (ZERO)										
LEFT WALL MODULE (SEE SHEET 5)	L										
RIGHT WALL MODULE (SEE SHEET 6)	M										
FOUR WALL MODULE (SEE SHEET 7)	I (ONE)										







spec ref	-	dr	Roger Ng	2011/11/22			size	A2	scale	4:1			
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Sandar Soe	2014/10/02			ecn no	ELX-S-18843-1					
ASME Y14.5		chr	-	-									
appr					Chen-Hong Tan	2014/12/10	product family		XCEDE	rel level	Released		
surface		linear	0.X	±0.2		title	MODULE ASSEMBLY VERTICAL HEADER 4 COLUMN, 3 PAIR			dwg no	10119187	rev	B
		0.XX	±0.10										
ASME Y14.5	angular	0°	±0.050	±2°									
		www.fci.com		cat. no.	-	Product - Customer Drw			sheet 1 of 8				

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

OPEN (2- WALL) MODULE

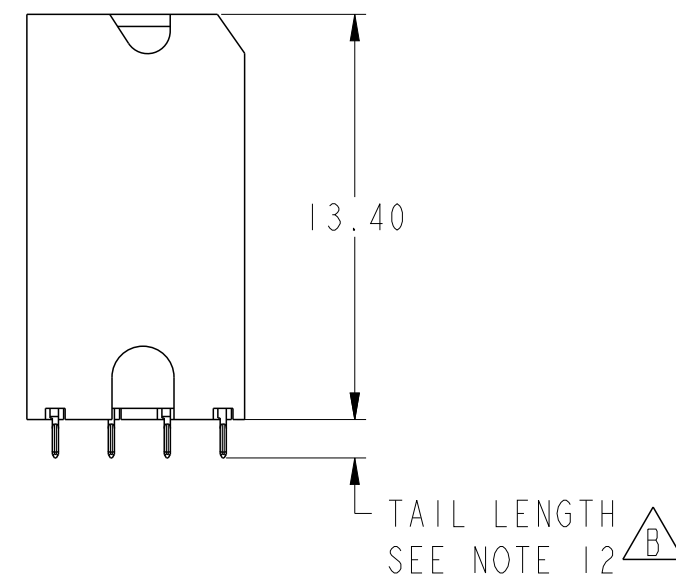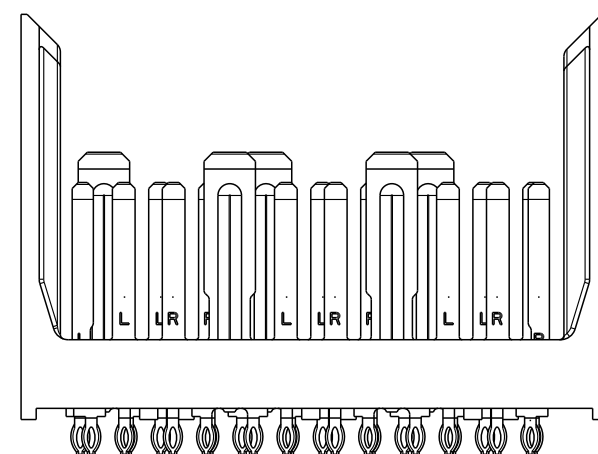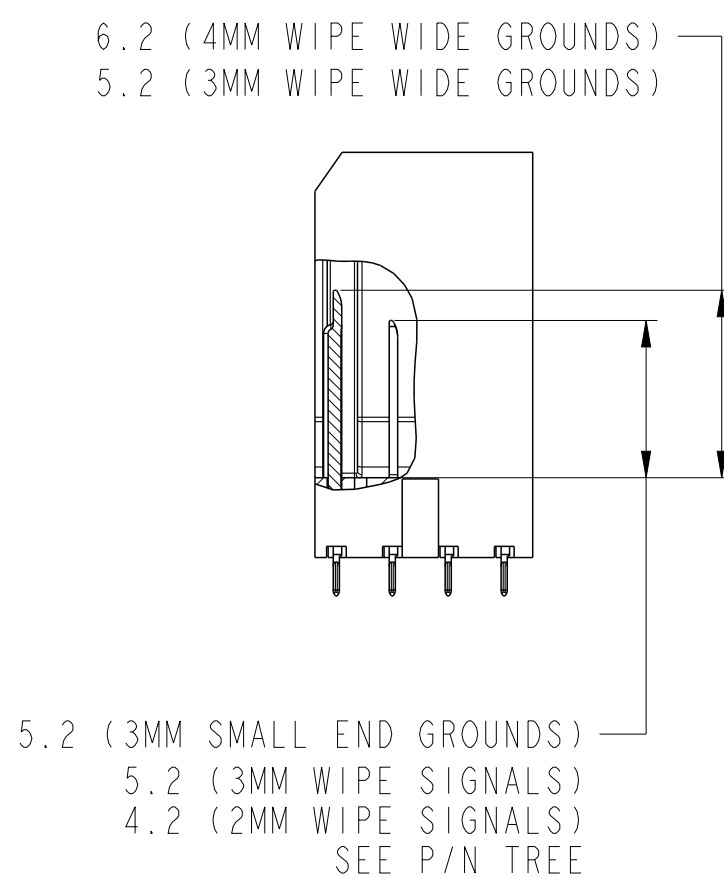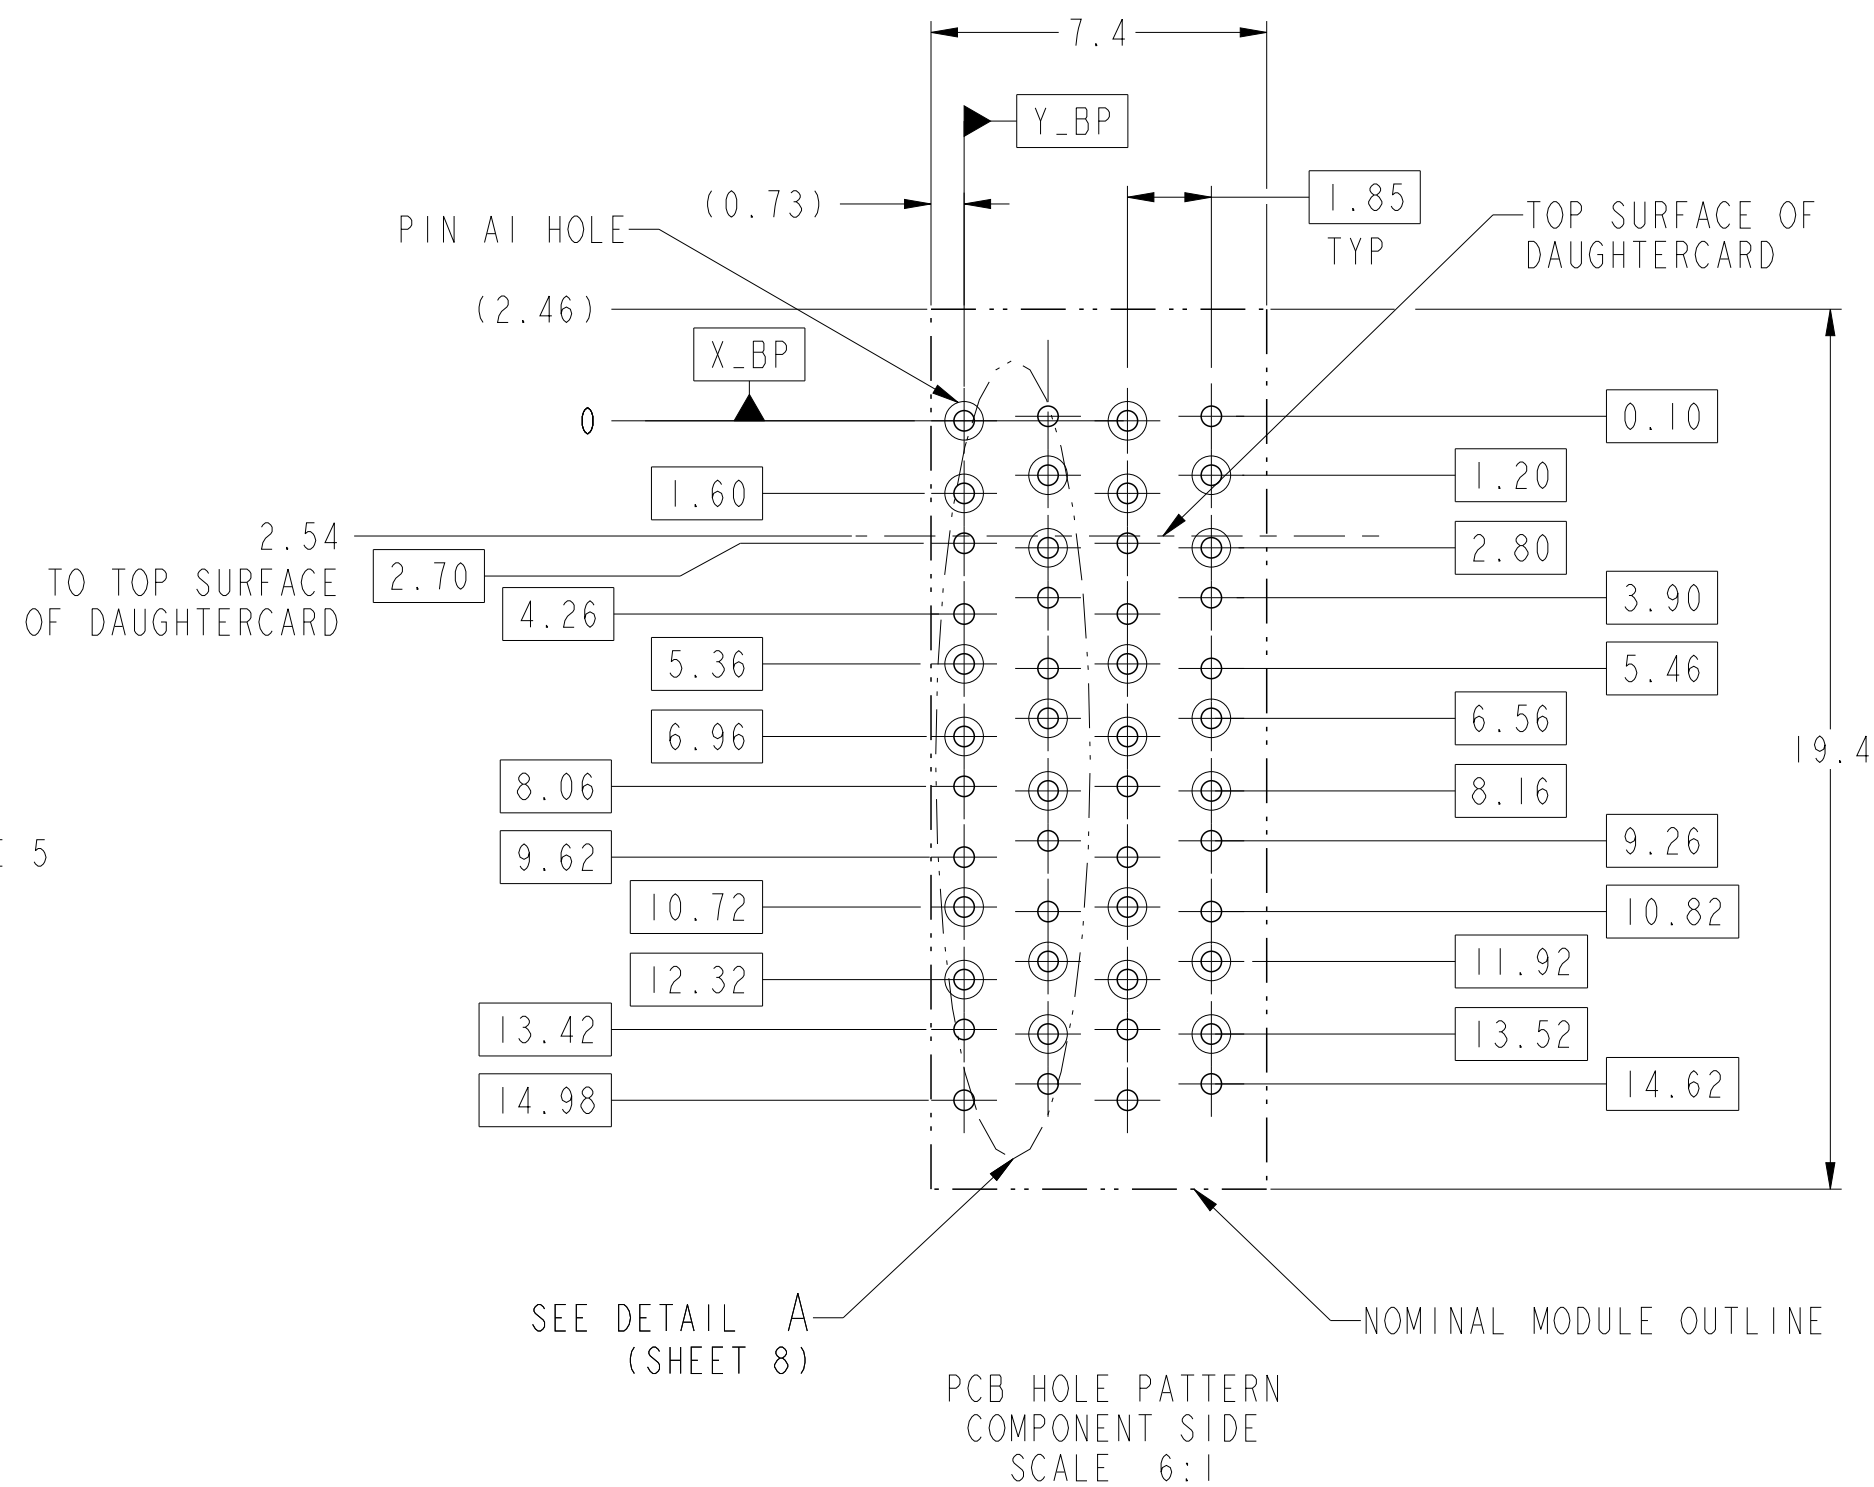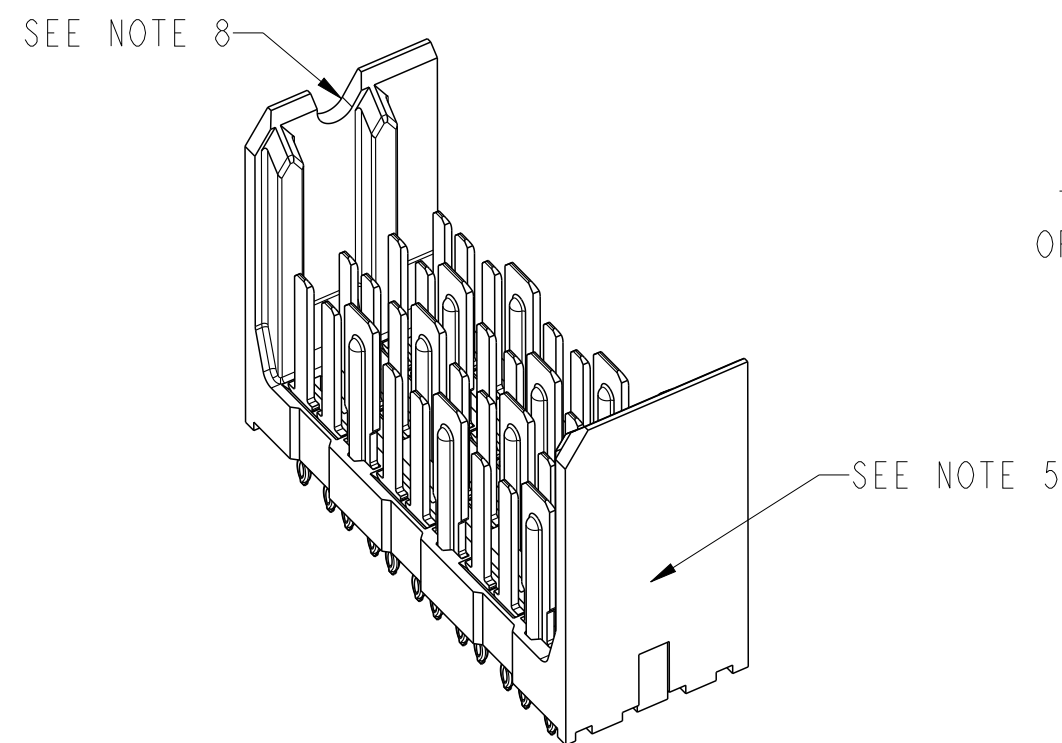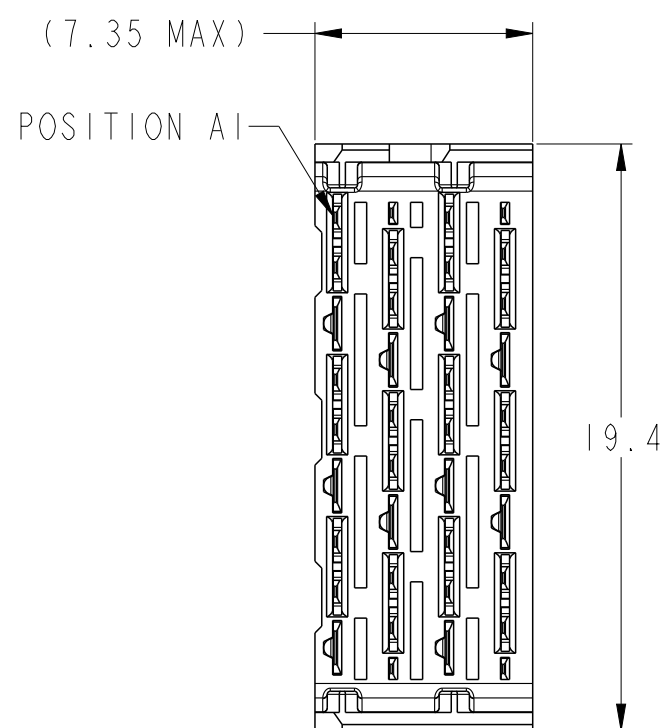







spec ref		-		dr		Roger Ng		2011/11/22		projection		MM		size		A2		scale		4:1			
tolerance std		-		eng		Sandar Soe		2014/10/02						ecn no		ELX-S-18843-1							
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-						product family		XCEDE		rel level		Released			
				appr		Chen-Hong Tan		2014/12/10															
surface		✓		linear		0.X		±0.2				title		MODULE ASSEMBLY		dwg no		10119187		rev		B	
				0.XX		±0.10																	
				0.XXX		±0.050																	
ASME Y14.5				angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 2 of 8					

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

LEFT POLARIZING/GUIDE MODULE

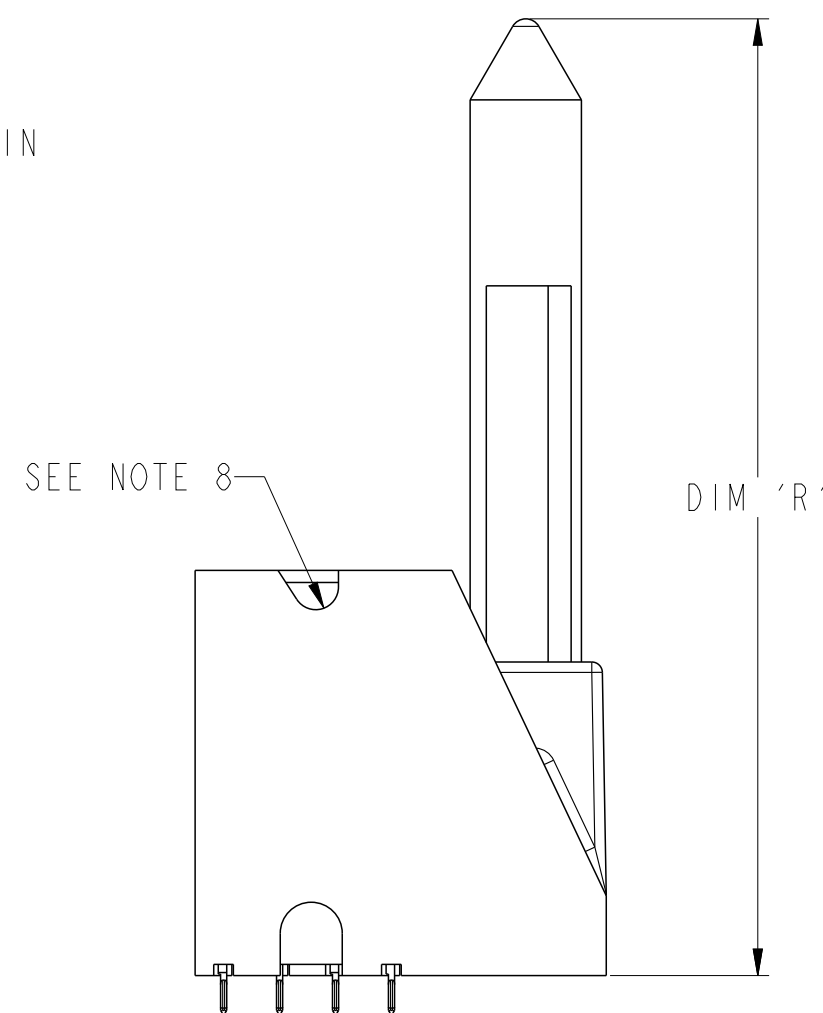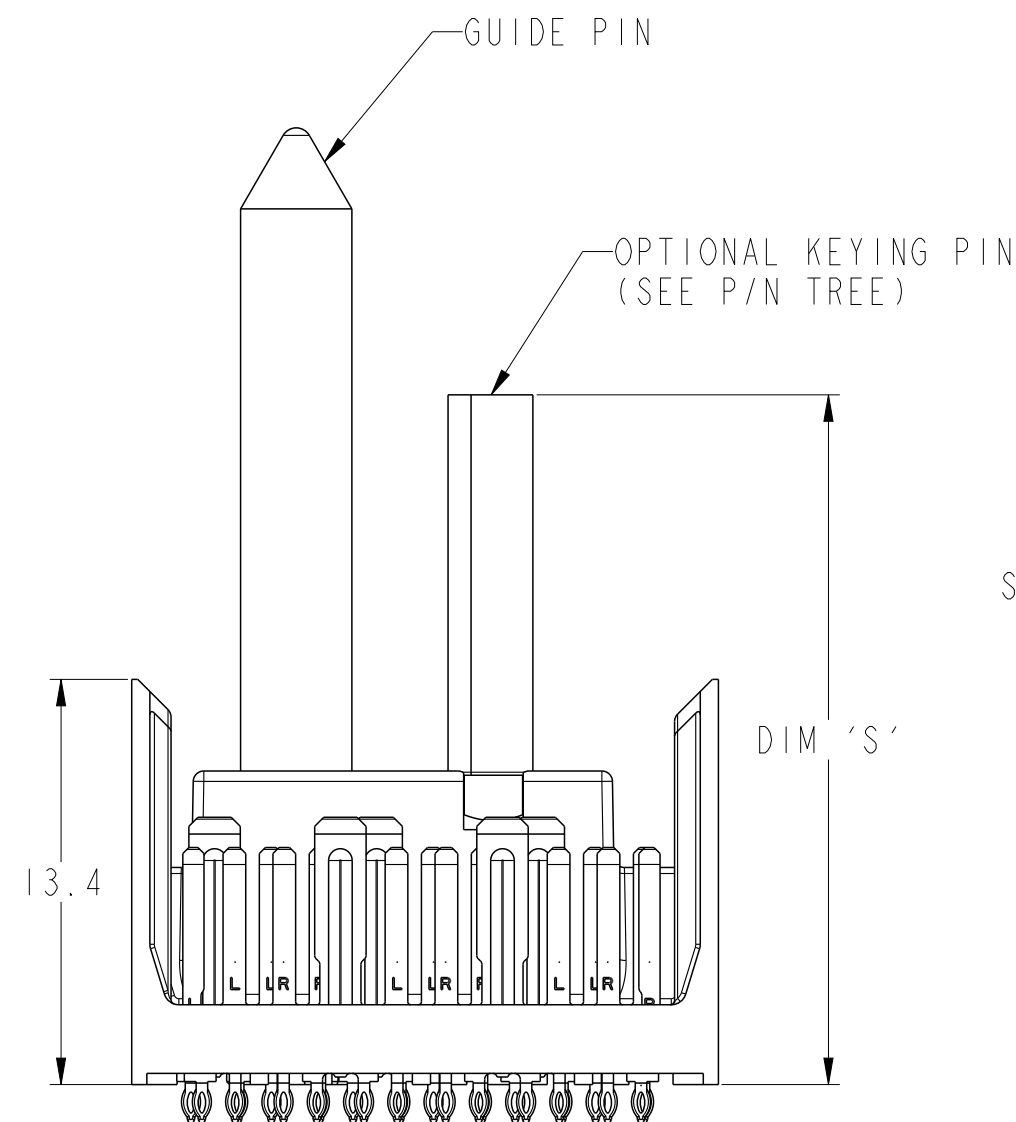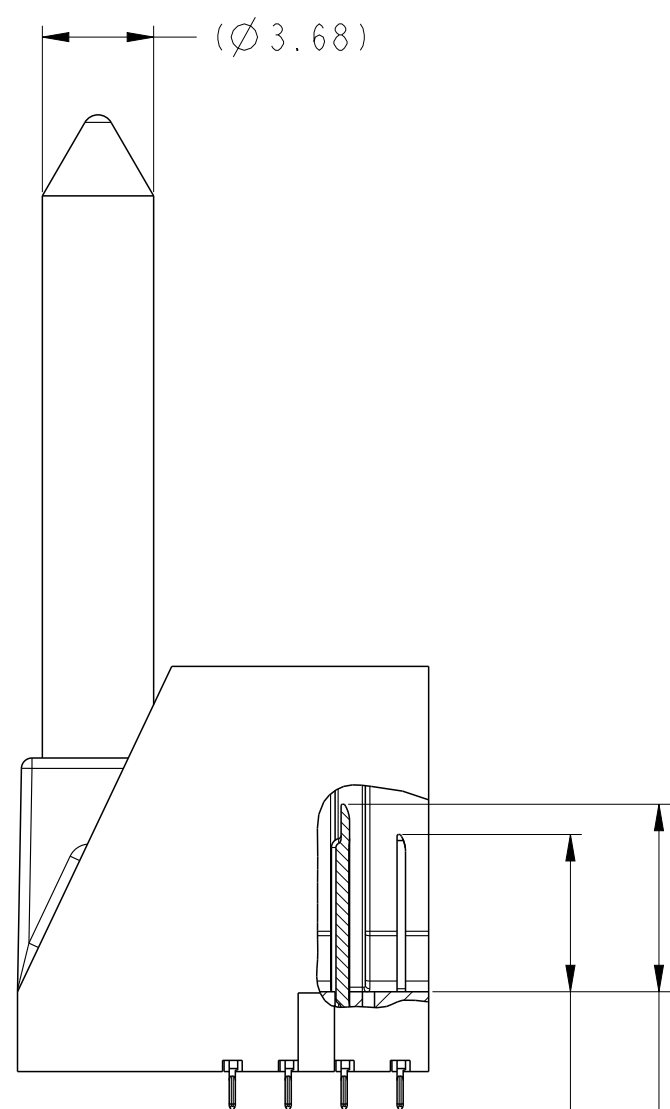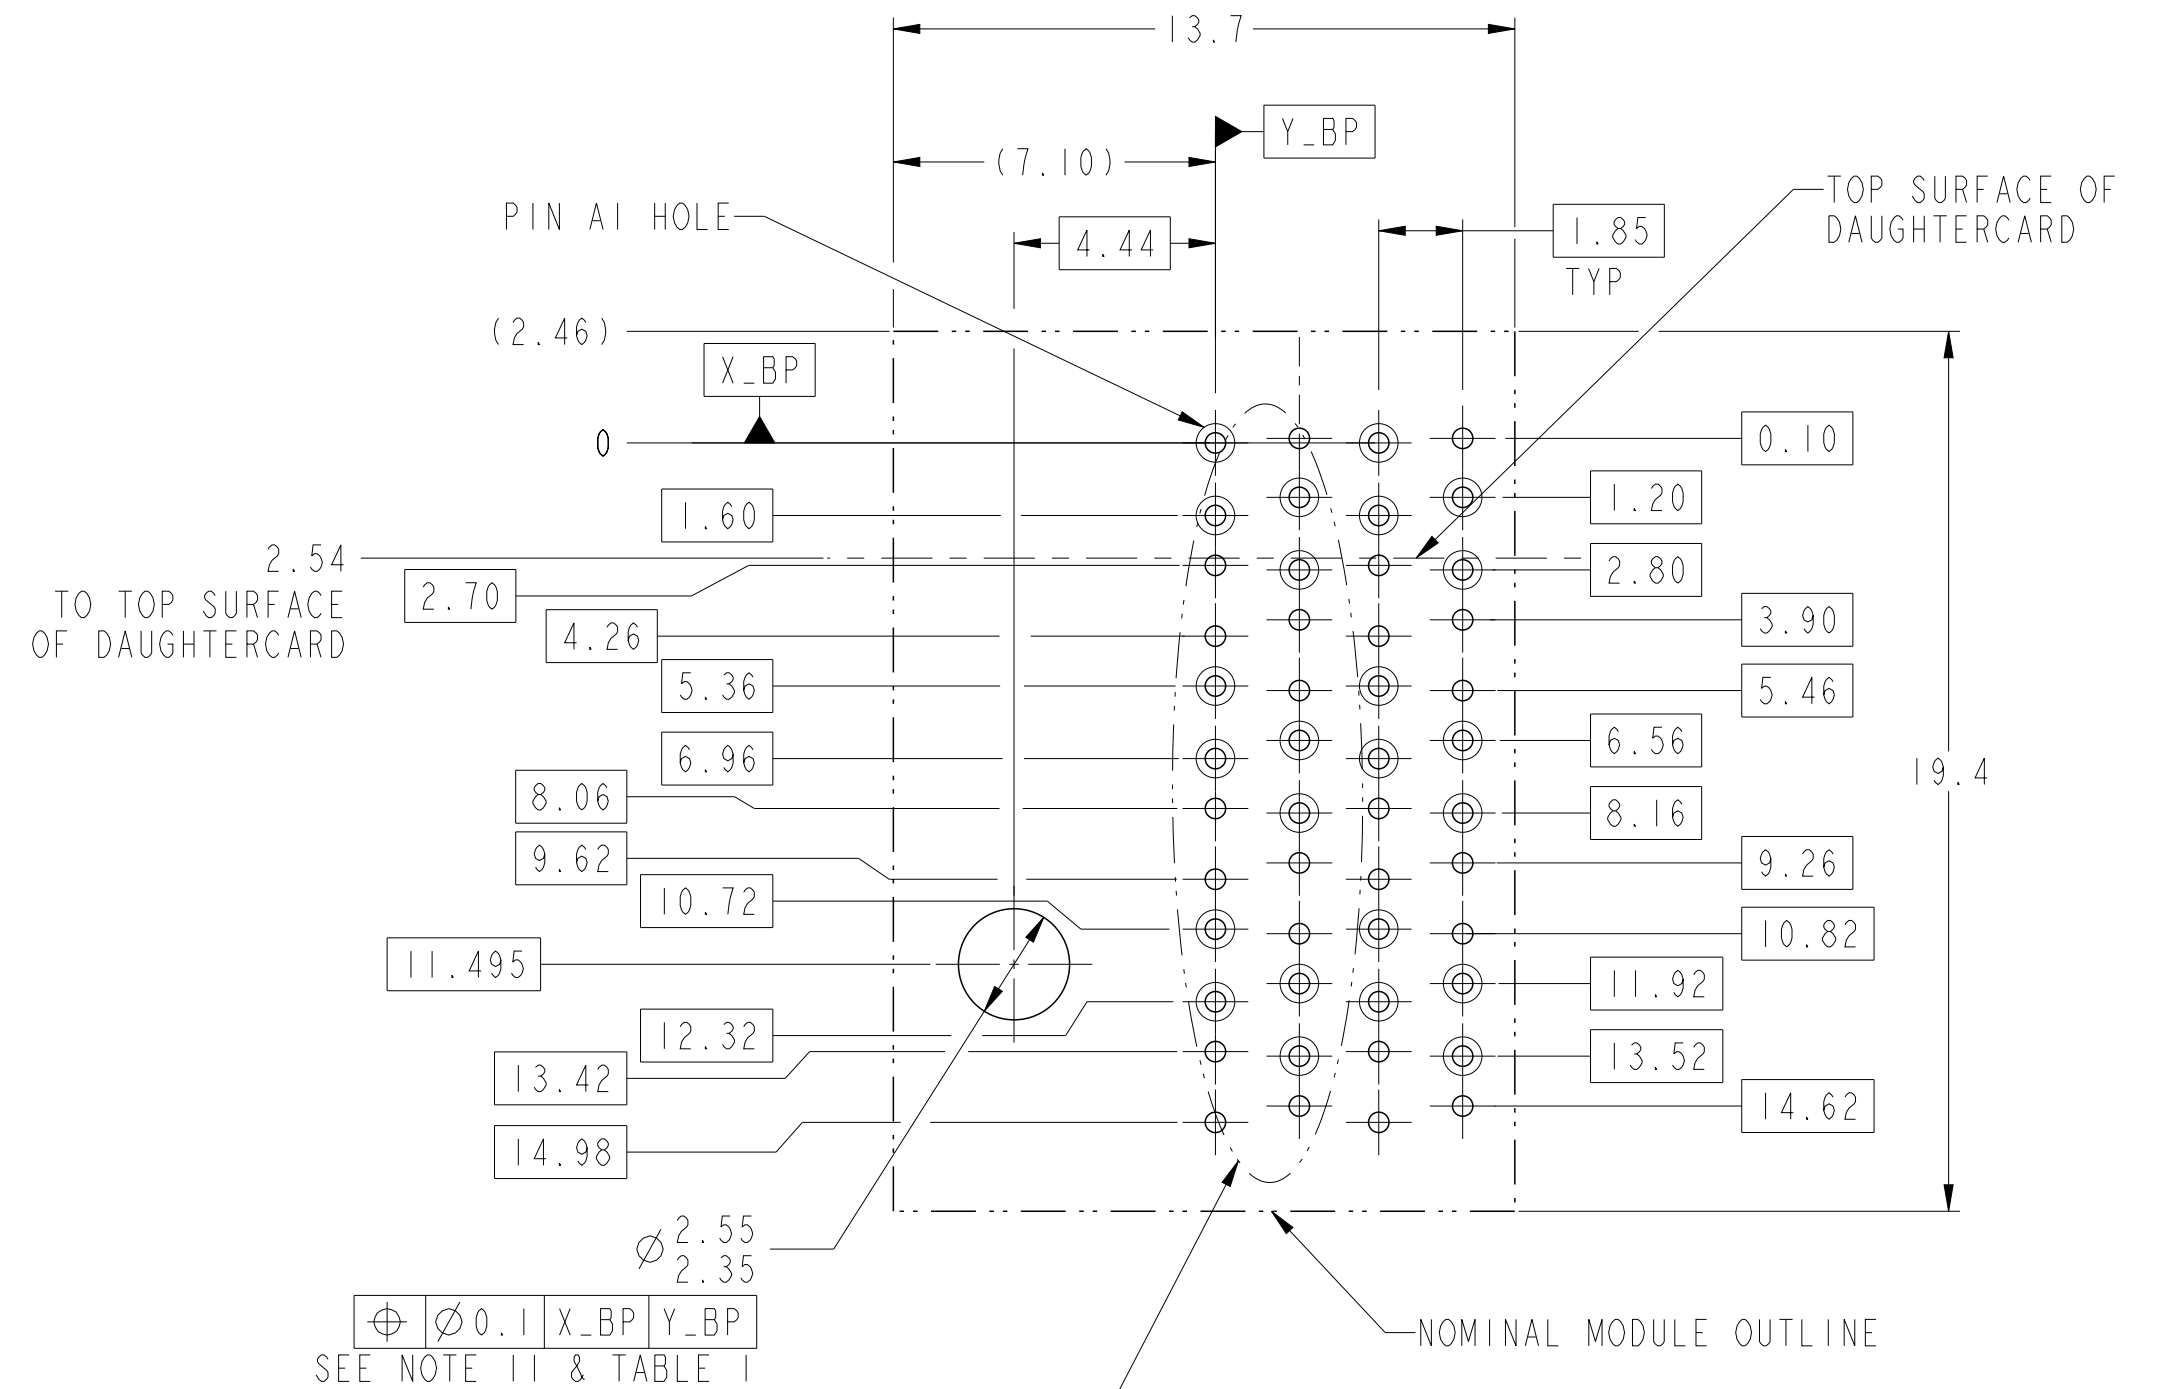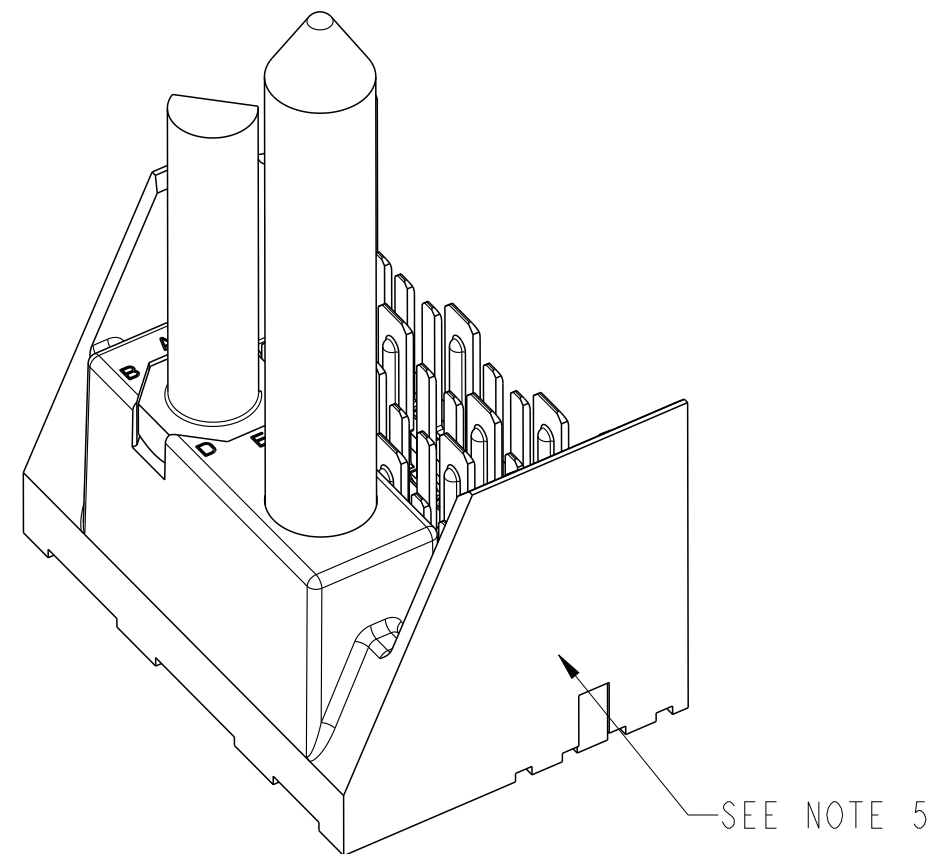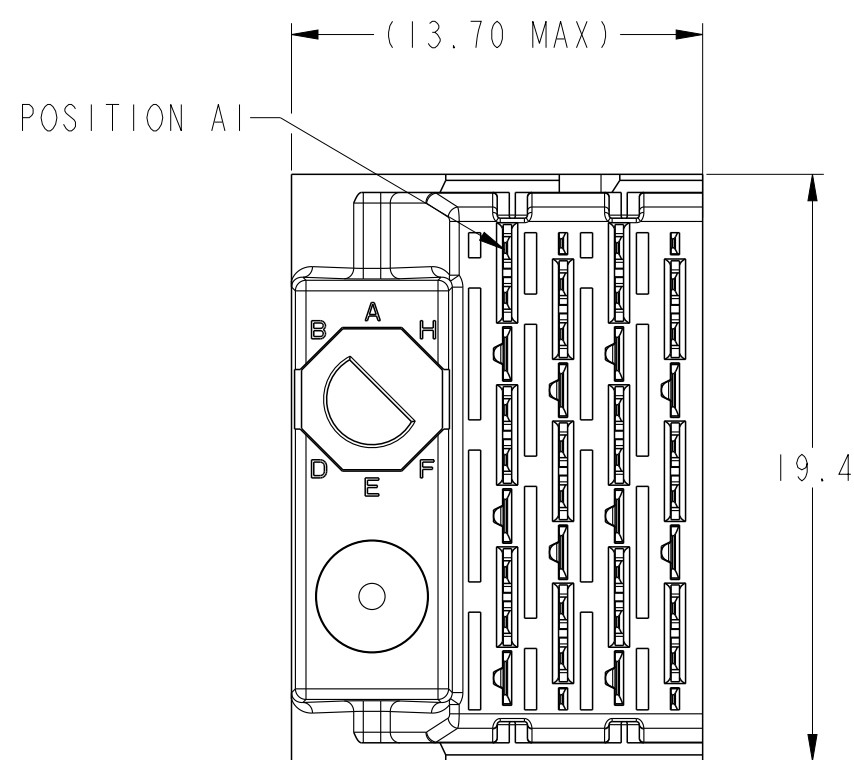

ASSEMBLY BASE CONFIGURATION END DASH NO.	GUIDE PIN	POLARIZING KEY
	DIM 'R'	DIM 'S'
-X0X	31.6mm	22.8mm
-X4X	25.7mm	20.0mm

5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE
6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)


spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02	chr	-	ecn no	ELX-S-18843-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Chen-Hong Tan	2014/12/10	product family	XCEDE	rel level	Released	rev	B
surface	linear	0.X	±0.2	0.XX	±0.10	0.XXX	±0.050	angular	0°	±2°
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 3 of 8		

PDS: Rev :B


STATUS:Released

Printed: Dec 10, 2014


RIGHT POLARIZING/GUIDE MODULE

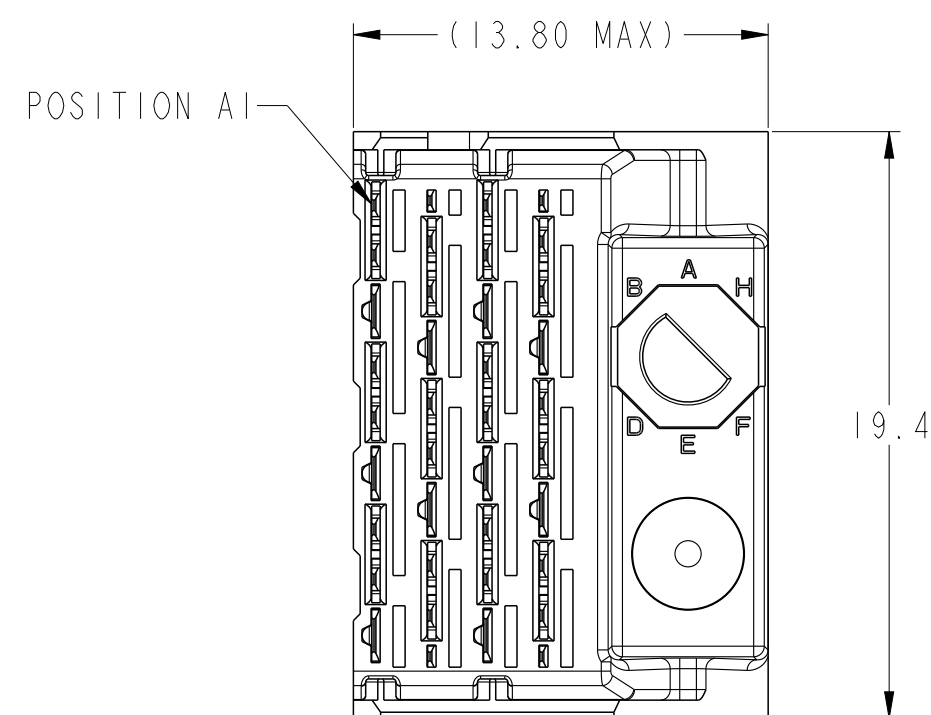


SEE NOTE 8

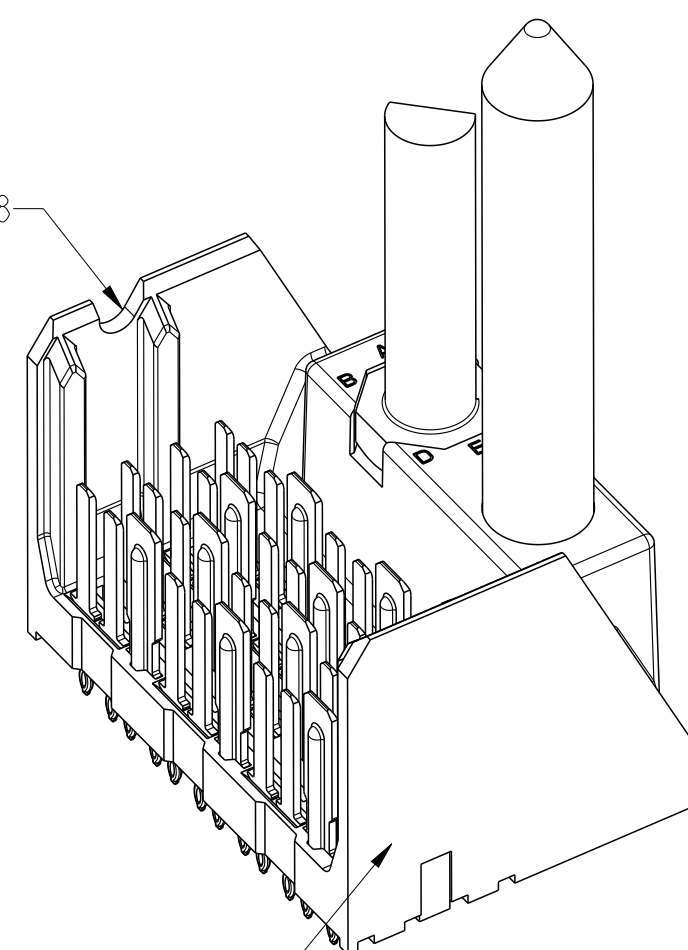

SEE NOTE 5


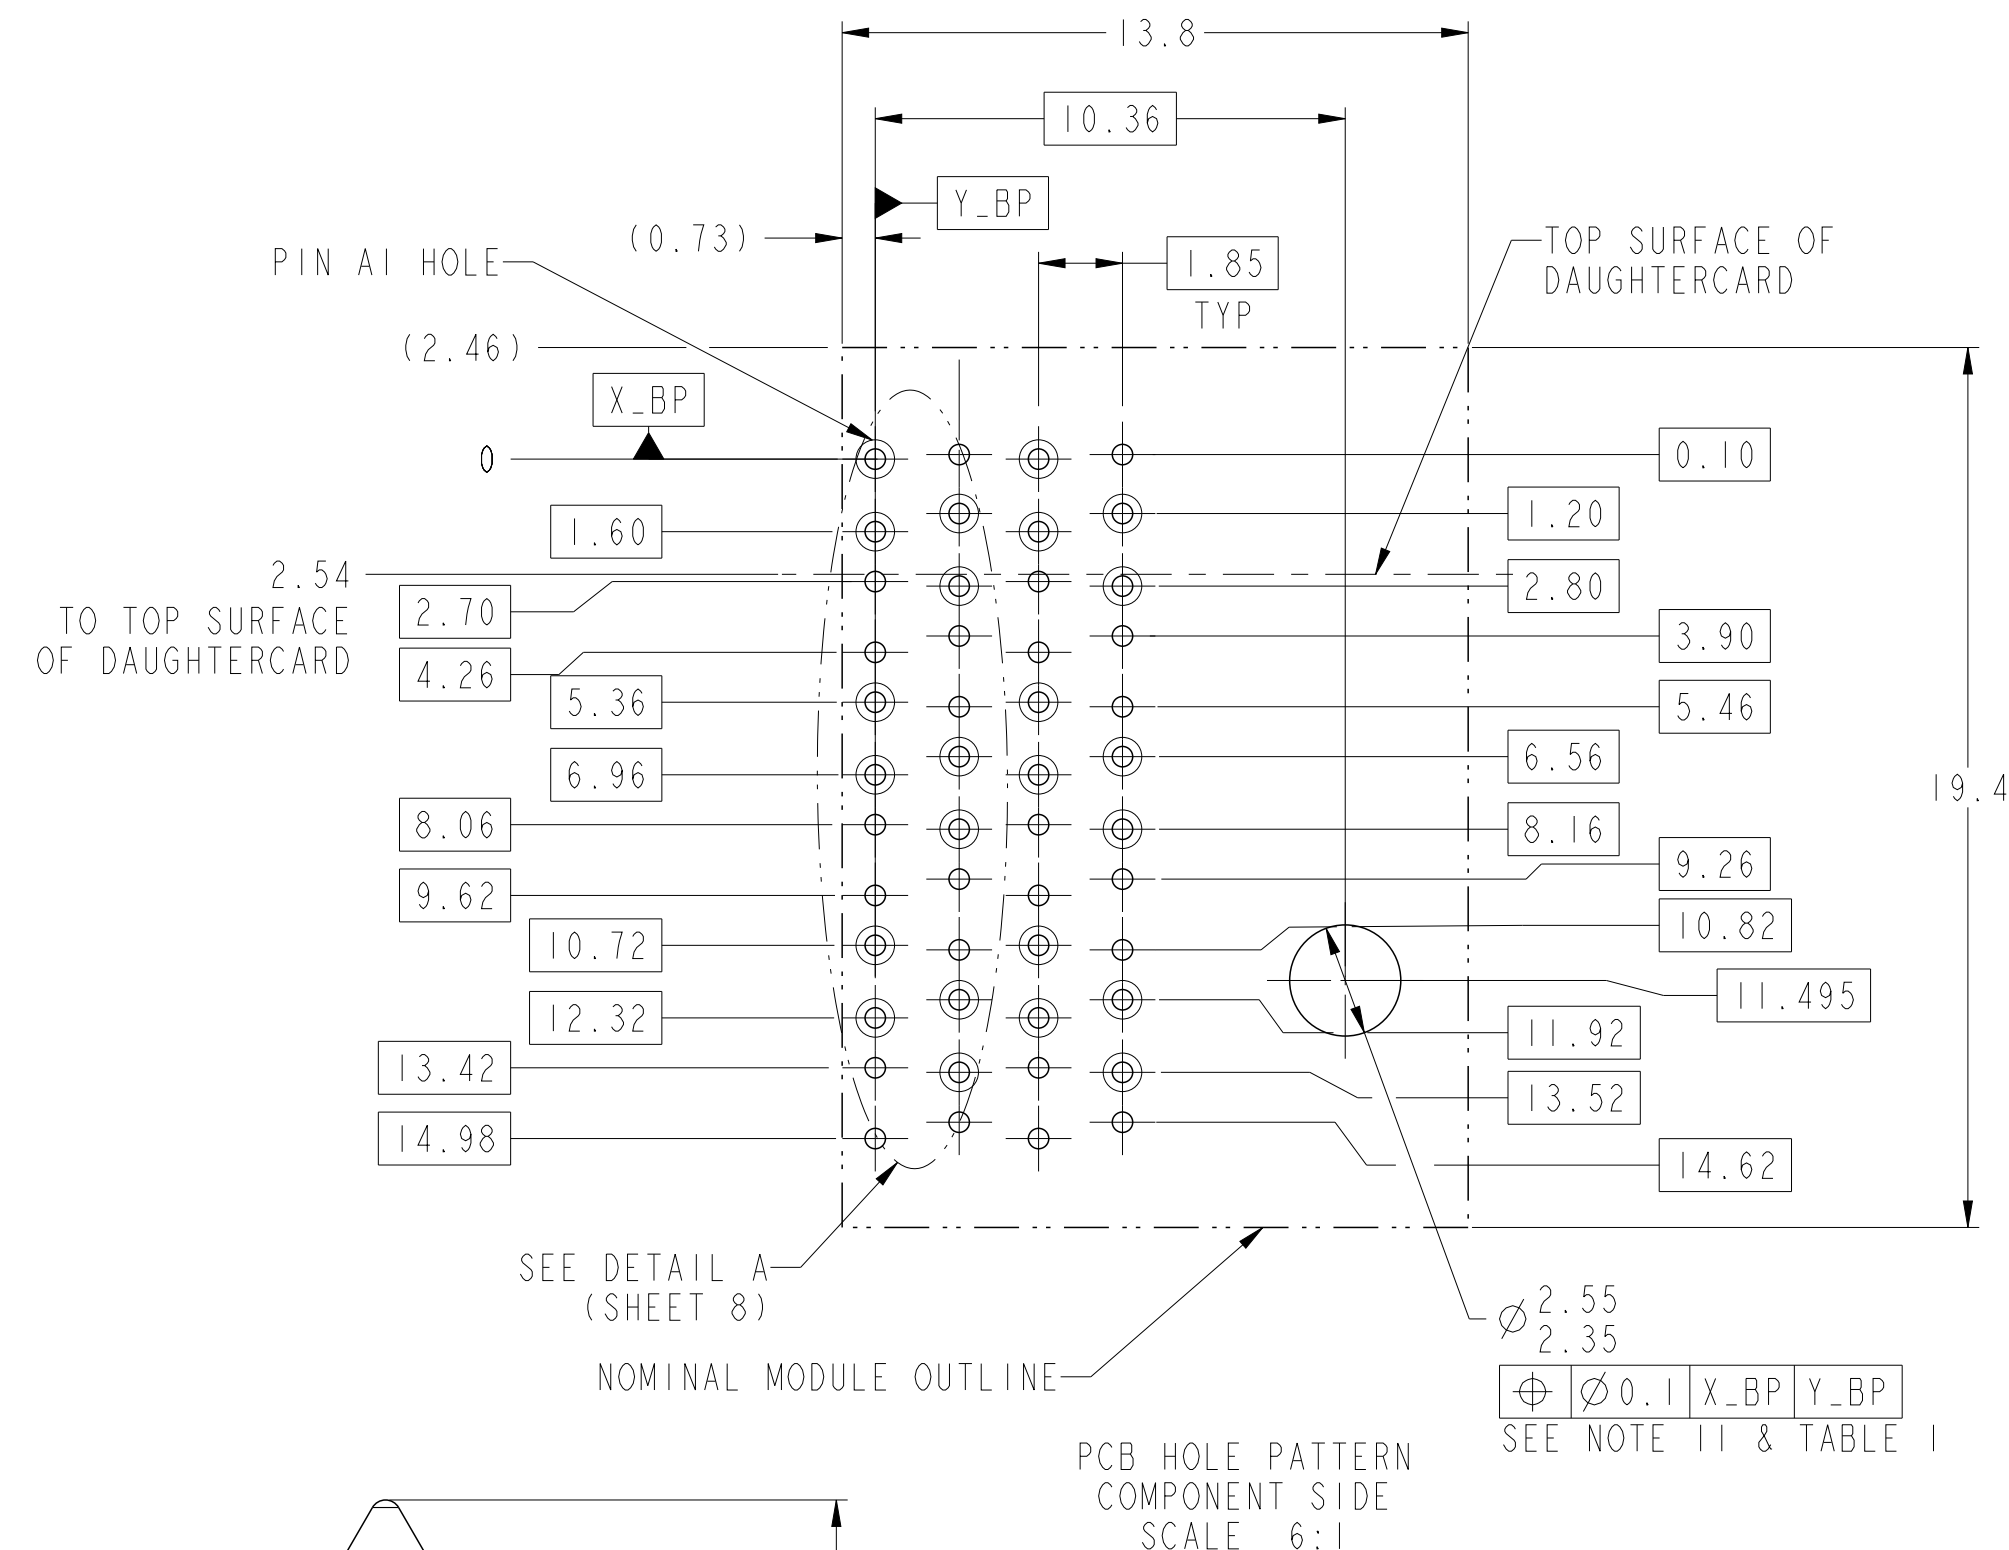


(Ø 3.68)

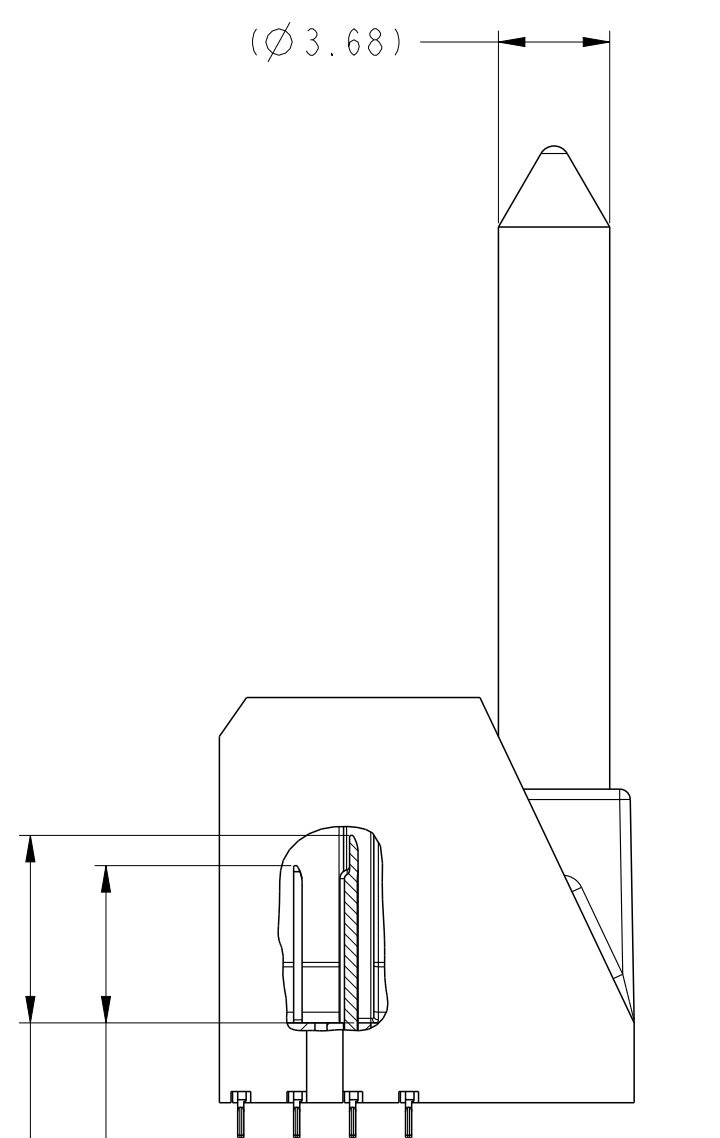

5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE

6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)

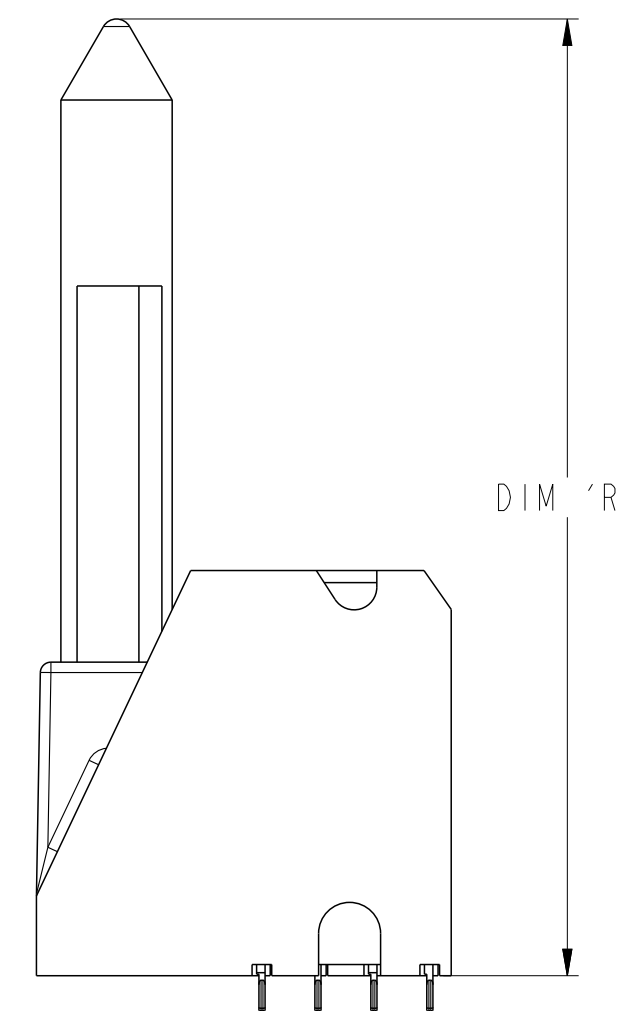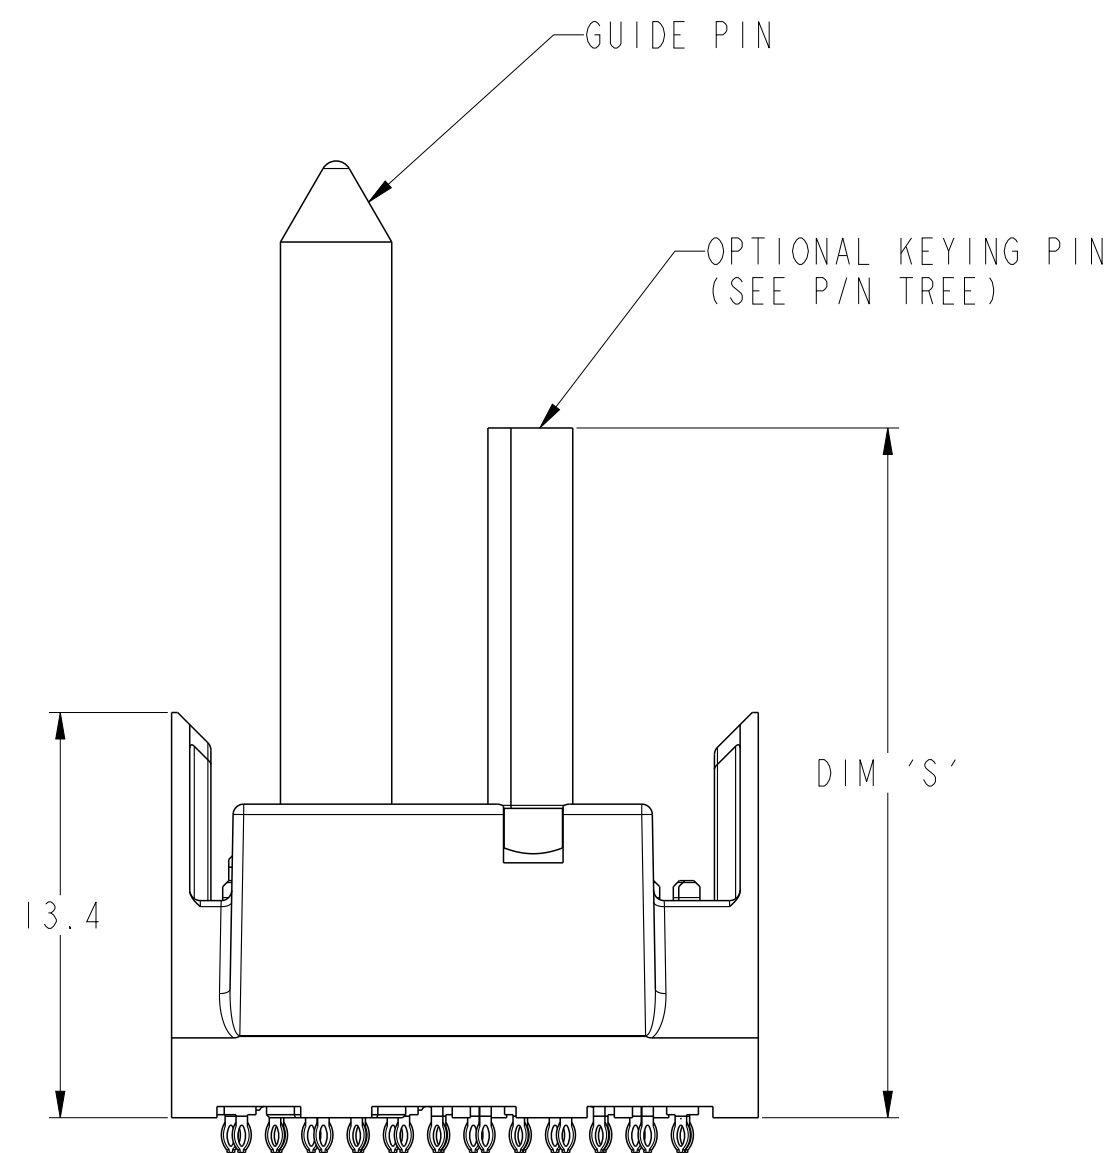

TAIL LENGTH
SEE NOTE 12





spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	ASME Y14.5	eng	Sandar Soe	2014/10/02	chr	-	ecn no	ELX-S-18843-1	rel level	Released
surface	✓	appr	Chen-Hong Tan	2014/12/10	product family	XCEDE	rel level	Released	rev	B
linear	0.X ±0.2 0.XX ±0.10 0.XXX ±0.050	FCI	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 4 of 8			
angular	0° ±2°									

PDS: Rev :B

STATUS:Released



Printed: Dec 10, 2014


LEFT WALL MODULE

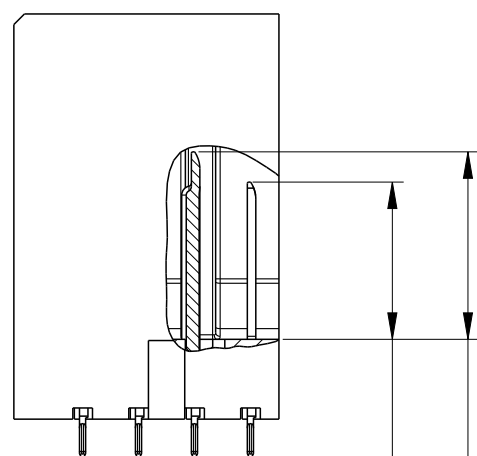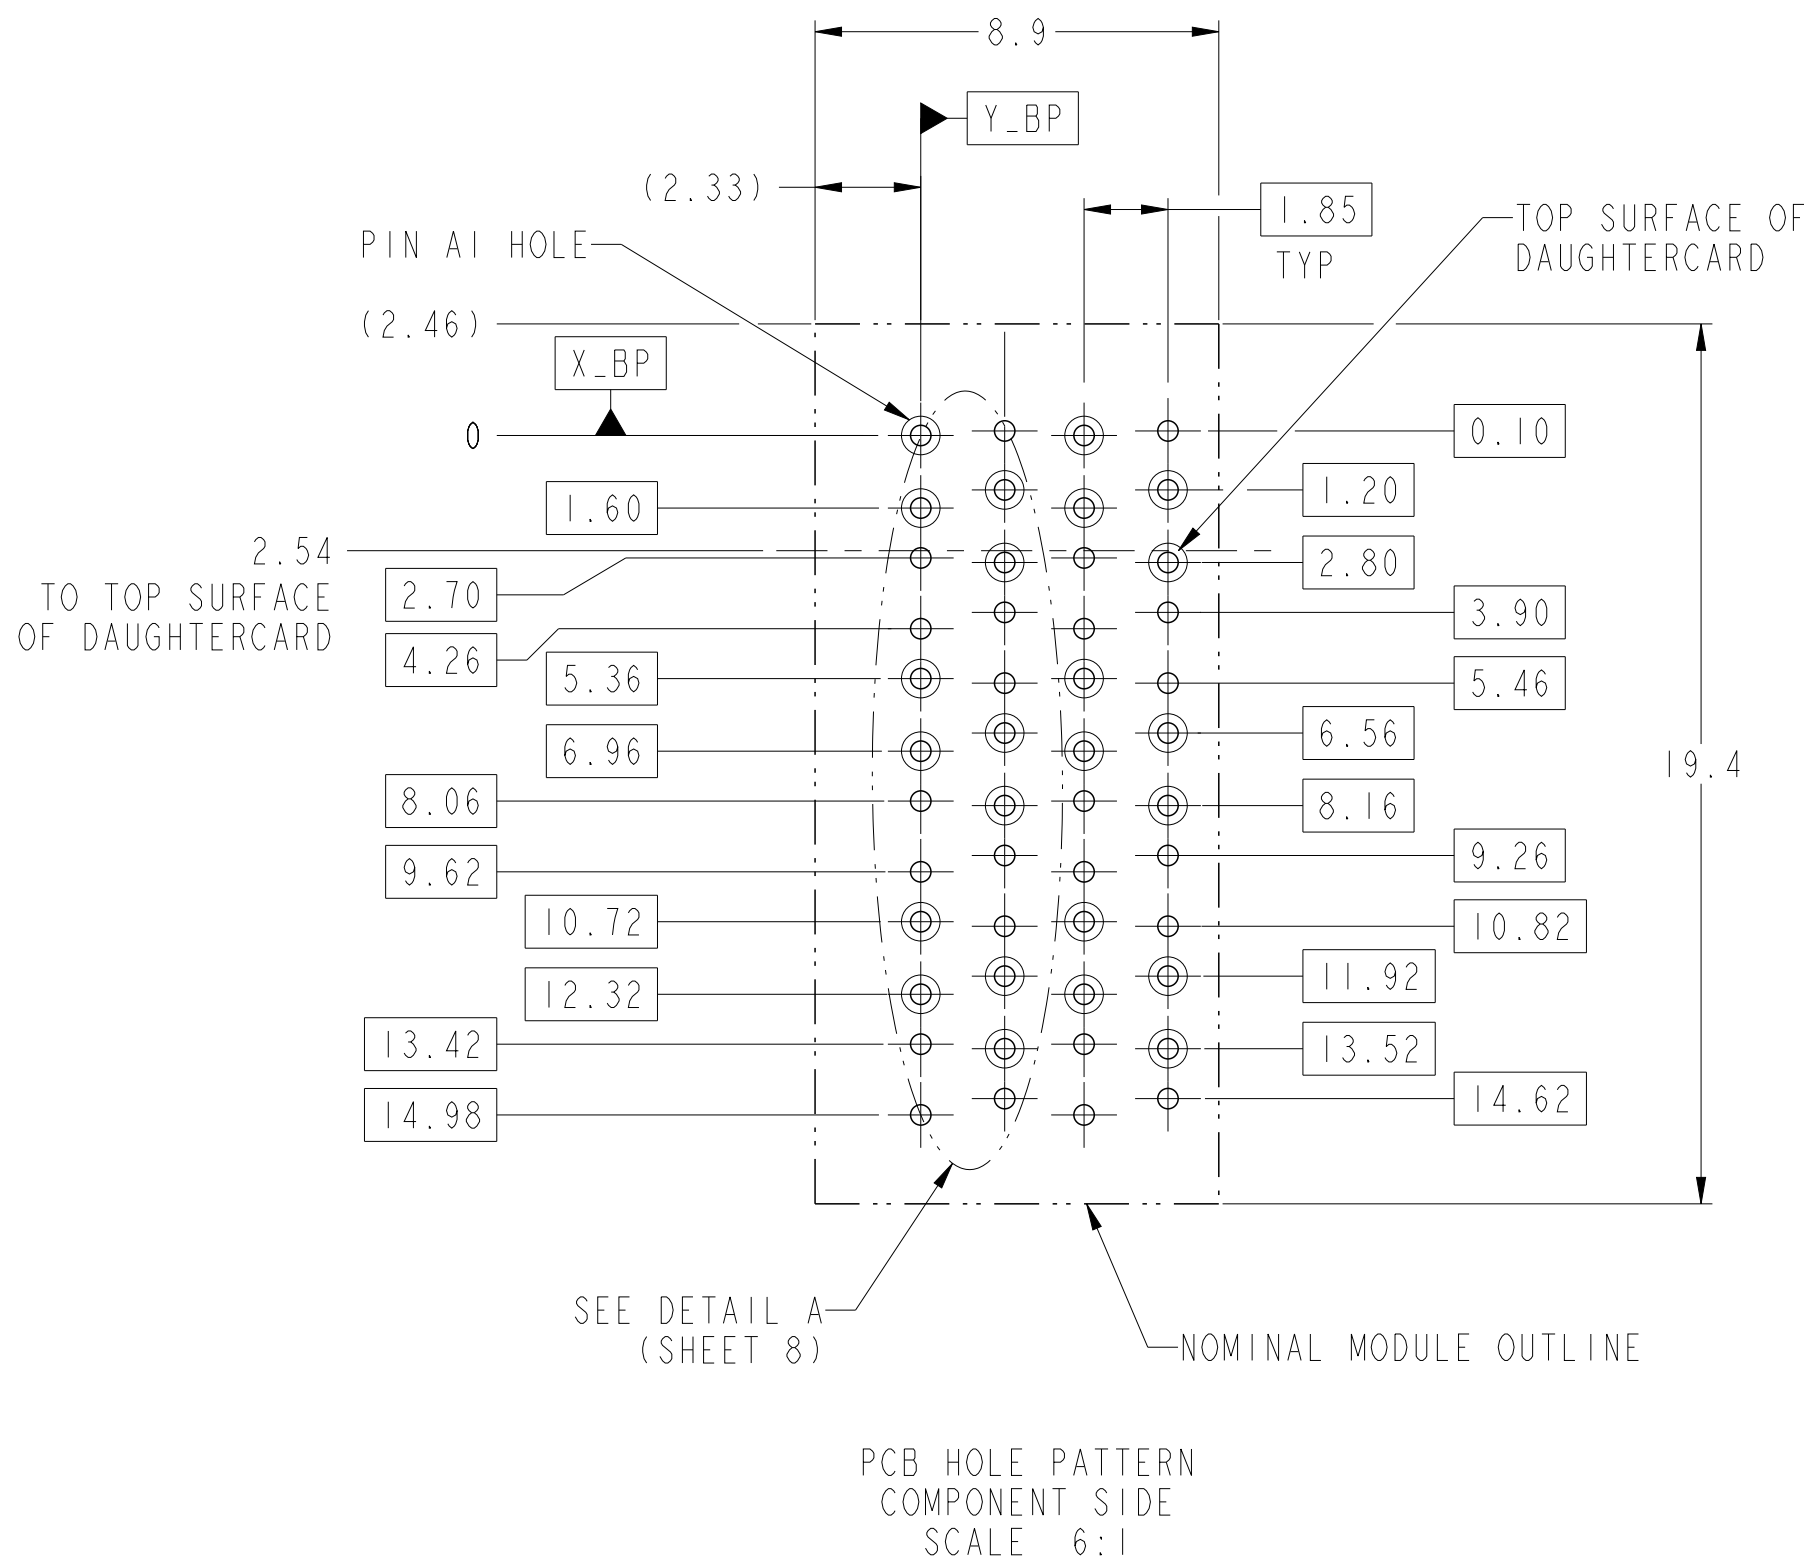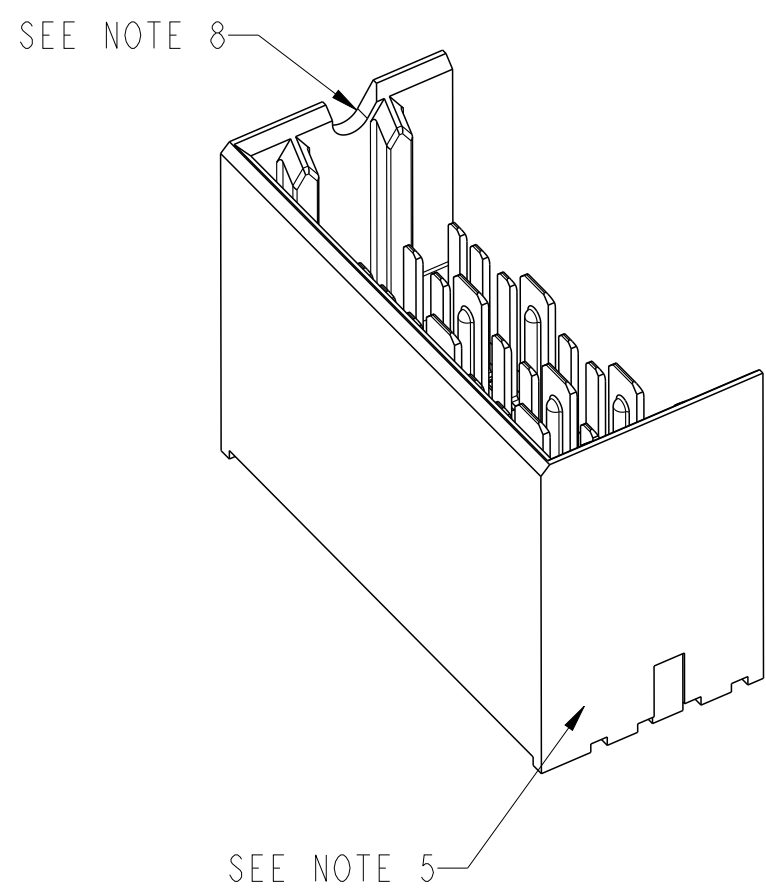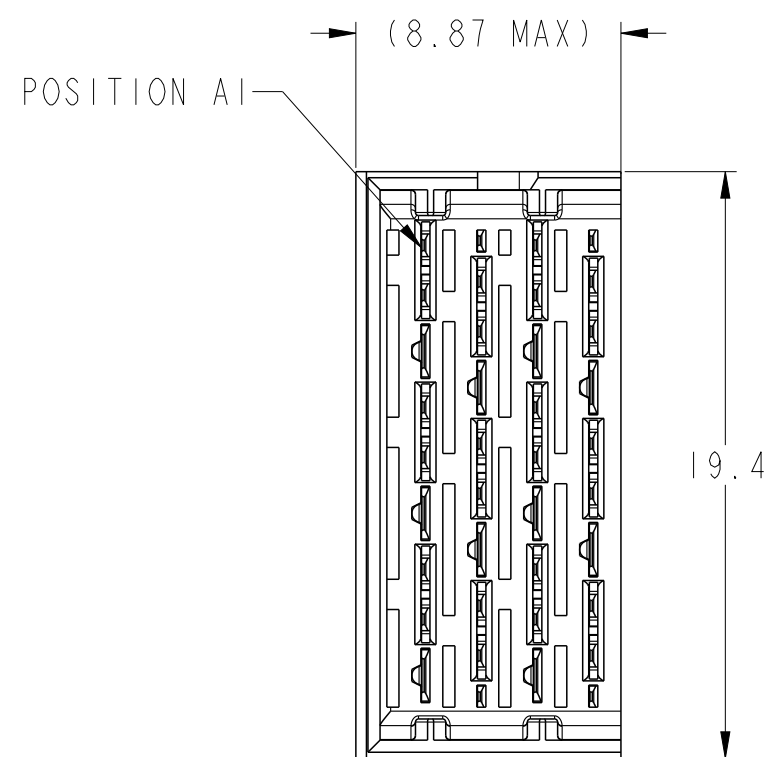

5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE

6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)

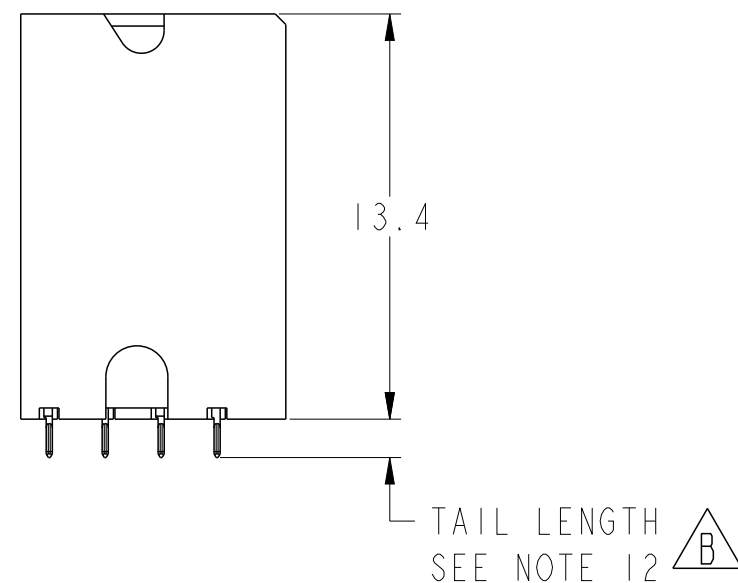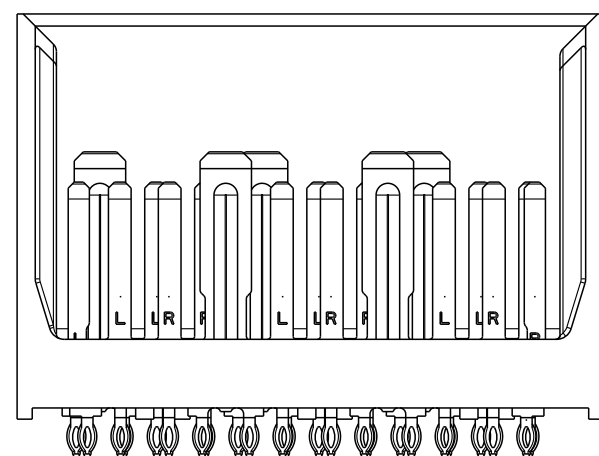





spec ref		-		dr		Roger Ng		2011/11/22		projection		MM		size		A2		scale		4:1			
tolerance std		-		eng		Sandar Soe		2014/10/02						ecn no		ELX-S-18843-1							
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-						rel level		Released							
				appr		Chen-Hong Tan		2014/12/10						product family		XCEDE							
surface				linear		0.X		±0.2				title		MODULE ASSEMBLY		dwg no		10119187		rev		B	
				0.XX		±0.10																	
				0.XXX		±0.050																	
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 5 of 8							

PDS: Rev :B

STATUS:Released



Printed: Dec 10, 2014

RIGHT WALL MODULE

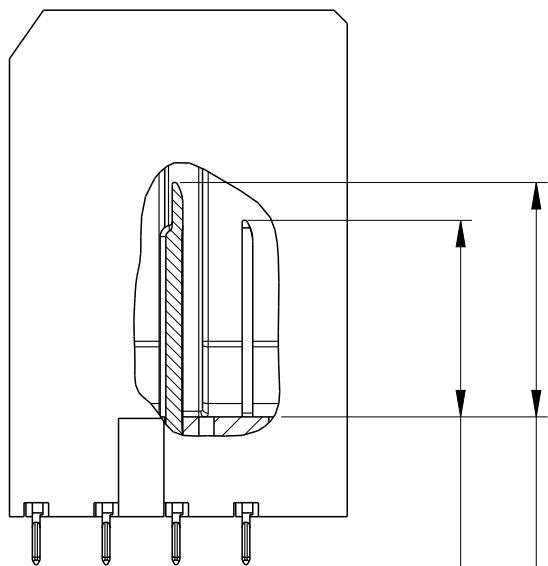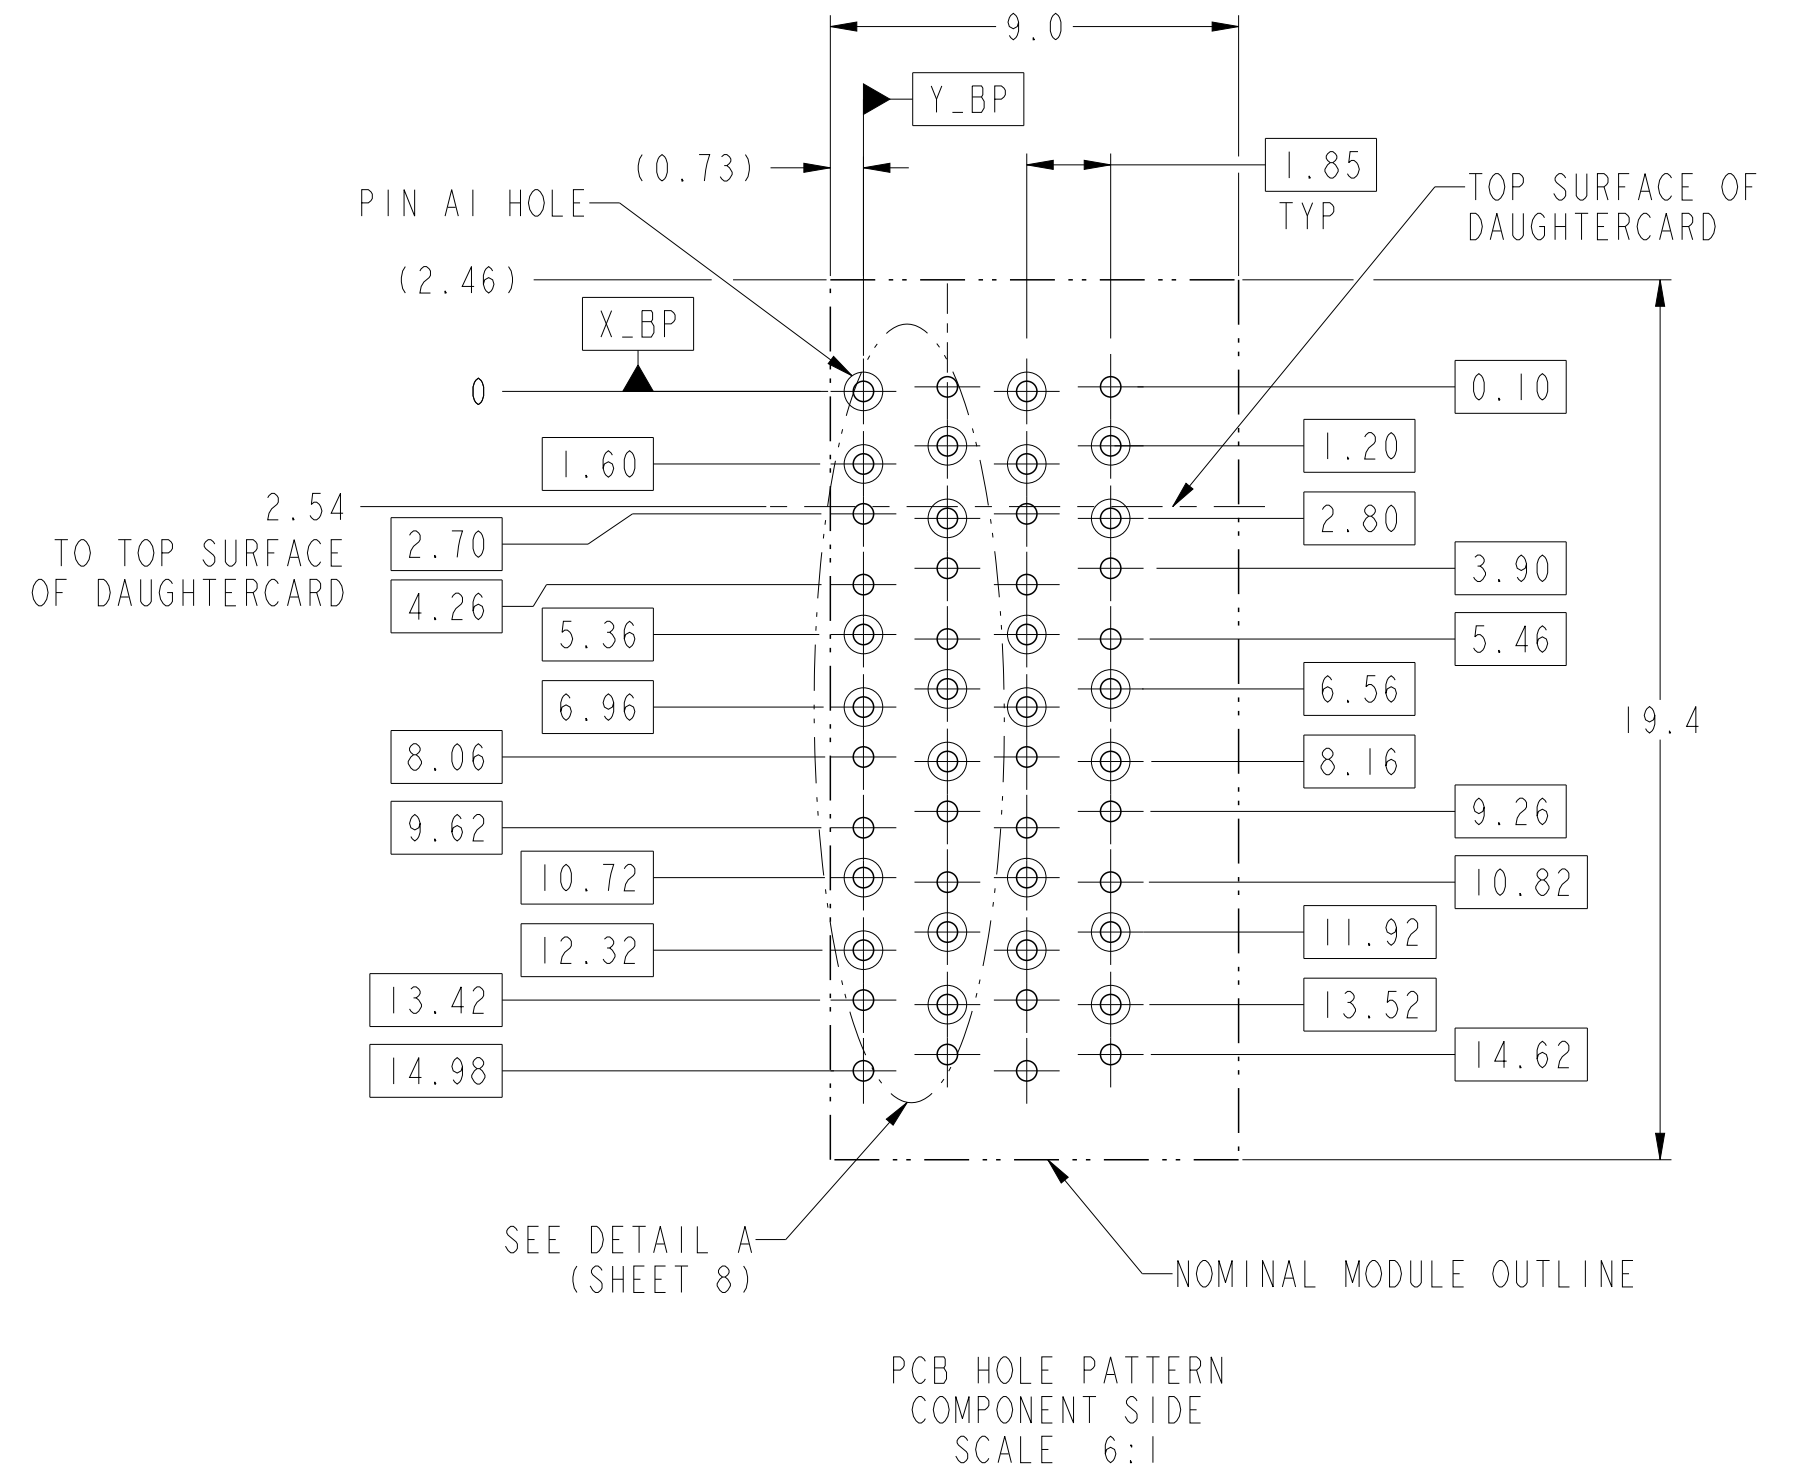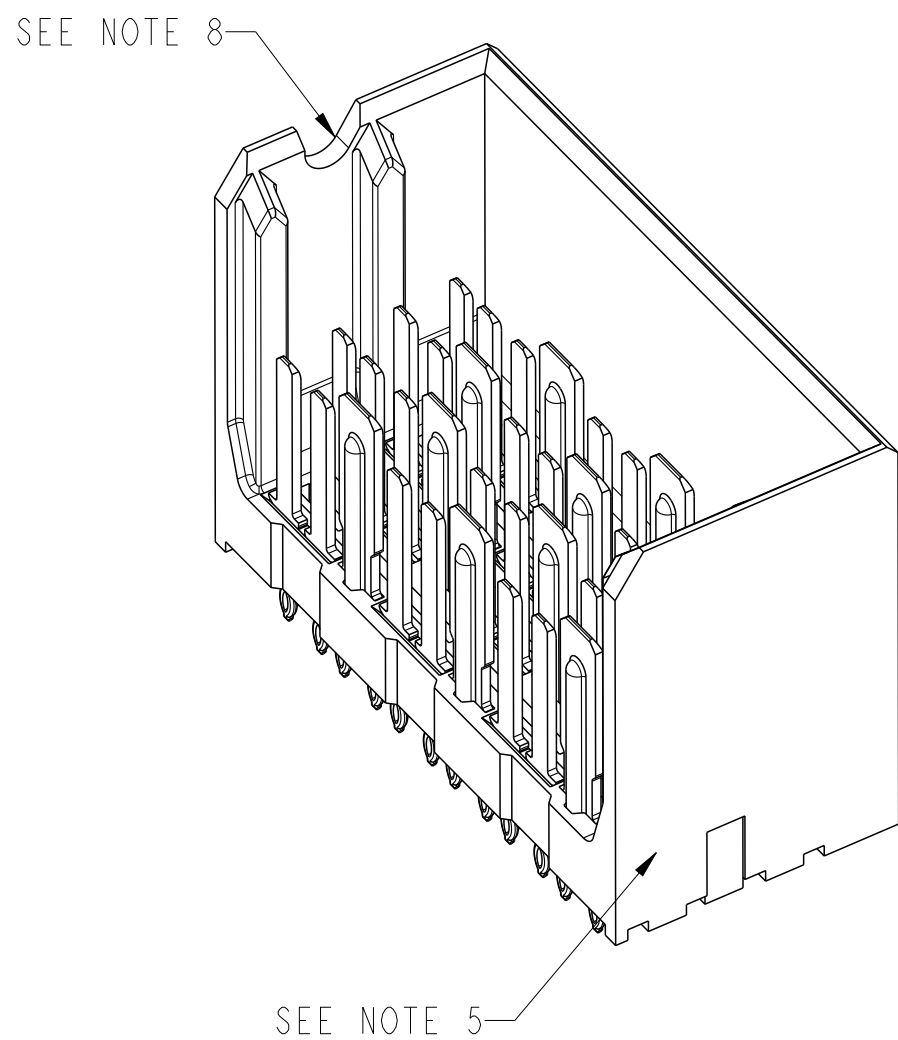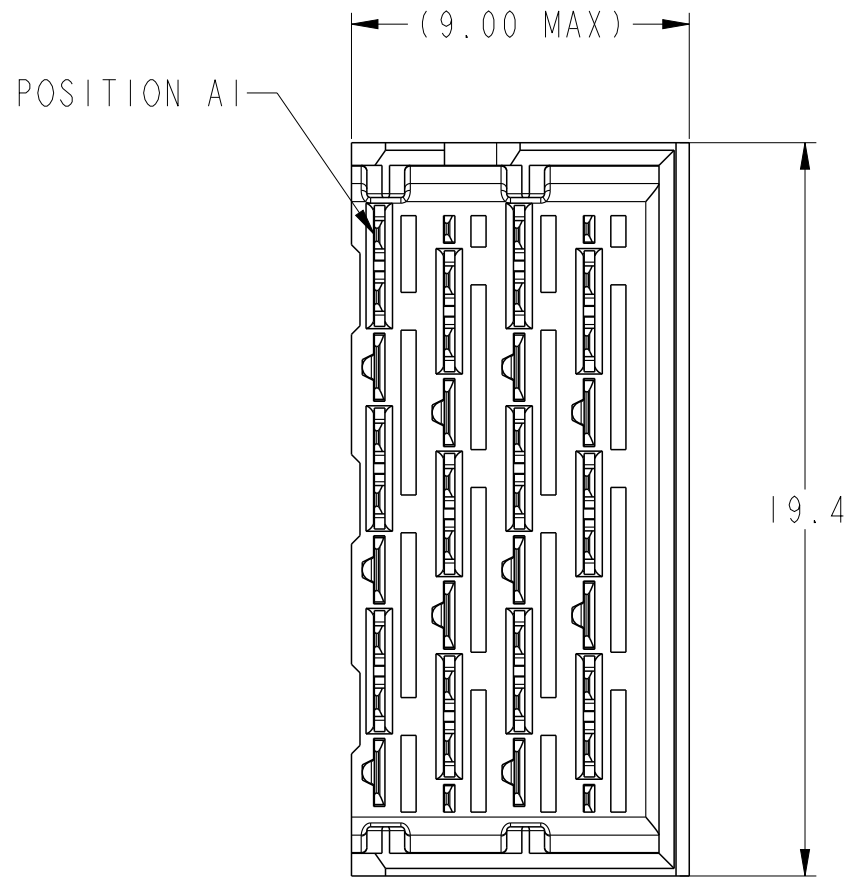

5.2 (3MM SMALL END GROUNDS)
 5.2 (3MM WIPE SIGNALS)
 4.2 (2MM WIPE SIGNALS)
 SEE P/N TREE

6.2 (4MM WIPE WIDE GROUNDS)
 5.2 (3MM WIPE WIDE GROUNDS)

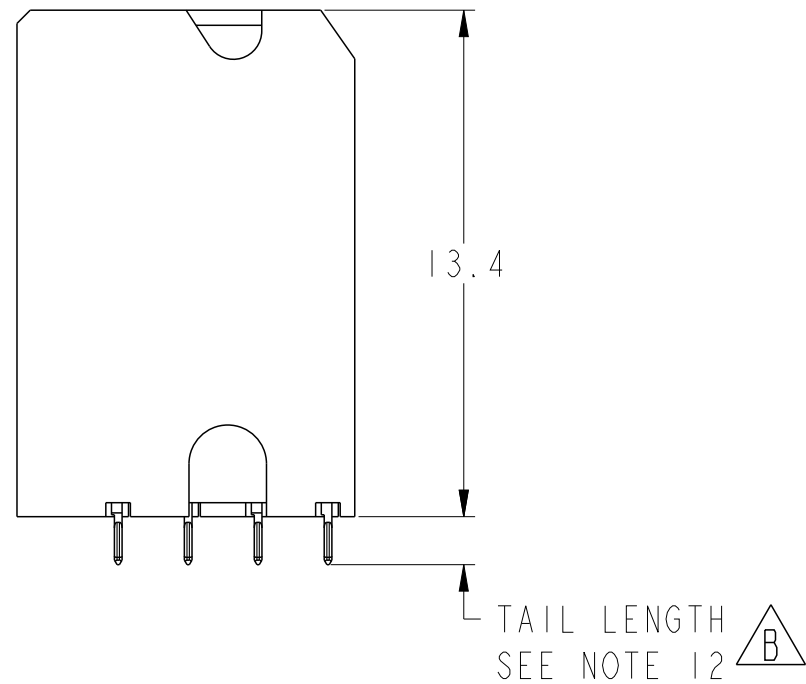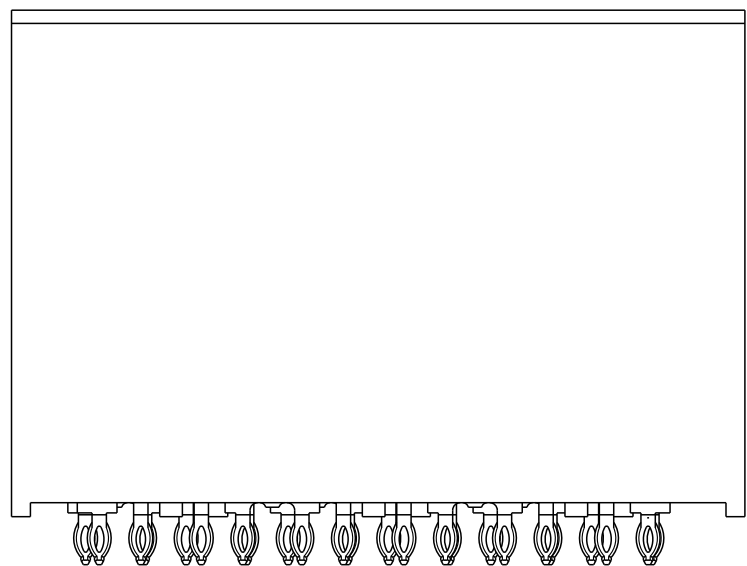







spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02			ecn no	ELX-S-18843-1		
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	chr	-	-			rel level	Released		
surface	✓	appr	Chen-Hong Tan	2014/12/10	product family	XCED	cat. no.	10119187	rev	B
ASME Y14.5	linear	0.X	±0.2							
		0.XX	±0.10							
		0.XXX	±0.050							
	angular	0°	±2°							

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

FOUR WALL MODULE

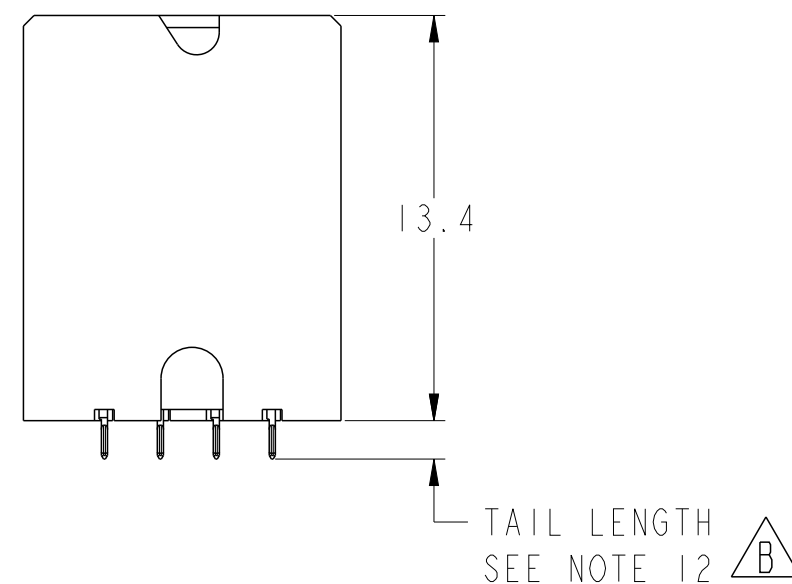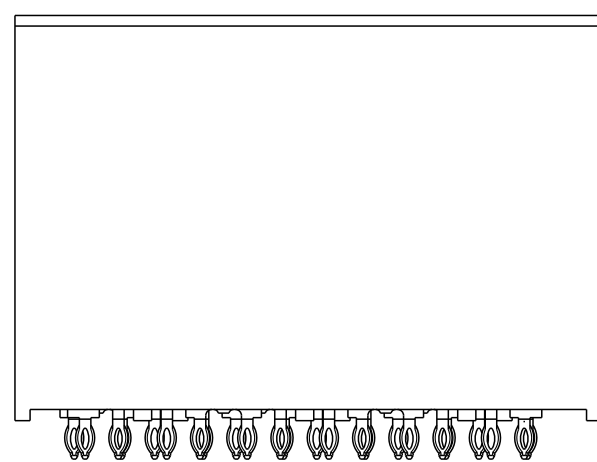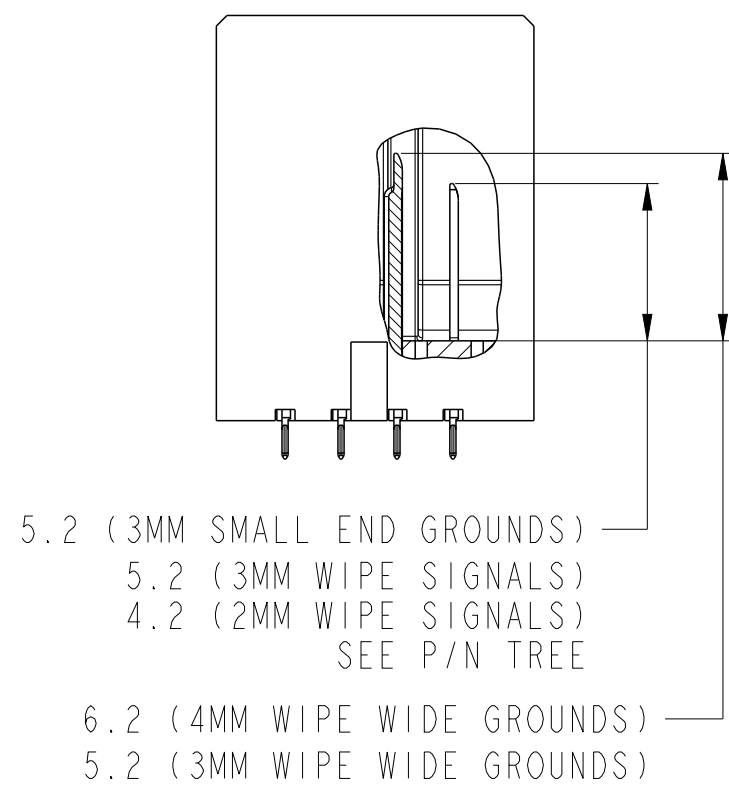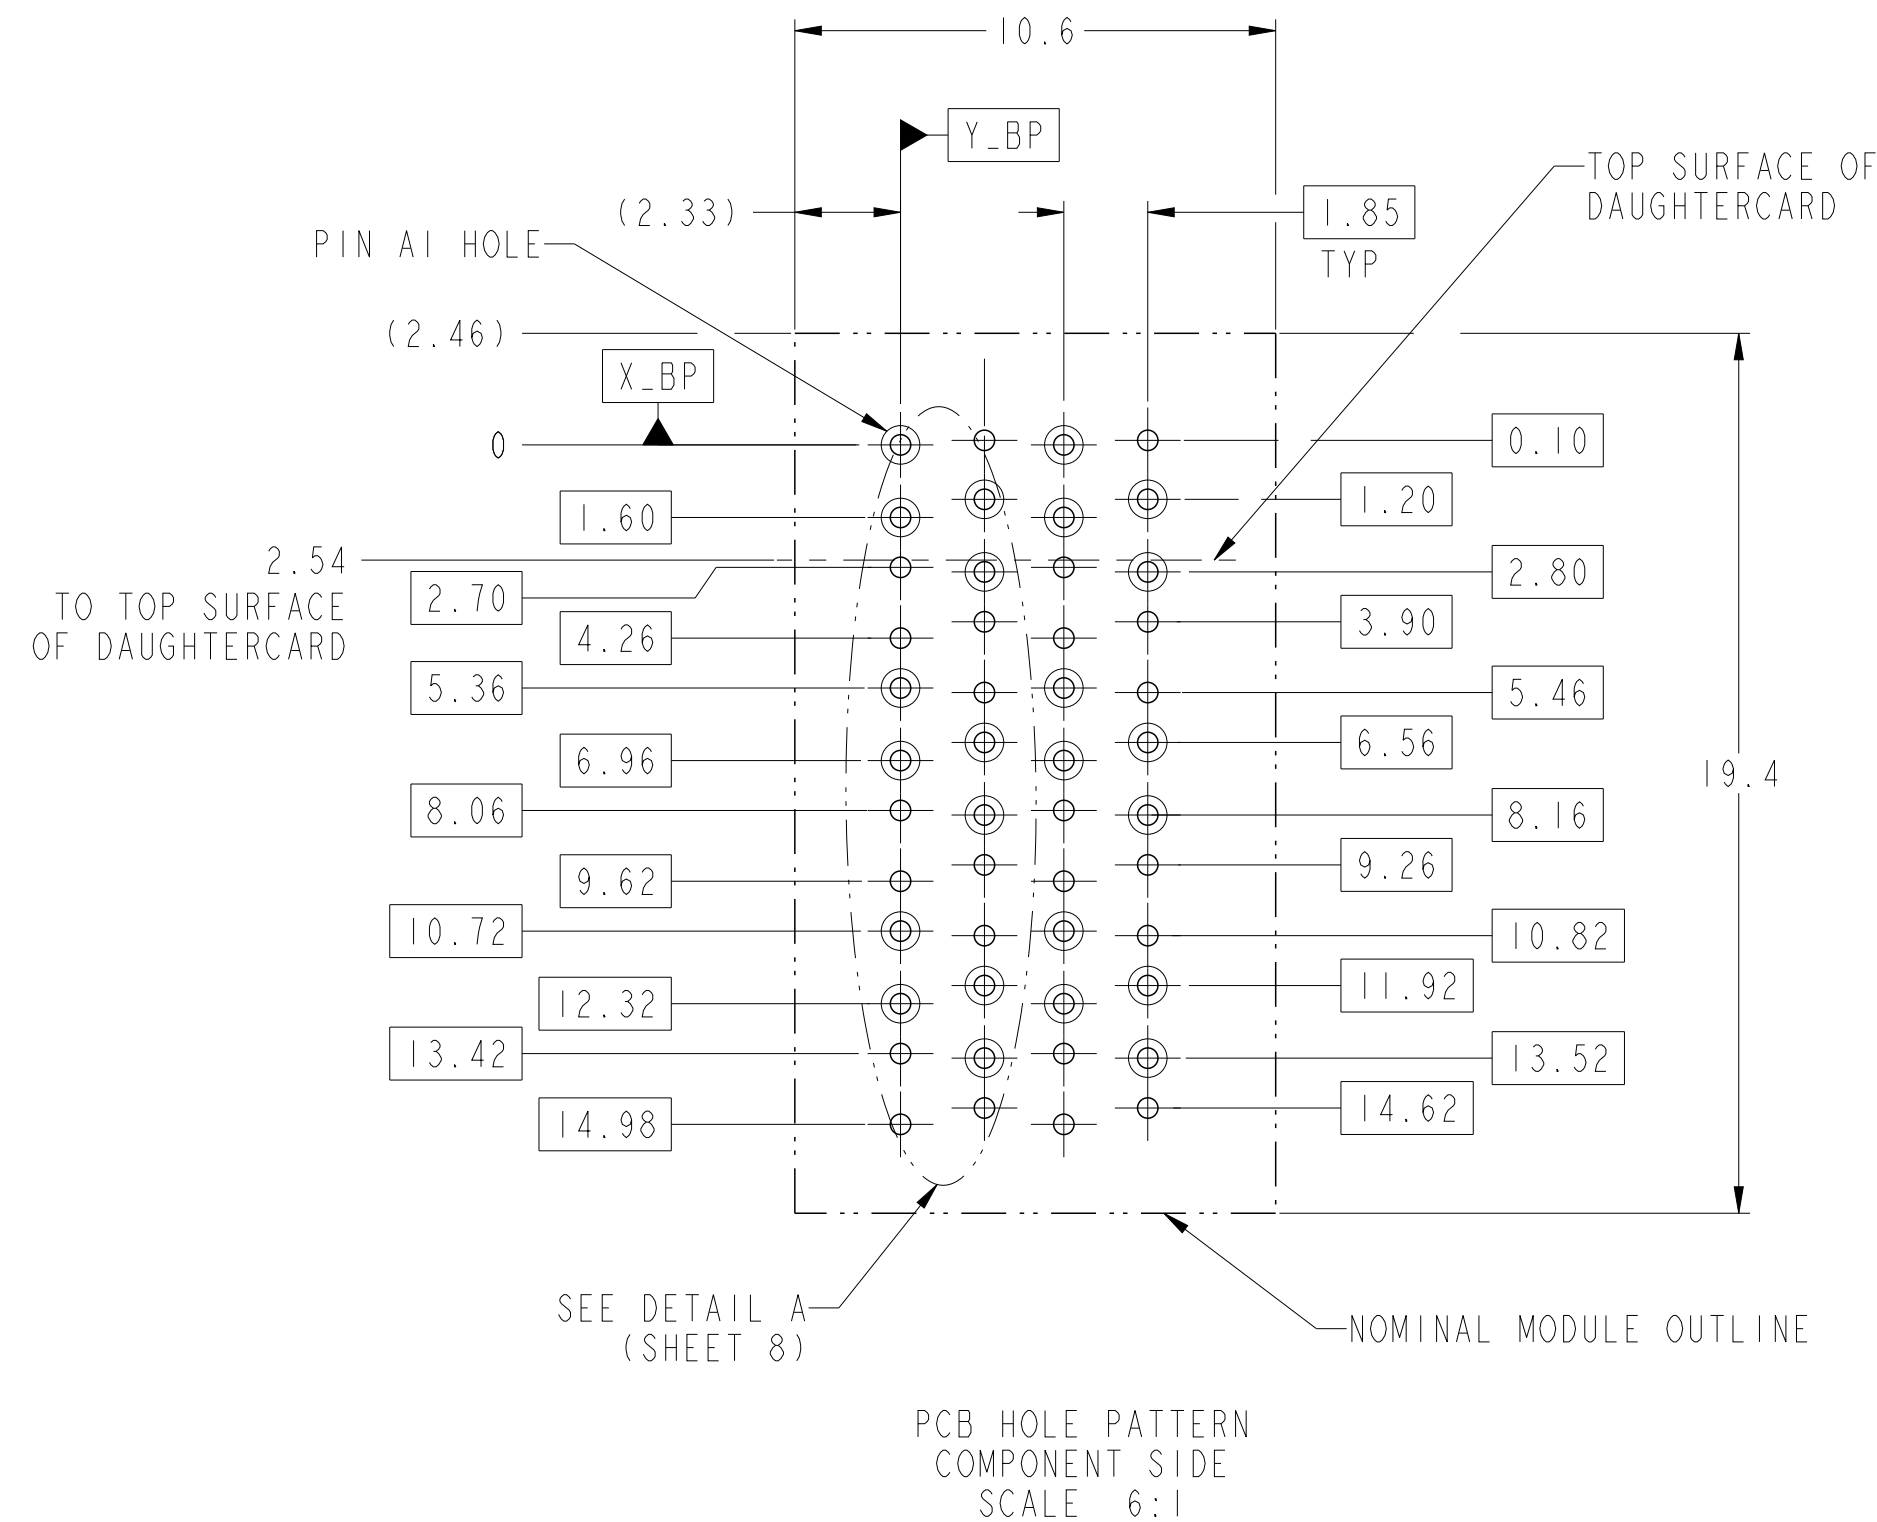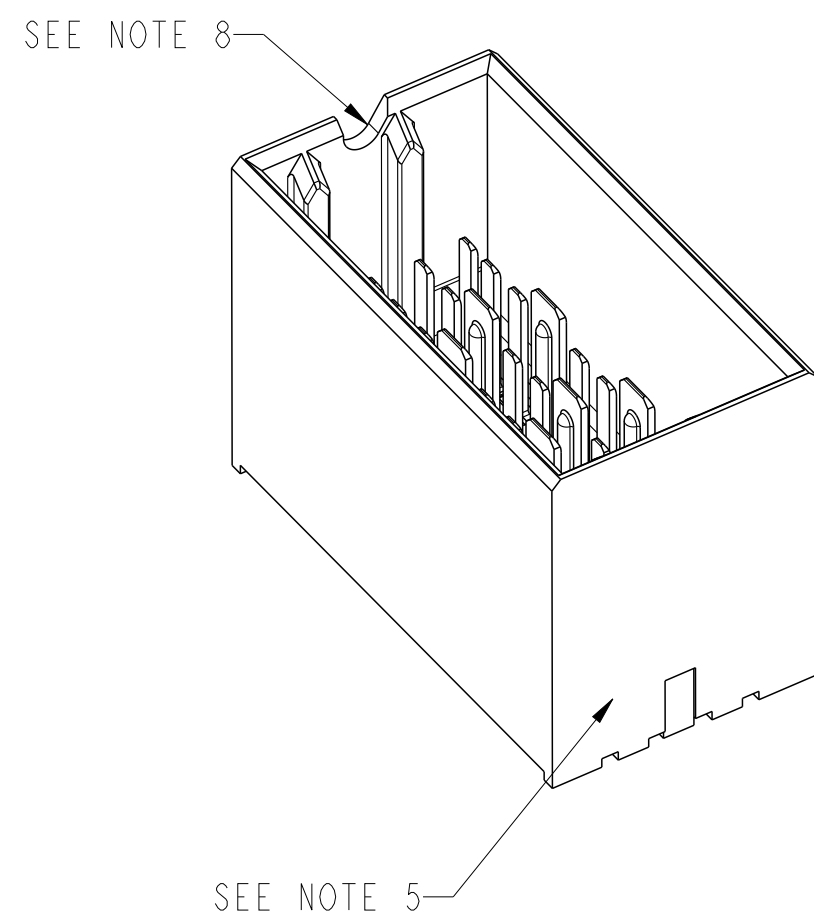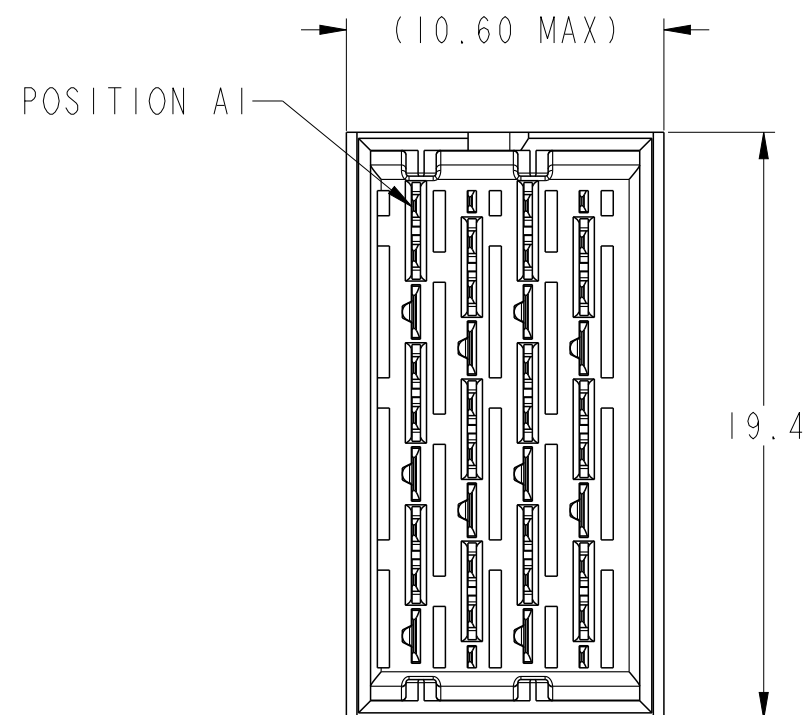

spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02	chr	-	ecn no	ELX-S-18843-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Chen-Hong Tan	2014/12/10	product family	XCEDE	rel level	Released	rev	B
surface	linear	0.X	±0.2	0.XX	±0.10	0.XXX	±0.050	angular	0°	±2°
ASME Y14.5	www.fci.com	cat. no.	-	Product	-	Customer Drw	sheet 7 of 8			

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

NOTES:

- CONNECTOR MATERIALS
SHROUD: HIGH-TEMP THERMOPLASTIC, GRAY, UL94V-0
CONTACTS: HIGH PERFORMANCE COPPER ALLOY
- CONTACT PLATING:

SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12-588, INCLUDING THE TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE (CO) OR UNCONTROLLED ENVIRONMENT (UE) TEST SEQUENCE AS NOTED IN P/N TREE.

PRESS-FIT TAILS: TIN OVER NICKEL (LF), OR TIN-LEAD ALLOY OVER NICKEL (NON-LF). SEE P/N TREE.
- PRODUCT SPECIFICATION: GS-12-588
- APPLICATION SPECIFICATION: GS-20-121
- PRODUCT MARKING (PART NUMBER AND LOT CODE) ON THESE SURFACES.
- HOUSING MUST WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR-PHASE REFLOW OVEN.
- PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.
- NOTCH INDICATES "ROW A" SIDE OF CONNECTOR.
- SEE APPLICATION SPECIFICATION FOR ROUTING GUIDELINES, ADDITIONAL PTH GUIDELINES, MATED DIMENSIONS, GUIDE PN SELECTION, ETC.
- SCREW IS OPTIONAL AND ENGAGES WITH BOTTOM OF GUIDE-PIN FROM BENEATH THE PCB FOR ADDITIONAL GUIDE-PIN SUPPORT.
- OPTIONAL HOLE LOCATION FOR GROUNDED PIN OR ADDITIONAL GUIDE-PIN SUPPORT. SEE TABLE 1 ON SHEET 1 FOR ADDITIONAL DETAILS.
- B

12

 TAIL LENGTH=1.3mm FOR $\varnothing 0.55[0.0217"]$ COMPLIANT PIN DRILL
TAIL LENGTH=1.5mm FOR $\varnothing 0.45[0.0177"]$ COMPLIANT PIN DRILL
- A

B


 SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

TABLE 3: PTH AND PAD SIZES WITH REFERENCE TO COMPLIANT PIN DRILL

COMPLIANT PIN DRILL	PTH	PAD
$\varnothing 0.55 [0.0217"]$	$\varnothing 0.45\pm 0.05$	$\varnothing 0.85$
$\varnothing 0.45 [0.0177"]$	$\varnothing 0.36\pm 0.05$	$\varnothing 0.75$

REFER TO TABLE 3
FOR PTH, DRILL & PAD SIZES

$\varnothing$	$\varnothing 0.10$	X_BP	Y_BP
---------------	--------------------	------	------

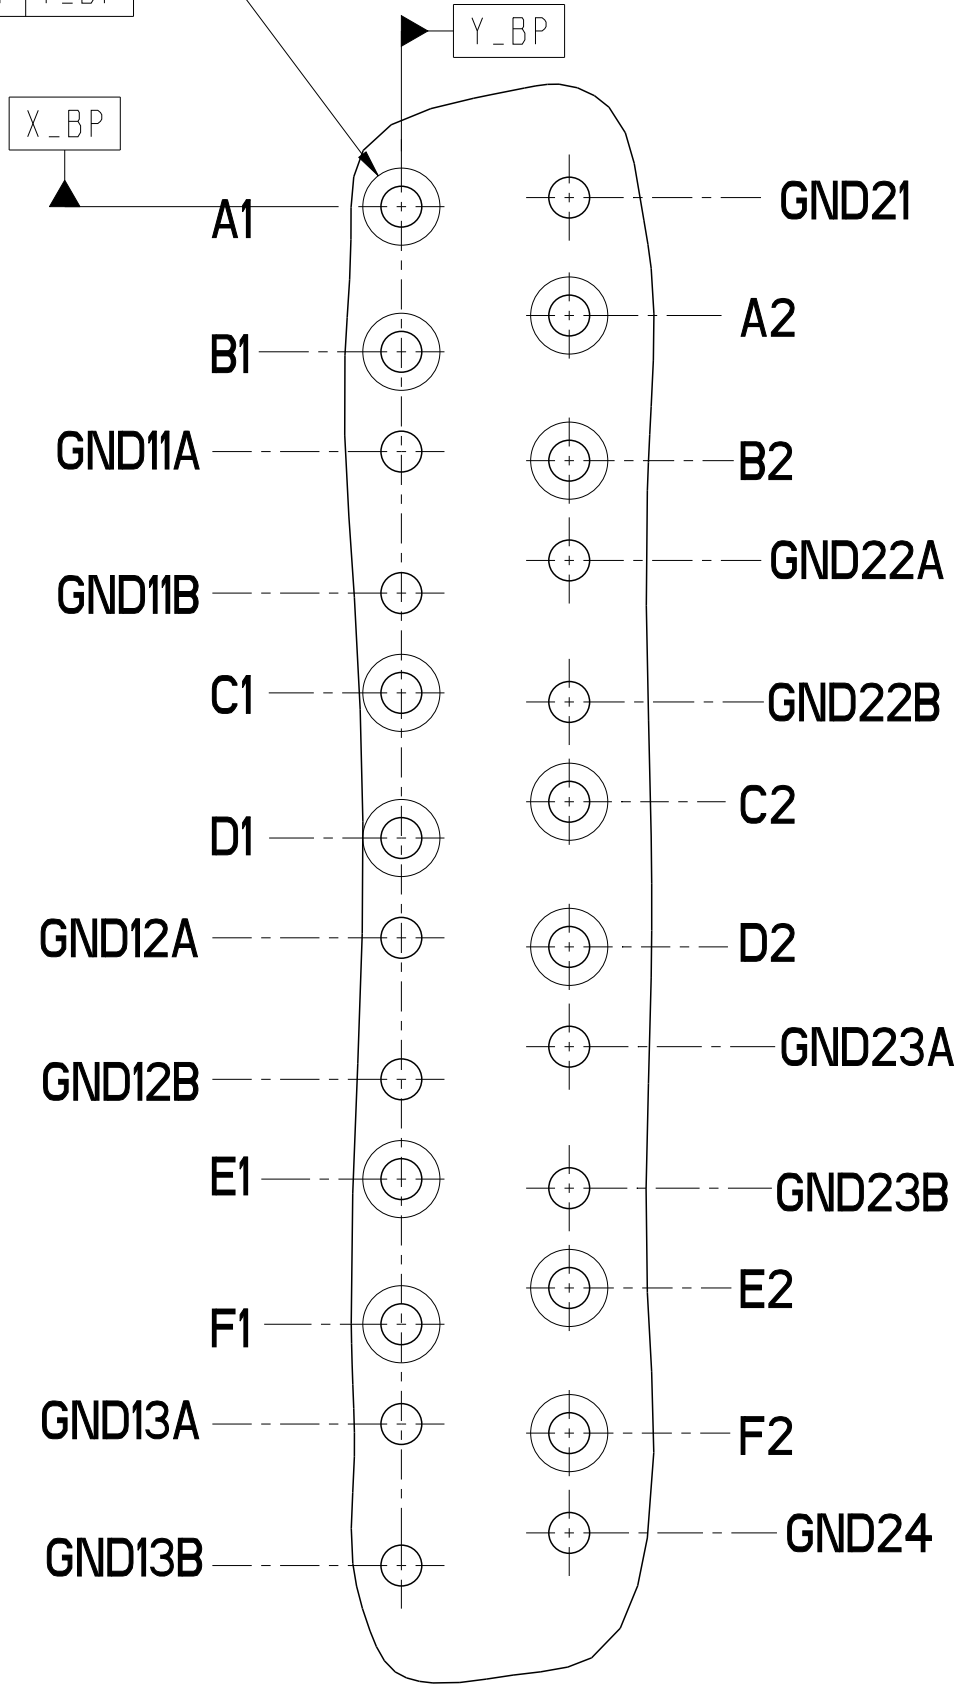

DETAIL A
SCALE 12:1

spec ref -				dr Roger Ng		2011/11/22		projection		MM		size A2		scale 4:1							
tolerance std -				eng Sandar Soe		2014/10/02						ecn no ELX-S-18843-1									
ASME Y14.5				TOLERANCES UNLESS OTHERWISE SPECIFIED		chr -										2014/12/10					
				appr Chen-Hong Tan																	
								product family				XCEDE		rel level		Released					
surface		linear		0.X		±0.2						title		MODULE ASSEMBLY		dwg no		10119187		rev	
				0.XX		±0.10															
				0.XXX		±0.050															
ASME Y14.5		angular		0°		±2°		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 8 of 8		B			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.