


## Professional MELF Resistors

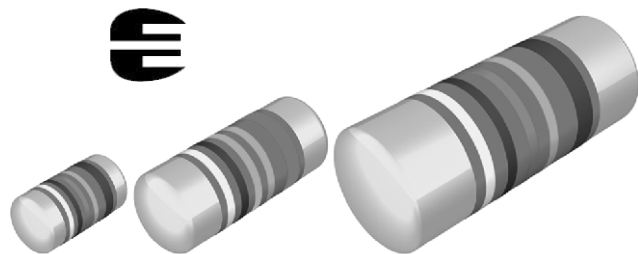

MMU 0102, MMA 0204 and MMB 0207 professional thin film MELF resistors are the perfect choice for most fields of modern professional electronics where reliability and stability is of major concern. The typical applications in the fields of automotive, telecommunication and medical equipment reflect the outstanding level of proven reliability.

### FEATURES

- Approved to EN 140401-803
- AEC-Q200 qualified
- Advanced thin film technology
- Excellent overall stability: Exceeds class 0.25
- Matte Sn termination on Ni barrier layer
- Compliant to RoHS Directive 2011/65/EU


**AUTOMOTIVE  
GRADE**

**RoHS  
COMPLIANT**

### APPLICATIONS

- Automotive
- Telecommunication
- Industrial
- Medical equipment

### METRIC SIZE

| DIN  | 0102     | 0204     | 0207     |
|------|----------|----------|----------|
| CECC | RC 2211M | RC 3715M | RC 6123M |

### TECHNICAL SPECIFICATIONS

| DESCRIPTION                                                                              | MMU 0102                     |                      | MMA 0204              |                      | MMB 0207                            |                      |          |
|------------------------------------------------------------------------------------------|------------------------------|----------------------|-----------------------|----------------------|-------------------------------------|----------------------|----------|
| CECC size                                                                                | RC 2211M                     |                      | RC 3715M              |                      | RC 6123M                            |                      |          |
| Resistance range                                                                         | 0.22 Ω to 2.21 MΩ; 0 Ω       |                      | 0.22 Ω to 10 MΩ; 0 Ω  |                      | 0.1 Ω to 15 MΩ; 0 Ω                 |                      |          |
| Resistance tolerance                                                                     | ± 5 %; ± 2 %; ± 1 %; ± 0.5 % |                      | ± 5 %; ± 1 %; ± 0.5 % |                      | ± 5 %; ± 2 %; ± 1 %; ± 0.5 %        |                      |          |
| Temperature coefficient                                                                  | ± 50 ppm/K; ± 25 ppm/K       |                      |                       |                      | ± 100 ppm/K; ± 50 ppm/K; ± 25 ppm/K |                      |          |
| Operation mode                                                                           | Standard                     | Power                | Standard              | Power                | Standard                            | Power                |          |
| Rated dissipation, $P_{70}$ <sup>(1)</sup>                                               | 0.2 W                        | 0.3 W                | 0.25 W                | 0.4 W                | 0.4 W                               | 1.0 W <sup>(2)</sup> |          |
| Operating voltage, $U_{\text{max}}$ AC/DC                                                | 150 V                        |                      | 200 V                 |                      | 300 V                               |                      |          |
| Permissible film temperature, $\vartheta_{\text{F}}$ max.                                | 125 °C                       | 155 °C               | 125 °C                | 155 °C               | 125 °C                              | 155 °C               |          |
| Operating temperature range                                                              | - 55 °C<br>to 125 °C         | - 55 °C<br>to 155 °C | - 55 °C<br>to 125 °C  | - 55 °C<br>to 155 °C | - 55 °C<br>to 125 °C                | - 55 °C<br>to 155 °C |          |
| Max. resistance change at $P_{70}$<br>for resistance range,<br>$\Delta R/R$ max., after: | 0.22 Ω to 221 kΩ             |                      | 0.22 Ω to 332 kΩ      |                      | 0.22 Ω to 1 MΩ                      |                      |          |
|                                                                                          | 1000 h                       | ≤ 0.15 %             | ≤ 0.25 %              | ≤ 0.15 %             | ≤ 0.25 %                            | ≤ 0.15 %             | ≤ 0.25 % |
|                                                                                          | 8000 h                       | ≤ 0.3 %              | ≤ 0.5 %               | ≤ 0.3 %              | ≤ 0.5 %                             | ≤ 0.3 %              | ≤ 0.5 %  |
|                                                                                          | 225 000 h                    | ≤ 1 %                | -                     | ≤ 1 %                | -                                   | ≤ 1 %                | -        |
| Permissible voltage<br>against ambient (insulation):                                     |                              |                      |                       |                      |                                     |                      |          |
| 1 min; $U_{\text{ins}}$                                                                  | 200 V                        |                      | 300 V                 |                      | 500 V                               |                      |          |
| Continuous                                                                               | 75 V                         |                      | 75 V                  |                      | 75 V                                |                      |          |
| Failure rate: FIT <sub>observed</sub>                                                    | ≤ 0.1 x 10 <sup>-9</sup> /h  |                      |                       |                      |                                     |                      |          |

### Notes

- These resistors do not feature a limited lifetime when operated within the permissible limits. However, resistance value drift increasing over operating time may result in exceeding a limit acceptable to the specific application, thereby establishing a functional lifetime.

<sup>(1)</sup> The power dissipation on the resistor generates a temperature rise against the local ambient, depending on the heatflow support of the printed-circuit board (thermal resistance). The rated dissipation applies only if the permitted film temperature is not exceeded. Furthermore, a high level of ambient temperature or of power dissipation may raise the temperature of the solder joint, hence special solder alloys or board materials may be required to maintain the reliability of the assembly.

<sup>(2)</sup> Specified power rating requires dedicated heat-sink pads.

### DIMENSIONS




| DIMENSIONS AND MASS |                |               |                             |                        |            |              |
|---------------------|----------------|---------------|-----------------------------|------------------------|------------|--------------|
| TYPE                | L<br>(mm)      | D<br>(mm)     | L <sub>1</sub> min.<br>(mm) | D <sub>1</sub><br>(mm) | K<br>(mm)  | MASS<br>(mg) |
| MMU 0102            | 2.2 + 0/- 0.1  | 1.1 + 0/- 0.1 | 1.2                         | D + 0/- 0.1            | 0.4 ± 0.05 | 8            |
| MMA 0204            | 3.6 + 0/- 0.2  | 1.4 + 0/- 0.1 | 1.8                         | D + 0/- 0.15           | 0.8 ± 0.1  | 22           |
| MMB 0207            | 5.8 + 0/- 0.15 | 2.2 + 0/- 0.2 | 3.2                         | D + 0/- 0.2            | 1.15 ± 0.1 | 80           |

#### Note

- Color code marking is applied according to IEC 60062 <sup>(3)</sup> in four bands (E24 series) or 5 bands (E96 or E192 series). Each color band appears as a single solid line, voids are permissible if at least  $\frac{2}{3}$  of the band is visible from each radial angle of view. The last color band for tolerance is approximately 50 % wider than the other bands. An interrupted yellow band between the 4<sup>th</sup> and 5<sup>th</sup> full band indicates TC25.

### PATTERN STYLES FOR MELF RESISTORS

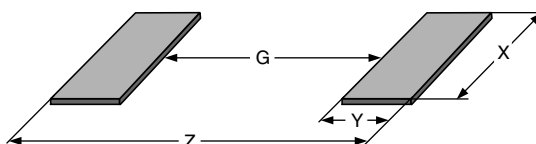

| RECOMMENDED SOLDER PAD DIMENSIONS |                |           |           |           |                  |           |           |           |
|-----------------------------------|----------------|-----------|-----------|-----------|------------------|-----------|-----------|-----------|
| TYPE                              | WAVE SOLDERING |           |           |           | REFLOW SOLDERING |           |           |           |
|                                   | G<br>(mm)      | Y<br>(mm) | X<br>(mm) | Z<br>(mm) | G<br>(mm)        | Y<br>(mm) | X<br>(mm) | Z<br>(mm) |
| MMU 0102                          | 0.7            | 1.2       | 1.5       | 3.1       | 1.1              | 0.8       | 1.3       | 2.7       |
| MMA 0204                          | 1.5            | 1.5       | 1.8       | 4.5       | 1.7              | 1.2       | 1.6       | 4.1       |
| MMB 0207                          | 2.8            | 2.1       | 2.6       | 7.0       | 3.2              | 1.7       | 2.4       | 6.6       |

#### Note

- The given solder pad dimensions reflect the considerations for board design and assembly as outlined e.g. in standards IEC 61188-5-x, or in publication IPC-7351. They do not guarantee any supposed thermal properties, however, they will be found adequate for most general applications.

## PART NUMBER AND PRODUCT DESCRIPTION

Part Number: MMB02070D5620DB200

Part Number: MMB02070Z0000ZB200

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| M | M | B | 0 | 2 | 0 | 7 | 0 | D | 5 | 6 | 2 | 0 | D | B | 2 | 0 | 0 |
| M | M | B | 0 | 2 | 0 | 7 | 0 | Z | 0 | 0 | 0 | 0 | Z | B | 2 | 0 | 0 |

## TYPE/SIZE

MMU0102  
MMA0204  
MMB0207

## VERSION

0 = EN 140401-803,  
"Version A"

## TCR

D =  $\pm 25$  ppm/K  
C =  $\pm 50$  ppm/K  
B =  $\pm 100$  ppm/K  
Z = Jumper

## RESISTANCE

3 digit value  
1 digit multiplier

## Multiplier

7 =  $\times 10^{-3}$   
8 =  $\times 10^{-2}$   
9 =  $\times 10^{-1}$   
0 =  $\times 10^0$   
1 =  $\times 10^1$   
2 =  $\times 10^2$   
3 =  $\times 10^3$   
4 =  $\times 10^4$   
5 =  $\times 10^5$   
0000 = Jumper

## TOLERANCE

D =  $\pm 0.5$  %  
F =  $\pm 1$  %  
G =  $\pm 2$  %  
J =  $\pm 5$  %  
Z = Jumper

## PACKAGING

B3  
B0  
B2  
B7  
M3  
M8

Product Description: MMB 0207 - 25 0.5 % B2 562R

Product Description: MMB 0207 B2 0R0

|      |      |                 |             |           |                     |
|------|------|-----------------|-------------|-----------|---------------------|
| MMB  | 0207 | - 25            | 0.5 %       | B2        | 562R                |
| MMB  | 0207 | -               | -           | B2        | 0R0                 |
| TYPE | SIZE | TCR             | TOLERANCE   | PACKAGING | RESISTANCE          |
| MMU  | 0102 | $\pm 25$ ppm/K  | $\pm 0.5$ % | BL        | 562R = 562 $\Omega$ |
| MMA  | 0204 | $\pm 50$ ppm/K  | $\pm 1$ %   | B0        | 0R0 = Jumper        |
| MMB  | 0207 | $\pm 100$ ppm/K | $\pm 2$ %   | B2        |                     |
|      |      |                 | $\pm 5$ %   | B7        |                     |
|      |      |                 |             | M3        |                     |
|      |      |                 |             | M8        |                     |

## Note

- Products can be ordered using either the PART NUMBER or the PRODUCT DESCRIPTION.

## PACKAGING

| TYPE     | CODE    | QUANTITY | CARRIER TAPE                                        | WIDTH | PITCH | REEL DIAMETER |
|----------|---------|----------|-----------------------------------------------------|-------|-------|---------------|
| MMU 0102 | B3 = BL | 3000     | Antistatic blister tape acc.<br>IEC 60286-3 type II | 8 mm  | 4 mm  | 180 mm/7"     |
|          | B0      | 10 000   |                                                     |       |       | 330 mm/13"    |
|          | M8      | 8000     | Bulk case acc.<br>IEC 60286-6                       | -     | -     | -             |
| MMA 0204 | B3 = BL | 3000     | Antistatic blister tape acc.<br>IEC 60286-3 type II | 8 mm  | 4 mm  | 180 mm/7"     |
|          | B0      | 10 000   |                                                     |       |       | 330 mm/13"    |
|          | M3      | 3000     | Bulk case acc.<br>IEC 60286-6                       | -     | -     | -             |
| MMB 0207 | B2      | 2000     | Antistatic blister tape acc.<br>IEC 60286-3 type II | 12 mm | 4 mm  | 180 mm/7"     |
|          | B7      | 7000     |                                                     |       |       | 330 mm/13"    |

### TEMPERATURE COEFFICIENT AND RESISTANCE RANGE

| DESCRIPTION |           | RESISTANCE               |                          |                          |
|-------------|-----------|--------------------------|--------------------------|--------------------------|
| TCR         | TOLERANCE | MMU 0102                 | MMA 0204                 | MMB 0207                 |
| ± 100 ppm/K | ± 5 %     | -                        | -                        | 0.1 Ω to 0.2 Ω           |
| ± 50 ppm/K  | ± 5 %     | 0.22 Ω to 0.91 Ω         | 0.22 Ω to 0.91 Ω         | 0.22 Ω to 0.91 Ω         |
|             | ± 2 %     | 1 Ω to 9.1 Ω             | -                        | 0.2 Ω to 0.91 Ω          |
|             | ± 1 %     | <b>10 Ω to 2.21 MΩ</b>   | <b>1 Ω to 10 MΩ</b>      | <b>1 Ω to 15 MΩ</b>      |
|             | ± 0.5 %   | 10 Ω to 221 kΩ           | 10 Ω to 2.21 MΩ          | -                        |
| ± 25 ppm/K  | ± 1 %     | 10 Ω to 221 kΩ           | 10 Ω to 511 kΩ           | -                        |
|             | ± 0.5 %   | <b>10 Ω to 221 kΩ</b>    | <b>10 Ω to 511 kΩ</b>    | <b>10 Ω to 1 MΩ</b>      |
| Jumper      |           | ≤ 10 mΩ; $I_{max} = 2 A$ | ≤ 10 mΩ; $I_{max} = 3 A$ | ≤ 10 mΩ; $I_{max} = 5 A$ |

#### Notes

- Resistance ranges printed in bold are preferred TCR/tolerance combinations with optimized availability.
- Resistance values to be selected for ± 5 % and ± 2 % tolerance from E24, for ± 1 % tolerance from E24 and E96 and for ± 0.5 % tolerance from E24 and E192.

### DESCRIPTION

Production is strictly controlled and follows an extensive set of instructions established for reproducibility. A homogeneous film of metal alloy is deposited on a high grade ceramic body ( $Al_2O_3$ ) and conditioned to achieve the desired temperature coefficient. Nickel plated steel termination caps are firmly pressed on the metallised rods. A special laser is used to achieve the target value by smoothly cutting a helical groove in the resistive layer without damaging the ceramics. The resistor elements are covered by a protective coating designed for electrical, mechanical and climatic protection. The terminations receive a final pure tin on nickel plating. Four or five color code rings designate the resistance value and tolerance in accordance with **IEC 60062** <sup>(3)</sup>.

The result of the determined production is verified by an extensive testing procedure performed on 100 % of the individual resistors. This includes pulse load screening (for  $R \geq 10 \Omega$ ) and additional non-linearity screening (for  $R \geq 30 \Omega$ ) for the elimination of products with a potential risk of early life failures according to EN 140401-803, 2.1.2.2. Only accepted products are laid directly into the blister tape in accordance with **IEC 60286-3, Type II** <sup>(3)</sup> or bulk case in accordance with **IEC 60286-6** <sup>(3)</sup>.

### ASSEMBLY

The resistors are suitable for processing on automatic SMD assembly systems. They are suitable for automatic soldering using wave, reflow or vapour phase as shown in **IEC 61760-1** <sup>(3)</sup>. Solderability is specified for 2 years after production or requalification, however, excellent solderability is proven after extended storage in excess of 10 years. The permitted storage time is 20 years.

The resistors are completely lead (Pb)-free, the pure tin plating provides compatibility with lead (Pb)-free soldering processes. The immunity of the plating against tin whisker growth has been proven under extensive testing.

The encapsulation is resistant to all cleaning solvents commonly used in the electronics industry, including alcohols, esters and aqueous solutions. The suitability of conformal coatings, if applied, shall be qualified by appropriate means to ensure the long-term stability of the whole system.

#### Notes

<sup>(1)</sup> Global Automotive Declarable Substance List, see [www.gadsl.org](http://www.gadsl.org).

<sup>(2)</sup> CEFIC (European Chemical Industry Council), EECA (European Electronic Component Manufacturers Association), EICTA (European trade organisation representing the information and communications technology and consumer electronics), see [www.eicta.org/index.php?id=995](http://www.eicta.org/index.php?id=995) → issues → environment policy → chemicals → chemicals for electronics.

<sup>(3)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents.

All products comply with the **GADSL** <sup>(1)</sup> and the **CEFIC-EECA-EICTA** <sup>(2)</sup> list of legal restrictions on hazardous substances. This includes full compliance with the following directives:

- 2000/53/EC End of Vehicle Life Directive (ELV) and Annex II (ELV II)
- 2011/65/EU Restriction of the use of Hazardous Substances Directive (RoHS)
- 2002/96/EC Waste Electrical and Electronic Equipment Directive (WEEE)

### APPROVALS

The resistors are approved within the IECQ-CECC Quality Assessment System for Electronic Components to the detail specification **EN 140401-803** which refers to **EN 60115-1**, **EN 140400** and the variety of environmental test procedures of the **IEC 60068** <sup>(3)</sup> series.

Conformity is attested by the use of the **CECC** logo (  ) as the mark of conformity on the package label.

Vishay Beyschlag has achieved “**Approval of Manufacturer**” in accordance with **IEC QC 001002-3, clause 2**. The release certificate for “**Technology Approval Schedule**” in accordance with **CECC 240001** based on **IEC QC 001002-3, clause 6** is granted for the Vishay Beyschlag manufacturing process.

The resistors are qualified according to AEC-Q200.

### RELATED PRODUCTS

For products with precision specification see the datasheet:

- “Precision MELF Resistors” ([www.vishay.com/doc?28714](http://www.vishay.com/doc?28714))
- “High Precision MINI-MELF Resistor” ([www.vishay.com/doc?28715](http://www.vishay.com/doc?28715))

Resistors are available with established reliability in accordance with **EN 140401-803 Version E**. Please refer to datasheet “MELF Resistors with Established Reliability” ([www.vishay.com/doc?28707](http://www.vishay.com/doc?28707)).

## FUNCTIONAL PERFORMANCE



## Derating - Standard Operation



## Note

<sup>(1)</sup> Specified power rating requires dedicated heat sink pads

## Derating - Power Operation



## Single Pulse


Maximum pulse load, single pulse; applicable if  $\bar{P} \rightarrow 0$  and  $n \leq 1000$  and  $\hat{U} \leq \hat{U}_{max}$ ; for permissible resistance change equivalent to 8000 h operation



# MMU 0102, MMA 0204, MMB 0207 - Professional


Professional MELF Resistors

Vishay Beyschlag

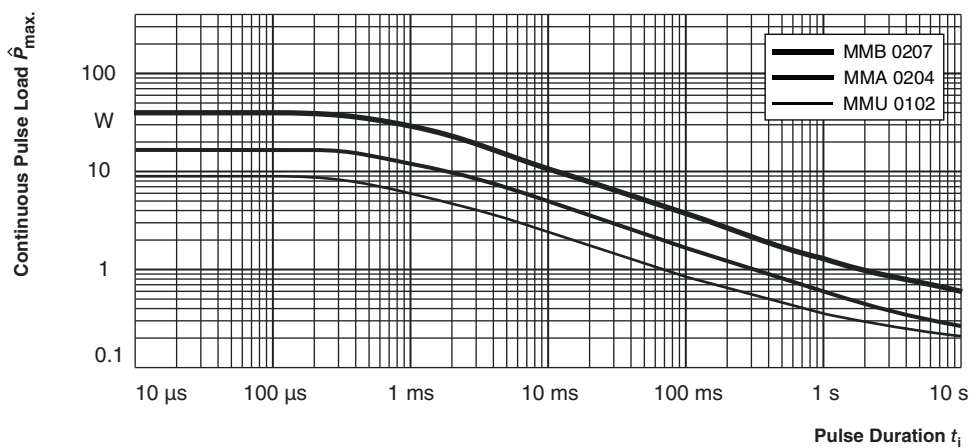


## Continuous Pulse

Maximum pulse load, continuous pulses; applicable if  $\bar{P} \leq P(\vartheta_{amb})$  and  $\hat{U} \leq \hat{U}_{max}$ ; for permissible resistance change equivalent to 8000 h operation

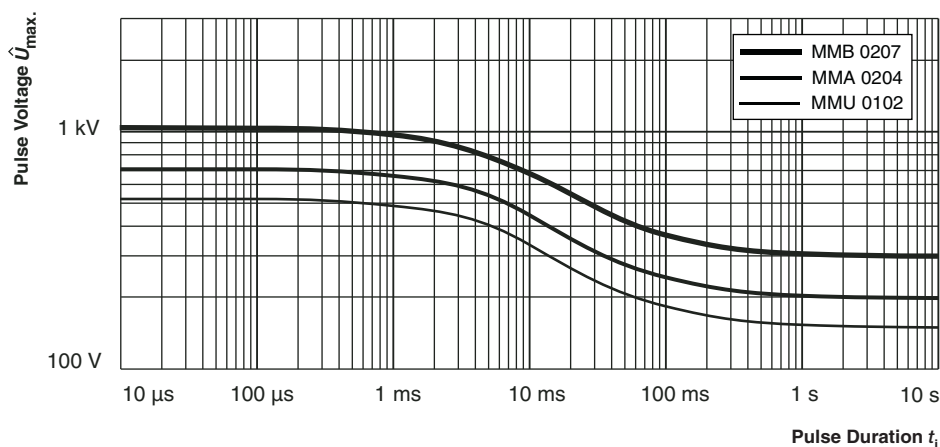


## Pulse Voltage

Maximum pulse voltage, single and continuous pulses; applicable if  $\hat{P} \leq \hat{P}_{max}$ ; for permissible resistance change equivalent to 8000 h operation

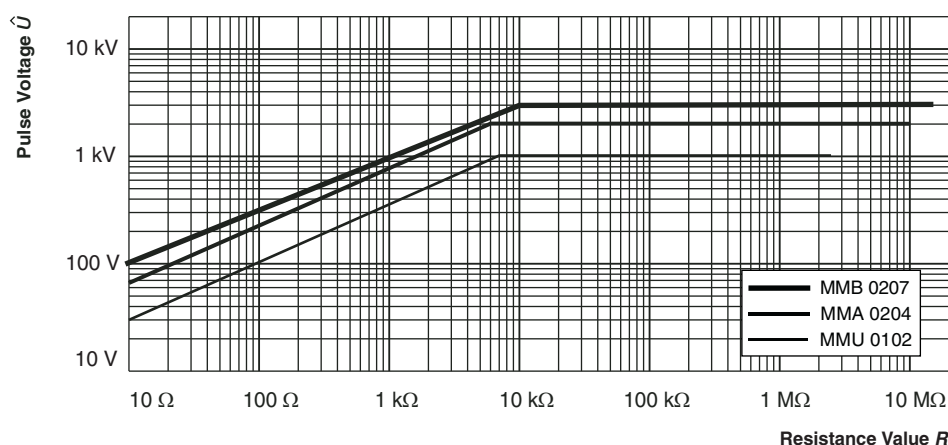


## 1.2/50 Pulse

Pulse load rating in accordance with IEC 60 115-1, 4.27; 1.2  $\mu$ s/50  $\mu$ s; 5 pulses at 12 s intervals; for permissible resistance change 0.5 %

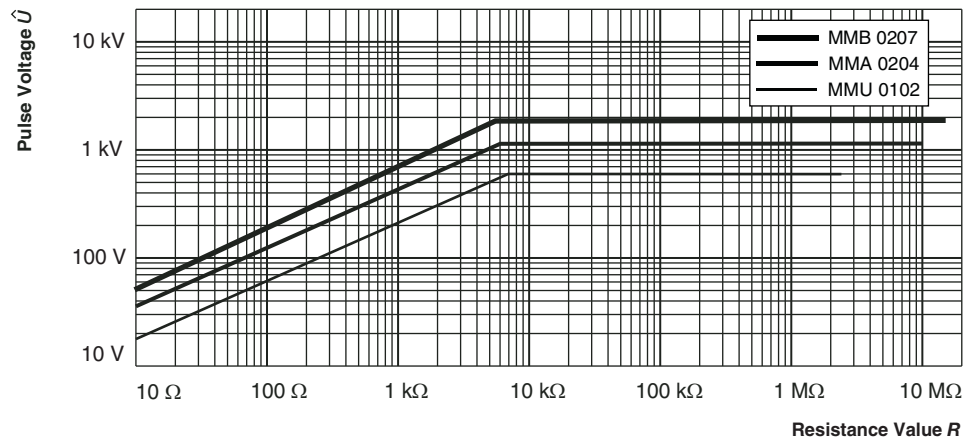


## 10/700 Pulse

Pulse load rating in accordance with IEC 60115-1, 4.27; 10  $\mu$ s/700  $\mu$ s;  
10 pulses at 1 minute intervals; for permissible resistance change 0.5 %

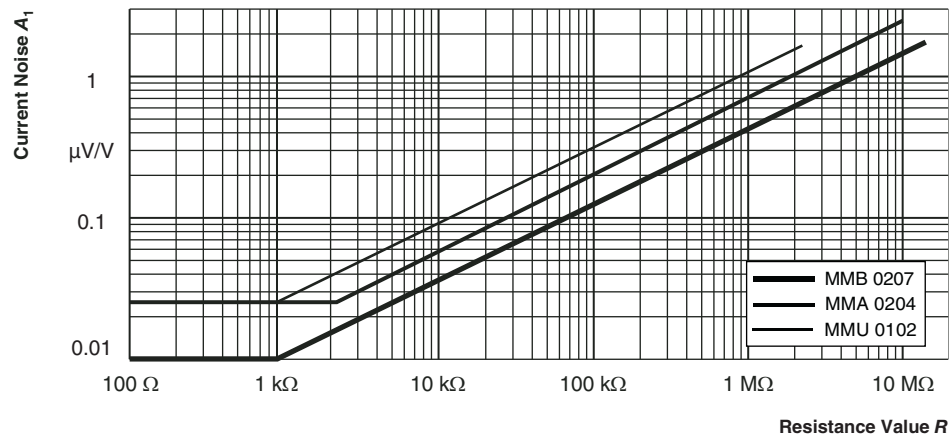

## Current Noise - $A_1$

Accordance with IEC 60195

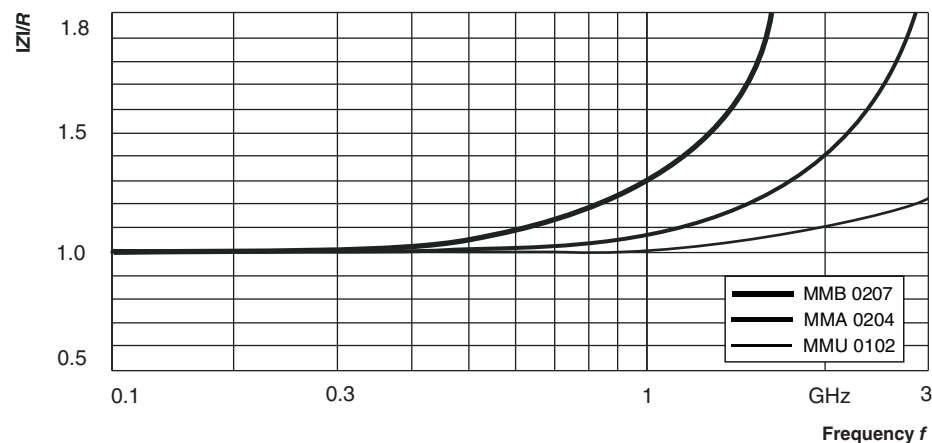

## RF - Behaviour

$|Z|/R$  for 49.9  $\Omega$  MELF resistors

**TEST AND REQUIREMENTS**

All tests are carried out in accordance with the following specifications:

EN 60115-1, generic specification

EN 140400, sectional specification

EN 140401-803, detail specification

The components are approved in accordance with the IECQ-CECC-system, where applicable. For the full test schedule refer to the documents listed above. The testing also covers most of the requirements specified by EIA/IS-703 and JIS-C-5202.

The tests are carried out under standard atmospheric conditions in accordance with IEC 60068-1, 5.3 <sup>(3)</sup>. Climatic category LCT/UCT/56 (rated temperature range: Lower category temperature, upper category temperature; damp heat, steady state, test duration 56 days) is valid.

Unless otherwise specified the following values apply:

Temperature: 15 °C to 35 °C

Relative humidity: 45 % to 75 %

Air pressure: 86 kPa to 106 kPa (860 mbar to 1060 mbar).

The components are mounted for testing on printed-circuit boards in accordance with EN 140400, 2.3.3, unless otherwise specified.

The requirements stated in the Test Procedures and Requirements table are based on the required tests and permitted limits of EN 140401-803. However, some additional tests and a number of improvements against those minimum requirements have been included. The stated requirements for long-term tests are typically fulfilled with a statistical safety of at least  $\bar{x} + 5 s$ .

| TEST PROCEDURES AND REQUIREMENTS |                                                 |                                                         |                                                                                                              |                                                                                             |                                             |                                            |                                                                                          |
|----------------------------------|-------------------------------------------------|---------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|---------------------------------------------|--------------------------------------------|------------------------------------------------------------------------------------------|
| EN<br>60115-1<br>CLAUSE          | IEC<br>60068-2 <sup>(2)</sup><br>TEST<br>METHOD | TEST                                                    | PROCEDURE                                                                                                    | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ )                                           |                                             |                                            |                                                                                          |
|                                  |                                                 |                                                         |                                                                                                              | STABILITY<br>CLASS 0.25<br>OR BETTER                                                        | STABILITY<br>CLASS 0.5<br>OR BETTER         | STABILITY<br>CLASS 1<br>OR BETTER          | STABILITY<br>CLASS 2<br>OR BETTER                                                        |
|                                  |                                                 |                                                         | Stability for<br>product types:                                                                              |                                                                                             |                                             |                                            |                                                                                          |
|                                  |                                                 |                                                         | MMU 0102                                                                                                     | 10 $\Omega$ to 221 k $\Omega$                                                               | 1 $\Omega$ to < 10 $\Omega$                 | < 1 $\Omega$                               | > 221 k $\Omega$                                                                         |
|                                  |                                                 |                                                         | MMA 0204                                                                                                     | 10 $\Omega$ to 332 k $\Omega$                                                               | 1 $\Omega$ to < 10 $\Omega$                 | < 1 $\Omega$                               | > 332 k $\Omega$                                                                         |
|                                  |                                                 |                                                         | MMB 0207                                                                                                     | 10 $\Omega$ to 1 M $\Omega$                                                                 | 1 $\Omega$ to < 10 $\Omega$                 | < 1 $\Omega$                               | > 1 M $\Omega$                                                                           |
| 4.5                              | -                                               | Resistance                                              | -                                                                                                            | $\pm 1\text{ }\% R$ ; $\pm 0.5\text{ }\% R$                                                 | $\pm 2\text{ }\% R$ ; $\pm 1\text{ }\% R$   | $\pm 5\text{ }\% R$                        | $\pm 1\text{ }\% R$                                                                      |
| 4.8.4.2                          | -                                               | Temperature<br>coefficient                              | At (20/- 55/20) °C<br>and<br>(20/125/20) °C                                                                  | $\pm 50\text{ ppm/K}$ ; $\pm 25\text{ ppm/K}$                                               |                                             |                                            |                                                                                          |
| 4.25.1                           | -                                               | Endurance<br>at 70 °C:<br>Standard<br>operation<br>mode | $U = \sqrt{P_{70} \times R}$<br>$\leq U_{\max.}$ ;<br>1.5 h on; 0.5 h off;<br>70 °C; 1000 h<br>70 °C; 8000 h | $\pm (0.15\text{ }\% R + 10\text{ m}\Omega)$<br>$\pm (0.3\text{ }\% R + 10\text{ m}\Omega)$ |                                             |                                            | $\pm (0.5\text{ }\% R + 10\text{ m}\Omega)$<br>$\pm (1\text{ }\% R + 10\text{ m}\Omega)$ |
|                                  |                                                 | Endurance<br>at 70 °C:<br>Power<br>operation<br>mode    | $U = \sqrt{P_{70} \times R}$<br>$\leq U_{\max.}$ ;<br>1.5 h on; 0.5 h off;<br>70 °C; 1000 h<br>70 °C; 8000 h | $\pm (0.25\text{ }\% R + 10\text{ m}\Omega)$<br>$\pm (0.5\text{ }\% R + 10\text{ m}\Omega)$ |                                             |                                            | $\pm (0.5\text{ }\% R + 10\text{ m}\Omega)$<br>$\pm (1\text{ }\% R + 10\text{ m}\Omega)$ |
| 4.25.3                           | -                                               | Endurance at<br>upper<br>category<br>temperature        | 125 °C; 1000 h                                                                                               | $\pm (0.15\text{ }\% R + 5\text{ m}\Omega)$                                                 | $\pm (0.25\text{ }\% R + 5\text{ m}\Omega)$ | $\pm (0.5\text{ }\% R + 5\text{ m}\Omega)$ | $\pm (1\text{ }\% R + 5\text{ m}\Omega)$                                                 |
|                                  |                                                 |                                                         | 155 °C; 1000 h                                                                                               | $\pm (0.3\text{ }\% R + 5\text{ m}\Omega)$                                                  | $\pm (0.5\text{ }\% R + 5\text{ m}\Omega)$  | $\pm (1\text{ }\% R + 5\text{ m}\Omega)$   | $\pm (2\text{ }\% R + 5\text{ m}\Omega)$                                                 |
| 4.24                             | 78 (Cab)                                        | Damp heat,<br>steady state                              | (40 $\pm$ 2) °C;<br>56 days;<br>(93 $\pm$ 3) % RH                                                            | $\pm (0.15\text{ }\% R + 10\text{ m}\Omega)$                                                | $\pm (0.5\text{ }\% R + 10\text{ m}\Omega)$ | $\pm (1\text{ }\% R + 10\text{ m}\Omega)$  | $\pm (1\text{ }\% R + 10\text{ m}\Omega)$                                                |

## TEST PROCEDURES AND REQUIREMENTS

| EN<br>60115-1<br>CLAUSE | IEC<br>60068-2 <sup>(2)</sup><br>TEST<br>METHOD | TEST                                                     | PROCEDURE                                                                                                                           | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ )                                |                                       |                                     |                                                                                 |
|-------------------------|-------------------------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|---------------------------------------|-------------------------------------|---------------------------------------------------------------------------------|
|                         |                                                 |                                                          |                                                                                                                                     | STABILITY<br>CLASS 0.25<br>OR BETTER                                             | STABILITY<br>CLASS 0.5<br>OR BETTER   | STABILITY<br>CLASS 1<br>OR BETTER   | STABILITY<br>CLASS 2<br>OR BETTER                                               |
|                         |                                                 |                                                          | Stability for<br>product types:                                                                                                     |                                                                                  |                                       |                                     |                                                                                 |
|                         |                                                 |                                                          | MMU 0102                                                                                                                            | 10 $\Omega$ to 221 k $\Omega$                                                    | 1 $\Omega$ to < 10 $\Omega$           | < 1 $\Omega$                        | > 221 k $\Omega$                                                                |
|                         |                                                 |                                                          | MMA 0204                                                                                                                            | 10 $\Omega$ to 332 k $\Omega$                                                    | 1 $\Omega$ to < 10 $\Omega$           | < 1 $\Omega$                        | > 332 k $\Omega$                                                                |
|                         |                                                 |                                                          | MMB 0207                                                                                                                            | 10 $\Omega$ to 1 M $\Omega$                                                      | 1 $\Omega$ to < 10 $\Omega$           | < 1 $\Omega$                        | > 1 M $\Omega$                                                                  |
| 4.39                    | 67 (Cy)                                         | Damp heat,<br>steady state,<br>accelerated               | (85 $\pm$ 2) $^{\circ}\text{C}$ ;<br>(85 $\pm$ 5) % RH;<br>$U = 0.3 \times \sqrt{P_{70} \times R}$<br>$\leq 100 \text{ V}$ ; 1000 h | $\pm (0.25 \% R + 10 \text{ m}\Omega)$                                           | $\pm (0.5 \% R + 10 \text{ m}\Omega)$ | $\pm (1 \% R + 10 \text{ m}\Omega)$ | $\pm (2 \% R + 10 \text{ m}\Omega)$                                             |
| 4.23                    |                                                 | Climatic<br>sequence:                                    |                                                                                                                                     |                                                                                  |                                       |                                     |                                                                                 |
| 4.23.2                  | 2 (Bb)                                          | dry heat                                                 | UCT; 16 h                                                                                                                           |                                                                                  |                                       |                                     |                                                                                 |
| 4.23.3                  | 30 (Db)                                         | damp heat,<br>cyclic                                     | 55 $^{\circ}\text{C}$ ; 24 h;<br>$\geq 90 \% \text{ RH}$ ; 1 cycle                                                                  |                                                                                  |                                       |                                     |                                                                                 |
| 4.23.4                  | 1 (Ab)                                          | cold                                                     | LCT; 2 h                                                                                                                            |                                                                                  |                                       |                                     |                                                                                 |
| 4.23.5                  | 13 (M)                                          | low air<br>pressure                                      | 8.5 kPa; 2 h;<br>(25 $\pm$ 10) $^{\circ}\text{C}$                                                                                   | $\pm (0.15 \% R + 10 \text{ m}\Omega)$                                           | $\pm (0.5 \% R + 10 \text{ m}\Omega)$ | $\pm (1 \% R + 10 \text{ m}\Omega)$ | $\pm (1 \% R + 10 \text{ m}\Omega)$                                             |
| 4.23.6                  | 30 (Db)                                         | damp heat,<br>cyclic                                     | 55 $^{\circ}\text{C}$ ; 24 h;<br>$\geq 90 \% \text{ RH}$ ;<br>5 cycles                                                              |                                                                                  |                                       |                                     |                                                                                 |
| 4.23.7                  | -                                               | DC load                                                  | $U = \sqrt{P_{70} \times R}$<br>$\leq U_{\text{max}}$ ; 1 min.<br>LCT = - 55 $^{\circ}\text{C}$ ;<br>UCT = 155 $^{\circ}\text{C}$   |                                                                                  |                                       |                                     |                                                                                 |
| -                       | 1 (Ab)                                          | Cold                                                     | - 55 $^{\circ}\text{C}$ ; 2 h                                                                                                       | $\pm (0.05 \% R + 5 \text{ m}\Omega)$                                            |                                       |                                     | $\pm (0.1 \% R + 5 \text{ m}\Omega)$                                            |
| 4.19                    | 14 (Na)                                         | Rapid<br>change of<br>temperature                        | 30 min at LCT;<br>30 min at UCT;<br>LCT = - 55 $^{\circ}\text{C}$ ;<br>UCT = 125 $^{\circ}\text{C}$<br><br>5 cycles<br>1000 cycles  | $\pm (0.05 \% R + 10 \text{ m}\Omega)$<br>$\pm (0.15 \% R + 10 \text{ m}\Omega)$ |                                       |                                     | $\pm (0.1 \% R + 10 \text{ m}\Omega)$<br>$\pm (0.25 \% R + 10 \text{ m}\Omega)$ |
|                         |                                                 |                                                          | LCT = - 55 $^{\circ}\text{C}$ ;<br>UCT = 155 $^{\circ}\text{C}$<br>1000 cycles                                                      | $\pm (0.25 \% R + 10 \text{ m}\Omega)$                                           |                                       |                                     | $\pm (0.5 \% R + 10 \text{ m}\Omega)$                                           |
| 4.13                    | -                                               | Short time<br>overload:<br>standard<br>operation<br>mode | $U = 2.5 \times \sqrt{P_{70} \times R}$<br>$\leq 2 \times U_{\text{max}}$ ; 5 s                                                     | $\pm (0.03 \% R + 5 \text{ m}\Omega)$                                            |                                       |                                     | $\pm (0.15 \% R + 5 \text{ m}\Omega)$                                           |
|                         |                                                 | Short time<br>overload:<br>power<br>operation<br>mode    |                                                                                                                                     | $\pm (0.05 \% R + 5 \text{ m}\Omega)$                                            |                                       |                                     | $\pm (0.15 \% R + 5 \text{ m}\Omega)$                                           |



| TEST PROCEDURES AND REQUIREMENTS |                                                 |                                                                            |                                                                                                                                              |                                                   |                                     |                                   |                                      |
|----------------------------------|-------------------------------------------------|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-------------------------------------|-----------------------------------|--------------------------------------|
| EN<br>60115-1<br>CLAUSE          | IEC<br>60068-2 <sup>(2)</sup><br>TEST<br>METHOD | TEST                                                                       | PROCEDURE                                                                                                                                    | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ ) |                                     |                                   |                                      |
|                                  |                                                 |                                                                            |                                                                                                                                              | STABILITY<br>CLASS 0.25<br>OR BETTER              | STABILITY<br>CLASS 0.5<br>OR BETTER | STABILITY<br>CLASS 1<br>OR BETTER | STABILITY<br>CLASS 2<br>OR BETTER    |
|                                  |                                                 |                                                                            | Stability for<br>product types:                                                                                                              |                                                   |                                     |                                   |                                      |
|                                  |                                                 |                                                                            | MMU 0102                                                                                                                                     | 10 $\Omega$ to 221 k $\Omega$                     | 1 $\Omega$ to < 10 $\Omega$         | < 1 $\Omega$                      | > 221 k $\Omega$                     |
|                                  |                                                 |                                                                            | MMA 0204                                                                                                                                     | 10 $\Omega$ to 332 k $\Omega$                     | 1 $\Omega$ to < 10 $\Omega$         | < 1 $\Omega$                      | > 332 k $\Omega$                     |
|                                  |                                                 |                                                                            | MMB 0207                                                                                                                                     | 10 $\Omega$ to 1 M $\Omega$                       | 1 $\Omega$ to < 10 $\Omega$         | < 1 $\Omega$                      | > 1 M $\Omega$                       |
| 4.27                             | -                                               | Single pulse<br>high voltage<br>overload;<br>standard<br>operation<br>mode | Severity no. 4:<br>$U = 10 \times \sqrt{P_{70} \times R}$<br>$\leq 2 \times U_{max.}$ ;<br>10 pulses<br>10 $\mu$ s/700 $\mu$ s               | $\pm (0.25 \% R + 5 \text{ m}\Omega)$             |                                     |                                   |                                      |
|                                  |                                                 | Single pulse<br>high voltage<br>overload;<br>power<br>operation<br>mode    |                                                                                                                                              | $\pm (0.5 \% R + 5 \text{ m}\Omega)$              |                                     |                                   |                                      |
| 4.37                             | -                                               | Periodic<br>electric<br>overload;<br>standard<br>operation<br>mode         | $U = \sqrt{15 \times P_{70} \times R}$<br>$\leq 2 \times U_{max.}$ ;<br>0.1 s on; 2.5 s off;<br>1000 cycles                                  | $\pm (0.5 \% R + 5 \text{ m}\Omega)$              |                                     |                                   |                                      |
|                                  |                                                 | Periodic<br>electric<br>overload;<br>power<br>operation<br>mode            |                                                                                                                                              | $\pm (1 \% R + 5 \text{ m}\Omega)$                |                                     |                                   |                                      |
| 4.22                             | 6 (Fc)                                          | Vibration                                                                  | Endurance by<br>sweeping;<br>10 Hz to 2000 Hz;<br>no resonance;<br>amplitude<br>$\leq 1.5 \text{ mm}$ or<br>$\leq 200 \text{ m/s}^2$ ; 7.5 h | $\pm (0.05 \% R + 5 \text{ m}\Omega)$             |                                     |                                   | $\pm (0.1 \% R + 5 \text{ m}\Omega)$ |
| 4.40                             | -                                               | Electrostatic<br>discharge<br>(Human Body<br>Model)                        | IEC 61340-3-1 <sup>(2)</sup> ;<br>3 pos. + 3 neg.<br>discharges<br>MMU 0102: 1.5 kV<br>MMA 0204: 2 kV<br>MMB 0207: 4 kV                      | $\pm (0.5 \% R + 50 \text{ m}\Omega)$             |                                     |                                   |                                      |

**TEST PROCEDURES AND REQUIREMENTS**

| EN<br>60115-1<br>CLAUSE | IEC<br>60068-2 <sup>(2)</sup><br>TEST<br>METHOD | TEST                                | PROCEDURE                                                                                                                    | REQUIREMENTS<br>PERMISSIBLE CHANGE ( $\Delta R$ )                                                        |                                     |                                     |                                     |
|-------------------------|-------------------------------------------------|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
|                         |                                                 |                                     |                                                                                                                              | STABILITY<br>CLASS 0.25<br>OR BETTER                                                                     | STABILITY<br>CLASS 0.5<br>OR BETTER | STABILITY<br>CLASS 1<br>OR BETTER   | STABILITY<br>CLASS 2<br>OR BETTER   |
|                         |                                                 |                                     | Stability for<br>product types:                                                                                              |                                                                                                          |                                     |                                     |                                     |
|                         |                                                 |                                     | MMU 0102                                                                                                                     | 10 $\Omega$ to 221 k $\Omega$                                                                            | 1 $\Omega$ to < 10 $\Omega$         | < 1 $\Omega$                        | > 221 k $\Omega$                    |
|                         |                                                 |                                     | MMA 0204                                                                                                                     | 10 $\Omega$ to 332 k $\Omega$                                                                            | 1 $\Omega$ to < 10 $\Omega$         | < 1 $\Omega$                        | > 332 k $\Omega$                    |
|                         |                                                 |                                     | MMB 0207                                                                                                                     | 10 $\Omega$ to 1 M $\Omega$                                                                              | 1 $\Omega$ to < 10 $\Omega$         | < 1 $\Omega$                        | > 1 M $\Omega$                      |
| 4.17.2                  | 58 (Td)                                         | Solderability                       | Solder bath<br>method; SnPb40;<br>non-activated flux;<br>(215 $\pm$ 3) $^{\circ}$ C;<br>(3 $\pm$ 0.3) s                      | Good tinning ( $\geq$ 95 % covered); no visible damage                                                   |                                     |                                     |                                     |
|                         |                                                 |                                     | Solder bath<br>method;<br>SnAg3Cu0.5 or<br>SnAg3.5;<br>non-activated flux;<br>(235 $\pm$ 3) $^{\circ}$ C;<br>(2 $\pm$ 0.2) s | Good tinning ( $\geq$ 95 % covered); no visible damage                                                   |                                     |                                     |                                     |
| 4.18.2                  | 58 (Td)                                         | Resistance to<br>soldering heat     | Solder bath<br>method;<br>(260 $\pm$ 5) $^{\circ}$ C;<br>(10 $\pm$ 1) s                                                      | $\pm$ (0.05 % $R$ + 10 m $\Omega$ )                                                                      | $\pm$ (0.1 % $R$ + 10 m $\Omega$ )  | $\pm$ (0.25 % $R$ + 10 m $\Omega$ ) | $\pm$ (0.25 % $R$ + 10 m $\Omega$ ) |
|                         |                                                 |                                     | Reflow method 2<br>(IR/forced gas<br>convection);<br>(260 $\pm$ 5) $^{\circ}$ C;<br>(10 $\pm$ 1) s                           | $\pm$ (0.02 % $R$ + 10 m $\Omega$ )                                                                      | $\pm$ (0.05 % $R$ + 10 m $\Omega$ ) | $\pm$ (0.05 % $R$ + 10 m $\Omega$ ) | $\pm$ (0.1 % $R$ + 10 m $\Omega$ )  |
| 4.29                    | 45 (XA)                                         | Component<br>solvent<br>resistance  | Isopropyl alcohol;<br>50 $^{\circ}$ C; method 2                                                                              | No visible damage                                                                                        |                                     |                                     |                                     |
| 4.30                    | 45 (XA)                                         | Solvent<br>resistance of<br>marking | Isopropyl alcohol;<br>50 $^{\circ}$ C; method 1,<br>toothbrush                                                               | Marking legible;<br>no visible damage                                                                    |                                     |                                     |                                     |
| 4.32                    | 21 (Ue <sub>3</sub> )                           | Shear<br>(adhesion)                 | 45 N                                                                                                                         | No visible damage                                                                                        |                                     |                                     |                                     |
| 4.33                    | 21 (Ue <sub>1</sub> )                           | Substrate<br>bending                | Depth 2 mm,<br>3 times                                                                                                       | No visible damage, no open circuit in bent position<br>$\pm$ (0.05 % $R$ + 5 m $\Omega$ ) <sup>(1)</sup> |                                     |                                     |                                     |
| 4.7                     | -                                               | Voltage proof                       | $U_{\text{RMS}} = U_{\text{ins}}$ ; 60 s                                                                                     | No flashover or breakdown                                                                                |                                     |                                     |                                     |
| 4.35                    | -                                               | Flammability                        | IEC 60695-11-5 <sup>(2)</sup> ,<br>needle flame test;<br>10 s                                                                | No burning after 30 s                                                                                    |                                     |                                     |                                     |

**Notes**

<sup>(1)</sup> Special requirements apply to MICRO-MELF, MMU 0102:

- $R < 100 \Omega$ :  $\pm$  (0.25 %  $R$  + 10 m $\Omega$ ).
- $100 \Omega \leq R \leq 221 \text{ k}\Omega$ :  $\pm$  0.1 %  $R$ .
- $221 \text{ k}\Omega < R$ :  $\pm$  0.25 %  $R$ .

<sup>(2)</sup> The quoted IEC standards are also released as EN standards with the same number and identical contents.



### HISTORICAL 12NC INFORMATION

- The resistors had a 12-digit numeric code starting with 2312.
- The subsequent 4 digits indicated the resistor type, specification and packaging; see the 12NC table.
- The remaining 4 digits indicated the resistance value:
  - The first 3 digits indicated the resistance value.
  - The last digit indicated the resistance decade in accordance with the 12NC Indicating Resistance Decade table.

### Last Digit of 12NC Indicating Resistance Decade

| RESISTANCE DECADE                | LAST DIGIT |
|----------------------------------|------------|
| 0.1 $\Omega$ to 0.999 $\Omega$   | 7          |
| 1 $\Omega$ to 9.99 $\Omega$      | 8          |
| 10 $\Omega$ to 99.9 $\Omega$     | 9          |
| 100 $\Omega$ to 999 $\Omega$     | 1          |
| 1 k $\Omega$ to 9.99 k $\Omega$  | 2          |
| 10 k $\Omega$ to 99.9 k $\Omega$ | 3          |
| 100 k $\Omega$ to 999 k $\Omega$ | 4          |
| 1 M $\Omega$ to 9.99 M $\Omega$  | 5          |
| 10 M $\Omega$ to 99.9 M $\Omega$ | 6          |

### Historical 12NC Example

The 12NC of a MMU 0102 resistor, value 47 k $\Omega$  and TCR 50 with  $\pm 1\%$  tolerance, supplied in blister tape of 3000 units per reel was: 2312 165 14703.

### HISTORICAL 12NC - Resistor type and packaging

| DESCRIPTION |                 |             | 2312... ..           |                    |                  |
|-------------|-----------------|-------------|----------------------|--------------------|------------------|
|             |                 |             | BLISTER TAPE ON REEL |                    | BULK CASE        |
| TYPE        | TCR             | TOL.        | BL<br>3000 UNITS     | B0<br>10 000 UNITS | M8<br>8000 UNITS |
| MMU 0102    | $\pm 50$ ppm/K  | $\pm 5\%$   | 165 3....            | 175 3....          | 060 3....        |
|             |                 | $\pm 2\%$   | 165 2....            | 175 2....          | 060 2....        |
|             |                 | $\pm 1\%$   | <b>165 1....</b>     | <b>175 1....</b>   | <b>060 1....</b> |
|             |                 | $\pm 0.5\%$ | 165 5....            | 175 5....          | 060 5....        |
|             | $\pm 25$ ppm/K  | $\pm 1\%$   | 166 1....            | 176 1....          | 061 1....        |
|             |                 | $\pm 0.5\%$ | <b>166 5....</b>     | <b>176 5....</b>   | <b>061 5....</b> |
|             | Jumper          |             | <b>165 90001</b>     | <b>175 90001</b>   | <b>060 90001</b> |
| TYPE        | TCR             | TOL.        | BL<br>3000 UNITS     | B0<br>10 000 UNITS | M3<br>3000 UNITS |
| MMA 0204    | $\pm 50$ ppm/K  | $\pm 5\%$   | 155 3....            | 145 3....          | 040 3....        |
|             |                 | $\pm 1\%$   | <b>155 1....</b>     | <b>145 1....</b>   | <b>040 1....</b> |
|             |                 | $\pm 0.5\%$ | 155 5....            | 145 5....          | 040 5....        |
|             | $\pm 25$ ppm/K  | $\pm 1\%$   | 156 1....            | 146 1....          | 041 1....        |
|             |                 | $\pm 0.5\%$ | <b>156 5....</b>     | <b>146 5....</b>   | <b>041 5....</b> |
|             | Jumper          |             | <b>155 90001</b>     | <b>145 90001</b>   | <b>040 90001</b> |
| TYPE        | TCR             | TOL.        | B2<br>2000 UNITS     | B7<br>7000 UNITS   |                  |
| MMB 0207    | $\pm 100$ ppm/K | $\pm 5\%$   | 195 3....            | 185 3....          |                  |
|             | $\pm 50$ ppm/K  | $\pm 5\%$   | 195 3....            | 185 3....          |                  |
|             |                 | $\pm 2\%$   | 195 2....            | 185 2....          |                  |
|             |                 | $\pm 1\%$   | <b>195 1....</b>     | <b>185 1....</b>   |                  |
|             | $\pm 25$ ppm/K  | $\pm 0.5\%$ | <b>196 5....</b>     | <b>186 5....</b>   |                  |
|             | Jumper          |             | <b>195 90001</b>     | <b>185 90001</b>   |                  |



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.