


| SPECIFICATION CONTROL DRAWING                                                           |                                                                     | 55FB1544        |               |
|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------|---------------|
| TITLE                                                                                   | FOUR CONDUCTOR CABLE, SHIELDED, JACKETED, FILTER LINE - ELECTROLOSS | Date<br>8-13-10 | Revision<br>D |
| This specification sheet forms a part of the latest issue of Raychem Specification 55F. |                                                                     |                 |               |

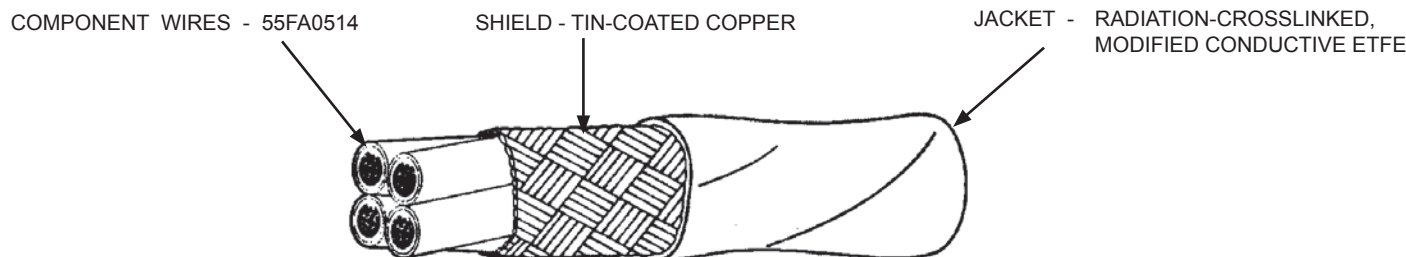

| CABLE CONSTRUCTION DETAILS |                            |                         |                           |         |                           |         |                                     | JACKET<br>FLEXURE<br>ENDURANCE<br>MANDREL<br>DIAMETER<br>(in.) (± 3%) |
|----------------------------|----------------------------|-------------------------|---------------------------|---------|---------------------------|---------|-------------------------------------|-----------------------------------------------------------------------|
| PART NUMBER<br>1/          | CONDUCTOR<br>SIZE<br>(AWG) | SHIELD<br>SIZE<br>(AWG) | JACKET THICKNESS<br>(in.) |         | OUTSIDE DIAMETER<br>(in.) |         | MAXIMUM<br>WEIGHT<br>(lbs/1000 ft.) |                                                                       |
|                            |                            |                         | MINIMUM                   | NOMINAL | NOMINAL                   | MAXIMUM |                                     |                                                                       |
| 55FB1544-26-*              | 26                         | 38                      | .0060                     | .008    | .137                      | .159    | 17.7                                | .250                                                                  |
| 55FB1544-24-*              | 24                         | 38                      | .0060                     | .008    | .141                      | .165    | 21.3                                | .250                                                                  |

#### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

##### TEMPERATURE RATING: 150°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

BLOCKING: 200 ± 3°C for 6 hours

CROSSLINKING PROOF TEST: 300 ± 3°C for 7 hours

FLAMMABILITY: 3 seconds (maximum); 3 in. (maximum);  
no flaming of facial tissue

##### FLUORIDE EXTRACTION:

70 ± 2° C for 168 hours, 250 ppm (maximum)

##### IDENTIFICATION AND COLOR STRIPING DURABILITY:

125 cycles (250 strokes) (minimum), 500 g weight

JACKET COLOR: Black

##### JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 3500 lbf/in<sup>2</sup> (minimum)

JACKET FLAWS: Not Applicable

JACKET FLEXURE ENDURANCE: 10 cycles, no cracking

LIFE CYCLE: 200 ± 3°C for 168 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 85% (minimum)

VOLTAGE WITHSTAND (DIELECTRIC):

Conductor to conductor and shield, 1500 volts (rms), 60 Hz

VOLTAGE WITHSTAND (Post Environmental): Not Applicable

##### PART NUMBER:

The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. Violet shall be light violet and the designator shall be 7L. Colors shown do not necessarily reflect the sequence of manufacturing.

Example: AWG 24, light violet, light violet with an orange stripe, light violet with a green stripe and light violet with a blue stripe  
component wires, black jacket: 55FB1544-24-7L/7L3/7L5/7L6-0

NOTE: Nominal values are for information only.

Nominal values are not requirements.

This product meets or exceeds all requirements of SAE AS85485/12 for 24 AWG, less identification.

Internal wire size 24 AWG meets or exceeds all requirements of SAE AS85485/10, less identification.

All other AWG sizes meet or exceed all requirements of SAE AS85485, less identification.

|                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                    |  |                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.<br>Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.                                                                                                        |                                                                                                                                                                    |  |                                                                                                                                                                                                                    |
| 1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER. |                                                                                                                                                                    |  |                                                                                                                                                                                                                    |
| Page 1 of 1                                                                                                                                                                                                                                                                                                                                                                                                            | The TE logo, Tyco Electronics, Electroloss and Raychem are trademarks.                                                                                             |  | <br>Raychem Wire & Cable<br>501 Oakside Avenue<br>Redwood City, CA 94063-3800<br>Phone: 1-800-227-8816<br>Fax: 1-650-361-6297 |
|                                                                                                                                                                                                                                                                                                                                                                                                                        | DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL                                                                                              |  |                                                                                                                                                                                                                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                        | THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.<br>REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID. |  |                                                                                                                                                                                                                    |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.