



### FEATURES

- DIP-24 Plastic Package
- Wide 2:1 Input Range
- Operating Temp.Range -40 to +85°C
- Overload Protection
- No Minimum Load Requirement
- Isolation voltage (optional)  
1500VDC for DN03S/DXXXXA  
3000VDC for DN03S/DXXXXH
- Input Filter meets EN55022,class A and FCC,level A
- Fully compatible with DE03S/D Series
- 3 Years Product Warranty



The DN03S/D series is a range of high performance dc-dc converter modules, designed as a cost optimized replacement for the highly popular DE03S/D series. The converter features wide 2:1 input ranges and tight output voltage regulation. Excellent efficiency allows an operating temperature up to +70°C at full load. The product comes in a DIP-24 plastic package with industry standard footprint. Typical applications for these economical priced dc-dc converters are industrial electronics, instrumentation or communication equipment.

### Model Selection Guide

| Model Number   | Input Voltage (Range)<br>VDC | Output Voltage<br>VDC                          | Output Current<br>Max.<br>mA   | Input Current  |  | Reflected Ripple Current<br>mA(typ.) | Max. capacitive Load<br>µF                              | Efficiency (typ.)                                       |
|--|------------------------------|--|--|--|--|--------------------------------------|---|---|
|  |                              |  |  | @Max. Load<br>mA(typ.)                               | @No Load<br>mA(typ.)                           |                                      |   | @Max. Load<br>%   |
|  |                              |  | DN03S0503A<br>DN03S0503H<br>DN03S0505A<br>DN03S0505H<br>DN03S0512A<br>DN03S0512H<br>DN03S0515A<br>DN03S0515H<br>DN03S0524A<br>DN03S0524H<br>DN03D0505A<br>DN03D0505H<br>DN03D0512A<br>DN03D0512H<br>DN03D0515A<br>DN03D0515H | 5<br>(4.5 ~ 9)                                       | 3.3<br>5<br>12<br>15<br>24<br>±5<br>±12<br>±15 |                                      |   | 600<br>500<br>250<br>200<br>125<br>±250<br>±125<br>±100 |
| DN03S1203A<br>DN03S1203H<br>DN03S1205A<br>DN03S1205H<br>DN03S1212A<br>DN03S1212H<br>DN03S1215A<br>DN03S1215H<br>DN03S1224A<br>DN03S1224H<br>DN03D1205A<br>DN03D1205H<br>DN03D1212A<br>DN03D1212H<br>DN03D1215A<br>DN03D1215H | 12<br>(9 ~ 18)               | 3.3<br>5<br>12<br>15<br>24<br>±5<br>±12<br>±15 | 600<br>500<br>250<br>200<br>125<br>±250<br>±125<br>±100  | 209<br>257<br>294<br>294<br>298<br>260<br>298<br>298 | 35   | 30                                   | 680<br>470<br>330<br>220<br>100<br>220#<br>150#<br>100# | 79<br>81<br>85<br>85<br>84<br>80<br>84<br>84            |

### Model Selection Guide

| Model Number             | Input Voltage (Range) | Output Voltage  | Output Current | Input Current |          | Reflected Ripple Current | Max. capacitive Load | Efficiency (typ.) |    |     |    |
|--------------------------|-----------------------|-----------------|----------------|---------------|----------|--------------------------|----------------------|-------------------|----|-----|----|
|                          |                       |                 | Max.           | @Max. Load    | @No Load |                          |                      | @Max. Load        |    |     |    |
|                          | VDC                   | VDC             | mA             | mA(typ.)      | mA(typ.) | mA(typ.)                 | μF                   | %                 |    |     |    |
| DN03S2403A<br>DN03S2403H | 24<br>(18 ~ 36)       | 3.3             | 600            | 104           | 20       | 15                       | 680                  | 79                |    |     |    |
| DN03S2405A<br>DN03S2405H |                       | 5               | 500            | 129           |          |                          | 470                  | 81                |    |     |    |
| DN03S2412A<br>DN03S2412H |                       | 12              | 250            | 147           |          |                          | 330                  | 85                |    |     |    |
| DN03S2415A<br>DN03S2415H |                       | 15              | 200            | 147           |          |                          | 220                  | 85                |    |     |    |
| DN03S2424A<br>DN03S2424H |                       | 24              | 125            | 149           |          |                          | 100                  | 84                |    |     |    |
| DN03D2405A<br>DN03D2405H |                       | ±5              | ±250           | 130           |          |                          | 220#                 | 80                |    |     |    |
| DN03D2412A<br>DN03D2412H |                       | ±12             | ±125           | 149           |          |                          | 150#                 | 84                |    |     |    |
| DN03D2415A<br>DN03D2415H |                       | ±15             | ±100           | 149           |          |                          | 100#                 | 84                |    |     |    |
| DN03S4803A<br>DN03S4803H |                       | 48<br>(36 ~ 75) | 3.3            | 600           |          |                          | 52                   | 15                | 10 | 680 | 79 |
| DN03S4805A<br>DN03S4805H |                       |                 | 5              | 500           |          |                          | 64                   |                   |    | 470 | 81 |
| DN03S4812A<br>DN03S4812H | 12                    |                 | 250            | 74            | 330      | 85                       |                      |                   |    |     |    |
| DN03S4815A<br>DN03S4815H | 15                    |                 | 200            | 74            | 220      | 85                       |                      |                   |    |     |    |
| DN03S4824A<br>DN03S4824H | 24                    |                 | 125            | 74            | 100      | 84                       |                      |                   |    |     |    |
| DN03D4805A<br>DN03D4805H | ±5                    |                 | ±250           | 65            | 220#     | 80                       |                      |                   |    |     |    |
| DN03D4812A<br>DN03D4812H | ±12                   |                 | ±125           | 74            | 150#     | 84                       |                      |                   |    |     |    |
| DN03D4815A<br>DN03D4815H | ±15                   |                 | ±100           | 74            | 100#     | 84                       |                      |                   |    |     |    |

# For each output



## Input Specifications

| Parameter                         | Model            | Min.      | Typ. | Max. | Unit |
|-----------------------------------|------------------|-----------|------|------|------|
| Input Surge Voltage (1 sec. max.) | 5V Input Models  | -0.7      | ---  | 11   | VDC  |
|                                   | 12V Input Models | -0.7      | ---  | 25   |      |
|                                   | 24V Input Models | -0.7      | ---  | 50   |      |
|                                   | 48V Input Models | -0.7      | ---  | 100  |      |
| Start-Up Threshold Voltage        | 5V Input Models  | ---       | ---  | 4.5  |      |
|                                   | 12V Input Models | ---       | ---  | 9    |      |
|                                   | 24V Input Models | ---       | ---  | 18   |      |
|                                   | 48V Input Models | ---       | ---  | 36   |      |
| Under Voltage Shutdown            | 5V Input Models  | ---       | ---  | 4    |      |
|                                   | 12V Input Models | ---       | ---  | 8.5  |      |
|                                   | 24V Input Models | ---       | ---  | 17.5 |      |
|                                   | 48V Input Models | ---       | ---  | 35.5 |      |
| Internal Filter Type              | All Models       | Pi Filter |      |      |      |
| Short Circuit Input Power         |                  | ---       | ---  | 2000 | mW   |
| Internal Power Dissipation        |                  | ---       | ---  | 1200 | mW   |

## Output Specifications

| Parameter                       | Conditions                  | Min. | Typ.  | Max.  | Unit              |
|---------------------------------|-----------------------------|------|-------|-------|-------------------|
| Output Voltage Setting Accuracy |                             | ---  | ---   | ±2.0  | %Vnom.            |
| Output Voltage Balance          | Dual Output, Balanced Loads | ---  | ±0.5  | ±2.0  | %                 |
| Line Regulation                 | Vin=Min. to Max.            | ---  | ±0.3  | ±1.0  | %                 |
| Load Regulation                 | Io=0% to 100%               | ---  | ±0.3  | ±1.0  | %                 |
| Min.Load                        | No minimum Load Requirement |      |       |       |                   |
| Ripple & Noise                  | 0-20 MHz Bandwidth          | ---  | ---   | 70    | mV <sub>P-P</sub> |
| Transient Recovery Time         | 25% Load Step Change        | ---  | 300   | 500   | µsec              |
| Transient Response Deviation    |                             | ---  | ±3    | ±5    | %                 |
| Temperature Coefficient         |                             | ---  | ±0.01 | ±0.02 | %/°C              |
| Over Load Protection            | Foldback                    | 120  | 150   | ---   | %                 |
| Short Circuit Protection        | Continuous                  |      |       |       |                   |

## General Specifications

| Parameter                     | Conditions   | Min.                    | Typ. | Max. | Unit  |     |
|-------------------------------|--|-------------------------|------|------|-------|-----|
| I/O Isolation Voltage (rated) | 60 Seconds   | Standard                | 1500 | ---  | ---   | VDC |
|                               |  | Suffix H <sub>(6)</sub> | 3000 | ---  | ---   | VDC |
| I/O Isolation Resistance      | 500 VDC  | 1000                    | ---  | ---  | MΩ    |     |
| I/O Isolation Capacitance     | 100KHz, 1V   | ---                     | ---  | 300  | pF    |     |
| Switching Frequency           |  | 90                      | ---  | ---  | KHz   |     |
| MTBF (calculated)             | MIL-HDBK-217F@25°C, Ground Benign                          | 1,000,000               |      |      | Hours |     |
| Safety Approvals (Pending)    | UL/cUL 60950-1 recognition(UL certificate), IEC/EN 60950-1 |                         |      |      |       |     |


## Environmental Specifications

| Parameter  | Conditions          | Min. | Max. | Unit     |
|--|---------------------|------|------|----------|
| Operating Ambient Temperature Range (See Power Derating Curve) | Natural Convection  | -40  | +85  | °C       |
| Case Temperature   |                     | ---  | +100 | °C       |
| Storage Temperature Range                                      |                     | -50  | +125 | °C       |
| Humidity (non condensing)                                      |                     | ---  | 95   | % rel. H |
| Cooling  | Free-Air convection |      |      |          |
| Lead Temperature (1.5mm from case for 10Sec.)                  |                     | ---  | 260  | °C       |

## EMC Specifications

| Parameter                     | Standards & Level                             | Performance      |
|-------------------------------|---|------------------|
| Conducted EMI                 | Compliance to EN 55022 and FCC part 15        | Class A          |
| ESD                           | EN61000-4-2 air $\pm 8KV$ , Contact $\pm 6KV$ | Perf. Criteria A |
| Radiated immunity             | EN61000-4-3 10V/m                             | Perf. Criteria A |
| Fast transient <sup>(5)</sup> | EN61000-4-4 $\pm 2KV$                         | Perf. Criteria A |
| Surge <sup>(5)</sup>          | EN61000-4-5 $\pm 1KV$                         | Perf. Criteria A |
| Conducted immunity            | EN61000-4-6 10V/m                             | Perf. Criteria A |

## Power Derating Curve

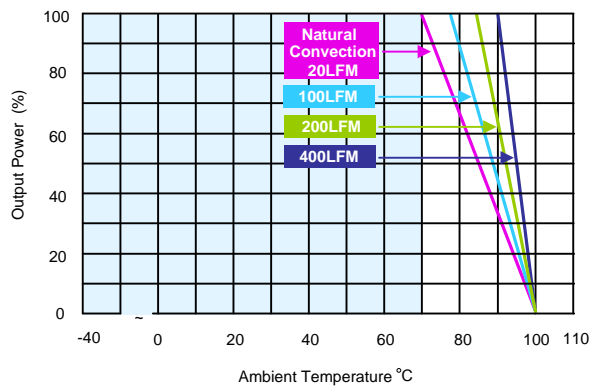


## Notes

- 1 Specifications typical at  $T_a = +25^\circ C$ , resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact factory.
- 5 To meet EN61000-4-4 & EN61000-4-5 an external capacitor across the input pins is required. Suggested capacitor: CHEMI-CON KY 220 $\mu F$ /100V
- 6 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 7 Specifications are subject to change without notice.

## Package Specifications

### Mechanical Dimensions

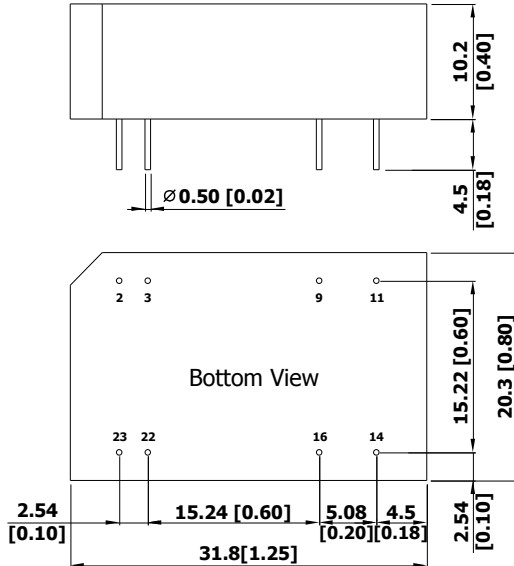

### Pin Connections

| Pin | Single Output | Dual Output |
|-----|---------------|-------------|
| 2   | -Vin          | -Vin        |
| 3   | -Vin          | -Vin        |
| 9   | No Pin        | Common      |
| 11  | NC            | -Vout       |
| 14  | +Vout         | +Vout       |
| 16  | -Vout         | Common      |
| 22  | +Vin          | +Vin        |
| 23  | +Vin          | +Vin        |

NC: No Connection

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)  
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter  $\varnothing$  0.5 ±0.05 (0.02±0.002)

## Physical Characteristics

Case Size : 31.8x20.3x10.2mm (1.25x0.80x0.40 inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)

Pin Material : Copper Alloy with Gold Plate Over Nickel  
Subplate

Weight : 12.8g



## Part Numbering System

| D           | N             | 03      | S                 | 05            | 03             | A                  |
|-------------|---------------|---------|-------------------|---------------|----------------|--------------------|
| Product typ | Family series | Watt    | Number of Outputs | Input Voltage | Output Voltage | Option Code        |
| D - DIP     | A~Z           | 01 - 1W | S - Single        | 03 - 3.3V     | 03 - 3.3V      | A - PCB Mount      |
| P - SIP     |               | 02 - 2W | D - Dual          | 05 - 5V       | 05 - 5V        | H - High Isolation |
| S - SMD     |               | 03 - 3W |                   | 12 - 12V      | 12 - 12V       |                    |
|             |               | 04 - 4W |                   | 24 - 24V      | 15 - 15V       |                    |
|             |               | 06 - 6W |                   | 48 - 48V      | 24 - 24V       |                    |

### WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.