


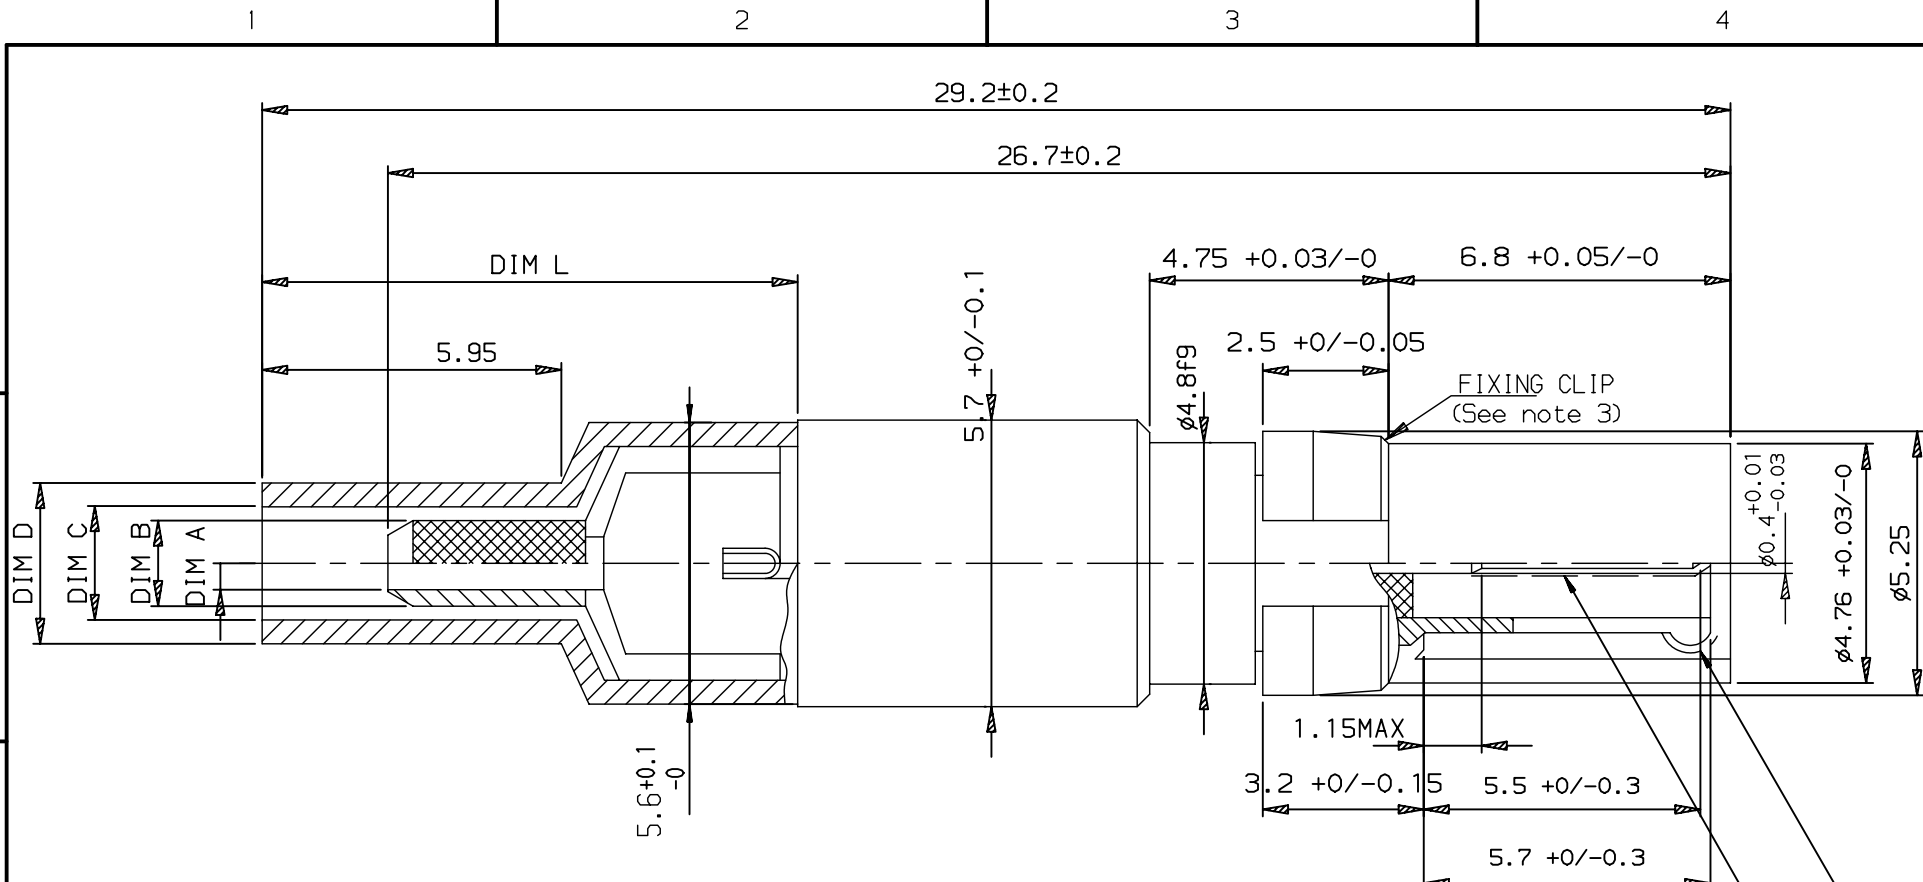

LEAD-FREE P/N	DIM A	DIM B	DIM C	DIM D	DIM L	CABLE TYPE	IMPEDANCE
71634-X11LF	1.05	1.70	2.25	3.20	10.4	RG178 B/U RG196 A/U	75 Ohm
71634-X21LF	1.70	2.70	3.20	3.80	10.4	RG174 A/U RG179 RG188 A/U RG316 /U	75 Ohm
71634-X31LF	1.70	2.70	3.58	4.30	10.4	RG316/U2 SHIELDED	75 Ohm
71634-X41LF	2.20	3.20	4.10	5.00	10.4	GPT CABLE	75 Ohm

- NOTES:
1. UNDERPLATING Ni.
 2. GENERAL TOLERANCE ±0.10
 3. FIXING CLIP PLATED WITH GOLD FLASH FOR IDENTIFICATION PURPOSES.


1	1.3 µm Au MIN	1.3 µm Au MIN
PLATING CODE X	PLATING CONTACT AREA 3	PLATING CONTACT AREA 4

- NOTE: RoHS INFORMATIONS
- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
 - The product is not intended to be exposed to a manufacturing solder process.
 - Packaging spec: see GS-14-920.

rev	ecn no	dr	date
L	LS06-0073	LGO	2006/11/05
M	LS07-0214	LGO	2007/08/20
N	LS08-0057	LGO	2008/02/18
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR	LINEAR	size A3
Dr GOISNARD 2006/11/05		0.X	±0.1	Scale 8
Eng GOISNARD 2006/11/05		0.XX	±0.1	ECN LS08-0057
Chr LEGARE 2006/11/05		0.XXX	±0.1	Spec ref -
Appr LEGARE 2006/11/05		Product family BACKPANEL		
FCj		DIN COAX HDR		Rev. N
STR CTW INSERT		71634		
catalog no		CUSTOMER		sheet 1 of 6

Copyright FCj.

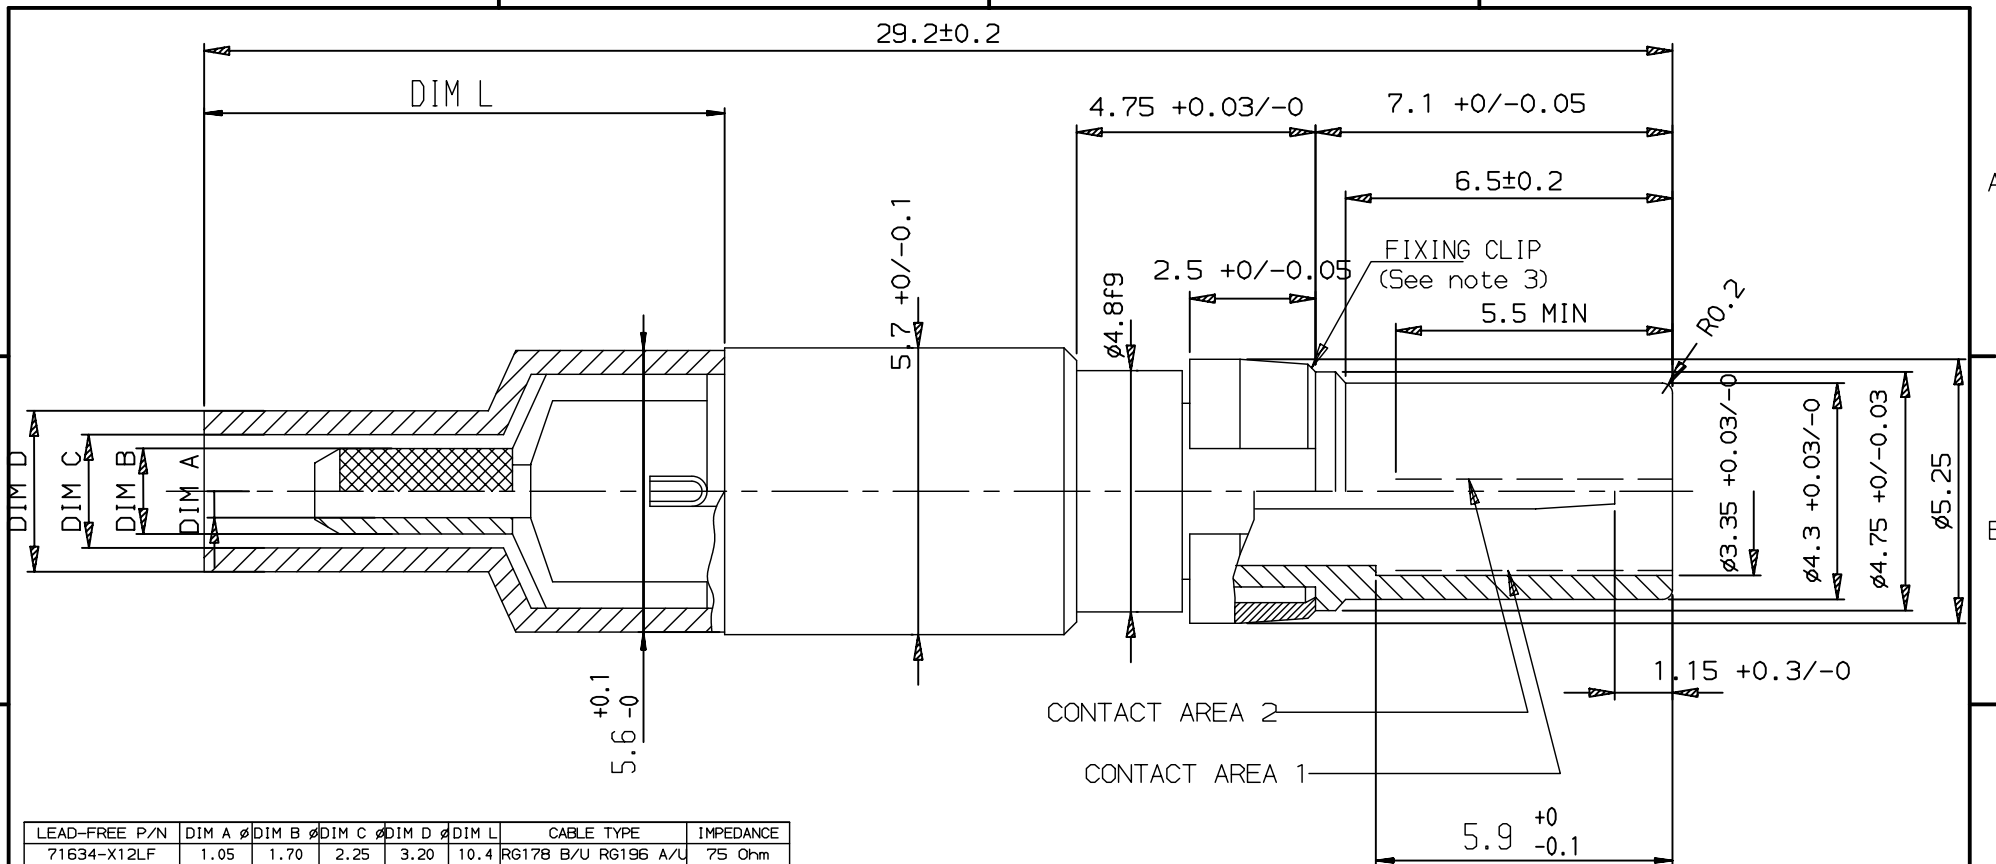

LEAD-FREE P/N	DIM A	DIM B	DIM C	DIM D	DIM L	CABLE TYPE	IMPEDANCE
71634-X12LF	1.05	1.70	2.25	3.20	10.4	RG178 B/U RG196 A/U	75 Ohm
71634-X22LF	1.70	2.70	3.20	3.80	10.4	RG174 A/U RG179 B/U RG187 A/U RG187 A/URG316 /U	75 Ohm
71634-X32LF	1.70	2.70	3.55	4.30	10.4	LG10/9-/19	75 Ohm
71634-X42LF	2.20	3.20	4.10	5.00	10.4	GPT CABLE	75 Ohm

NOTES:

1. UNDERPLATING Ni.
2. GENERAL TOLERANCE ± 0.10
3. FIXING CLIP PLATED WITH GOLD FLASH FOR IDENTIFICATION PURPOSES.


1	1.3 μ m Au MIN	1.3 μ m Au MIN
PLATING CODE X	PLATING CONTACT AREA 3	PLATING CONTACT AREA 4

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

www.fciconnect.com			surface ISO 1302 ☒	tolerance std ISO 406 ISO 1101	projection 	mm
TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	GOISNARD	2006/11/05	ANGULAR LINEAR	0.X	± 0.1	size A3
Eng	GOISNARD	2006/11/05		0.XX	± 0.1	Scale 8
Chr	LEGARE	2006/11/05		0.XXX	± 0.1	ECN LS08-0057
Appr	LEGARE	2006/11/05	Product family		BACKPANEL	Spec ref -
FCI			DIN COAX RCP			Rev. N
STR CTW INSERT			71634			
catalog no			CUSTOMER			sheet 2 of 6

REV F - 2006-04-17

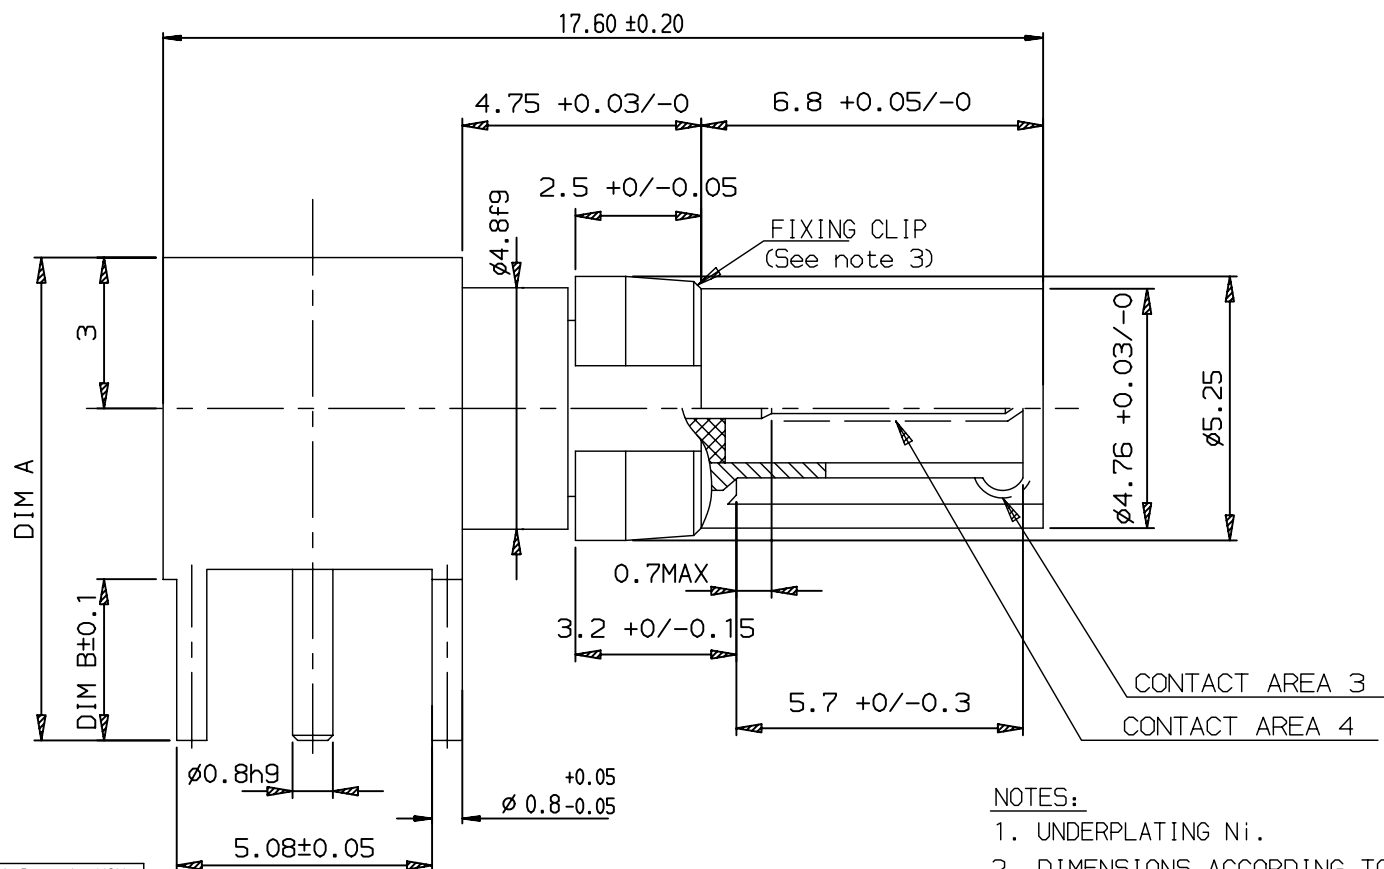

NOTES:

1. UNDERPLATING Ni.
2. DIMENSIONS ACCORDING TO DIN 41626
2. GENERAL TOLERANCE ± 0.10
3. FIXING CLIP PLATED WITH GOLD FLASH

1	1.3 μm Au MIN	1.3 μm Au MIN
PLATING CODE X	PLATING CONTACT AREA 3	PLATING CONTACT AREA 4

LEAD-FREE P/N	DIM A	DIM B	IMPEDANCE
71634-X03LF	9.6	3.2	75 Ohm
71634-X13LF	10.4	4.0	75 Ohm


NOTE: RoHS INFORMATION

- The "LF" product meets European Union Directives and other country regulations as described in GS-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see GS-14-920.

European Views

www.fciconnect.com			surface ISO 1302 ☒	tolerance std ISO 406 ISO 1101	projection 	mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	GOISNARD	2006/11/05	ANGULAR LINEAR	0.X	± 0.1	size A3
Eng	GOISNARD	2006/11/05		0.XX	± 0.1	
Chr	LEGARE	2006/11/05		0.XXX	± 0.1	
Appr	LEGARE	2006/11/05	Product family BACKPANEL			ECN LS08-0057
FCj			title DIN COAX HDR RA STB INSERT			dwg no 71634
			catalog no			Rev. N
			CUSTOMER			sheet 3 of 6

REV F - 2006-04-17

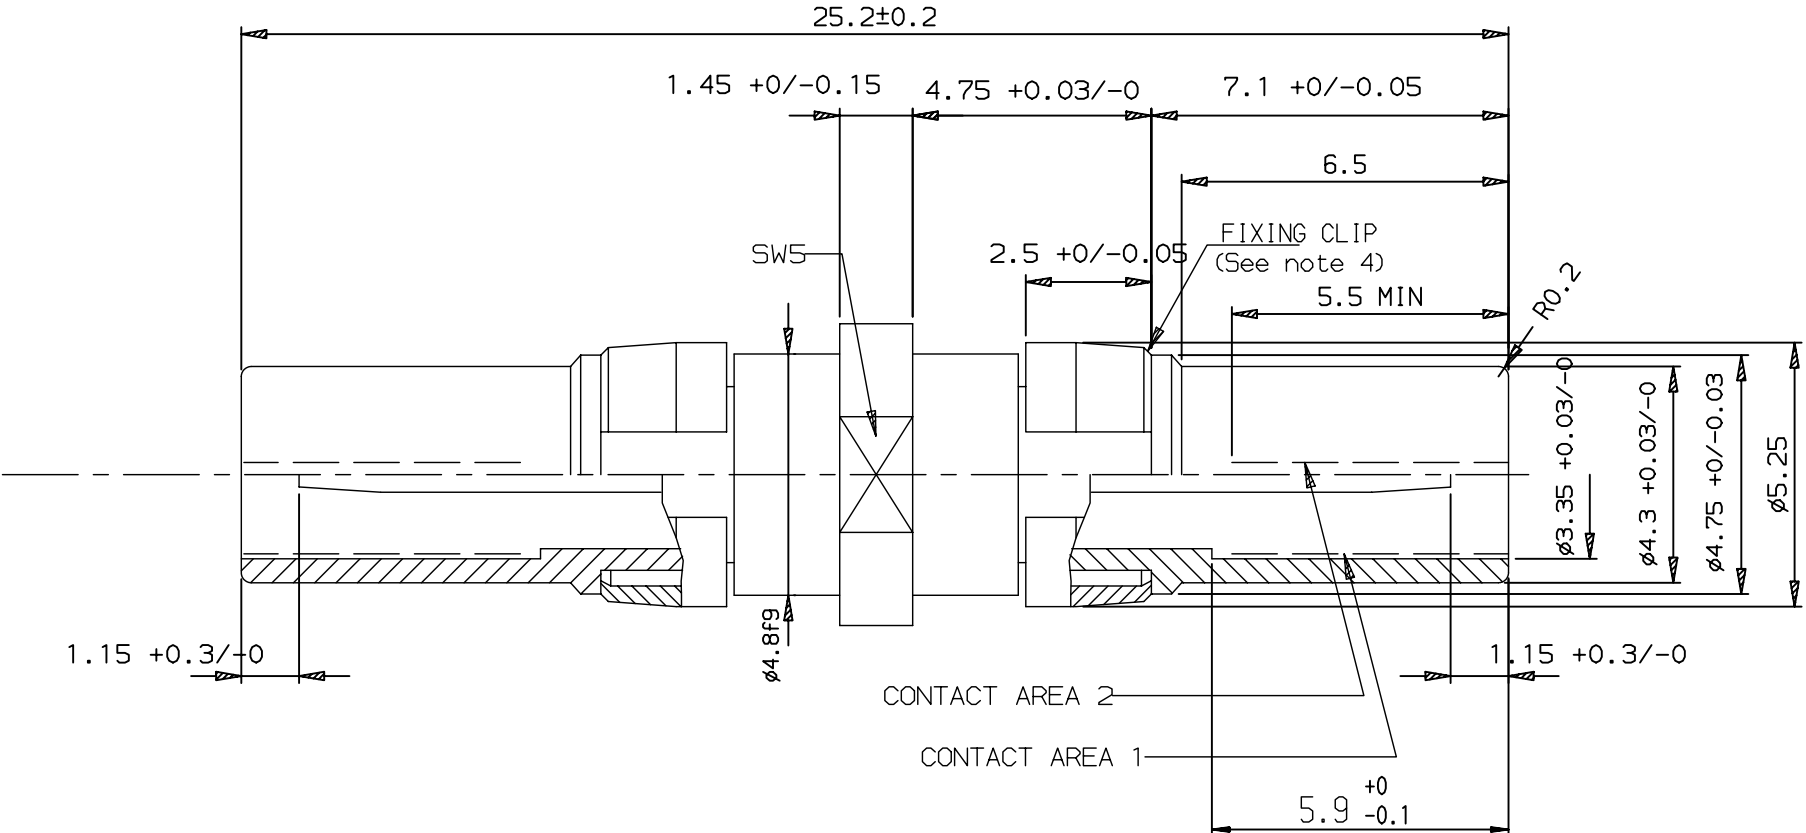

LEAD-FREE P/N	IMPEDANCE
71634-X04LF	75 Ohm

- NOTES:
1. UNDERPLATING Ni.
 2. DIMENSIONS ACCORDING TO DIN 41626
 3. FIXING CLIP PLATED WITH GOLD FLASH FOR IDENTIFICATION PURPOSES.


1	1.3 µm Au MIN	1.3 µm Au MIN
PLATING CODE X	PLATING CONTACT AREA 1	PLATING CONTACT AREA 2

NOTE:RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in 65-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see 65-14-920.

European Views

www.fciconnect.com			surface ISO 1302 ✓	tolerance std ISO 406 ISO 1101	projection mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED		
Dr	GOISNARD	2006/11/05	ANGULAR LINEAR	0.X ±0.1	size A3
Eng	GOISNARD	2006/11/05		0.XX ±0.1	
Chr	LEGARE	2006/11/05		0.XXX ±0.1	
Appr	LEGARE	2006/11/05	Product family	BACKPANEL	ECN LS08-0057
			Spec ref -		
FCI			title DIN COAX RCP		
			coupler 75 MICRON SHORT		
			catalog no	-	CUSTOMER
			dwg no	71634	Rev. N

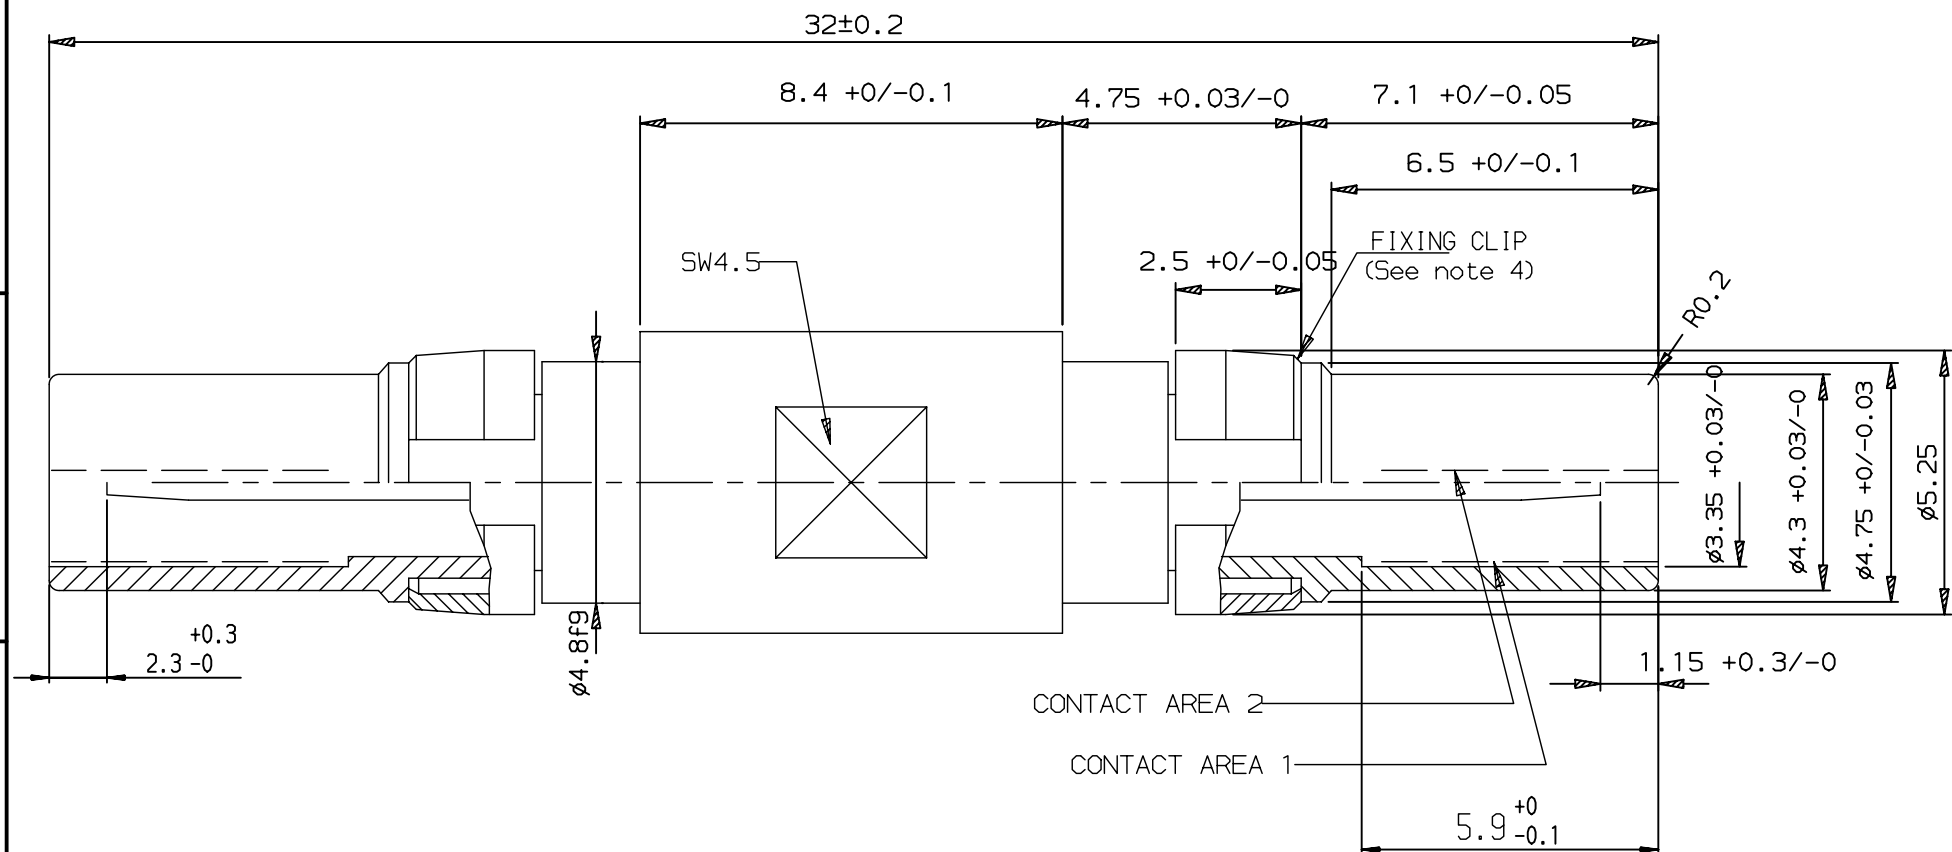

LEAD-FREE P/N	IMPEDANCE
71634-X05LF	75 Ohm

NOTES:

1. UNDERPLATING Ni.
2. DIMENSIONS ACCORDING TO DIN 41626
2. GENERAL TOLERANCE ±0.10
3. FIXING CLIP PLATED WITH GOLD FLASH FOR IDENTIFICATION PURPOSES.

1	1.3 µm Au MIN	1.3 µm Au MIN
PLATING CODE X	PLATING CONTACT AREA 1	PLATING CONTACT AREA 2

NOTE: RoHS INFORMATIONS

- The "LF" product meets European union Directives and other country regulations as described in G5-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see G5-14-920.

European Views

www.fciconnect.com			surface ISO 1302	tolerance std ISO 406 ISO 1101	projection A3	mm
			TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	GOISNARD	2006/11/05	ANGULAR	0.X	±0.1	size
Eng	GOISNARD	2006/11/05	LINEAR	0.XX	±0.1	Scale
Chr	LEGARE	2006/11/05	0.XX' ±2'	0.XXX	±0.1	ECN
Appr	LEGARE	2006/11/05	Product family	BACKPANEL	Spec ref	-
FCI			DIN COAX RCP			Rev.
			COUPLER 75 MICRON LONG			N
catalog no			71634			sheet 5 of 6
			CUSTOMER			

REV F - 2006-04-17

1.3 μm Au MIN
0.8 μm Au MIN
PLATING CONTACT
AREA 4

23.7
20.7
9.6 +0/-0.1
6.5 +0/-0.1
2.5 +0/-0.05
FIXING CLIP
(See note 4)
R0.2
Ø5.7
Ø4.8f9
4.75 +0.03/-0
5.9 +0/-0.1
1.15 +0.3/-0
Ø3.35 +0.03/-0
Ø4.3 +0.03/-0
Ø4.75 +0/-0.03
Ø5.25
12.55±0.3
7.8
5.5
DIM A
DIM B
DIM C
DIM D
CONTACT AREA 2
CONTACT AREA 1

LEAD-FREE P/N	DIM A ϕ	DIM B ϕ	DIM C ϕ	DIM D ϕ	IMPEDANCE
71634-X17LF	1.05	1.70	2.25	3.20	75 Ohm
71634-X27LF	1.70	2.70	3.20	3.80	75 Ohm
71634-X37LF	1.70	2.70	3.58	4.30	75 Ohm
71634-X47LF	2.20	3.20	4.10	5.00	75 Ohm

TO DIN 41626
0.10
GOLD FLASH
CSG

1. UNDERPLATING Ni.
2. DIMENSIONS ACCORDING TO DIN 41626
2. GENERAL TOLERANCE ± 0.10
3. FIXING CLIP PLATED WITH GOLD FLASH FOR IDENTIFICATION PURPOSES.

- The "LF" product meets European union Directives and other country regulations as described in 65-22-008.
- The product is not intended to be exposed to a manufacturing solder process.
- Packaging spec: see 65-14-920.

European Views

REV F - 2006-04-17



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.