



## 3 Amp Axial Schottky Barrier Rectifiers

Qualified per MIL-PRF-19500/620

*Qualified Levels\*:*  
 JAN, JANTX,  
 JANTXV and JANS

### DESCRIPTION

This series of 3 amp Schottky rectifiers in their axial-leaded “B” packaging offer flexible thru-hole mounting. The 1N5822 and 1N6864 are military qualified for high-reliability applications.

**Important:** For the latest information, visit our website <http://www.microsemi.com>.

### FEATURES

- JEDEC registered 1N5820 – 1N5822 and 1N6864 numbers.
- Hermetically sealed.
- Metallurgically bonded.
- Double plug construction.
- \*JAN, JANTX, JANTXV and JANS qualifications are available per MIL-PRF-19500/620 for 1N6822 and 1N6864 only.  
 (See [Part Nomenclature](#) for all available options.)
- RoHS compliant devices available (commercial grade only).

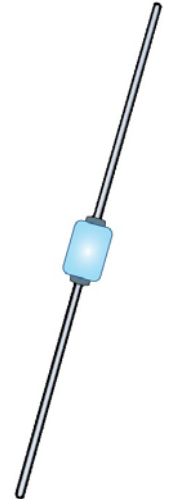
### APPLICATIONS / BENEFITS

- Flexible axial leads for thru-hole mounting (see package illustration).
- Non-sensitive to ESD per MIL-STD-750 method 1020.

### MAXIMUM RATINGS @ T<sub>A</sub> = +25 °C unless otherwise noted.


Parameters/Test Conditions	Symbol	Value	Unit
Junction Temperature	T <sub>J</sub>	-65 to +125	°C
Storage Temperature	T <sub>STG</sub>	-65 to +150	°C
Thermal Resistance Junction-to-Lead @ .375 inch (9.52 mm) lead length	R <sub>θJL</sub>	30	°C/W
Surge Peak Forward Current @ T <sub>A</sub> = +25 °C (Test pulse = 8.3 ms, half-sine wave.)	I <sub>FSM</sub>	80	A
Average Rectified Output Current @ T <sub>L</sub> = +55 °C <sup>(1)</sup>	I <sub>O</sub>	3	A

**NOTES:** 1. See [Figures 3 and 4](#) for derating curves and for effects of V<sub>R</sub> on T<sub>J</sub>. The maximum T<sub>J</sub> depends on the voltage applied.



“B” Package

Also available in:

 “B” MELF Package  
 (surface mount)  
[1N5820US – 1N5822US](#)  
[1N6864US](#)

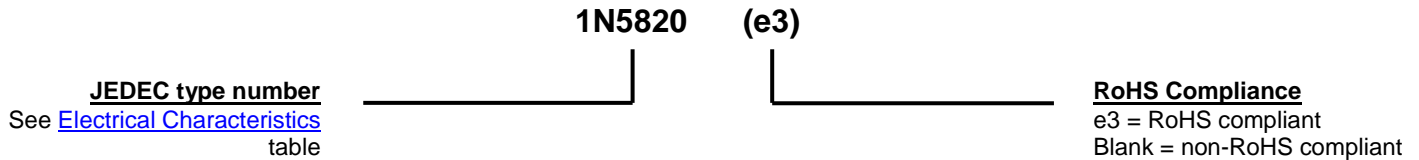
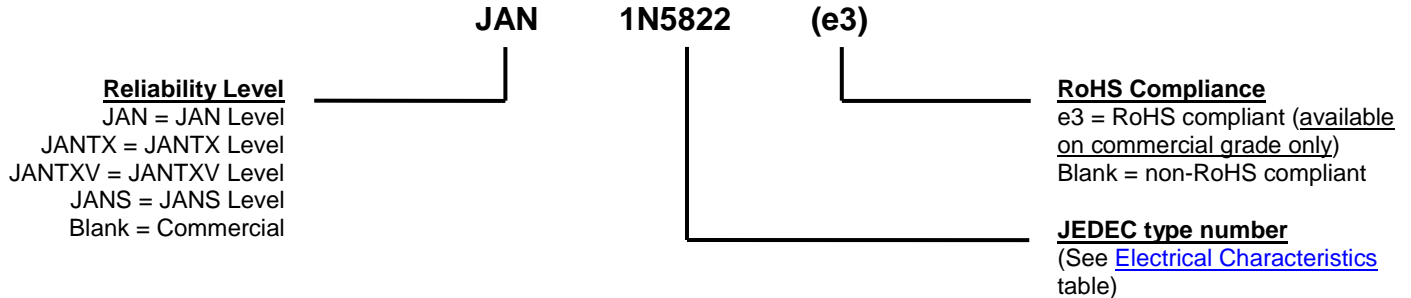
**MSC – Lawrence**  
 6 Lake Street,  
 Lawrence, MA 01841  
 1-800-446-1158  
 Tel: (978) 620-2600  
 Fax: (978) 689-0803

**MSC – Ireland**  
 Gort Road Business Park,  
 Ennis, Co. Clare, Ireland  
 Tel: +353 (0) 65 6840044  
 Fax: +353 (0) 65 6822298

**Website:**  
[www.microsemi.com](http://www.microsemi.com)

**MECHANICAL and PACKAGING**

- CASE: Hermetically sealed voidless hard glass with tungsten slugs.
- TERMINALS: Tin/lead or RoHS compliant matte/tin on commercial grade only (no JAN levels) over nickel plate over copper.
- MARKING: Body coated in blue with part number.
- POLARITY: Cathode indicated by band.
- TAPE & REEL option: Standard per EIA-296. Consult factory for quantities.
- WEIGHT: Approximately 750 milligrams.
- See [Package Dimensions](#) on last page.

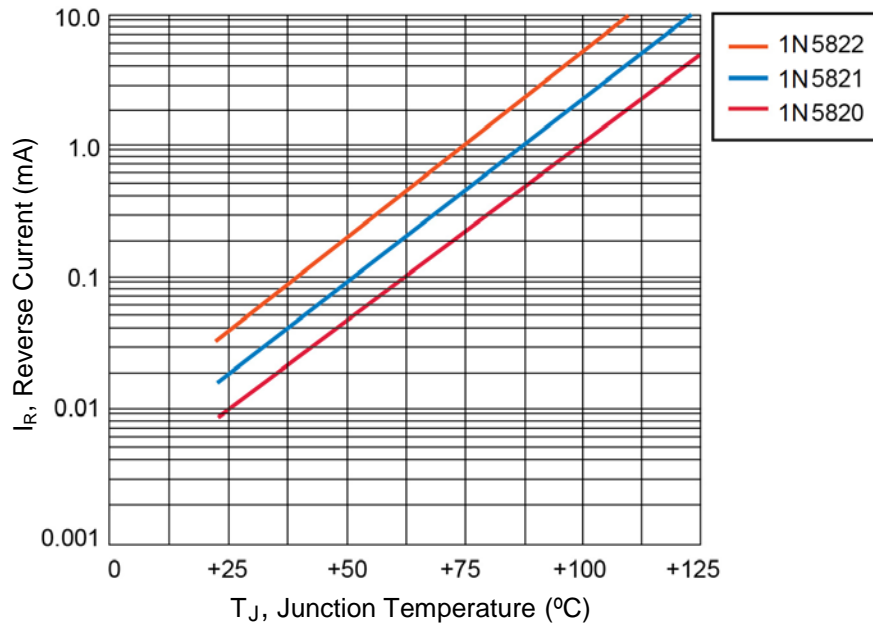
**PART NOMENCLATURE**
***1N5820 – 1N5821***

***1N5822 and 1N6864 only:***

**SYMBOLS & DEFINITIONS**

Symbol	Definition
$C_T$	Capacitance: The capacitance in pF at a frequency of 1 MHz and specified voltage.
$f$	frequency
$I_R$	Maximum Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.
$I_o$	Average Rectified Output Current: The output current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
$V_F$	Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.
$V_R$	Reverse Voltage: The dc voltage applied in the reverse direction below the breakdown region.
$V_{RWM}$	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range.

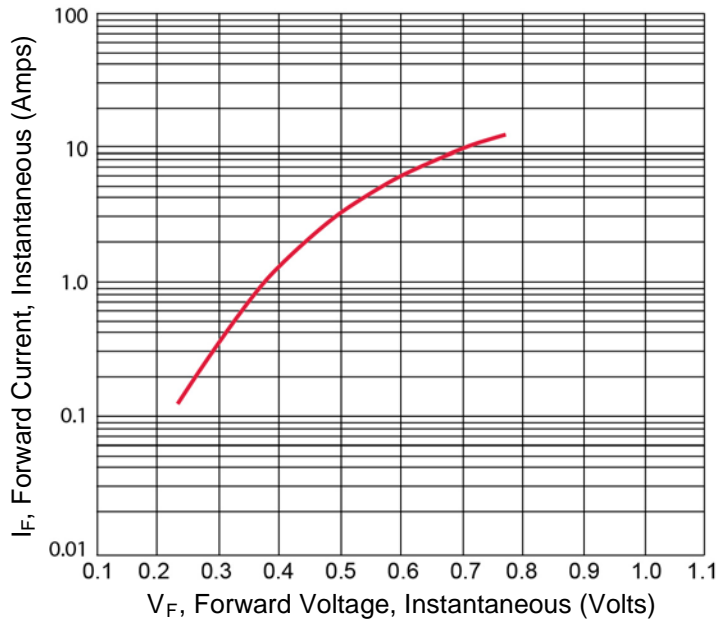
**ELECTRICAL CHARACTERISTICS @ 25 °C unless otherwise noted.**

TYPE NUMBER	WORKING PEAK REVERSE VOLTAGE	MAXIMUM FORWARD VOLTAGE $V_{FM1}$	MAXIMUM FORWARD VOLTAGE $V_{FM2}$	MAXIMUM FORWARD VOLTAGE $V_{FM3}$	MAXIMUM REVERSE LEAKAGE CURRENT $I_{RM}$ @ $V_{RM}$	
	$V_{RWM}$	$I_{FM} = 1.0$ A	$I_{FM} = 3.0$ A	$I_{FM} = 9.4$ A	$T_J = +25$ °C	$T_J = +100$ °C
	V (pk)	Volts	Volts	Volts	mA	mA
1N5820	20	0.40	0.50	0.70	0.10 @ 20 V	12.5 @ 20 V
1N5821	30	0.40	0.50	0.70	0.10 @ 30 V	12.5 @ 30 V
1N5822	40	0.40	0.50	0.70	0.10 @ 40 V	12.5 @ 40 V
1N6864	80	0.50	0.70	N/A	0.15 @ 80 V	18.0 @ 80 V

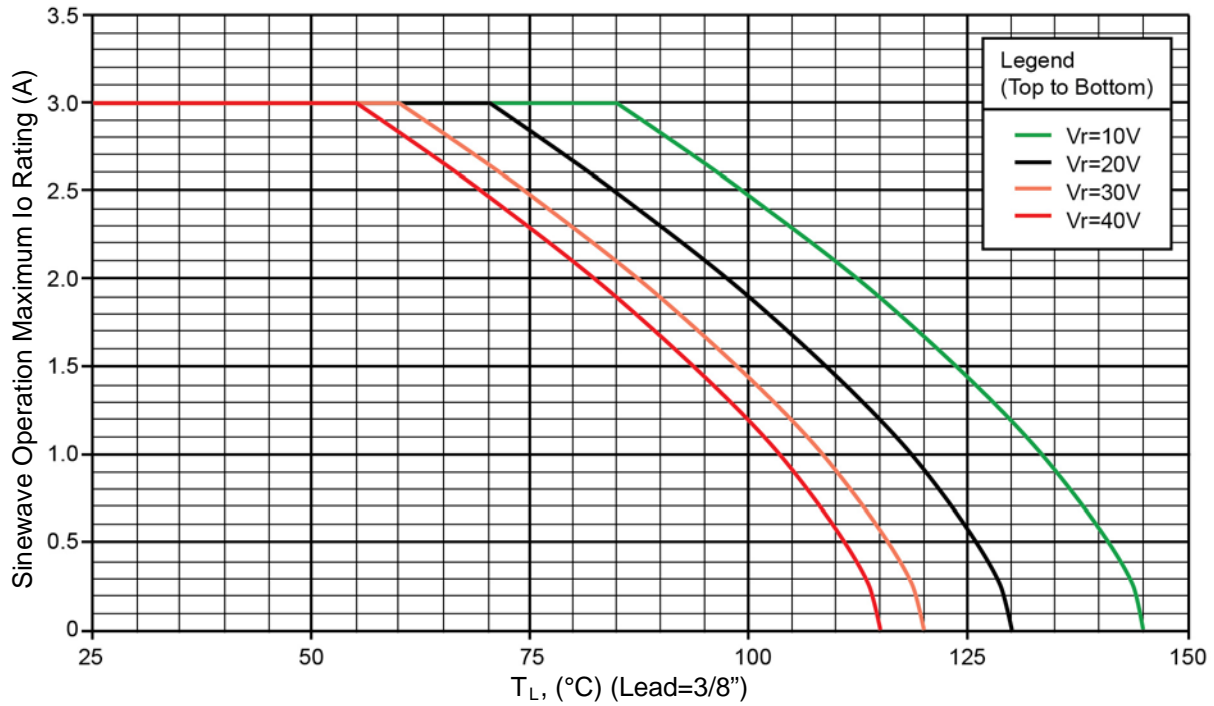
GRAPHS



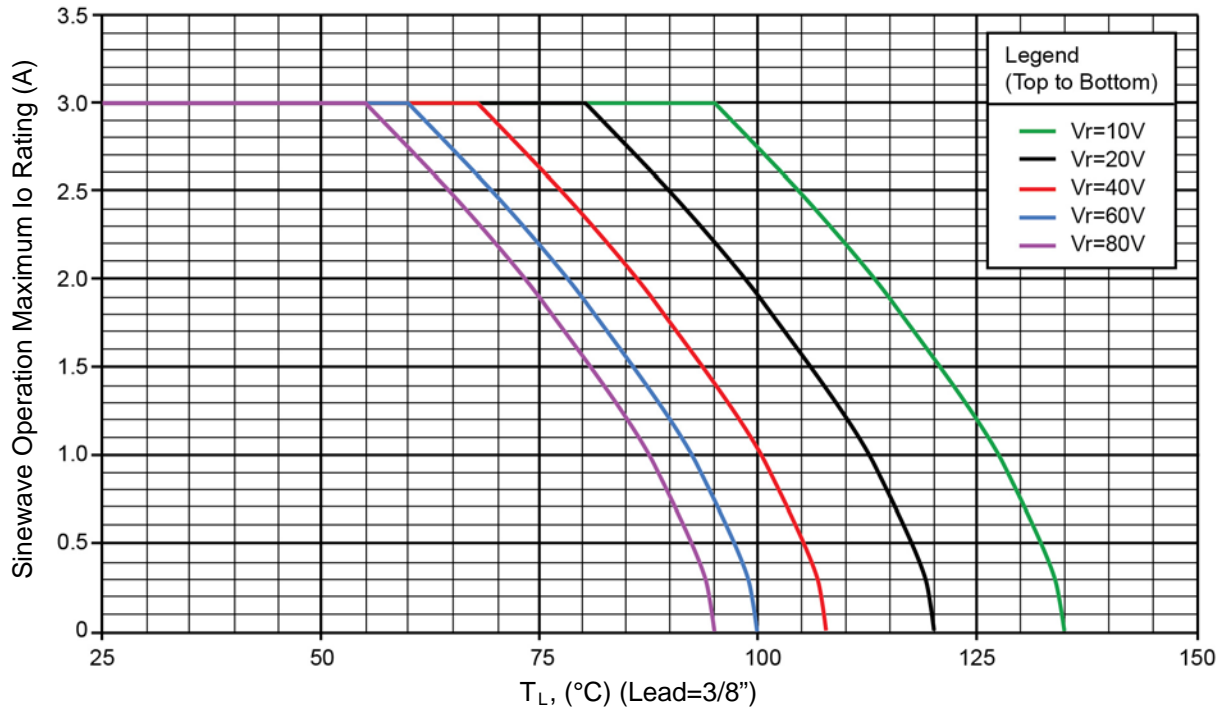
**FIGURE 1**  
Typical Reverse Leakage Current at Rated PIV (PULSED)



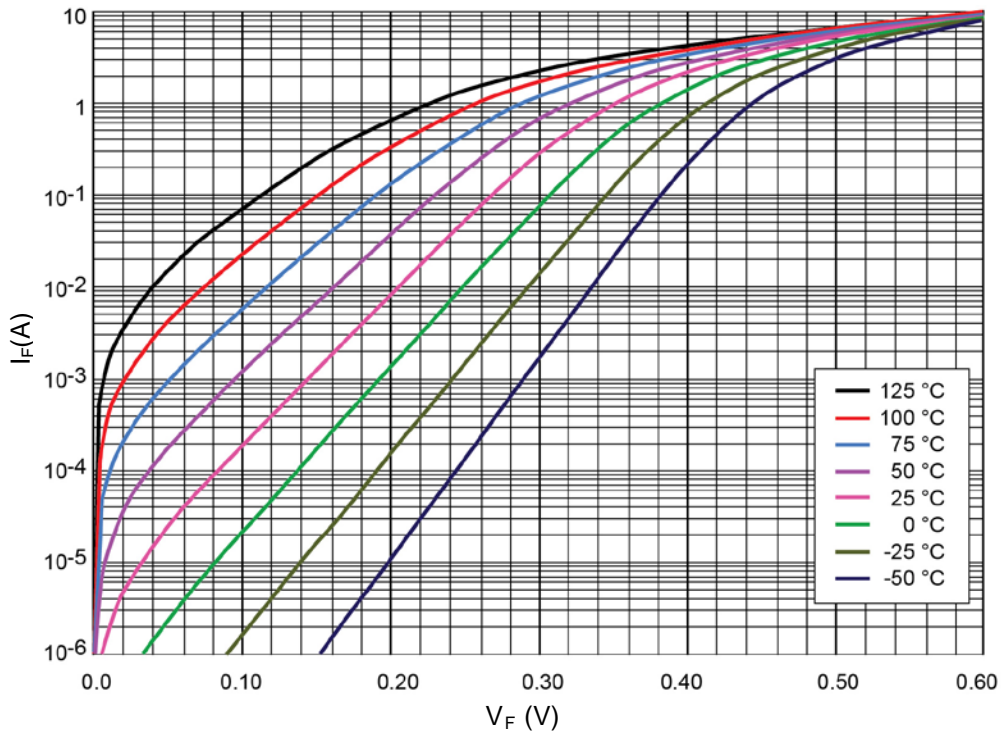
**FIGURE 2**  
Typical Forward Voltage

**GRAPHS (continued)**


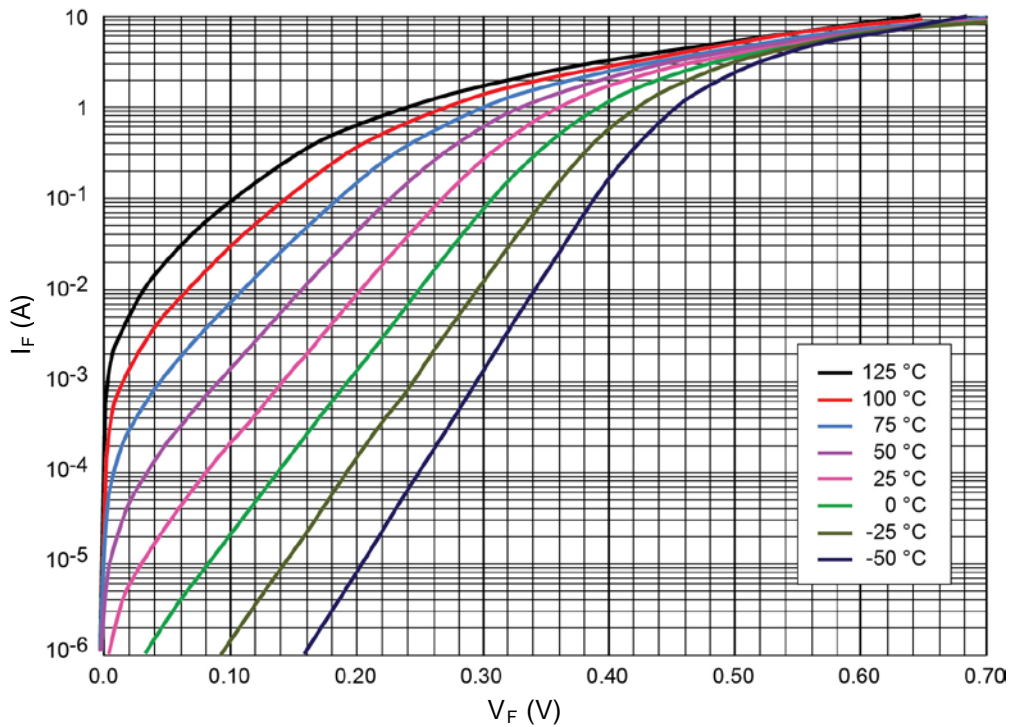
**FIGURE 3**  
Temperature current derating for 1N5822



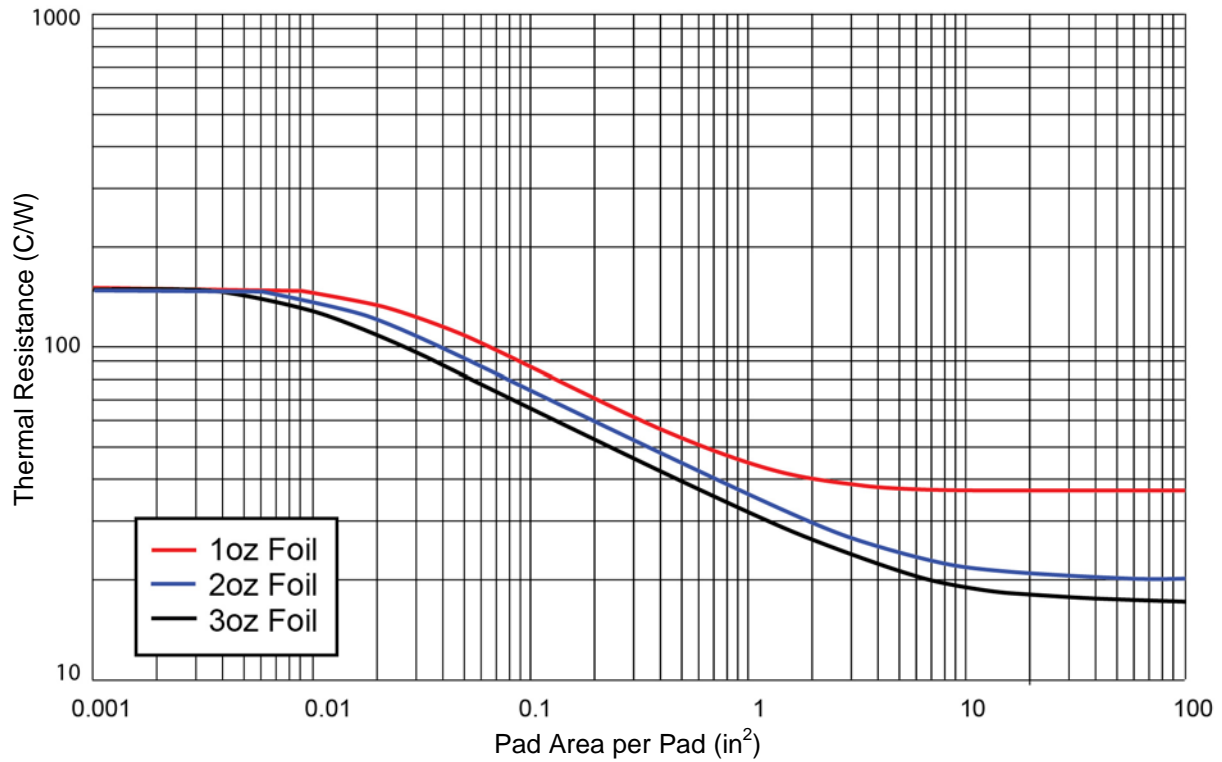
**FIGURE 4**  
Temperature current derating for 1N6864

**GRAPHS (continued)**


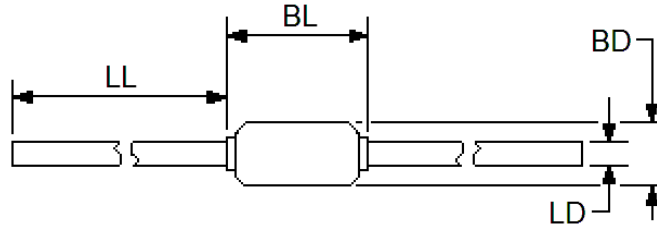
**FIGURE 5**  
Schottky  $V_F - I_F$  Characteristics (Typical 1N5822)



**FIGURE 6**  
Schottky  $V_F - I_F$  Characteristics (Typical 1N6864)

**GRAPHS (continued)**


**FIGURE 7**  
Thermal resistance vs FR4 Pad Area Still Air with the PCB horizontal  
 (At lead length = 0.187 inch)

**PACKAGE DIMENSIONS**

**NOTES:**

1. Dimensions are in inches.
2. Millimeters are given for information only.
3. Dimension BL shall include the entire body including slugs and sections of the lead over which the diameter is uncontrolled. This uncontrolled area is defined as the zone between the edge of the diode body and extending .050 inch (1.27 mm) onto the leads.
4. Dimension BD shall be measured at the largest diameter.
5. In accordance with ASME Y14.5M, diameters are equivalent to  $\Phi$ x symbology.

Ltr	DIMENSIONS				Notes
	INCH		MILLIMETERS		
	Min	Max	Min	Max	
<b>BD</b>	0.115	0.142	2.92	3.61	4
<b>BL</b>	0.130	0.300	3.30	7.62	3
<b>LD</b>	0.036	0.042	0.91	1.07	3
<b>LL</b>	0.900	1.30	22.86	33.02	

Lead Tolerance = +.002 - .003 in.

(Includes sections of the lead or fillet over which the lead diameter is uncontrolled.)



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[1N5822](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.