



ON Semiconductor®

<http://onsemi.com>

# LC709202F

CMOS LSI

1-Cell Li+ (lithium-ion)

## Battery Monitor IC

### Overview

The LC709202F is an IC that measures the remaining power level of 1-cell lithium-ion (Li+) batteries used for a portable equipment etc.

This product is able to reduce a fuel gauge errors by implementing its unique correction technology for measurement value of battery temperature and voltage.

It is possible for this to realize high precision for measurement in battery power measurement IC that does not need a current sensing resistor. ( $\pm 3\%$  under certain conditions)

### Applications

- Wireless Handsets
- Smartphones/PDA devices
- MP3 players
- digital cameras
- Portable Game Players
- USB-related devices

### Features

- Accuracy of remaining battery power level measurement
- $\pm 3\%$  (at an ambient operating temperature of  $0^{\circ}\text{C}$  to  $50^{\circ}\text{C}$ )

Note: The accuracy above is the value of an experiment using the evaluation board.

- Precision  $\pm 7.5\text{mV/Cell}$  Voltage Measurement

- A current sensing resistor is unnecessary.

- Alert function

- Interface

- I<sup>2</sup>C Interface (up to 400 kHz supported)

- Low power consumption

- Normal Mode :  $15\mu\text{A}$
- Sleep Mode :  $0.1\mu\text{A}$

- Corresponding battery

- Model to be used depending on the material of the electrode of the battery pack + is different.


LC709202F-01: ternary system

LC709202F-02: nickelic acid

### Package Dimensions

unit : mm (typ)

3318

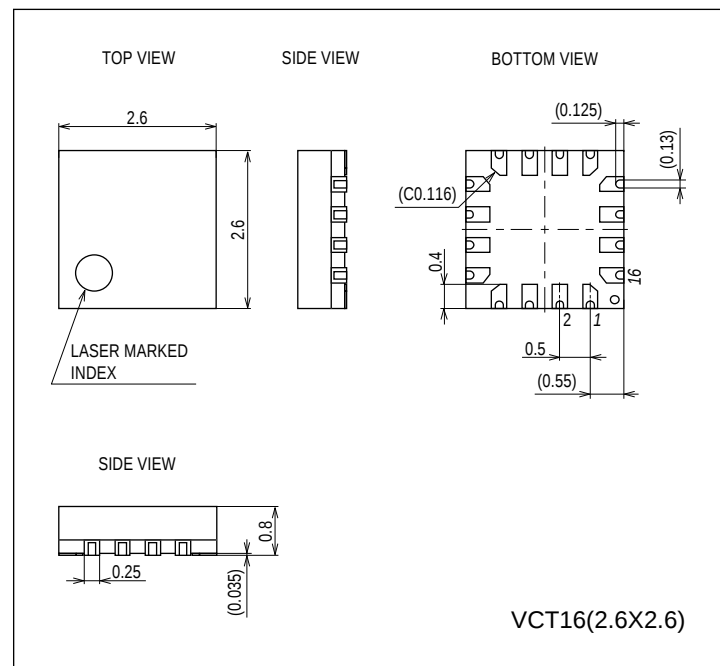

\* I<sup>2</sup>C Bus is a trademark of Philips Corporation.

## LC709202F


### ■ Ports

- I<sup>2</sup>C communication pin 2 (SDA, SCL)
- Battery temperature reading control pin 1 (TSW)
- Analog voltage input pin for battery temperature 1 (TSENSE)
- External alarm / Interrupt for Low-Battery warning 1 (ALARMB)
- Reset pin 1 (RESB)
- TEST pin 3 (TEST0, TEST1, TEST2)
- Power supply pin 3 (VSS, VDD1, VDD2)

### ■ Package form

- VCT16 (2.6×2.6) : Lead-free type

## Pin Assignment

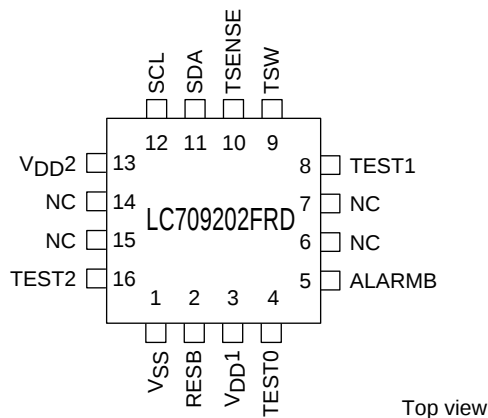


VCT16 (2.6×2.6) “Lead-free Type”

## Pin Function

| VCT16 | Pin Name | I/O | Description                                                                                                                                                               |
|-------|----------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1     | VSS      | -   | Connect to the - terminal of the battery.                                                                                                                                 |
| 2     | RESB     | I   | Reset pin                                                                                                                                                                 |
| 3     | VDD1     | -   | Connect to the + terminal of the battery.                                                                                                                                 |
| 4     | TEST0    | I   | Test pin<br>*Connect to VSS.                                                                                                                                              |
| 5     | ALARMB   | O   | Alert indication. An active low output used to indicate specified condition thresholds have been met.<br>*When you do not use an alert function, please connect with VSS. |
| 8     | TEST1    | O   | Set “OPEN”                                                                                                                                                                |
| 9     | TSW      | O   | Battery temperature reading control pin<br>*Set high when reading in the temperature, held low at other times.                                                            |
| 10    | TSENSE   | I   | Battery temperature analog voltage input pin                                                                                                                              |
| 11    | SDA      | I/O | I <sup>2</sup> C data pin                                                                                                                                                 |
| 12    | SCL      | I/O | I <sup>2</sup> C clock pin                                                                                                                                                |
| 13    | VDD2     | -   | + power pin for I <sup>2</sup> C-Bus communication pin(SDA,SCL)                                                                                                           |
| 16    | TEST2    | O   | Set “OPEN”                                                                                                                                                                |

# Block Diagram

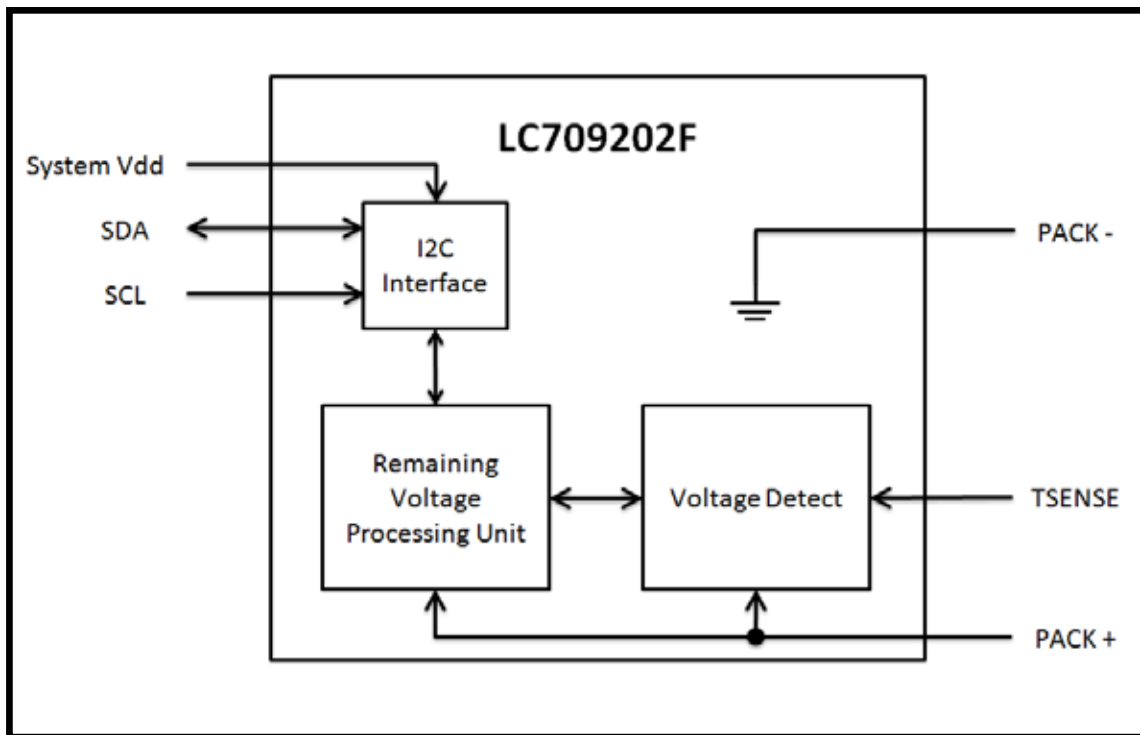

## LC709202F

### Absolute Maximum Ratings at Ta=25°C, VSS=0V

| Parameter                     | Symbol   | Pin/Remarks  | Conditions     | VDD[V] | Specification |     |          | Unit |
|-------------------------------|----------|--------------|----------------|--------|---------------|-----|----------|------|
|                               |          |              |                |        | min           | typ | max      |      |
| Maximum supply voltage        | VDD max  | VDD1, VDD2   |                |        | -0.3          |     | +6.5     | V    |
| Input voltage                 | VI (1)   | RESB, TSENSE |                |        | -0.3          |     | VDD1+0.3 |      |
| Output voltage                | VO (1)   | TSW          |                |        | -0.3          |     | VDD1+0.3 |      |
|                               | VO (2)   | ALARMB       |                |        | -0.3          |     |          |      |
| Input/output voltage          | VI/O (1) | SDA, SCL     |                |        | -0.3          |     | +5.5     |      |
| Allowable power dissipation   | Pd max   | VCT16        | Ta=-40 to+85°C |        |               |     | 55       | mW   |
| Operating ambient temperature | Topr     |              |                |        | -40           |     | +85      | °C   |
| Storage ambient temperature   | Tstg     |              |                |        | -55           |     | +125     |      |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

### Allowable Operating Conditions at Ta= -40 to +85°C, VSS=0V

| Parameter                | Symbol  | Pin/Remarks | Conditions        | VDD[V]     | Specification |     |          | unit |
|--------------------------|---------|-------------|-------------------|------------|---------------|-----|----------|------|
|                          |         |             |                   |            | min           | typ | max      |      |
| Operating supply voltage | VDD (1) | VDD1        |                   |            | 2.5           |     | 4.5      | V    |
| High level input voltage | VIH (1) | TSENSE      |                   | 2.5 to 4.5 | 0.70VDD1      |     | VDD1     |      |
|                          | VIH (2) | RESB        |                   | 2.5 to 4.5 | 0.75VDD1      |     | VDD1     |      |
|                          | VIH (3) | SDA, SCL    | VDD2=1.6V to 5.5V | 2.5 to 4.5 | 0.70VDD2      |     | VDD2     |      |
| Low level input voltage  | VIL (1) | TSENSE      |                   | 2.5 to 4.5 | VSS           |     | 0.25VDD1 |      |
|                          | VIL (2) | RESB        |                   | 2.5 to 4.5 | VSS           |     | 0.25VDD1 |      |
|                          | VIL (3) | SDA, SCL    | VDD2=1.6V to 5.5V | 2.5 to 4.5 | VSS           |     | 0.30VDD2 |      |

# LC709202F

## Electrical Characteristics at Ta= -40 to +85°C, VSS=0V

| Parameter                       | Symbol               | Pin/Remarks           | Conditions                                                                                                               | Specification |                      |                     |         | Unit    |
|---------------------------------|----------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------|---------------|----------------------|---------------------|---------|---------|
|                                 |                      |                       |                                                                                                                          | VDD[V]        | min                  | typ                 | max     |         |
| High level input current        | I <sub>IH</sub> (1)  | RESB                  | V <sub>IN</sub> =V <sub>DD1</sub><br>(including output transistor off leakage current)                                   | 2.5 to 4.5    |                      |                     | 1       | μA      |
|                                 | I <sub>IH</sub> (2)  | SDA, SCL              | V <sub>IN</sub> =V <sub>DD2</sub><br>V <sub>DD2</sub> =1.6V to 5.5V<br>(including output transistor off leakage current) | 2.5 to 4.5    |                      |                     | 1       |         |
| Low level input current         | I <sub>IL</sub> (1)  | RESB                  | V <sub>IN</sub> =V <sub>SS</sub><br>(including output transistor off leakage current)                                    | 2.5 to 4.5    | -1                   |                     |         | μA      |
|                                 | I <sub>IL</sub> (2)  | SDA, SCL              | V <sub>IN</sub> =V <sub>SS</sub><br>V <sub>DD2</sub> =1.6V to 5.5V<br>(including output transistor off leakage current)  | 2.5 to 4.5    | -1                   |                     |         |         |
| High level output voltage       | V <sub>OH</sub> (1)  | TSW                   | I <sub>OH</sub> =-0.4 mA                                                                                                 | 3.0 to 4.5    | V <sub>DD</sub> -0.4 |                     |         | V       |
|                                 | V <sub>OH</sub> (2)  |                       | I <sub>OH</sub> =-0.2 mA                                                                                                 | 2.5 to 4.5    | V <sub>DD</sub> -0.4 |                     |         |         |
| Low level output voltage        | V <sub>OL</sub> (1)  | TSW, ALARMB, SDA, SCL | I <sub>OL</sub> =3.0 mA                                                                                                  | 3.0 to 4.5    |                      |                     | 0.4     |         |
|                                 | V <sub>OL</sub> (2)  |                       | I <sub>OL</sub> =1.3 mA                                                                                                  | 2.5 to 4.5    |                      |                     | 0.4     |         |
| Hysteresis voltage              | V <sub>HYS</sub> (1) | RESB                  |                                                                                                                          | 2.5 to 4.5    |                      | 0.1V <sub>DD1</sub> |         |         |
|                                 | V <sub>HYS</sub> (2) | SDA, SCL              |                                                                                                                          | 2.5 to 4.5    |                      | 0.1V <sub>DD2</sub> |         |         |
| Pin capacitance                 | CP                   | All pins              | Pins other than the pin under test<br>V <sub>IN</sub> =V <sub>SS</sub><br>Ta=25°C                                        | 2.5 to 4.5    |                      | 10                  |         | pF      |
| Consumption current<br>(Note 1) | I <sub>DD</sub> (1)  | V <sub>DD1</sub>      | Normal Mode                                                                                                              | 2.5 to 4.5    |                      | 15                  | 26      | μA      |
|                                 | I <sub>DD</sub> (2)  |                       | Auto Mode                                                                                                                | 2.5 to 4.5    |                      | 2 to 15             | 4 to 26 |         |
|                                 | I <sub>DD</sub> (3)  |                       | Sleep Mode                                                                                                               | 2.5 to 4.5    |                      | 0.1                 | 5       |         |
| Voltage measurement accuracy    | V <sub>ME</sub> (1)  | V <sub>DD1</sub>      | Ta= +25°C                                                                                                                | 3.6           | -7.5                 |                     | +7.5    | mV/cell |
|                                 | V <sub>ME</sub> (2)  |                       | Ta= -20°C to +70°C                                                                                                       | 2.5 to 4.5    | -20                  |                     | +20     |         |

Note 1: Consumption current is a value in the range of -20°C to +70°C

**I<sup>2</sup>C Slave Characteristics** at Ta=-40 to+85°C, V<sub>SS</sub>=0V

| Parameter                                                                                  | Symbol  | Pin/Remarks | Conditions  | V <sub>DD</sub> [V] | Specification          |     | unit |
|--------------------------------------------------------------------------------------------|---------|-------------|-------------|---------------------|------------------------|-----|------|
|                                                                                            |         |             |             |                     | min                    | max |      |
| Clock frequency                                                                            | TSCL    | SCL         |             | 2.5 to 4.5          |                        | 400 | kHz  |
| Bus free time between STOP condition and START condition                                   | TBUF    | SCL, SDA    | See Fig. 1. |                     | 1.3                    |     | μs   |
| Hold time (repeated) START condition<br>First clock pulse is generated after this interval | THD:STA | SCL, SDA    | See Fig. 1. |                     | 0.6                    |     | μs   |
| Repeated START condition setup time                                                        | TSU:STA | SCL, SDA    | See Fig. 1. |                     | 0.6                    |     | μs   |
| STOP condition setup time                                                                  | TSU:STO | SCL, SDA    | See Fig. 1. |                     | 0.6                    |     | μs   |
| Data hold time                                                                             | THD:DAT | SCL, SDA    | See Fig. 1. |                     | 0                      | 0.9 | μs   |
| Data setup time                                                                            | TSU:DAT | SCL, SDA    | See Fig. 1. |                     | 100                    |     | ns   |
| Clock low period                                                                           | TLOW    | SCL         |             |                     | 1.3                    |     | μs   |
| Clock high period                                                                          | THIGH   | SCL         |             |                     | 0.6                    |     | μs   |
| Clock/data fall time                                                                       | TF      | SCL, SDA    |             |                     | 20 + 0.1C <sub>B</sub> | 300 | ns   |
| Clock/data rise time                                                                       | TR      | SCL, SDA    |             |                     | 20 + 0.1C <sub>B</sub> | 300 | ns   |

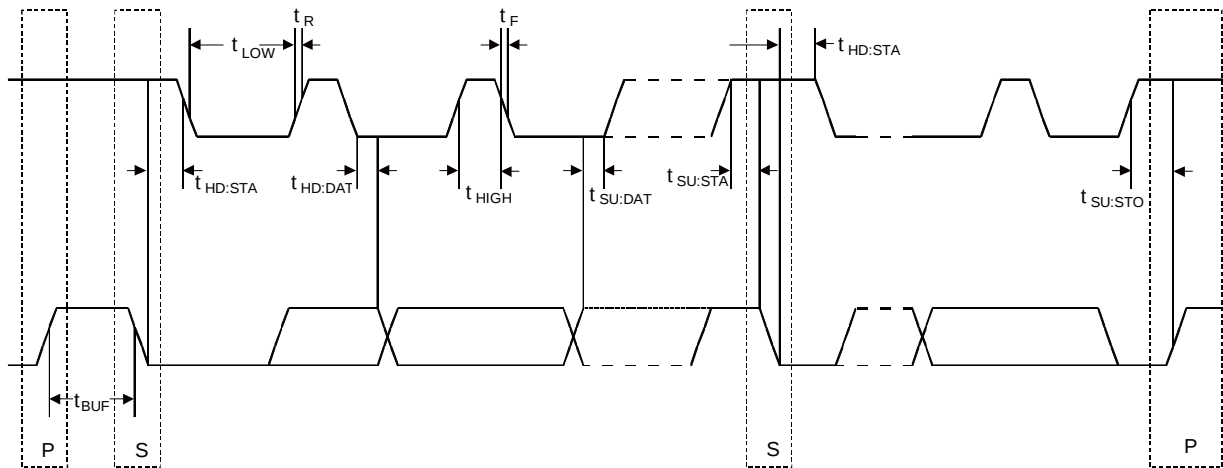


Figure 1 I<sup>2</sup>C Timing

## Discharge Characteristics

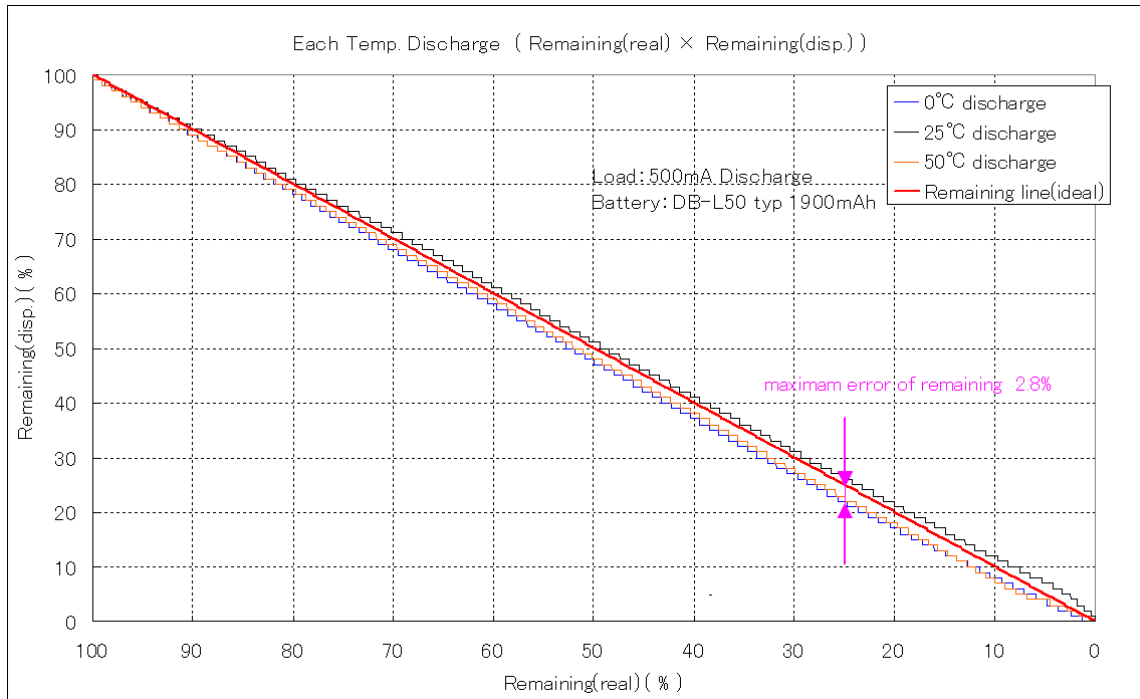


Figure 2 Discharge Characteristics by Temperature Change

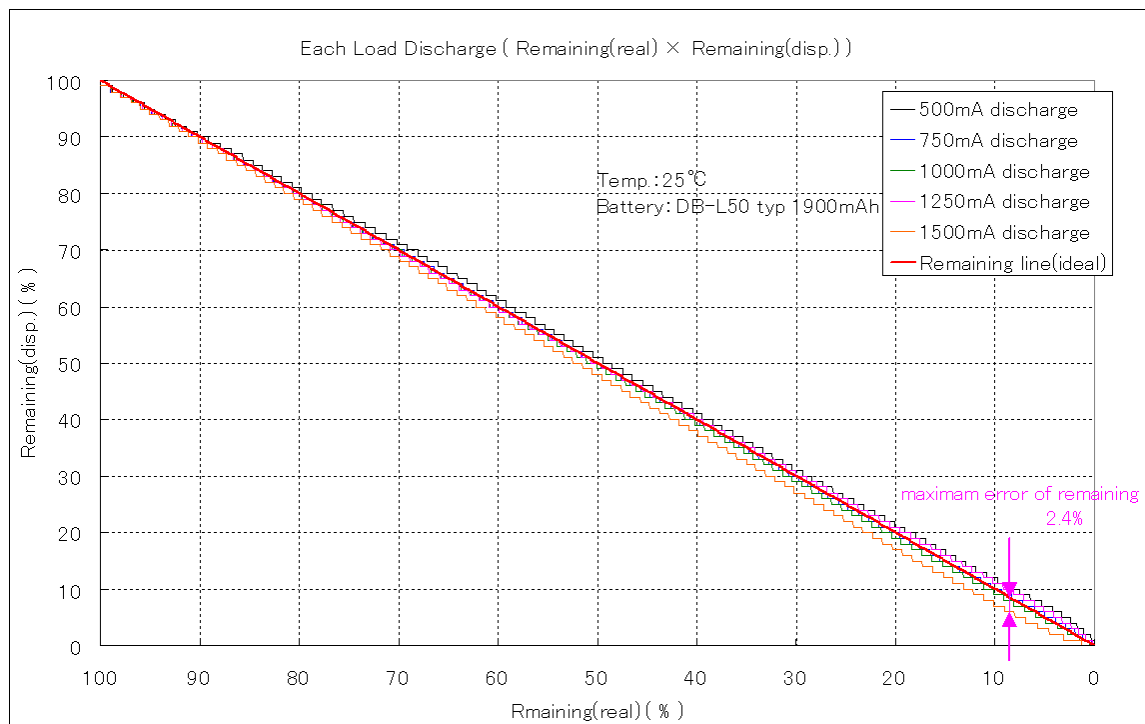


Figure 3 Discharge Characteristics by Load Change

## Communication Protocol

Communication protocol type: I<sup>2</sup>C

Frequency: 400 kHz

Address: 0x16

### Bus Protocols

|                                                                                   |   |                                                                                    |
|-----------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|
| S                                                                                 | : | Start Condition                                                                    |
| Sr                                                                                | : | Repeated Start Condition                                                           |
| Rd                                                                                | : | Read (bit value of 1)                                                              |
| Wr                                                                                | : | Write (bit value of 0)                                                             |
| A                                                                                 | : | ACK (bit value of 0)                                                               |
| N                                                                                 | : | NACK (bit value of 1)                                                              |
| P                                                                                 | : | Stop Condition                                                                     |
| CRC-8                                                                             | : | Slave Address to Last Data (CRC-8-ATM: ex.3778mV: 0x16,0x09,0x17,0xC2,0x0E □ 0x86) |
|  | : | Master-to-Slave                                                                    |
|  | : | Slave-to-Master                                                                    |
| ...                                                                               | : | Continuation of protocol                                                           |

### Read Word Protocol

|    |               |    |   |               |   |                    |
|----|---------------|----|---|---------------|---|--------------------|
| S  | Slave Address | Wr | A | Command Code  | A | ...                |
| Sr | Slave Address | Rd | A | Data Byte Low | A | Data Byte High ... |
| A  | CRC-8         | N  | P |               |   |                    |

### Write Word Protocol

|   |               |    |                |              |       |     |
|---|---------------|----|----------------|--------------|-------|-----|
| S | Slave Address | Wr | A              | Command Code | A     | ... |
|   | Data Byte Low | A  | Data Byte High | A            | CRC-8 | A P |

| Access | Slave Functions                      | Command Code | Range                                                     | Unit                                               |
|--------|--------------------------------------|--------------|-----------------------------------------------------------|----------------------------------------------------|
| Read   | Cell Temperature                     | 0x08         | 0 to 65535                                                | 0.1°K (0.0°C= 2732)                                |
|        | Cell Voltage                         | 0x09         | 0 to 65535                                                | mV                                                 |
|        | Current                              | 0x0A         | -32768 to 32767                                           | mA                                                 |
|        | Adjustment Pack 8                    | 0x0B         | 0 to 255                                                  | Value                                              |
|        | Relative State Of Charge             | 0x0D         | 0 to 100                                                  | %                                                  |
|        | Remaining Capacity                   | 0x0F         | 0 to 1000                                                 | mAh                                                |
|        | Full Charge Capacity                 | 0x10         | 1000                                                      | mAh                                                |
|        | IC Version                           | 0x11         | 0 to 65535                                                | Version                                            |
|        | Adjustment Thermistor                | 0x12         | 0 to 255                                                  | Value                                              |
|        | Hot Start<br>Sleep Mode<br>Auto Mode | 0x13         | bit 0<br>bit 1<br>bit 2                                   | disable: 0<br>or<br>enable: 1                      |
|        | Alarm Low Battery                    | 0x14         | High : 0 to 250<br>Low : 0 to 100                         | 20mV<br>%                                          |
|        | Adjustment B                         | 0x15         | 0 to 65535                                                | B                                                  |
|        | System Mode                          | 0x16         | bit 0to3 :<br>bit 4to7 : data 0 to 6                      | Nomal Mode<br>Sleep Mode<br>Auto Mode<br>Auto deep |
| Write  | Adjustment Pack 0                    | 0x00         | 0 to 32767                                                | Value                                              |
|        | Adjustment Pack 1                    | 0x01         | 0 to 32767                                                | Value                                              |
|        | Adjustment Pack 2                    | 0x02         | 0 to 32767                                                | Value                                              |
|        | Adjustment Pack 3                    | 0x03         | 0 to 32767                                                | Value                                              |
|        | Adjustment Pack 4                    | 0x04         | 0 to 32767                                                | Value                                              |
|        | Adjustment Pack 5                    | 0x05         | 0 to 32767                                                | Value                                              |
|        | Set Relative State Of Charge         | 0x08         | High : 0xA5<br>Low : 0 to 100                             | -<br>%                                             |
|        | Adjustment Pack 8                    |              | High : 0x5A<br>Low : 0 to 255                             | -<br>Value                                         |
|        | Adjustment Thermistor                |              | High : 0xAA<br>Low : 0 to 255                             | -<br>Value                                         |
|        | Hot Start<br>Sleep Mode<br>Auto Mode |              | High : 0x55<br>Low : bit 0<br>bit 1<br>bit 2              | disable: 0<br>or<br>enable: 1                      |
|        | Initial Relative State Of Charge     |              | 0xAA55                                                    | -                                                  |
|        | Alarm Low Battery                    | 0x0A         | High : 0 to 250<br>Low : 0 to 100                         | 20mV(activate under)<br>%(activate under)          |
|        | Adjustment B                         | 0x0B         | 0 to 65535                                                | B                                                  |
|        | Cell Temperature                     | 0x0C         | 2532 to 3332 (I2C Write Mode)<br>0xAA55 (Thermistor Mode) | 0.1°K (0.0°C= 2732)<br>-                           |

[illegible]

The schematic diagram illustrates the connection of the LC709202F VCT16(2.6x2.6) sensor module to a Battery Pac, an ASIC, and System Vdd/Vss. The sensor module is centrally located and has the following pins and connections:

- SCL**: Connected to the SCL pin of the ASIC.
- SDA**: Connected to the SDA pin of the ASIC.
- TSENSE**: Connected to the TSENSE pin of the ASIC.
- TSW**: Connected to the TSW pin of the ASIC.
- VDD2**: Connected to the VDD2 pin of the ASIC.
- VSS**: Connected to the VSS pin of the ASIC.
- RESB**: Connected to the RESB pin of the ASIC.
- VDD1**: Connected to the VDD1 pin of the ASIC.
- TEST0**: Connected to the TEST0 pin of the ASIC.
- TEST1**: Connected to the TEST1 pin of the ASIC.
- TEST2**: Connected to the TEST2 pin of the ASIC.
- ALARMB**: Connected to the ALARMB pin of the ASIC.

The Battery Pac is connected to the sensor module via the following pins:

- PACK-**: Connected to the VSS pin of the sensor module.
- PACK+**: Connected to the VDD2 pin of the sensor module.
- T**: Connected to the TSENSE pin of the sensor module.

The ASIC is connected to the sensor module via the following pins:

- I2C Bus Master**: Connected to the SCL and SDA pins of the sensor module.
- Interrupt Input**: Connected to the ALARMB pin of the sensor module.
- Vdd**: Connected to the VDD2 pin of the sensor module.
- Vss**: Connected to the VSS pin of the sensor module.

The System Vdd/Vss is connected to the sensor module via the following pins:

- System Vdd**: Connected to the VDD2 pin of the sensor module.
- System Vss**: Connected to the VSS pin of the sensor module.

Various resistors and capacitors are used for interfacing and decoupling:

- 10kΩ**: Connected between VDD2 and SCL, SDA, and TSENSE.
- 100Ω**: Connected between VDD2 and SCL, SDA, and TSENSE.
- 100kΩ**: Connected between VDD2 and TSENSE.
- 0.1μF**: Connected between VDD2 and VSS.
- 1μF**: Connected between VDD2 and VSS.
- 100kΩ**: Connected between VDD2 and VSS.

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.