

## Features

- 7.5 ns pin-to-pin logic delays on all pins
- $f_{CNT}$  to 125 MHz
- 108 macrocells with 2,400 usable gates
- Up to 108 user I/O pins
- 5V in-system programmable
  - Endurance of 10,000 program/erase cycles
  - Program/erase over full commercial voltage and temperature range
- Enhanced pin-locking architecture
- Flexible 36V18 Function Block
  - 90 product terms drive any or all of 18 macrocells within Function Block
  - Global and product term clocks, output enables, set and reset signals
- Extensive IEEE Std 1149.1 boundary-scan (JTAG) support
- Programmable power reduction mode in each macrocell
- Slew rate control on individual outputs
- User programmable ground pin capability
- Extended pattern security features for design protection
- High-drive 24 mA outputs
- 3.3V or 5V I/O capability
- Advanced CMOS 5V FastFLASH™ technology
- Supports parallel programming of more than one XC9500 concurrently
- Available in 84-pin PLCC, 100-pin PQFP, 100-pin TQFP, and 160-pin PQFP packages

## Description

The XC95108 is a high-performance CPLD providing advanced in-system programming and test capabilities for general purpose logic integration. It is comprised of eight 36V18 Function Blocks, providing 2,400 usable gates with propagation delays of 7.5 ns. See Figure 2 for the architecture overview.

## Power Management

Power dissipation can be reduced in the XC95108 by configuring macrocells to standard or low-power modes of operation. Unused macrocells are turned off to minimize power dissipation.

Operating current for each design can be approximated for specific operating conditions using the following equation:

$$I_{CC} \text{ (mA)} = MC_{HP} (1.7) + MC_{LP} (0.9) + MC (0.006 \text{ mA/MHz}) f$$

Where:


$MC_{HP}$  = Macrocells in high-performance mode

$MC_{LP}$  = Macrocells in low-power mode

$MC$  = Total number of macrocells used


$f$  = Clock frequency (MHz)

Figure 1 shows a typical calculation for the XC95108 device.

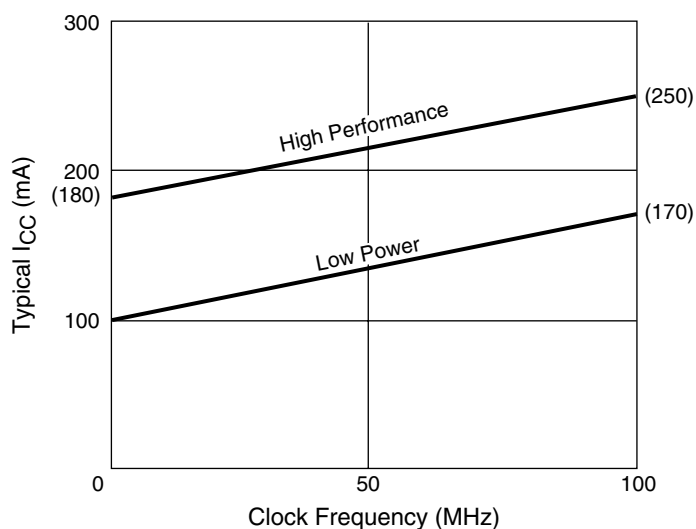

DS066\_01\_110501

Figure 1: Typical  $I_{CC}$  vs. Frequency for XC95108

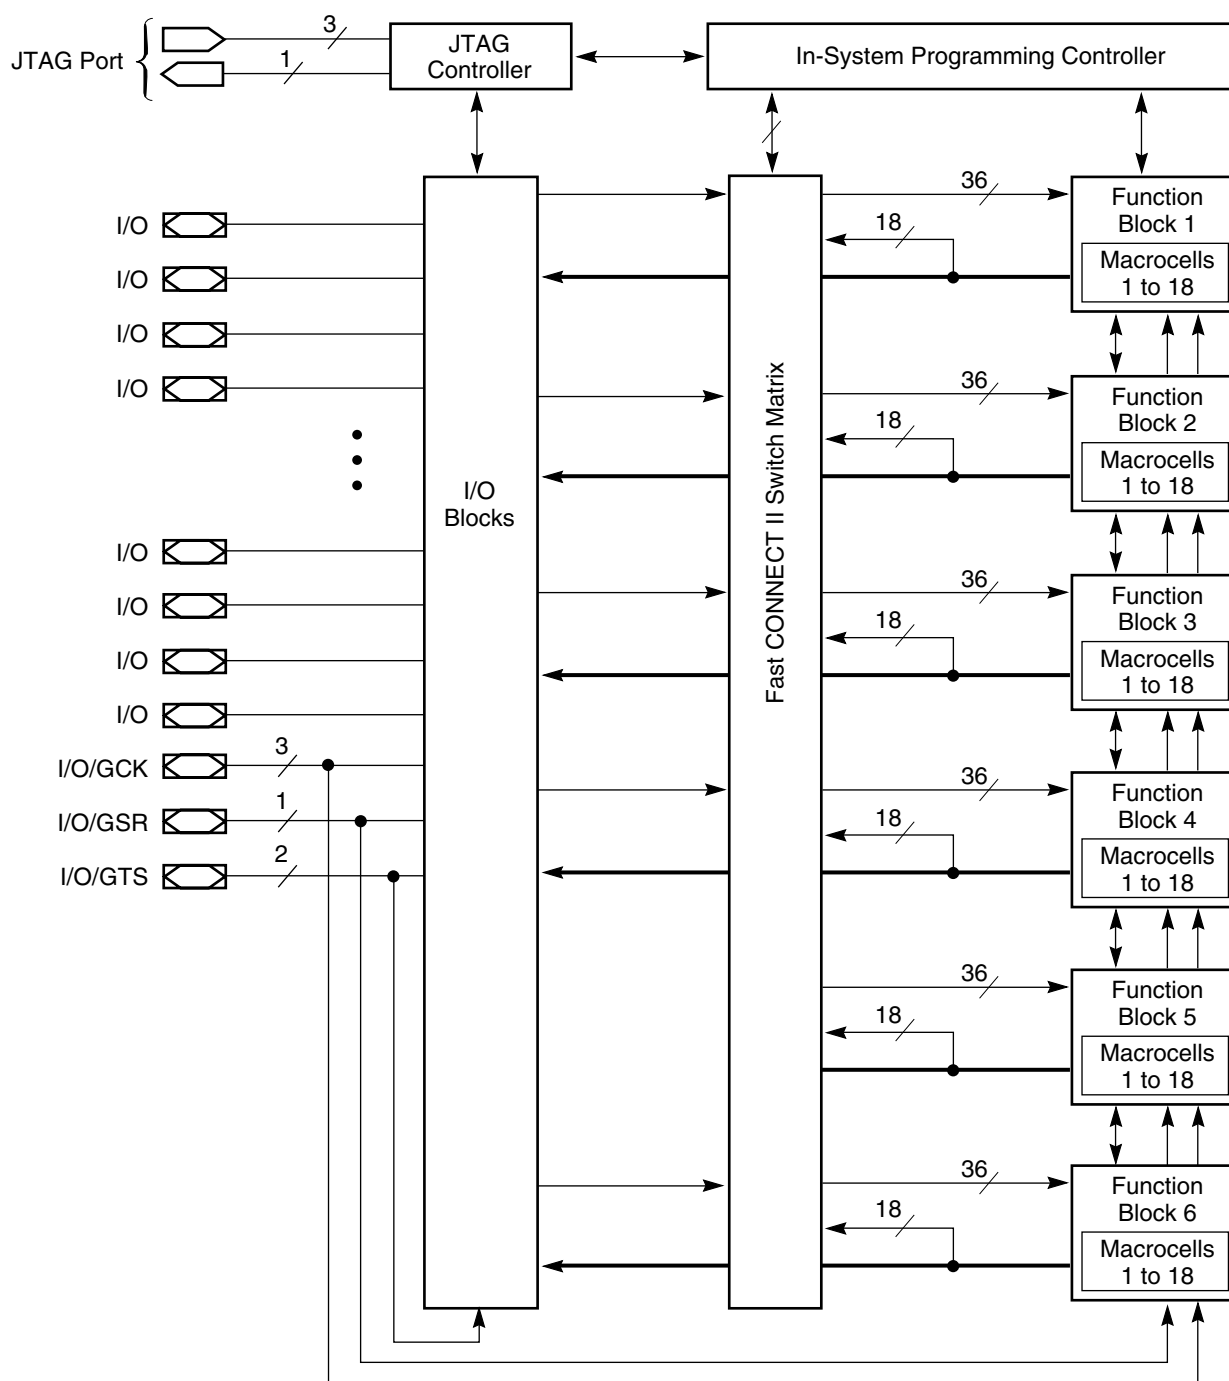

DS066\_02\_110101

**Figure 2: XC95108 Architecture**

Function block outputs (indicated by the bold line) drive the I/O blocks directly.

## Absolute Maximum Ratings

| Symbol    | Description                       | Value                  | Units |
|-----------|-----------------------------------|------------------------|-------|
| $V_{CC}$  | Supply voltage relative to GND    | –0.5 to 7.0            | V     |
| $V_{IN}$  | Input voltage relative to GND     | –0.5 to $V_{CC} + 0.5$ | V     |
| $V_{TS}$  | Voltage applied to 3-state output | –0.5 to $V_{CC} + 0.5$ | V     |
| $T_{STG}$ | Storage temperature (ambient)     | –65 to +150            | °C    |
| $T_J$     | Junction temperature              | +150                   | °C    |

### Notes:

- Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those listed under Operating Conditions is not implied. Exposure to Absolute Maximum Ratings conditions for extended periods of time may affect device reliability.

## Recommended Operation Conditions

| Symbol      | Parameter                                            |                                                                 | Min  | Max               | Units |
|-------------|------------------------------------------------------|-----------------------------------------------------------------|------|-------------------|-------|
| $V_{CCINT}$ | Supply voltage for internal logic and input buffers  | Commercial $T_A = 0^{\circ}\text{C}$ to $70^{\circ}\text{C}$    | 4.75 | 5.25              | V     |
|             |                                                      | Industrial $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | 4.5  | 5.5               |       |
| $V_{CCIO}$  | Supply voltage for output drivers for 5V operation   | Commercial $T_A = 0^{\circ}\text{C}$ to $70^{\circ}\text{C}$    | 4.75 | 5.25              | V     |
|             |                                                      | Industrial $T_A = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | 4.5  | 5.5               |       |
|             | Supply voltage for output drivers for 3.3V operation |                                                                 | 3.0  | 3.6               |       |
| $V_{IL}$    | Low-level input voltage                              |                                                                 | 0    | 0.80              | V     |
| $V_{IH}$    | High-level input voltage                             |                                                                 | 2.0  | $V_{CCINT} + 0.5$ | V     |
| $V_O$       | Output voltage                                       |                                                                 | 0    | $V_{CCIO}$        | V     |

## Quality and Reliability Characteristics

| Symbol   | Parameter                        | Min    | Max | Units  |
|----------|----------------------------------|--------|-----|--------|
| $T_{DR}$ | Data Retention                   | 20     | -   | Years  |
| $N_{PE}$ | Program/Erase Cycles (Endurance) | 10,000 | -   | Cycles |

## DC Characteristic Over Recommended Operating Conditions


| Symbol   | Parameter                                         | Test Conditions                                           | Min           | Max      | Units         |
|----------|---------------------------------------------------|-----------------------------------------------------------|---------------|----------|---------------|
| $V_{OH}$ | Output high voltage for 5V outputs                | $I_{OH} = -4.0\text{ mA}$ , $V_{CC} = \text{Min}$         | 2.4           | -        | V             |
|          | Output high voltage for 3.3V outputs              | $I_{OH} = -3.2\text{ mA}$ , $V_{CC} = \text{Min}$         | 2.4           | -        | V             |
| $V_{OL}$ | Output low voltage for 5V outputs                 | $I_{OL} = 24\text{ mA}$ , $V_{CC} = \text{Min}$           | -             | 0.5      | V             |
|          | Output low voltage for 3.3V outputs               | $I_{OL} = 10\text{ mA}$ , $V_{CC} = \text{Min}$           | -             | 0.4      | V             |
| $I_{IL}$ | Input leakage current                             | $V_{CC} = \text{Max}$<br>$V_{IN} = \text{GND or } V_{CC}$ | -             | $\pm 10$ | $\mu\text{A}$ |
| $I_{IH}$ | I/O high-Z leakage current                        | $V_{CC} = \text{Max}$<br>$V_{IN} = \text{GND or } V_{CC}$ | -             | $\pm 10$ | $\mu\text{A}$ |
| $C_{IN}$ | I/O capacitance                                   | $V_{IN} = \text{GND}$<br>$f = 1.0\text{ MHz}$             | -             | 10       | pF            |
| $I_{CC}$ | Operating supply current (low power mode, active) | $V_I = \text{GND}$ , No load<br>$f = 1.0\text{ MHz}$      | 100 (Typical) |          | mA            |

## AC Characteristics

| Symbol             | Parameter                                           | XC95108-7 |     | XC95108-10 |      | XC95108-15 |      | XC95108-20 |      | Units |
|--------------------|-----------------------------------------------------|-----------|-----|------------|------|------------|------|------------|------|-------|
|                    |                                                     | Min       | Max | Min        | Max  | Min        | Max  | Min        | Max  |       |
| $T_{PD}$           | I/O to output valid                                 | -         | 7.5 | -          | 10.0 | -          | 15.0 | -          | 20.0 | ns    |
| $T_{SU}$           | I/O setup time before GCK                           | 4.5       | -   | 6.0        | -    | 8.0        | -    | 10.0       | -    | ns    |
| $T_H$              | I/O hold time after GCK                             | 0         | -   | 0          | -    | 0          | -    | 0          | -    | ns    |
| $T_{CO}$           | GCK to output valid                                 | -         | 4.5 | -          | 6.0  | -          | 8.0  | -          | 10.0 | ns    |
| $f_{CNT}^{(1)}$    | 16-bit counter frequency                            | 125.0     | -   | 111.1      | -    | 95.2       | -    | 83.3       | -    | MHz   |
| $f_{SYSTEM}^{(2)}$ | Multiple FB internal operating frequency            | 83.3      | -   | 66.7       | -    | 55.6       | -    | 50.0       | -    | MHz   |
| $T_{PSU}$          | I/O setup time before p-term clock input            | 0.5       | -   | 2.0        | -    | 4.0        | -    | 4.0        | -    | ns    |
| $T_{PH}$           | I/O hold time after p-term clock input              | 4.0       | -   | 4.0        | -    | 4.0        | -    | 6.0        | -    | ns    |
| $T_{PCO}$          | P-term clock output valid                           | -         | 8.5 | -          | 10.0 | -          | 12.0 | -          | 16.0 | ns    |
| $T_{OE}$           | GTS to output valid                                 | -         | 5.5 | -          | 6.0  | -          | 11.0 | -          | 16.0 | ns    |
| $T_{OD}$           | GTS to output disable                               | -         | 5.5 | -          | 6.0  | -          | 11.0 | -          | 16.0 | ns    |
| $T_{POE}$          | Product term OE to output enabled                   | -         | 9.5 | -          | 10.0 | -          | 14.0 | -          | 18.0 | ns    |
| $T_{POD}$          | Product term OE to output disabled                  | -         | 9.5 | -          | 10.0 | -          | 14.0 | -          | 18.0 | ns    |
| $T_{WLH}$          | GCK pulse width (High or Low)                       | 4.0       | -   | 4.5        | -    | 5.5        | -    | 5.5        | -    | ns    |
| $T_{APRPW}$        | Asynchronous preset/reset pulse width (High or Low) | 7.0       | -   | 7.5        | -    | 8.0        | -    | 8.0        | -    | ns    |

### Notes:

- $f_{CNT}$  is the fastest 16-bit counter frequency available, using the local feedback when applicable.  
 $f_{CNT}$  is also the Export Control Maximum flip-flop toggle rate,  $f_{TOG}$ .
- $f_{SYSTEM}$  is the internal operating frequency for general purpose system designs spanning multiple FBs.

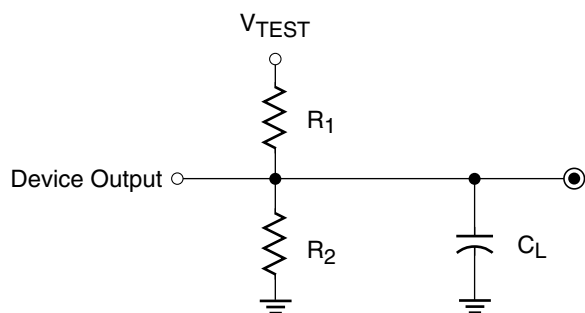

| Output Type | V <sub>CCIO</sub> | V <sub>TEST</sub> | R <sub>1</sub> | R <sub>2</sub> | C <sub>L</sub> |
|-------------|-------------------|-------------------|----------------|----------------|----------------|
|             | 5.0V              | 5.0V              | 160Ω           | 120Ω           | 35 pF          |
|             | 3.3V              | 3.3V              | 260Ω           | 360Ω           | 35 pF          |

DS067\_03\_110101

Figure 3: AC Load Circuit

## Internal Timing Parameters

| Symbol                                     | Parameter                                | XC95108-7 |      | XC95108-10 |      | XC95108-15 |      | XC95108-20 |      | Units |
|--------------------------------------------|------------------------------------------|-----------|------|------------|------|------------|------|------------|------|-------|
|                                            |                                          | Min       | Max  | Min        | Max  | Min        | Max  | Min        | Max  |       |
| Buffer Delays                              |                                          |           |      |            |      |            |      |            |      |       |
| T <sub>IN</sub>                            | Input buffer delay                       | -         | 2.5  | -          | 3.5  | -          | 4.5  | -          | 6.5  | ns    |
| T <sub>GCK</sub>                           | GCK buffer delay                         | -         | 1.5  | -          | 2.5  | -          | 3.0  | -          | 3.0  | ns    |
| T <sub>GSR</sub>                           | GSR buffer delay                         | -         | 4.5  | -          | 6.0  | -          | 7.5  | -          | 9.5  | ns    |
| T <sub>GTS</sub>                           | GTS buffer delay                         | -         | 5.5  | -          | 6.0  | -          | 11.0 | -          | 16.0 | ns    |
| T <sub>OUT</sub>                           | Output buffer delay                      | -         | 2.5  | -          | 3.0  | -          | 4.5  | -          | 6.5  | ns    |
| T <sub>EN</sub>                            | Output buffer enable/disable delay       | -         | 0    | -          | 0    | -          | 0    | -          | 0    | ns    |
| Product Term Control Delays                |                                          |           |      |            |      |            |      |            |      |       |
| T <sub>PTCK</sub>                          | Product term clock delay                 | -         | 3.0  | -          | 3.0  | -          | 2.5  | -          | 2.5  | ns    |
| T <sub>PTSR</sub>                          | Product term set/reset delay             | -         | 2.0  | -          | 2.5  | -          | 3.0  | -          | 3.0  | ns    |
| T <sub>PTTS</sub>                          | Product term 3-state delay               | -         | 4.5  | -          | 3.5  | -          | 5.0  | -          | 5.0  | ns    |
| Internal Register and Combinatorial Delays |                                          |           |      |            |      |            |      |            |      |       |
| T <sub>PDI</sub>                           | Combinatorial logic propagation delay    | -         | 0.5  | -          | 1.0  | -          | 3.0  | -          | 4.0  | ns    |
| T <sub>SUI</sub>                           | Register setup time                      | 1.5       | -    | 2.5        | -    | 3.5        | -    | 3.5        | -    | ns    |
| T <sub>HI</sub>                            | Register hold time                       | 3.0       | -    | 3.5        | -    | 4.5        | -    | 6.5        | -    | ns    |
| T <sub>COI</sub>                           | Register clock to output valid time      | -         | 0.5  | -          | 0.5  | -          | 0.5  | -          | 0.5  | ns    |
| T <sub>AOI</sub>                           | Register async. S/R to output delay      | -         | 6.5  | -          | 7.0  | -          | 8.0  | -          | 8.0  | ns    |
| T <sub>RAI</sub>                           | Register async. S/R recover before clock | 7.5       | -    | 10.0       | -    | 10.0       | -    | 10.0       | -    | ns    |
| T <sub>LOGI</sub>                          | Internal logic delay                     | -         | 2.0  | -          | 2.5  | -          | 3.0  | -          | 3.0  | ns    |
| T <sub>LOGILP</sub>                        | Internal low power logic delay           | -         | 10.0 | -          | 11.0 | -          | 11.5 | -          | 11.5 | ns    |
| Feedback Delays                            |                                          |           |      |            |      |            |      |            |      |       |
| T <sub>F</sub>                             | FastCONNECT feedback delay               | -         | 8.0  | -          | 9.5  | -          | 11.0 | -          | 13.0 | ns    |
| T <sub>LF</sub>                            | Function block local feedback delay      | -         | 4.0  | -          | 3.5  | -          | 3.5  | -          | 5.0  | ns    |
| Time Adders                                |                                          |           |      |            |      |            |      |            |      |       |
| T <sub>PTA</sub> <sup>(1)</sup>            | Incremental product term allocator delay | -         | 1.0  | -          | 1.0  | -          | 1.0  | -          | 1.5  | ns    |
| T <sub>SLEW</sub>                          | Slew-rate limited delay                  | -         | 4.0  | -          | 4.5  | -          | 5.0  | -          | 5.5  | ns    |

**Notes:**

1.  $T_{PTA}$  is multiplied by the span of the function as defined in the XC9500 family data sheet.

## XC95108 I/O Pins

| Function Block | Macro-cell | PC84              | PQ100             | TQ100             | PQ160              | BScan Order        | Function Block | Macro-cell | PC84 | PQ100 | TQ100 | PQ160 | BScan Order |
|----------------|------------|-------------------|-------------------|-------------------|--------------------|--------------------|----------------|------------|------|-------|-------|-------|-------------|
| 1              | 1          | —                 | —                 | —                 | 25                 | 321                | 3              | 1          | —    | —     | —     | 45    | 213         |
| 1              | 2          | 1                 | 15                | 13                | 21                 | 318                | 3              | 2          | 14   | 31    | 29    | 47    | 210         |
| 1              | 3          | 2                 | 16                | 14                | 22                 | 315                | 3              | 3          | 15   | 32    | 30    | 49    | 207         |
| 1              | 4          | —                 | 21                | 19                | 29                 | 312                | 3              | 4          | —    | 36    | 34    | 57    | 204         |
| 1              | 5          | 3                 | 17                | 15                | 23                 | 309                | 3              | 5          | 17   | 34    | 32    | 54    | 201         |
| 1              | 6          | 4                 | 18                | 16                | 24                 | 306                | 3              | 6          | 18   | 35    | 33    | 56    | 198         |
| 1              | 7          | —                 | —                 | —                 | 27                 | 303                | 3              | 7          | —    | —     | —     | 50    | 195         |
| 1              | 8          | 5                 | 19                | 17                | 26                 | 300                | 3              | 8          | 19   | 37    | 35    | 58    | 192         |
| 1              | 9          | 6                 | 20                | 18                | 28                 | 297                | 3              | 9          | 20   | 38    | 36    | 59    | 189         |
| 1              | 10         | —                 | 26                | 24                | 36                 | 294                | 3              | 10         | —    | 45    | 43    | 69    | 186         |
| 1              | 11         | 7                 | 22                | 20                | 30                 | 291                | 3              | 11         | 21   | 39    | 37    | 60    | 183         |
| 1              | 12         | 9 <sup>[1]</sup>  | 24 <sup>[1]</sup> | 22 <sup>[1]</sup> | 33 <sup>[1]</sup>  | 288 <sup>[1]</sup> | 3              | 12         | 23   | 41    | 39    | 62    | 180         |
| 1              | 13         | —                 | —                 | —                 | 34                 | 285                | 3              | 13         | —    | —     | —     | 52    | 177         |
| 1              | 14         | 10 <sup>[1]</sup> | 25 <sup>[1]</sup> | 23 <sup>[1]</sup> | 35 <sup>[1]</sup>  | 282 <sup>[1]</sup> | 3              | 14         | 24   | 42    | 40    | 63    | 174         |
| 1              | 15         | 11                | 27                | 25                | 37                 | 279                | 3              | 15         | 25   | 43    | 41    | 64    | 171         |
| 1              | 16         | 12 <sup>[1]</sup> | 29 <sup>[1]</sup> | 27 <sup>[1]</sup> | 42 <sup>[1]</sup>  | 276 <sup>[1]</sup> | 3              | 16         | 26   | 44    | 42    | 68    | 168         |
| 1              | 17         | 13                | 30                | 28                | 44                 | 273                | 3              | 17         | 31   | 51    | 49    | 77    | 165         |
| 1              | 18         | —                 | —                 | —                 | 43                 | 270                | 3              | 18         | —    | —     | —     | 74    | 162         |
| 2              | 1          | —                 | —                 | —                 | 158                | 267                | 4              | 1          | —    | —     | —     | 123   | 159         |
| 2              | 2          | 71                | 98                | 96                | 154                | 264                | 4              | 2          | 57   | 83    | 81    | 134   | 156         |
| 2              | 3          | 72                | 99                | 97                | 156                | 261                | 4              | 3          | 58   | 84    | 82    | 135   | 153         |
| 2              | 4          | —                 | 4                 | 2                 | 4                  | 258                | 4              | 4          | —    | 82    | 80    | 133   | 150         |
| 2              | 5          | 74 <sup>[1]</sup> | 1 <sup>[1]</sup>  | 99 <sup>[1]</sup> | 159 <sup>[1]</sup> | 255 <sup>[1]</sup> | 4              | 5          | 61   | 87    | 85    | 138   | 147         |
| 2              | 6          | 75                | 3                 | 1                 | 2                  | 252                | 4              | 6          | 62   | 88    | 86    | 139   | 144         |
| 2              | 7          | —                 | —                 | —                 | 9                  | 249                | 4              | 7          | —    | —     | —     | 128   | 141         |
| 2              | 8          | 76 <sup>[1]</sup> | 5 <sup>[1]</sup>  | 3 <sup>[1]</sup>  | 6 <sup>[1]</sup>   | 246 <sup>[1]</sup> | 4              | 8          | 63   | 89    | 87    | 140   | 138         |
| 2              | 9          | 77 <sup>[1]</sup> | 6 <sup>[1]</sup>  | 4 <sup>[1]</sup>  | 8 <sup>[1]</sup>   | 243 <sup>[1]</sup> | 4              | 9          | 65   | 91    | 89    | 142   | 135         |
| 2              | 10         | —                 | 9                 | 7                 | 12                 | 240                | 4              | 10         | —    | —     | —     | 147   | 132         |
| 2              | 11         | 79                | 8                 | 6                 | 11                 | 237                | 4              | 11         | 66   | 92    | 90    | 143   | 129         |
| 2              | 12         | 80                | 10                | 8                 | 13                 | 234                | 4              | 12         | 67   | 93    | 91    | 144   | 126         |
| 2              | 13         | —                 | —                 | —                 | 14                 | 231                | 4              | 13         | —    | —     | —     | 153   | 123         |
| 2              | 14         | 81                | 11                | 9                 | 15                 | 228                | 4              | 14         | 68   | 95    | 93    | 146   | 120         |
| 2              | 15         | 82                | 12                | 10                | 17                 | 225                | 4              | 15         | 69   | 96    | 94    | 148   | 117         |
| 2              | 16         | 83                | 13                | 11                | 18                 | 222                | 4              | 16         | —    | 94    | 92    | 145   | 114         |
| 2              | 17         | 84                | 14                | 12                | 19                 | 219                | 4              | 17         | 70   | 97    | 95    | 152   | 111         |
| 2              | 18         | —                 | —                 | —                 | 16                 | 216                | 4              | 18         | —    | —     | —     | 155   | 108         |

### Notes:

1. Global control pin.


## XC95108 I/O Pins (Continued)

| Function Block | Macro-cell | PC84 | PQ100 | TQ100 | PQ160 | BScan Order | Function Block | Macro-cell | PC84 | PQ100 | TQ100 | PQ160 | BScan Order |
|----------------|------------|------|-------|-------|-------|-------------|----------------|------------|------|-------|-------|-------|-------------|
| 5              | 1          | —    | —     | —     | 76    | 105         | 6              | 1          | —    | —     | —     | 91    | 51          |
| 5              | 2          | 32   | 52    | 50    | 79    | 102         | 6              | 2          | 45   | 67    | 65    | 103   | 48          |
| 5              | 3          | 33   | 54    | 52    | 82    | 99          | 6              | 3          | 46   | 68    | 66    | 104   | 45          |
| 5              | 4          | —    | 48    | 46    | 72    | 96          | 6              | 4          | —    | 75    | 73    | 116   | 42          |
| 5              | 5          | 34   | 55    | 53    | 86    | 93          | 6              | 5          | 47   | 69    | 67    | 106   | 39          |
| 5              | 6          | 35   | 56    | 54    | 88    | 90          | 6              | 6          | 48   | 70    | 68    | 108   | 36          |
| 5              | 7          | —    | —     | —     | 78    | 87          | 6              | 7          | —    | —     | —     | 105   | 33          |
| 5              | 8          | 36   | 57    | 55    | 90    | 84          | 6              | 8          | 50   | 72    | 70    | 111   | 30          |
| 5              | 9          | 37   | 58    | 56    | 92    | 81          | 6              | 9          | 51   | 73    | 71    | 113   | 27          |
| 5              | 10         | —    | —     | —     | 84    | 78          | 6              | 10         | —    | —     | —     | 107   | 24          |
| 5              | 11         | 39   | 60    | 58    | 95    | 75          | 6              | 11         | 52   | 74    | 72    | 115   | 21          |
| 5              | 12         | 40   | 62    | 60    | 97    | 72          | 6              | 12         | 53   | 76    | 74    | 117   | 18          |
| 5              | 13         | —    | —     | —     | 87    | 69          | 6              | 13         | —    | —     | —     | 112   | 15          |
| 5              | 14         | 41   | 63    | 61    | 98    | 66          | 6              | 14         | 54   | 78    | 76    | 122   | 12          |
| 5              | 15         | 43   | 65    | 63    | 101   | 63          | 6              | 15         | 55   | 79    | 77    | 124   | 9           |
| 5              | 16         | —    | 61    | 59    | 96    | 60          | 6              | 16         | —    | 81    | 79    | 129   | 6           |
| 5              | 17         | 44   | 66    | 64    | 102   | 57          | 6              | 17         | 56   | 80    | 78    | 126   | 3           |
| 5              | 18         | —    | —     | —     | 89    | 54          | 6              | 18         | —    | —     | —     | 114   | 0           |

## XC95108 Global, JTAG, and Power Pins

| Pin Type                  | PC84             | PQ100                  | TQ100                    | PQ160                                                                             |
|---------------------------|------------------|------------------------|--------------------------|-----------------------------------------------------------------------------------|
| I/O/GCK1                  | 9                | 24                     | 22                       | 33                                                                                |
| I/O/GCK2                  | 10               | 25                     | 23                       | 35                                                                                |
| I/O/GCK3                  | 12               | 29                     | 27                       | 42                                                                                |
| I/O/GTS1                  | 76               | 5                      | 3                        | 6                                                                                 |
| I/O/GTS2                  | 77               | 6                      | 4                        | 8                                                                                 |
| I/O/GSR                   | 74               | 1                      | 99                       | 159                                                                               |
| TCK                       | 30               | 50                     | 48                       | 75                                                                                |
| TDI                       | 28               | 47                     | 45                       | 71                                                                                |
| TDO                       | 59               | 85                     | 83                       | 136                                                                               |
| TMS                       | 29               | 49                     | 47                       | 73                                                                                |
| V <sub>CCINT</sub> 5V     | 38,73,78         | 7,59,100               | 5,57,98                  | 10,46,94,157                                                                      |
| V <sub>CCIO</sub> 3.3V/5V | 22,64            | 28,40,53,90            | 26,38,51,88              | 1,41,61,81,121,141                                                                |
| GND                       | 8,16,27,42,49,60 | 2,23,33,46,64,71,77,86 | 100,21,31,44,62,69,75,84 | 20,31,40,51,70,80,99                                                              |
| GND                       | —                | —                      | —                        | 100,110,120,127,137                                                               |
| GND                       | —                | —                      | —                        | 160                                                                               |
| No connects               | —                | —                      | —                        | 3,5,7,32,38,39,48,53,55,65,66,67,83,85,93,109,118,119,125,130,131,132,149,150,151 |

## Device Part Marking and Ordering Combination Information

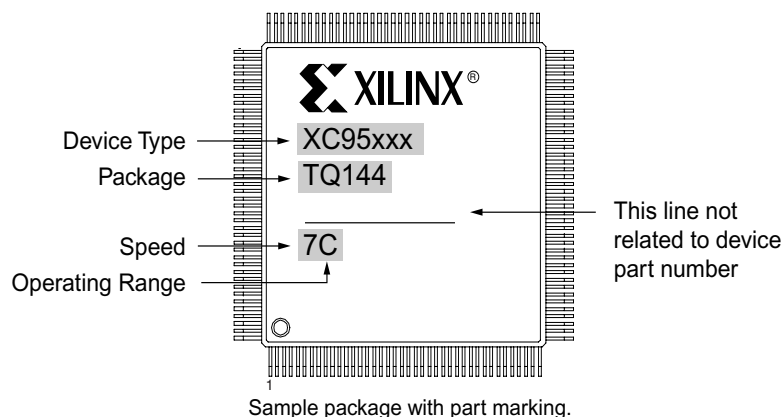

| Device Ordering and Part Marking Number | Speed (pin-to-pin delay) | Pkg. Symbol | No. of Pins | Package Type                              | Operating Range <sup>(1)</sup> |
|-----------------------------------------|--------------------------|-------------|-------------|-------------------------------------------|--------------------------------|
| XC95108-7PC84C                          | 7.5 ns                   | PC84        | 84-pin      | Plastic Lead Chip Carrier (PLCC)          | C                              |
| XC95108-7PCG84C                         | 7.5 ns                   | PCG84       | 84-pin      | Plastic Lead Chip Carrier (PLCC); Pb-Free | C                              |
| XC95108-7PQ100C                         | 7.5 ns                   | PQ100       | 100-pin     | Plastic Quad Flat Pack (PQFP)             | C                              |
| XC95108-7PQG100C                        | 7.5 ns                   | PQG100      | 100-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | C                              |
| XC95108-7TQ100C                         | 7.5 ns                   | TQ100       | 100-pin     | Thin Quad Flat Pack (TQFP)                | C                              |
| XC95108-7TQG100C                        | 7.5 ns                   | TQG100      | 100-pin     | Thin Quad Flat Pack (TQFP); Pb-Free       | C                              |
| XC95108-7PQ160C                         | 7.5 ns                   | PQ160       | 160-pin     | Plastic Quad Flat Pack (PQFP)             | C                              |
| XC95108-7PQG160C                        | 7.5 ns                   | PQG160      | 160-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | C                              |
| XC95108-7PC84I                          | 7.5 ns                   | PC84        | 84-pin      | Plastic Lead Chip Carrier (PLCC)          | I                              |
| XC95108-7PCG84I                         | 7.5 ns                   | PCG84       | 84-pin      | Plastic Lead Chip Carrier (PLCC); Pb-Free | I                              |
| XC95108-7PQ100I                         | 7.5 ns                   | PQ100       | 100-pin     | Plastic Quad Flat Pack (PQFP)             | I                              |
| XC95108-7PQG100I                        | 7.5 ns                   | PQG100      | 100-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | I                              |
| XC95108-7TQ100I                         | 7.5 ns                   | TQ100       | 100-pin     | Thin Quad Flat Pack (TQFP)                | I                              |
| XC95108-7TQG100I                        | 7.5 ns                   | TQG100      | 100-pin     | Thin Quad Flat Pack (TQFP); Pb-Free       | I                              |
| XC95108-7PQ160I                         | 7.5 ns                   | PQ160       | 160-pin     | Plastic Quad Flat Pack (PQFP)             | I                              |
| XC95108-7PQG160I                        | 7.5 ns                   | PQG160      | 160-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | I                              |
| XC95108-10PC84C                         | 10 ns                    | PC84        | 84-pin      | Plastic Lead Chip Carrier (PLCC)          | C                              |
| XC95108-10PCG84C                        | 10 ns                    | PCG84       | 84-pin      | Plastic Lead Chip Carrier (PLCC); Pb-Free | C                              |
| XC95108-10PQ100C                        | 10 ns                    | PQ100       | 100-pin     | Plastic Quad Flat Pack (PQFP)             | C                              |
| XC95108-10PQG100C                       | 10 ns                    | PQG100      | 100-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | C                              |
| XC95108-10TQ100C                        | 10 ns                    | TQ100       | 100-pin     | Thin Quad Flat Pack (TQFP)                | C                              |
| XC95108-10TQG100C                       | 10 ns                    | TQG100      | 100-pin     | Thin Quad Flat Pack (TQFP); Pb-Free       | C                              |
| XC95108-10PQ160C                        | 10 ns                    | PQ160       | 160-pin     | Plastic Quad Flat Pack (PQFP)             | C                              |
| XC95108-10PQG160C                       | 10 ns                    | PQG160      | 160-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | C                              |
| XC95108-10PC84I                         | 10 ns                    | PC84        | 84-pin      | Plastic Lead Chip Carrier (PLCC)          | I                              |
| XC95108-10PCG84I                        | 10 ns                    | PCG84       | 84-pin      | Plastic Lead Chip Carrier (PLCC); Pb-Free | I                              |
| XC95108-10PQ100I                        | 10 ns                    | PQ100       | 100-pin     | Plastic Quad Flat Pack (PQFP)             | I                              |
| XC95108-10PQG100I                       | 10 ns                    | PQG100      | 100-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | I                              |
| XC95108-10TQ100I                        | 10 ns                    | TQ100       | 100-pin     | Thin Quad Flat Pack (TQFP)                | I                              |
| XC95108-10TQG100I                       | 10 ns                    | TQG100      | 100-pin     | Thin Quad Flat Pack (TQFP); Pb-Free       | I                              |
| XC95108-10PQ160I                        | 10 ns                    | PQ160       | 160-pin     | Plastic Quad Flat Pack (PQFP)             | I                              |
| XC95108-10PQG160I                       | 10 ns                    | PQG160      | 160-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | I                              |
| XC95108-15PC84C                         | 15 ns                    | PC84        | 84-pin      | Plastic Lead Chip Carrier (PLCC)          | C                              |



| Device Ordering and Part Marking Number | Speed (pin-to-pin delay) | Pkg. Symbol | No. of Pins | Package Type                              | Operating Range <sup>(1)</sup> |
|-----------------------------------------|--------------------------|-------------|-------------|-------------------------------------------|--------------------------------|
| XC95108-15PCG84C                        | 15 ns                    | PCG84       | 84-pin      | Plastic Lead Chip Carrier (PLCC); Pb-Free | C                              |
| XC95108-15PQ100C                        | 15 ns                    | PQ100       | 100-pin     | Plastic Quad Flat Pack (PQFP)             | C                              |
| XC95108-15PQG100C                       | 15 ns                    | PQG100      | 100-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | C                              |
| XC95108-15TQ100C                        | 15 ns                    | TQ100       | 100-pin     | Thin Quad Flat Pack (TQFP)                | C                              |
| XC95108-15TQG100C                       | 15 ns                    | TQG100      | 100-pin     | Thin Quad Flat Pack (TQFP); Pb-Free       | C                              |
| XC95108-15PQ160C                        | 15 ns                    | PQ160       | 160-pin     | Plastic Quad Flat Pack (PQFP)             | C                              |
| XC95108-15PQG160C                       | 15 ns                    | PQG160      | 160-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | C                              |
| XC95108-15PC84I                         | 15 ns                    | PC84        | 84-pin      | Plastic Lead Chip Carrier (PLCC)          | I                              |
| XC95108-15PCG84I                        | 15 ns                    | PCG84       | 84-pin      | Plastic Lead Chip Carrier (PLCC); Pb-Free | I                              |
| XC95108-15PQ100I                        | 15 ns                    | PQ100       | 100-pin     | Plastic Quad Flat Pack (PQFP)             | I                              |
| XC95108-15PQG100I                       | 15 ns                    | PQG100      | 100-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | I                              |
| XC95108-15TQ100I                        | 15 ns                    | TQ100       | 100-pin     | Thin Quad Flat Pack (TQFP)                | I                              |
| XC95108-15TQG100I                       | 15 ns                    | TQG100      | 100-pin     | Thin Quad Flat Pack (TQFP); Pb-Free       | I                              |
| XC95108-15PQ160I                        | 15 ns                    | PQ160       | 160-pin     | Plastic Quad Flat Pack (PQFP)             | I                              |
| XC95108-15PQG160I                       | 15 ns                    | PQG160      | 160-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | I                              |
| XC95108-20PC84C                         | 20 ns                    | PC84        | 84-pin      | Plastic Lead Chip Carrier (PLCC)          | C                              |
| XC95108-20PCG84C                        | 20 ns                    | PCG84       | 84-pin      | Plastic Lead Chip Carrier (PLCC); Pb-Free | C                              |
| XC95108-20PQ100C                        | 20 ns                    | PQ100       | 100-pin     | Plastic Quad Flat Pack (PQFP)             | C                              |
| XC95108-20PQG100C                       | 20 ns                    | PQG100      | 100-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | C                              |
| XC95108-20TQ100C                        | 20 ns                    | TQ100       | 100-pin     | Thin Quad Flat Pack (TQFP)                | C                              |
| XC95108-20TQG100C                       | 20 ns                    | TQG100      | 100-pin     | Thin Quad Flat Pack (TQFP); Pb-Free       | C                              |
| XC95108-20PQ160C                        | 20 ns                    | PQ160       | 160-pin     | Plastic Quad Flat Pack (PQFP)             | C                              |
| XC95108-20PQG160C                       | 20 ns                    | PQG160      | 160-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | C                              |
| XC95108-20PC84I                         | 20 ns                    | PC84        | 84-pin      | Plastic Lead Chip Carrier (PLCC)          | I                              |
| XC95108-20PCG84I                        | 20 ns                    | PCG84       | 84-pin      | Plastic Lead Chip Carrier (PLCC); Pb-Free | I                              |
| XC95108-20PQ100I                        | 20 ns                    | PQ100       | 100-pin     | Plastic Quad Flat Pack (PQFP)             | I                              |
| XC95108-20PQG100I                       | 20 ns                    | PQG100      | 100-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | I                              |
| XC95108-20TQ100I                        | 20 ns                    | TQ100       | 100-pin     | Thin Quad Flat Pack (TQFP)                | I                              |
| XC95108-20TQG100I                       | 20 ns                    | TQG100      | 100-pin     | Thin Quad Flat Pack (TQFP); Pb-Free       | I                              |
| XC95108-20PQ160I                        | 20 ns                    | PQ160       | 160-pin     | Plastic Quad Flat Pack (PQFP)             | I                              |
| XC95108-20PQG160I                       | 20 ns                    | PQG160      | 160-pin     | Plastic Quad Flat Pack (PQFP); Pb-Free    | I                              |

**Notes:**

1. C = Commercial: T<sub>A</sub> = 0° to +70°C; I = Industrial: T<sub>A</sub> = –40° to +85°C

## Warranty Disclaimer

THESE PRODUCTS ARE SUBJECT TO THE TERMS OF THE XILINX LIMITED WARRANTY WHICH CAN BE VIEWED AT <http://www.xilinx.com/warranty.htm>. THIS LIMITED WARRANTY DOES NOT EXTEND TO ANY USE OF THE PRODUCTS IN AN APPLICATION OR ENVIRONMENT THAT IS NOT WITHIN THE SPECIFICATIONS STATED ON THE THEN-CURRENT XILINX DATA SHEET FOR THE PRODUCTS. PRODUCTS ARE NOT DESIGNED TO BE FAIL-SAFE AND ARE NOT WARRANTED FOR USE IN APPLICATIONS THAT POSE A RISK OF PHYSICAL HARM OR LOSS OF LIFE. USE OF PRODUCTS IN SUCH APPLICATIONS IS FULLY AT THE RISK OF CUSTOMER SUBJECT TO APPLICABLE LAWS AND REGULATIONS.

## Additional Information

[XC9500 Data Sheets and Application Notes](#)

[Online Store](#)

[Device Packaging](#)

---

---

## Revision History

The following table shows the revision history for this document.

| Date     | Version | Revision                                                                   |
|----------|---------|----------------------------------------------------------------------------|
| 12/04/98 | 3.0     | Update AC characteristics and internal parameters.                         |
| 06/18/03 | 4.0     | Updated format.                                                            |
| 08/21/03 | 4.1     | Updated Package Device Marking Pin 1 orientation.                          |
| 03/01/04 | 4.2     | Updated table on page 8 for PQ160 pins.                                    |
| 04/15/05 | 4.3     | Added asynchronous preset/reset pulse width specification ( $T_{APRPW}$ ). |
| 04/03/06 | 4.4     | Added Warranty Disclaimer. Added Pb-Free package ordering information.     |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.