



### Features

- 3" x 5" x 1.3" Package
- 180W Convection Cooled Power
- Ideal for 1U Applications
- Class I and Class II versions
- Universal Input 90-264 VAC
- Approved to CSA/EN/IEC/UL60601-1, 3<sup>rd</sup> Edition, 2 x MOPP Isolation
- Approved to CSA/EN/IEC/UL60950-1 2<sup>nd</sup> Edition
- Efficiency 90% typical
- 3 Year Warranty
- RoHS Compliant



### Description

The MINT1180 product family is the most cost-effective medically approved supply in the market with 180 watts of convection cooled output power in 3"X5" footprint. The series comes in eight different models ranging from 12 to 48V and has been approved to IEC60601-1 3<sup>rd</sup> Edition, rated for 2 MOPP (Means of Patient Protection) isolation. This new single output power supply family has both Class I and II input versions and accepts wide input range of 90 to 264Vac. The typical 90% efficiency and convection cooled make this supply an excellent solution for HomeCare applications where the use of fans is not desired.

### Model Selection

Model Number	Volts	Output Current*	Minimum Load	Ripple & Noise**	Total Regulation	OVP Threshold
MINT1180A1275K01	12V	15.0A	0A	120mV pk-pk	±3%	14.0 ± 1.1V
MINT1180A1575K01	15V	12.0A	0A	150mV pk-pk	±3%	18.5 ± 1.2V
MINT1180A1875K01	18V	10.0A	0A	180mV pk-pk	±3%	21.5 ± 2.0V
MINT1180A2475K01	24V	7.50A	0A	240mV pk-pk	±3%	29.0 ± 2.5V
MINT1180A2875K01	28V	6.40A	0A	280mV pk-pk	±3%	33.5 ± 2.5V
MINT1180A3275K01	32V	5.62A	0A	320mV pk-pk	±3%	36.0 ± 3.0V
MINT1180A4875K01	48V	3.75A	0A	480mV pk-pk	±3%	56.0 ± 3.0V

Notes: \* Total convection power is 180 Watts.

\*\* Measured with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR capacitors.

### General Specifications


<b>AC Input</b>	100-240Vac, ±10%, 47-63Hz, 1Ø 120-370Vdc	<b>Turn On Time</b>	Less than 3 sec. @ 115Vac & Full Load
<b>Input Current</b>	115Vac: 1.8A, 230Vac: 0.9A	<b>Hold-up Time</b>	>16mS at 180W, 120Vac

**General Specifications** (continued)

<b>Inrush Current</b>	264Vac, cold start: will not exceed 55A	<b>Signals</b>	N/A
<b>Input Fuses</b>	F1, F2: 3.15A, 250VAC fuses provided on all models	<b>Overload Protection</b>	120%-150% of rating, Hiccup Mode
<b>Earth Leakage Current</b>	<275 $\mu$ A@264Vac, 60Hz, NC; <400 $\mu$ A SFC	<b>Short Circuit Protection</b>	Provided - no damage will occur if the output is shorted, auto recovery
<b>Efficiency</b>	88% typical	<b>Overvoltage Protection</b>	OVP latch at 110%-130% of rated output voltage.
<b>Output Power</b>	180W convection cooled	<b>Switching Frequency</b>	PFC: Fixed, 65kHz Main Converter: Variable 35-200kHz, 65-70kHz at full load.
<b>Transient Response</b>	500 $\mu$ S typ. for return to within 0.5% of nominal, 50% load step. $\Delta i/\Delta t$ <0.2A/ $\mu$ S. Max Volt Deviation = 3%	<b>Isolation</b>	Input-Output: 4000Vac, 2 x MOPP Input-Ground: 1800Vac, 1 x MOPP Output-Ground: 1500Vac
<b>Ripple and Noise</b>	See chart	<b>Operating Temperature</b>	-10°C to +70°C Start Up at -40°C, full load
<b>Output Voltage</b>	See chart	<b>Temperature Derating</b>	Derate output power linearly above 50°C to 50% at 70°C
<b>Voltage Adjustability</b>	+/-5% from nominal	<b>Storage Temperature</b>	-40°C to +85°C
<b>Minimum Load</b>	Not required	<b>Altitude</b>	Operating: -500 to 10,000 ft. Non-operating: -500 to 40,000 ft.
<b>Total Regulation</b>	+/- 3% combined line, load and initial setting.	<b>Relative Humidity</b>	5% to 95%, non-condensing
<b>Vibration</b>	Operating: 0.003g <sup>2</sup> /Hz, 1.5grms overall, 3 axes, 10 min/axis Non-Operating: 0.026g <sup>2</sup> /Hz, 5.0grms overall, 3 axes, 1 hr/axis	<b>Shock</b>	Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10 ms, 3 axes, 6 shocks total
<b>Dimensions</b>	W: 3.0" x L: 5.0" x H: 1.3"	<b>Safety Standards</b>	EN/CSA/UL/IEC 60601-1, 3 <sup>rd</sup> Edition EN/CSA/UL/IEC 60950-1, 2 <sup>nd</sup> Edition
<b>Weight</b>	325g	<b>MTBF</b>	405,000 hours, 25°C, 110Vac

**Output vs. Temperature Derating Curve**

180W convection cooled, derate output power to 50% at 70°C.

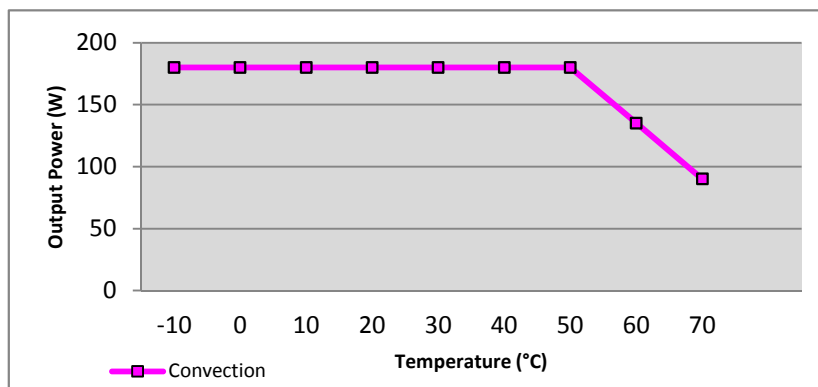


## EMI/EMC Compliance

Conducted Emissions	EN55011/22 Class B, FCC Part 15, Subpart B, Class B
Radiated Emissions	EN55011/22 Class B; FCC Part 15, Subpart B, Class B
Static Discharge Immunity	EN61000-4-2, Criteria A, 6kV Contact Discharge, 8kV air discharge
Radiated RF Immunity	EN61000-4-3, 3V/m, Criteria A.
EFT/Burst Immunity	EN61000-4-4, 2kV/5kHz, Criteria A
Line Surge Immunity	EN61000-4-5, 1kV differential, 2kV common-mode, Criteria A
Conducted RF Immunity	EN61000-4-6, 3Vrms, Criteria A
Power Frequency Magnetic Field Immunity	EN61000-4-8, 3A/m, Criteria A
Voltage Dip Immunity	EN61000-4-11, 5% Vnom: 0.5cycle; 40% Vnom: 5 cycles, 70% Vnom: 25 cycles, Criteria A
Line Harmonic Emissions	EN61000-3-2, Class A, B, C, & D
Flicker Test	EN61000-3-3, Complies (dmax<6%)

## Mechanical Drawing

- Notes:**
1. All dimensions in inches (mm), tolerance is +/-0.000".
  2. Mounting holes should be grounded for EMI purposes.
  3. FG is safety ground connection.
  4. The power supply requires mounting on metal standoffs 0.20" (5mm) in height, min.

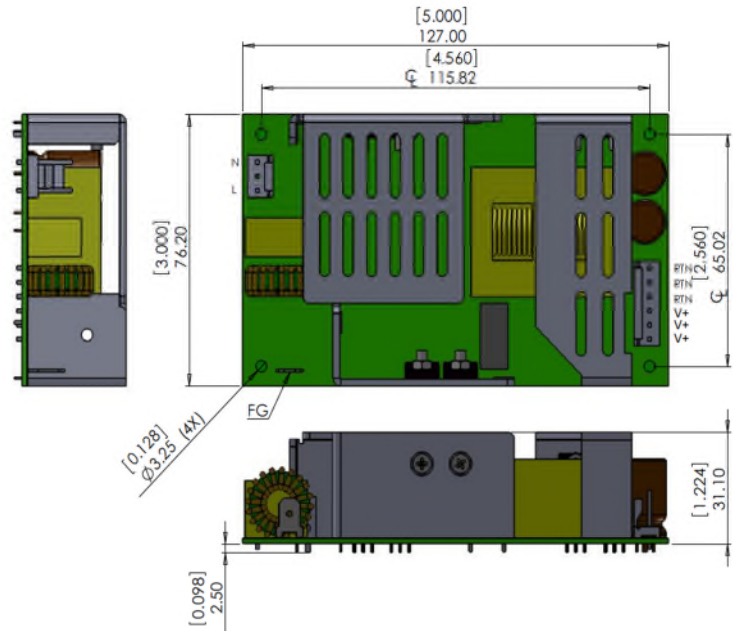

## Connector Information

Input Connector J100	Ground (FG)	DC Output Connector J300	
PIN 1) AC LINE PIN 2) EMPTY PIN 3) AC NEUTRAL	0.25" FASTON TAB	Term. 1,2,3: RTN Term. 4,5,6: +Vout	
Mating Connector: AMP 640250-3 Pins: 640252-2	Mating Connector: Molex 01-90020001	Mating Connector: AMP 640250-6 Pins: 640252-2	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.