


- **Output Swing includes Both Supply Rails**
- **Low Noise . . . 12 nV/√Hz Typ at f = 1 kHz**
- **Low Input Bias Current . . . 1 pA Typ**
- **Fully Specified for Both Single-Supply and Split-Supply Operation**
- **Low Power . . . 500 μA Max**
- **Common-Mode Input Voltage Range Includes Negative Rail**
- **Low Input Offset Voltage**  
950 μV Max at T<sub>A</sub> = 25°C (TLC2262A)
- **Macromodel Included**
- **Performance Upgrade for the TS27M2/M4 and TLC27M2/M4**
- **Available in Q-Temp Automotive HighRel Automotive Applications Configuration Control/Print Support Qualification to Automotive Standards**

## description

The TLC2262 and TLC2264 are dual and quadruple operational amplifiers from Texas Instruments. Both devices exhibit rail-to-rail output performance for increased dynamic range in single- or split-supply applications. The TLC226x family offers a compromise between the micropower TLC225x and the ac performance of the TLC227x. It has low supply current for battery-powered applications, while still having adequate ac performance for applications that demand it. The noise performance has been dramatically improved over previous generations of CMOS amplifiers. Figure 1 depicts the low level of noise voltage for this CMOS amplifier, which has only 200 μA (typ) of supply current per amplifier.

The TLC226x, exhibiting high input impedance and low noise, are excellent for small-signal conditioning for high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single or split supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLC226xA family is available and has a maximum input offset voltage of 950 μV. This family is fully characterized at 5 V and ±5 V.

The TLC2262/4 also makes great upgrades to the TLC27M2/L4 or TS27M2/L4 in standard designs. They offer increased output dynamic range, lower noise voltage and lower input offset voltage. This enhanced feature set allows them to be used in a wider range of applications. For applications that require higher output drive and wider input voltage range, see the TLV2432 and TLV2442. If your design requires single amplifiers, please see the TLV2211/21/31 family. These devices are single rail-to-rail operational amplifiers in the SOT-23 package. Their small size and low power consumption, make them ideal for high density, battery-powered equipment.

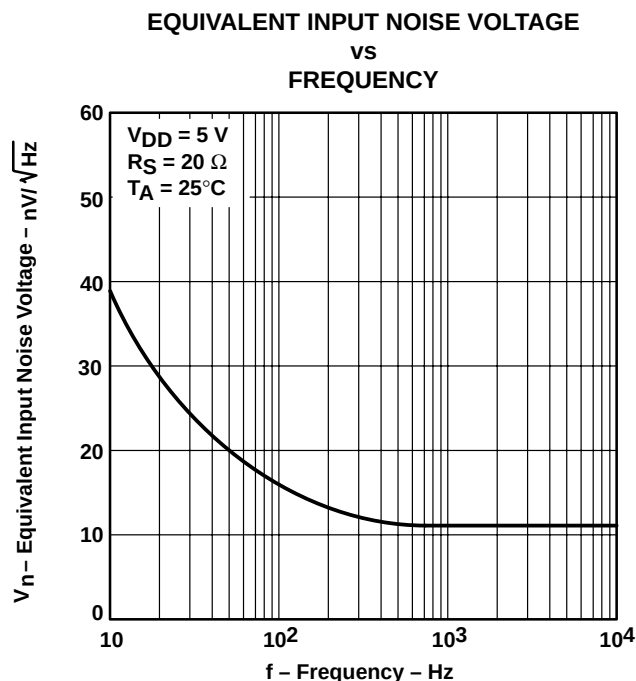

**Figure 1**



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

Advanced LinCMOS is a trademark of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2001, Texas Instruments Incorporated  
 On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

#### TLC2262 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES        |                           |                           |                         |                  |                            |
|----------------|--------------------------------|-------------------------|---------------------------|---------------------------|-------------------------|------------------|----------------------------|
|                |                                | SMALL<br>OUTLINE<br>(D) | CHIP<br>CARRIER<br>(FK)   | CERAMIC<br>DIP<br>(JG)    | PLASTIC<br>DIP<br>(P)   | TSSOP<br>(PW)    | CERAMIC<br>FLATPACK<br>(U) |
| 0°C to 70°C    | 2.5 mV                         | TLC2262CD               | —                         | —                         | TLC2262CP               | TLC2262CPW       | —                          |
| –40°C to 125°C | 950 µV<br>2.5 mV               | TLC2262AID<br>TLC2262ID | —<br>—                    | —<br>—                    | TLC2262AIP<br>TLC2262IP | TLC2262AIPW<br>— | —<br>—                     |
| –40°C to 125°C | 950 µV<br>2.5 mV               | TLC2262AQD<br>TLC2262QD | —<br>—                    | —<br>—                    | —<br>—                  | —<br>—           | —<br>—                     |
| –55°C to 125°C | 950 µV<br>2.5 mV               | —<br>—                  | TLC2262AMFK<br>TLC2262MFK | TLC2262AMJG<br>TLC2262MJG | —<br>—                  | —<br>—           | TLC2262AMU<br>TLC2262MU    |

The D packages are available taped and reeled. Add R suffix to device type (e.g., TLC2262CDR). The PW package is available only left-end taped and reeled. Chips are tested at 25°C.

#### TLC2264 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGED DEVICES        |                           |                         |                         |                  |                            |
|----------------|--------------------------------|-------------------------|---------------------------|-------------------------|-------------------------|------------------|----------------------------|
|                |                                | SMALL<br>OUTLINE<br>(D) | CHIP<br>CARRIER<br>(FK)   | CERAMIC<br>DIP<br>(J)   | PLASTIC<br>DIP<br>(N)   | TSSOP<br>(PW)    | CERAMIC<br>FLATPACK<br>(W) |
| 0°C to 70°C    | 2.5 mV                         | TLC2264CD               | —                         | —                       | TLC2264CN               | TLC2264CPW       | —                          |
| –40°C to 125°C | 950 µV<br>2.5 mV               | TLC2264AID<br>TLC2264ID | —<br>—                    | —<br>—                  | TLC2264AIN<br>TLC2264IN | TLC2264AIPW<br>— | —<br>—                     |
| –40°C to 125°C | 950 µV<br>2.5 mV               | TLC2264AQD<br>TLC2264QD | —<br>—                    | —<br>—                  | —<br>—                  | —<br>—           | —<br>—                     |
| –55°C to 125°C | 950 µV<br>2.5 mV               | —<br>—                  | TLC2264AMFK<br>TLC2264MFK | TLC2264AMJ<br>TLC2264MJ | —<br>—                  | —<br>—           | TLC2264AMW<br>TLC2264MW    |

The D packages are available taped and reeled. Add R suffix to device type (e.g., TLC2264CDR). The PW package is available only left-end taped and reeled. Chips are tested at 25°C.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


**TLC226x, TLC226xA**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**OPERATIONAL AMPLIFIERS**

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001


**TLC2262C, TLC2262AC**  
**TLC2262I, TLC2262AI**  
**TLC2262Q, TLC2262AQ**  
**D, P, OR PW PACKAGE**  
**(TOP VIEW)**

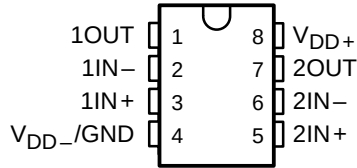


**TLC2262M, TLC2262AM . . . FK PACKAGE**  
**(TOP VIEW)**

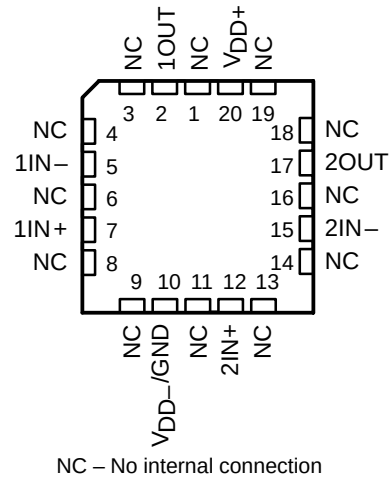


**TLC2262M, TLC2262AM . . . JG PACKAGE**  
**(TOP VIEW)**

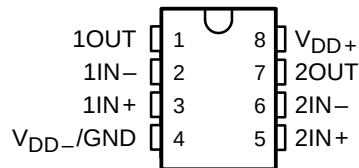


**TLC2262M, TLC2262AM . . . U PACKAGE**  
**(TOP VIEW)**

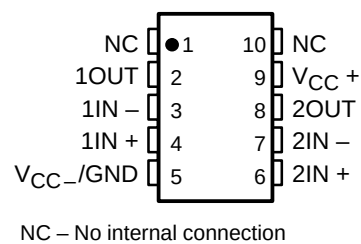


**TLC2264C, TLC2264AC**  
**TLC2264I, TLC2264AI**  
**TLC2264Q, TLC2264AQ**  
**D, N, OR PW PACKAGE**  
**(TOP VIEW)**

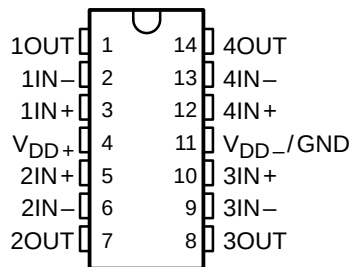

**TLC2264M, TLC2264AM . . . J OR W PACKAGE**  
**(TOP VIEW)**



**TLC2264M, TLC2264AM . . . FK PACKAGE**  
**(TOP VIEW)**

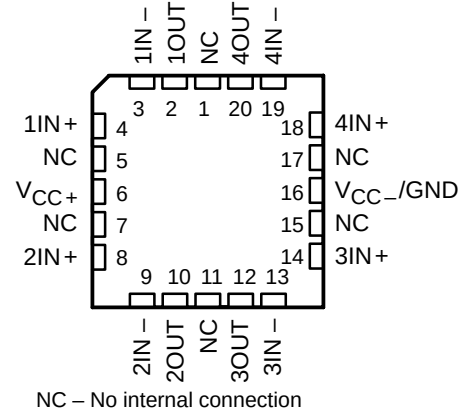


# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

equivalent schematic (each amplifier)

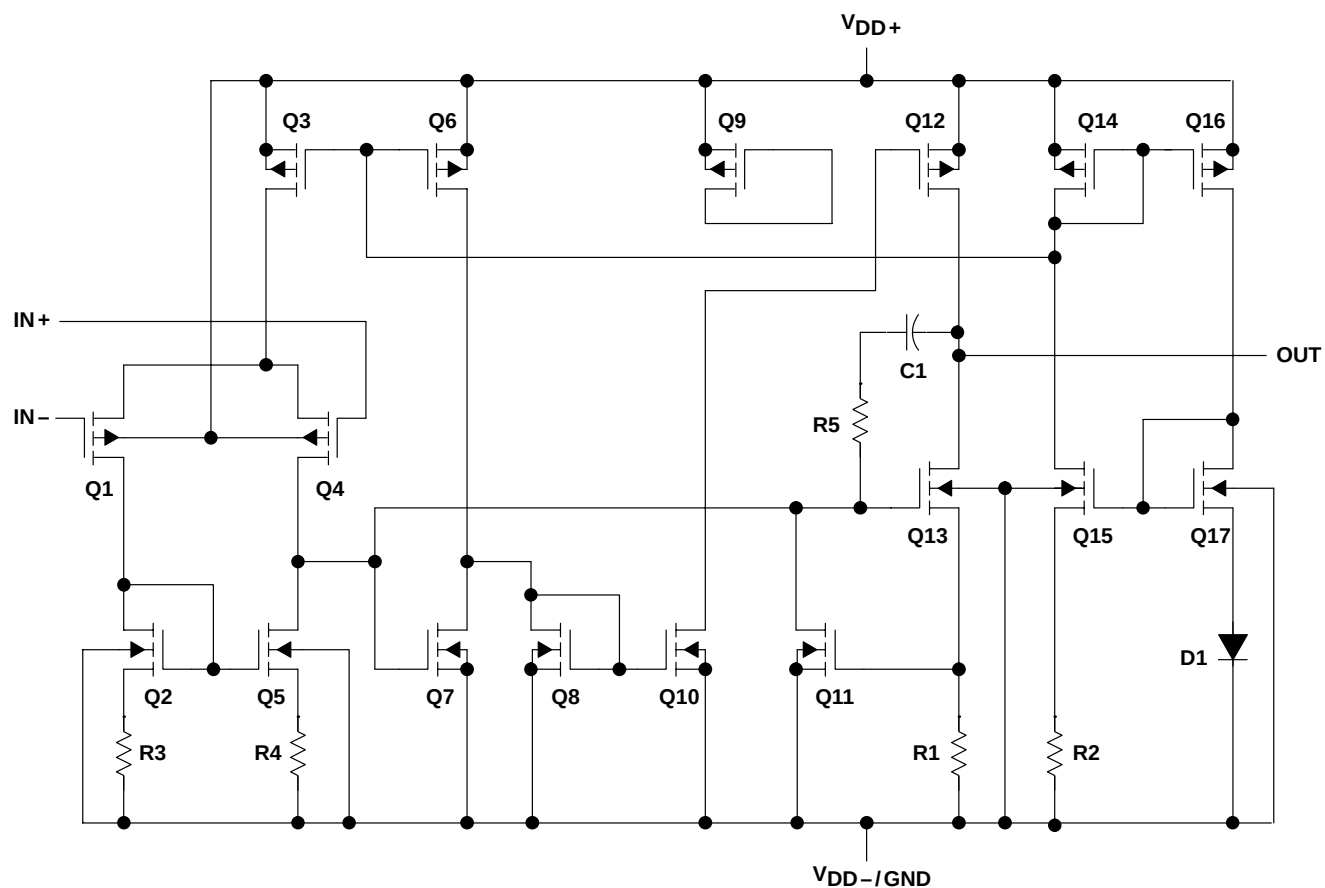

| ACTUAL DEVICE COMPONENT COUNT† |         |         |
|--------------------------------|---------|---------|
| COMPONENT                      | TLC2262 | TLC2264 |
| Transistors                    | 38      | 76      |
| Resistors                      | 28      | 56      |
| Diodes                         | 9       | 18      |
| Capacitors                     | 3       | 6       |

† Includes both amplifiers and all ESD, bias, and trim circuitry

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†**

|                                                                                        |                                        |
|----------------------------------------------------------------------------------------|----------------------------------------|
| Supply voltage, $V_{DD+}$ (see Note 1)                                                 | 8 V                                    |
| Supply voltage, $V_{DD-}$ (see Note 1)                                                 | –8 V                                   |
| Differential input voltage, $V_{ID}$ (see Note 2)                                      | ±16 V                                  |
| Input voltage, $V_I$ (any input, see Note 1)                                           | $V_{DD-} - 0.3 \text{ V}$ to $V_{DD+}$ |
| Input current, $I_I$ (each input)                                                      | ±5 mA                                  |
| Output current, $I_O$                                                                  | ±50 mA                                 |
| Total current into $V_{DD+}$                                                           | ±50 mA                                 |
| Total current out of $V_{DD-}$                                                         | ±50 mA                                 |
| Duration of short-circuit current at (or below) 25°C (see Note 3)                      | unlimited                              |
| Continuous total dissipation                                                           | See Dissipation Rating Table           |
| Operating free-air temperature range, $T_A$ : C suffix                                 | 0°C to 70°C                            |
| I suffix                                                                               | –40°C to 125°C                         |
| Q suffix                                                                               | –40°C to 125°C                         |
| M suffix                                                                               | –55°C to 125°C                         |
| Storage temperature range, $T_{stg}$                                                   | –65°C to 150°C                         |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: D, N, P, and PW packages | 260°C                                  |
| J, JG, U, and W packages                                                               | 300°C                                  |

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to the midpoint between  $V_{DD+}$  and  $V_{DD-}$ .  
2. Differential voltages are at  $IN+$  with respect to  $IN-$ . Excessive current flows if input is brought below  $V_{DD-} - 0.3 \text{ V}$ .  
3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

**DISSIPATION RATING TABLE**

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D–8     | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   | 377 mW                                   | 145 mW                                    |
| D–14    | 950 mW                                      | 7.6 mW/°C                                         | 608 mW                                   | 494 mW                                   | 190 mW                                    |
| FK      | 1375 mW                                     | 11.0 mW/°C                                        | 880 mW                                   | 715 mW                                   | 275 mW                                    |
| J       | 1375 mW                                     | 11.0 mW/°C                                        | 880 mW                                   | 715 mW                                   | 275 mW                                    |
| JG      | 1050 mW                                     | 8.4 mW/°C                                         | 672 mW                                   | 546 mW                                   | 210 mW                                    |
| N       | 1150 mW                                     | 9.2 mW/°C                                         | 736 mW                                   | 598 mW                                   | 230 mW                                    |
| P       | 1000 mW                                     | 8.0 mW/°C                                         | 640 mW                                   | 520 mW                                   | 200 mW                                    |
| PW–8    | 525 mW                                      | 4.2 mW/°C                                         | 336 mW                                   | 273 mW                                   | 105 mW                                    |
| PW–14   | 700 mW                                      | 5.6 mW/°C                                         | 448 mW                                   | 364 mW                                   | 140 mW                                    |
| U       | 700 mW                                      | 5.5 mW/°C                                         | 452 mW                                   | 370 mW                                   | 150 mW                                    |
| W       | 700 mW                                      | 5.5 mW/°C                                         | 452 mW                                   | 370 mW                                   | 150 mW                                    |

**recommended operating conditions**

|                                       | C SUFFIX  |                 | I SUFFIX  |                 | Q SUFFIX  |                 | M SUFFIX  |                 | UNIT |
|---------------------------------------|-----------|-----------------|-----------|-----------------|-----------|-----------------|-----------|-----------------|------|
|                                       | MIN       | MAX             | MIN       | MAX             | MIN       | MAX             | MIN       | MAX             |      |
| Supply voltage, $V_{DD\pm}$           | ±2.2      | ±8              | ±2.2      | ±8              | ±2.2      | ±8              | ±2.2      | ±8              | V    |
| Input voltage range, $V_I$            | $V_{DD-}$ | $V_{DD+} - 1.5$ | $V_{DD-}$ | $V_{DD+} - 1.5$ | $V_{DD-}$ | $V_{DD+} - 1.5$ | $V_{DD-}$ | $V_{DD+} - 1.5$ | V    |
| Common-mode input voltage, $V_{IC}$   | $V_{DD-}$ | $V_{DD+} - 1.5$ | $V_{DD-}$ | $V_{DD+} - 1.5$ | $V_{DD-}$ | $V_{DD+} - 1.5$ | $V_{DD-}$ | $V_{DD+} - 1.5$ | V    |
| Operating free-air temperature, $T_A$ | 0         | 70              | –40       | 125             | –40       | 125             | –55       | 125             | °C   |

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2262C electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS                                                                        | $T_A$ †                            | TLC2262C   |             |      | UNIT                         |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------|------------|-------------|------|------------------------------|
|                                                                            |                                                                                        |                                    | MIN        | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                              | $V_{IC} = 0$ ,<br>$V_O = 0$ ,<br>$V_{DD} \pm \pm 2.5\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C                               |            | 300         | 2500 | $\mu\text{V}$                |
|                                                                            |                                                                                        | Full range                         |            |             | 3000 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage             |                                                                                        | 25°C to 70°C                       |            | 2           |      | $\mu\text{V}/^\circ\text{C}$ |
| Input offset voltage long-term drift (see Note 4)                          |                                                                                        | 25°C                               |            | 0.003       |      | $\mu\text{V}/\text{mo}$      |
| $I_{IO}$ Input offset current                                              |                                                                                        | 25°C                               |            | 0.5         |      | $\text{pA}$                  |
|                                                                            |                                                                                        | Full range                         |            |             | 100  |                              |
| $I_{IB}$ Input bias current                                                |                                                                                        | 25°C                               |            | 1           |      | $\text{pA}$                  |
|                                                                            |                                                                                        | Full range                         |            |             | 100  |                              |
| $V_{ICR}$ Common-mode input voltage range                                  | $R_S = 50\ \Omega$ ,<br>$ V_{IO}  \leq 5\text{ mV}$                                    | 25°C                               | 0 to 4     | –0.3 to 4.2 |      | $\text{V}$                   |
|                                                                            |                                                                                        | Full range                         | 0 to 3.5   |             |      |                              |
| $V_{OH}$ High-level output voltage                                         | $I_{OH} = -20\ \mu\text{A}$                                                            | 25°C                               |            | 4.99        |      | $\text{V}$                   |
|                                                                            | $I_{OH} = -100\ \mu\text{A}$                                                           | 25°C                               | 4.85       | 4.94        |      |                              |
|                                                                            |                                                                                        | Full range                         |            | 4.82        |      |                              |
|                                                                            | $I_{OH} = -400\ \mu\text{A}$                                                           | 25°C                               | 4.70       | 4.85        |      |                              |
|                                                                            |                                                                                        | Full range                         |            | 4.60        |      |                              |
| $V_{OL}$ Low-level output voltage                                          | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 50\ \mu\text{A}$                                   | 25°C                               |            | 0.01        |      | $\text{V}$                   |
|                                                                            | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 500\ \mu\text{A}$                                  | 25°C                               |            | 0.09        | 0.15 |                              |
|                                                                            |                                                                                        | Full range                         |            |             | 0.15 |                              |
|                                                                            | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 1\text{ mA}$                                       | 25°C                               |            | 0.2         | 0.3  |                              |
|                                                                            |                                                                                        | Full range                         |            |             | 0.3  |                              |
|                                                                            | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 4\text{ mA}$                                       | 25°C                               |            | 0.7         | 1    |                              |
|                                                                            |                                                                                        | Full range                         |            |             | 1.2  |                              |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{IC} = 2.5\text{ V}$ ,<br>$V_O = 1\text{ V to }4\text{ V}$                          | $R_L = 50\text{ k}\Omega^\ddagger$ | 25°C       | 80          | 170  | $\text{V/mV}$                |
|                                                                            |                                                                                        |                                    | Full range | 55          |      |                              |
|                                                                            |                                                                                        | $R_L = 1\text{ M}\Omega^\ddagger$  | 25°C       | 550         |      |                              |
| $r_{i(d)}$ Differential input resistance                                   |                                                                                        | 25°C                               |            | $10^{12}$   |      | $\Omega$                     |
| $r_{i(c)}$ Common-mode input resistance                                    |                                                                                        | 25°C                               |            | $10^{12}$   |      | $\Omega$                     |
| $c_{i(c)}$ Common-mode input capacitance                                   | $f = 10\text{ kHz}$ , P package                                                        | 25°C                               |            | 8           |      | $\text{pF}$                  |
| $z_o$ Closed-loop output impedance                                         | $f = 100\text{ kHz}$ , $A_V = 10$                                                      | 25°C                               |            | 240         |      | $\Omega$                     |
| $\text{CMRR}$ Common-mode rejection ratio                                  | $V_{IC} = 0\text{ to }2.7\text{ V}$ , $V_O = 2.5\text{ V}$ ,<br>$R_S = 50\ \Omega$     | 25°C                               | 70         | 83          |      | $\text{dB}$                  |
|                                                                            |                                                                                        | Full range                         | 70         |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 4.4\text{ V to }16\text{ V}$ ,<br>$V_{IC} = V_{DD}/2$ , No load              | 25°C                               | 80         | 95          |      | $\text{dB}$                  |
|                                                                            |                                                                                        | Full range                         | 80         |             |      |                              |
| $I_{DD}$ Supply current                                                    | $V_O = 2.5\text{ V}$ , No load                                                         | 25°C                               |            | 400         | 500  | $\mu\text{A}$                |
|                                                                            |                                                                                        | Full range                         |            |             | 500  |                              |

† Full range is 0°C to 70°C.

‡ Referenced to 2.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLC2262C operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                                |                                              | $T_A^\dagger$ | TLC2262C |        |     | UNIT                         |
|-------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------------------|---------------|----------|--------|-----|------------------------------|
|             |                                             |                                                                                                                |                                              |               | MIN      | TYP    | MAX |                              |
| SR          | Slew rate at unity gain                     | $V_O = 1.5\text{ V to }3.5\text{ V},$<br>$C_L = 100\text{ pF}^\ddagger$                                        | $R_L = 50\text{ k}\Omega^\ddagger,$          | 25°C          | 0.35     | 0.55   |     | V/ $\mu\text{s}$             |
|             |                                             |                                                                                                                |                                              | Full range    | 0.3      |        |     |                              |
| $V_n$       | Equivalent input noise voltage              | $f = 10\text{ Hz}$                                                                                             |                                              | 25°C          |          | 40     |     | $\text{nV}/\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                                             |                                              | 25°C          |          | 12     |     |                              |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                             |                                              | 25°C          |          | 0.7    |     | $\mu\text{V}$                |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                            |                                              | 25°C          |          | 1.3    |     |                              |
| $I_n$       | Equivalent input noise current              |                                                                                                                |                                              | 25°C          |          | 0.6    |     | $\text{fA}/\sqrt{\text{Hz}}$ |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 0.5\text{ V to }2.5\text{ V},$<br>$f = 20\text{ kHz},$<br>$R_L = 50\text{ k}\Omega^\ddagger$            | $A_V = 1$                                    | 25°C          |          | 0.017% |     |                              |
|             |                                             |                                                                                                                | $A_V = 10$                                   |               |          | 0.03%  |     |                              |
|             | Gain-bandwidth product                      | $f = 10\text{ kHz},$<br>$C_L = 100\text{ pF}^\ddagger$                                                         | $R_L = 50\text{ k}\Omega^\ddagger,$          | 25°C          |          | 0.71   |     | MHz                          |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V},$<br>$R_L = 50\text{ k}\Omega^\ddagger,$                                               | $A_V = 1,$<br>$C_L = 100\text{ pF}^\ddagger$ | 25°C          |          | 185    |     | kHz                          |
| $t_s$       | Settling time                               | $A_V = -1,$<br>Step = 0.5 V to 2.5 V,<br>$R_L = 50\text{ k}\Omega^\ddagger,$<br>$C_L = 100\text{ pF}^\ddagger$ | To 0.1%                                      | 25°C          |          | 6.4    |     | $\mu\text{s}$                |
|             |                                             |                                                                                                                | To 0.01%                                     |               |          | 14.1   |     |                              |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 50\text{ k}\Omega^\ddagger,$                                                                            | $C_L = 100\text{ pF}^\ddagger$               | 25°C          |          | 56°    |     |                              |
|             | Gain margin                                 |                                                                                                                |                                              | 25°C          |          | 11     |     | dB                           |

$^\dagger$  Full range is 0°C to 70°C.

$^\ddagger$  Referenced to 2.5 V

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2262C electrical characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5$  V (unless otherwise specified)**

| PARAMETER                                                                       | TEST CONDITIONS                                          | $T_A^\dagger$         | TLC2262C   |             |       | UNIT             |
|---------------------------------------------------------------------------------|----------------------------------------------------------|-----------------------|------------|-------------|-------|------------------|
|                                                                                 |                                                          |                       | MIN        | TYP         | MAX   |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                   | 25°C                  |            | 300         | 2500  | $\mu V$          |
|                                                                                 |                                                          | Full range            |            |             | 3000  |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                          | 25°C to 70°C          |            | 2           |       | $\mu V/^\circ C$ |
| Input offset voltage long-term drift (see Note 4)                               |                                                          | 25°C                  |            | 0.003       |       | $\mu V/mo$       |
| $I_{IO}$ Input offset current                                                   |                                                          | 25°C                  |            | 0.5         |       | pA               |
|                                                                                 |                                                          | Full range            |            |             | 100   |                  |
| $I_{IB}$ Input bias current                                                     |                                                          | 25°C                  |            | 1           |       | pA               |
|                                                                                 |                                                          | Full range            |            |             | 100   |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $ V_{IO}  \leq 5$ mV, $R_S = 50 \Omega$                  | 25°C                  | -5 to 4    | -5.3 to 4.2 |       | V                |
|                                                                                 |                                                          | Full range            | -5 to 3.5  |             |       |                  |
| $V_{OM+}$ Maximum positive peak output voltage                                  | $I_O = -20 \mu A$                                        | 25°C                  |            | 4.99        |       | V                |
|                                                                                 | $I_O = -100 \mu A$                                       | 25°C                  |            | 4.85        | 4.94  |                  |
|                                                                                 |                                                          | Full range            |            | 4.82        |       |                  |
|                                                                                 | $I_O = -400 \mu A$                                       | 25°C                  |            | 4.7         | 4.85  |                  |
| $V_{OM-}$ Maximum negative peak output voltage                                  | $V_{IC} = 0, I_O = 50 \mu A$                             | 25°C                  |            | -4.99       |       | V                |
|                                                                                 | $V_{IC} = 0, I_O = 500 \mu A$                            | 25°C                  |            | -4.85       | -4.91 |                  |
|                                                                                 |                                                          | Full range            |            | -4.85       |       |                  |
|                                                                                 | $V_{IC} = 0, I_O = 1$ mA                                 | 25°C                  |            | -4.7        | -4.8  |                  |
|                                                                                 |                                                          | Full range            |            | -4.7        |       |                  |
|                                                                                 | $V_{IC} = 0, I_O = 4$ mA                                 | 25°C                  |            | -4          | -4.3  |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 4$ V                                          | $R_L = 50$ k $\Omega$ | 25°C       | 80          | 200   | V/mV             |
|                                                                                 |                                                          |                       | Full range | 55          |       |                  |
|                                                                                 |                                                          | $R_L = 1$ M $\Omega$  | 25°C       |             | 1000  |                  |
| $r_{i(d)}$ Differential input resistance                                        |                                                          | 25°C                  |            | $10^{12}$   |       | $\Omega$         |
| $r_{i(c)}$ Common-mode input resistance                                         |                                                          | 25°C                  |            | $10^{12}$   |       | $\Omega$         |
| $c_{i(c)}$ Common-mode input capacitance                                        | $f = 10$ kHz, P package                                  | 25°C                  |            | 8           |       | pF               |
| $z_o$ Closed-loop output impedance                                              | $f = 100$ kHz, $A_V = 10$                                | 25°C                  |            | 220         |       | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = -5$ V to 2.7 V, $V_O = 0$ V, $R_S = 50 \Omega$ | 25°C                  |            | 75          | 88    | dB               |
|                                                                                 |                                                          | Full range            |            | 75          |       |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD\pm} / \Delta V_{IO}$ ) | $V_{DD\pm} = 2.2$ V to $\pm 8$ V, $V_{IC} = 0$ , No load | 25°C                  |            | 80          | 95    | dB               |
|                                                                                 |                                                          | Full range            |            | 80          |       |                  |
| $I_{DD}$ Supply current                                                         | $V_O = 0$ V, No load                                     | 25°C                  |            | 425         | 500   | $\mu A$          |
|                                                                                 |                                                          | Full range            |            |             | 500   |                  |

$^\dagger$  Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ C$  extrapolated to  $T_A = 25^\circ C$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.





**TLC2262C operating characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5\text{ V}$**

| PARAMETER              |                                             | TEST CONDITIONS                                                                                       |                                                | T <sub>A</sub> <sup>†</sup> | TLC2262C |      |     | UNIT   |
|------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------|-----------------------------|----------|------|-----|--------|
|                        |                                             |                                                                                                       |                                                |                             | MIN      | TYP  | MAX |        |
| SR                     | Slew rate at unity gain                     | V <sub>O</sub> = ±1.9 V,<br>C <sub>L</sub> = 100 pF<br><br>R <sub>L</sub> = 50 kΩ                     |                                                | 25°C                        | 0.35     | 0.55 |     | V/μs   |
|                        |                                             |                                                                                                       |                                                | Full range                  | 0.3      |      |     |        |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 10 Hz                                                                                             |                                                | 25°C                        | 43       |      |     | nV/√Hz |
|                        |                                             | f = 1 kHz                                                                                             |                                                | 25°C                        | 12       |      |     |        |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                    |                                                | 25°C                        | 0.8      |      |     | μV     |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                                   |                                                | 25°C                        | 1.3      |      |     |        |
| I <sub>n</sub>         | Equivalent input noise current              |                                                                                                       |                                                | 25°C                        | 0.6      |      |     | fA/√Hz |
| THD + N                | Total harmonic distortion pulse duration    | V <sub>O</sub> = ±2.3 V,<br>f = 20 kHz,<br>R <sub>L</sub> = 50 kΩ                                     | A <sub>V</sub> = 1                             | 25°C                        | 0.014%   |      |     |        |
|                        |                                             |                                                                                                       | A <sub>V</sub> = 10                            |                             | 0.024%   |      |     |        |
| Gain-bandwidth product |                                             | f = 10 kHz,<br>C <sub>L</sub> = 100 pF                                                                | R <sub>L</sub> = 50 kΩ                         | 25°C                        | 0.73     |      |     | MHz    |
| B <sub>OM</sub>        | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4.6 V,<br>R <sub>L</sub> = 50 kΩ,                                                | A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF | 25°C                        | 85       |      |     | kHz    |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = −2.3 V to 2.3 V,<br>R <sub>L</sub> = 50 kΩ,<br>C <sub>L</sub> = 100 pF | To 0.1%                                        | 25°C                        | 7.1      |      |     | μs     |
|                        |                                             |                                                                                                       | To 0.01%                                       |                             | 16.5     |      |     |        |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 50 kΩ,<br><br>C <sub>L</sub> = 100 pF                                                |                                                | 25°C                        | 57°      |      |     |        |
| Gain margin            |                                             |                                                                                                       |                                                | 25°C                        | 11       |      |     | dB     |

<sup>†</sup> Full range is 0°C to 70°C.

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2264C electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS                                                                        | $T_A$ †                            | TLC2264C   |             |      | UNIT                         |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------|------------|-------------|------|------------------------------|
|                                                                            |                                                                                        |                                    | MIN        | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                              | $V_{IC} = 0$ ,<br>$V_O = 0$ ,<br>$V_{DD} \pm \pm 2.5\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C                               |            | 300         | 2500 | $\mu\text{V}$                |
|                                                                            |                                                                                        | Full range                         |            |             | 3000 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage             |                                                                                        | 25°C to 70°C                       |            | 2           |      | $\mu\text{V}/^\circ\text{C}$ |
| Input offset voltage long-term drift (see Note 4)                          |                                                                                        | 25°C                               |            | 0.003       |      | $\mu\text{V}/\text{mo}$      |
| $I_{IO}$ Input offset current                                              |                                                                                        | 25°C                               |            | 0.5         |      | $\text{pA}$                  |
|                                                                            |                                                                                        | Full range                         |            |             | 100  |                              |
| $I_{IB}$ Input bias current                                                |                                                                                        | 25°C                               |            | 1           |      | $\text{pA}$                  |
|                                                                            |                                                                                        | Full range                         |            |             | 100  |                              |
| $V_{ICR}$ Common-mode input voltage range                                  | $R_S = 50\ \Omega$ ,<br>$ V_{IO}  \leq 5\text{ mV}$                                    | 25°C                               | 0 to 4     | –0.3 to 4.2 |      | $\text{V}$                   |
|                                                                            |                                                                                        | Full range                         | 0 to 3.5   |             |      |                              |
| $V_{OH}$ High-level output voltage                                         | $I_{OH} = -20\ \mu\text{A}$                                                            | 25°C                               |            | 4.99        |      | $\text{V}$                   |
|                                                                            | $I_{OH} = -100\ \mu\text{A}$                                                           | 25°C                               |            | 4.85        | 4.94 |                              |
|                                                                            |                                                                                        | Full range                         |            | 4.82        |      |                              |
|                                                                            | $I_{OH} = -400\ \mu\text{A}$                                                           | 25°C                               |            | 4.70        | 4.85 |                              |
|                                                                            |                                                                                        | Full range                         |            | 4.60        |      |                              |
| $V_{OL}$ Low-level output voltage                                          | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 50\ \mu\text{A}$                                   | 25°C                               |            | 0.01        |      | $\text{V}$                   |
|                                                                            | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 500\ \mu\text{A}$                                  | 25°C                               |            | 0.09        | 0.15 |                              |
|                                                                            |                                                                                        | Full range                         |            |             | 0.15 |                              |
|                                                                            | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 1\text{ mA}$                                       | 25°C                               |            | 0.2         | 0.3  |                              |
|                                                                            |                                                                                        | Full range                         |            |             | 0.3  |                              |
|                                                                            | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 4\text{ mA}$                                       | 25°C                               |            | 0.7         | 1    |                              |
|                                                                            |                                                                                        | Full range                         |            |             | 1.2  |                              |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{IC} = 2.5\text{ V}$ ,<br>$V_O = 1\text{ V to } 4\text{ V}$                         | $R_L = 50\text{ k}\Omega^\ddagger$ | 25°C       | 80          | 170  | $\text{V}/\text{mV}$         |
|                                                                            |                                                                                        |                                    | Full range | 55          |      |                              |
|                                                                            |                                                                                        | $R_L = 1\text{ M}\Omega^\ddagger$  | 25°C       | 550         |      |                              |
| $r_{i(d)}$ Differential input resistance                                   |                                                                                        | 25°C                               |            | $10^{12}$   |      | $\Omega$                     |
| $r_{i(c)}$ Common-mode input resistance                                    |                                                                                        | 25°C                               |            | $10^{12}$   |      | $\Omega$                     |
| $c_{i(c)}$ Common-mode input capacitance                                   | $f = 10\text{ kHz}$ ,<br>N package                                                     | 25°C                               |            | 8           |      | $\text{pF}$                  |
| $z_o$ Closed-loop output impedance                                         | $f = 100\text{ kHz}$ ,<br>$A_V = 10$                                                   | 25°C                               |            | 240         |      | $\Omega$                     |
| CMRR Common-mode rejection ratio                                           | $V_{IC} = 0\text{ to } 2.7\text{ V}$ ,<br>$V_O = 2.5\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C                               | 70         | 83          |      | $\text{dB}$                  |
|                                                                            |                                                                                        | Full range                         | 70         |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 4.4\text{ V to } 16\text{ V}$ ,<br>$V_{IC} = V_{DD}/2$ ,<br>No load          | 25°C                               | 80         | 95          |      | $\text{dB}$                  |
|                                                                            |                                                                                        | Full range                         | 80         |             |      |                              |
| $I_{DD}$ Supply current (four amplifiers)                                  | $V_O = 2.5\text{ V}$ ,<br>No load                                                      | 25°C                               |            | 0.8         | 1    | $\text{mA}$                  |
|                                                                            |                                                                                        | Full range                         |            |             | 1    |                              |

† Full range is 0°C to 70°C.

‡ Referenced to 2.5 V

NOTE 4. Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLC2264C operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                                                   |                                               | $T_A$ †    | TLC2264C |        |     | UNIT                   |
|-------------|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------|----------|--------|-----|------------------------|
|             |                                             |                                                                                                                                   |                                               |            | MIN      | TYP    | MAX |                        |
| SR          | Slew rate at unity gain                     | $V_O = 1.4\text{ V to }2.6\text{ V}$ ,<br>$R_L = 50\text{ k}\Omega^\ddagger$ ,<br>$C_L = 100\text{ pF}^\ddagger$                  |                                               | 25°C       | 0.35     | 0.55   |     | V/ $\mu\text{s}$       |
|             |                                             |                                                                                                                                   |                                               | Full range | 0.3      |        |     |                        |
| $V_n$       | Equivalent input noise voltage              | $f = 10\text{ Hz}$<br>$f = 1\text{ kHz}$                                                                                          |                                               | 25°C       |          | 40     |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             |                                                                                                                                   |                                               | 25°C       |          | 12     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$<br>$f = 0.1\text{ Hz to }10\text{ Hz}$                                                         |                                               | 25°C       |          | 0.7    |     | $\mu\text{V}$          |
|             |                                             |                                                                                                                                   |                                               | 25°C       |          | 1.3    |     |                        |
| $I_n$       | Equivalent input noise current              |                                                                                                                                   |                                               | 25°C       |          | 0.6    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 0.5\text{ V to }2.5\text{ V}$ ,<br>$f = 20\text{ kHz}$ ,<br>$R_L = 50\text{ k}\Omega^\ddagger$                             | $A_V = 1$                                     | 25°C       |          | 0.017% |     |                        |
|             |                                             |                                                                                                                                   | $A_V = 10$                                    |            |          | 0.03%  |     |                        |
|             | Gain-bandwidth product                      | $f = 10\text{ kHz}$ ,<br>$C_L = 100\text{ pF}^\ddagger$                                                                           | $R_L = 50\text{ k}\Omega^\ddagger$            | 25°C       |          | 0.71   |     | MHz                    |
| BOM         | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V}$ ,<br>$R_L = 50\text{ k}\Omega^\ddagger$                                                                  | $A_V = 1$ ,<br>$C_L = 100\text{ pF}^\ddagger$ | 25°C       |          | 185    |     | kHz                    |
| $t_s$       | Settling time                               | $A_V = -1$ ,<br>Step = $0.5\text{ V to }2.5\text{ V}$ ,<br>$R_L = 50\text{ k}\Omega^\ddagger$ ,<br>$C_L = 100\text{ pF}^\ddagger$ | To 0.1%                                       | 25°C       |          | 6.4    |     | $\mu\text{s}$          |
|             |                                             |                                                                                                                                   | To 0.01%                                      |            |          | 14.1   |     |                        |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 50\text{ k}\Omega^\ddagger$                                                                                                | $C_L = 100\text{ pF}^\ddagger$                | 25°C       |          | 56°    |     |                        |
|             | Gain margin                                 |                                                                                                                                   |                                               | 25°C       |          | 11     |     | dB                     |

† Full range is 0°C to 70°C.

‡ Referenced to 2.5 V

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2264C electrical characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5$  V (unless otherwise specified)**

| PARAMETER                                                                       | TEST CONDITIONS                                              | $T_A^\dagger$         | TLC2264C   |             |       | UNIT             |
|---------------------------------------------------------------------------------|--------------------------------------------------------------|-----------------------|------------|-------------|-------|------------------|
|                                                                                 |                                                              |                       | MIN        | TYP         | MAX   |                  |
| $V_{IO}$ Input offset voltage                                                   | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                       | 25°C                  |            | 300         | 2500  | $\mu V$          |
|                                                                                 |                                                              | Full range            |            |             | 3000  |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                  |                                                              | 25°C to 70°C          |            | 2           |       | $\mu V/^\circ C$ |
| Input offset voltage long-term drift (see Note 4)                               |                                                              | 25°C                  |            | 0.003       |       | $\mu V/mo$       |
| $I_{IO}$ Input offset current                                                   |                                                              | 25°C                  |            | 0.5         |       | pA               |
|                                                                                 |                                                              | Full range            |            |             | 100   |                  |
| $I_{IB}$ Input bias current                                                     |                                                              | 25°C                  |            | 1           |       | pA               |
|                                                                                 |                                                              | Full range            |            |             | 100   |                  |
| $V_{ICR}$ Common-mode input voltage range                                       | $ V_{IO}  \leq 5$ mV, $R_S = 50 \Omega$                      | 25°C                  | –5 to 4    | –5.3 to 4.2 |       | V                |
|                                                                                 |                                                              | Full range            | –5 to 3.5  |             |       |                  |
| $V_{OM+}$ Maximum positive peak output voltage                                  | $I_O = -20 \mu A$                                            | 25°C                  |            | 4.99        |       | V                |
|                                                                                 | $I_O = -100 \mu A$                                           | 25°C                  |            | 4.85        | 4.94  |                  |
|                                                                                 |                                                              | Full range            |            | 4.82        |       |                  |
|                                                                                 | $I_O = -400 \mu A$                                           | 25°C                  |            | 4.7         | 4.85  |                  |
| $V_{OM-}$ Maximum negative peak output voltage                                  | $V_{IC} = 0, I_O = 50 \mu A$                                 | 25°C                  |            | –4.99       |       | V                |
|                                                                                 | $V_{IC} = 0, I_O = 500 \mu A$                                | 25°C                  |            | –4.85       | –4.91 |                  |
|                                                                                 |                                                              | Full range            |            | –4.85       |       |                  |
|                                                                                 | $V_{IC} = 0, I_O = 1$ mA                                     | 25°C                  |            | –4.7        | –4.8  |                  |
|                                                                                 |                                                              | Full range            |            | –4.7        |       |                  |
|                                                                                 | $V_{IC} = 0, I_O = 4$ mA                                     | 25°C                  |            | –4          | –4.3  |                  |
| $A_{VD}$ Large-signal differential voltage amplification                        | $V_O = \pm 4$ V                                              | $R_L = 50$ k $\Omega$ | 25°C       | 80          | 200   | V/mV             |
|                                                                                 |                                                              |                       | Full range | 55          |       |                  |
|                                                                                 |                                                              | $R_L = 1$ M $\Omega$  | 25°C       |             | 1000  |                  |
| $r_{i(d)}$ Differential input resistance                                        |                                                              | 25°C                  |            | $10^{12}$   |       | $\Omega$         |
| $r_{i(c)}$ Common-mode input resistance                                         |                                                              | 25°C                  |            | $10^{12}$   |       | $\Omega$         |
| $c_{i(c)}$ Common-mode input capacitance                                        | $f = 10$ kHz, N package                                      | 25°C                  |            | 8           |       | pF               |
| $z_o$ Closed-loop output impedance                                              | $f = 100$ kHz, $A_V = 10$                                    | 25°C                  |            | 220         |       | $\Omega$         |
| CMRR Common-mode rejection ratio                                                | $V_{IC} = -5$ V to 2.7 V, $V_O = 0, R_S = 50 \Omega$         | 25°C                  |            | 75          | 88    | dB               |
|                                                                                 |                                                              | Full range            |            | 75          |       |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD\pm} / \Delta V_{IO}$ ) | $V_{DD\pm} = \pm 2.2$ V to $\pm 8$ V, $V_{IC} = 0$ , No load | 25°C                  |            | 80          | 95    | dB               |
|                                                                                 |                                                              | Full range            |            | 80          |       |                  |
| $I_{DD}$ Supply current (four amplifiers)                                       | $V_O = 0$ , No load                                          | 25°C                  |            | 0.85        | 1     | mA               |
|                                                                                 |                                                              | Full range            |            |             | 1     |                  |

$^\dagger$  Full range is 0°C to 70°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ C$  extrapolated to  $T_A = 25^\circ C$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLC2264C operating characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5\text{ V}$**

| PARAMETER              |                                             | TEST CONDITIONS                                                                                       |                                                | T <sub>A</sub> <sup>†</sup> | TLC2264C |      |        | UNIT |
|------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------|-----------------------------|----------|------|--------|------|
|                        |                                             |                                                                                                       |                                                |                             | MIN      | TYP  | MAX    |      |
| SR                     | Slew rate at unity gain                     | V <sub>O</sub> = ±1.9 V,<br>C <sub>L</sub> = 100 pF                                                   | R <sub>L</sub> = 50 kΩ,                        | 25°C                        | 0.35     | 0.55 | V/μs   |      |
|                        |                                             |                                                                                                       |                                                | Full range                  | 0.3      |      |        |      |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 10 Hz                                                                                             |                                                | 25°C                        | 43       |      | nV/√Hz |      |
|                        |                                             | f = 1 kHz                                                                                             |                                                | 25°C                        | 12       |      |        |      |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                    |                                                | 25°C                        | 0.8      |      | μV     |      |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                                   |                                                | 25°C                        | 1.3      |      |        |      |
| I <sub>n</sub>         | Equivalent input noise current              |                                                                                                       |                                                | 25°C                        | 0.6      |      | fA/√Hz |      |
| THD + N                | Total harmonic distortion plus noise        | V <sub>O</sub> = ± 2.3 V,<br>f = 20 kHz,<br>R <sub>L</sub> = 50 kΩ                                    | A <sub>V</sub> = 1                             | 25°C                        | 0.014%   |      |        |      |
|                        |                                             |                                                                                                       | A <sub>V</sub> = 10                            |                             | 0.024%   |      |        |      |
| Gain-bandwidth product |                                             | f = 10 kHz,<br>C <sub>L</sub> = 100 pF                                                                | R <sub>L</sub> = 50 kΩ,                        | 25°C                        | 0.73     |      | MHz    |      |
| B <sub>OM</sub>        | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4.6 V,<br>R <sub>L</sub> = 50 kΩ,                                                | A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF | 25°C                        | 70       |      | kHz    |      |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = −2.3 V to 2.3 V,<br>R <sub>L</sub> = 50 kΩ,<br>C <sub>L</sub> = 100 pF | To 0.1%                                        | 25°C                        | 7.1      |      | μs     |      |
|                        |                                             |                                                                                                       | To 0.01%                                       |                             | 16.5     |      |        |      |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 50 kΩ,<br>C <sub>L</sub> = 100 pF                                                    |                                                | 25°C                        | 57°      |      |        |      |
|                        | Gain margin                                 |                                                                                                       |                                                | 25°C                        | 11       |      | dB     |      |

<sup>†</sup> Full range is 0°C to 70°C.

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2262I electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                          |                                                   | TEST CONDITIONS                                                                           |                                                 | T <sub>A</sub> <sup>†</sup>                          | TLC2262I                            |                  |           | TLC2262AI        |     |        | UNIT |
|------------------------------------|---------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------------------------------------|------------------------------------------------------|-------------------------------------|------------------|-----------|------------------|-----|--------|------|
|                                    |                                                   |                                                                                           |                                                 |                                                      | MIN                                 | TYP              | MAX       | MIN              | TYP | MAX    |      |
| V <sub>IO</sub>                    | Input offset voltage                              | V <sub>DD±</sub> = ±2.5 V, V <sub>IC</sub> = 0, V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω |                                                 | 25°C                                                 | 300                                 | 2500             |           | 300              | 950 | μV     |      |
|                                    | Full range                                        |                                                                                           |                                                 |                                                      | 3000                                |                  | 1500      |                  |     |        |      |
| α <sub>VIO</sub>                   | Temperature coefficient of input offset voltage   |                                                                                           |                                                 | 25°C to 85°C                                         | 2                                   |                  |           | 2                |     | μV/°C  |      |
|                                    | Input offset voltage long-term drift (see Note 4) |                                                                                           |                                                 | 25°C                                                 | 0.003                               |                  |           | 0.003            |     | μV/mo  |      |
| I <sub>IO</sub>                    | Input offset current                              |                                                                                           |                                                 | 25°C                                                 | 0.5                                 |                  |           | 0.5              |     | pA     |      |
|                                    |                                                   |                                                                                           |                                                 | 85°C                                                 |                                     | 150              |           |                  | 150 |        |      |
|                                    |                                                   |                                                                                           |                                                 | Full range                                           |                                     | 800              |           |                  | 800 | pA     |      |
| I <sub>IB</sub>                    | Input bias current                                |                                                                                           |                                                 | 25°C                                                 | 1                                   |                  |           | 1                |     | pA     |      |
|                                    |                                                   |                                                                                           |                                                 | 85°C                                                 |                                     | 150              |           |                  | 150 | pA     |      |
|                                    |                                                   |                                                                                           |                                                 | Full range                                           |                                     | 800              |           |                  | 800 | pA     |      |
| V <sub>ICR</sub>                   | Common-mode input voltage range                   | R <sub>S</sub> = 50 Ω,  V <sub>IO</sub>   ≤ 5 mV                                          | 25°C                                            | 0 to 4                                               | −0.3 to 4.2                         |                  | 0 to 4    | −0.3 to 4.2      | V   |        |      |
|                                    |                                                   |                                                                                           | Full range                                      | 0 to 3.5                                             |                                     |                  | 0 to 3.5  |                  |     |        |      |
| V <sub>OH</sub>                    | High-level output voltage                         | I <sub>OH</sub> = −20 μA                                                                  | 25°C                                            |                                                      | 4.99                                |                  |           | 4.99             | V   |        |      |
|                                    |                                                   | I <sub>OH</sub> = −100 μA                                                                 | 25°C                                            | 4.85                                                 | 4.94                                |                  | 4.85      | 4.94             |     |        |      |
|                                    |                                                   |                                                                                           | Full range                                      | 4.82                                                 |                                     |                  | 4.82      |                  |     |        |      |
|                                    |                                                   | I <sub>OH</sub> = −400 μA                                                                 | 25°C                                            | 4.7                                                  | 4.85                                |                  | 4.7       | 4.85             |     |        |      |
|                                    |                                                   |                                                                                           | Full range                                      | 4.5                                                  |                                     |                  | 4.5       |                  |     |        |      |
| V <sub>OL</sub>                    | Low-level output voltage                          | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 50 μA                                          | 25°C                                            |                                                      | 0.01                                |                  |           | 0.01             | V   |        |      |
|                                    |                                                   | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 500 μA                                         | 25°C                                            |                                                      | 0.09 0.15                           |                  | 0.09 0.15 |                  |     |        |      |
|                                    |                                                   |                                                                                           | Full range                                      |                                                      | 0.15                                |                  | 0.15      |                  |     |        |      |
|                                    |                                                   | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 4 mA                                           | 25°C                                            |                                                      | 0.8 1                               |                  | 0.7 1     |                  |     |        |      |
|                                    |                                                   |                                                                                           | Full range                                      |                                                      | 1.2                                 |                  | 1.2       |                  |     |        |      |
|                                    |                                                   | A <sub>VD</sub>                                                                           | Large-signal differential voltage amplification | V <sub>IC</sub> = 2.5 V, V <sub>O</sub> = 1 V to 4 V | R <sub>L</sub> = 50 kΩ <sup>‡</sup> | 25°C             | 80 100    |                  |     | 80 170 | V/mV |
| Full range                         | 50                                                |                                                                                           |                                                 |                                                      |                                     |                  | 50        |                  |     |        |      |
| R <sub>L</sub> = 1 MΩ <sup>‡</sup> | 25°C                                              |                                                                                           |                                                 |                                                      |                                     | 550              |           | 550              |     |        |      |
| r <sub>i(d)</sub>                  | Differential input resistance                     |                                                                                           |                                                 | 25°C                                                 |                                     | 10 <sup>12</sup> |           | 10 <sup>12</sup> | Ω   |        |      |
| r <sub>i(c)</sub>                  | Common-mode input resistance                      |                                                                                           |                                                 | 25°C                                                 |                                     | 10 <sup>12</sup> |           | 10 <sup>12</sup> | Ω   |        |      |
| c <sub>i(c)</sub>                  | Common-mode input capacitance                     | f = 10 kHz,                                                                               | P package                                       | 25°C                                                 |                                     | 8                |           | 8                | pF  |        |      |
| z <sub>o</sub>                     | Closed-loop output impedance                      | f = 100 kHz,                                                                              | A <sub>V</sub> = 10                             | 25°C                                                 |                                     | 240              |           | 240              | Ω   |        |      |
| CMRR                               | Common-mode rejection ratio                       | V <sub>IC</sub> = 0 to 2.7 V, V <sub>O</sub> = 2.5 V, R <sub>S</sub> = 50 Ω               |                                                 | 25°C                                                 | 70 83                               |                  | 70 83     | dB               |     |        |      |
|                                    |                                                   |                                                                                           |                                                 | Full range                                           | 70                                  |                  | 70        |                  |     |        |      |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

$^\ddagger$  Referenced to 2.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLC2262I operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER          |                                                                              | TEST CONDITIONS                                                                                                                 |                                                             | T <sub>A</sub> <sup>†</sup> | TLC2262I |      |     | TLC2262AI |      |     | UNIT   |
|--------------------|------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-----------------------------|----------|------|-----|-----------|------|-----|--------|
|                    |                                                                              |                                                                                                                                 |                                                             |                             | MIN      | TYP  | MAX | MIN       | TYP  | MAX |        |
| k <sub>SVR</sub>   | Supply-voltage re-<br>jection ratio<br>(ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 4.4 V to 16 V,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,                                                       | No load                                                     | 25°C                        | 80       | 95   |     | 80        | 95   |     | dB     |
|                    |                                                                              |                                                                                                                                 |                                                             | Full<br>range               | 80       |      |     | 80        |      |     |        |
| I <sub>DD</sub>    | Supply current                                                               | V <sub>O</sub> = 2.5 V,                                                                                                         | No load                                                     | 25°C                        |          | 400  | 500 |           | 400  | 500 | μA     |
|                    |                                                                              |                                                                                                                                 |                                                             | Full<br>range               |          |      | 500 |           |      | 500 |        |
| SR                 | Slew rate at unity<br>gain                                                   | V <sub>O</sub> = 1.5 V to 3.5 V,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                                        | R <sub>L</sub> = 50 kΩ <sup>‡</sup> ,                       | 25°C                        | 0.35     | 0.55 |     | 0.35      | 0.55 |     | V/μs   |
|                    |                                                                              |                                                                                                                                 |                                                             | Full<br>range               | 0.25     |      |     | 0.25      |      |     |        |
| V <sub>n</sub>     | Equivalent input<br>noise voltage                                            | f = 10 Hz                                                                                                                       |                                                             | 25°C                        |          | 40   |     |           | 40   |     | nV/√Hz |
|                    |                                                                              | f = 1 kHz                                                                                                                       |                                                             | 25°C                        |          | 12   |     |           | 12   |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak<br>equivalent input<br>noise voltage                            | f = 0.1 Hz to 1 Hz                                                                                                              |                                                             | 25°C                        |          | 0.7  |     |           | 0.7  |     | μV     |
|                    |                                                                              | f = 0.1 Hz to 10 Hz                                                                                                             |                                                             | 25°C                        |          | 1.3  |     |           | 1.3  |     |        |
| I <sub>n</sub>     | Equivalent input<br>noise current                                            |                                                                                                                                 |                                                             | 25°C                        |          | 0.6  |     |           | 0.6  |     | fA√Hz  |
| THD + N            | Total harmonic<br>distortion plus<br>noise                                   | V <sub>O</sub> = 0.5 V to 2.5 V,<br>f = 20 kHz,<br>R <sub>L</sub> = 50 kΩ <sup>‡</sup>                                          | A <sub>V</sub> = 1                                          | 25°C                        | 0.017%   |      |     | 0.017%    |      |     |        |
|                    |                                                                              |                                                                                                                                 | A <sub>V</sub> = 10                                         |                             | 0.03%    |      |     | 0.03%     |      |     |        |
|                    | Gain-bandwidth<br>product                                                    | f = 50 kHz,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                                                             | R <sub>L</sub> = 50 kΩ <sup>‡</sup> ,                       | 25°C                        | 0.82     |      |     | 0.82      |      |     | MHz    |
| B <sub>OM</sub>    | Maximum output-<br>swing bandwidth                                           | V <sub>O(PP)</sub> = 2 V,<br>R <sub>L</sub> = 50 kΩ <sup>‡</sup> ,                                                              | A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF <sup>‡</sup> | 25°C                        | 185      |      |     | 185       |      |     | kHz    |
| t <sub>s</sub>     | Settling time                                                                | A <sub>V</sub> = −1,<br>Step = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 50 kΩ <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup> | To 0.1%                                                     | 25°C                        | 6.4      |      |     | 6.4       |      |     | μs     |
|                    |                                                                              |                                                                                                                                 | To 0.01%                                                    |                             | 14.1     |      |     | 14.1      |      |     |        |
| φ <sub>m</sub>     | Phase margin at<br>unity gain                                                | R <sub>L</sub> = 50 kΩ <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>                                                   |                                                             | 25°C                        | 56°      |      |     | 56°       |      |     |        |
|                    | Gain margin                                                                  |                                                                                                                                 |                                                             | 25°C                        | 11       |      |     | 11        |      |     | dB     |

$^\dagger$  Full range is  $-40^\circ\text{C to }125^\circ\text{C}.$

$^\ddagger$  Referenced to 2.5 V

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2262I electrical characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER         |                                                   | TEST CONDITIONS                                                                |                        | T <sub>A</sub> <sup>†</sup> | TLC2262I         |           |                  | TLC2262AI   |       |      | UNIT |
|-------------------|---------------------------------------------------|--------------------------------------------------------------------------------|------------------------|-----------------------------|------------------|-----------|------------------|-------------|-------|------|------|
|                   |                                                   |                                                                                |                        |                             | MIN              | TYP       | MAX              | MIN         | TYP   | MAX  |      |
| V <sub>IO</sub>   | Input offset voltage                              | V <sub>IC</sub> = 0, V <sub>O</sub> = 0<br>R <sub>S</sub> = 50 Ω               |                        | 25°C                        | 300              | 2500      |                  | 300         | 950   | μV   |      |
|                   | Full range                                        |                                                                                |                        |                             | 3000             |           | 1500             |             |       |      |      |
| α <sub>VIO</sub>  | Temperature coefficient of input offset voltage   |                                                                                |                        | 25°C to 85°C                | 2                |           | 2                |             | μV/°C |      |      |
|                   | Input offset voltage long-term drift (see Note 4) |                                                                                |                        | 25°C                        | 0.003            |           | 0.003            |             | μV/mo |      |      |
| I <sub>IO</sub>   |                                                   |                                                                                |                        | 25°C                        | 0.5              |           | 0.5              |             | pA    |      |      |
|                   |                                                   |                                                                                |                        | 85°C                        |                  | 150       |                  | 150         |       | pA   |      |
|                   |                                                   |                                                                                |                        | Full range                  |                  | 800       |                  | 800         |       | pA   |      |
| I <sub>IB</sub>   |                                                   |                                                                                |                        | 25°C                        | 1                |           | 1                |             | pA    |      |      |
|                   |                                                   |                                                                                |                        | 85°C                        |                  | 150       |                  | 150         |       | pA   |      |
|                   |                                                   |                                                                                |                        | Full range                  |                  | 800       |                  | 800         |       | pA   |      |
| V <sub>ICR</sub>  |                                                   | R <sub>S</sub> = 50 Ω,  V <sub>IO</sub>   ≤ 5 mV                               | 25°C                   | –5 to 4                     | –5.3 to 4.2      |           | –5 to 4          | –5.3 to 4.2 | V     |      |      |
|                   |                                                   |                                                                                | Full range             | –5 to 3.5                   |                  | –5 to 3.5 |                  |             |       |      |      |
| V <sub>OM+</sub>  |                                                   | I <sub>O</sub> = –20 μA                                                        | 25°C                   | 4.99                        |                  | 4.99      |                  | V           |       |      |      |
|                   |                                                   | I <sub>O</sub> = –100 μA                                                       | 25°C                   | 4.85                        | 4.94             |           | 4.85             |             | 4.94  |      |      |
|                   |                                                   |                                                                                | Full range             | 4.82                        |                  | 4.82      |                  |             |       |      |      |
|                   |                                                   | I <sub>O</sub> = –400 μA                                                       | 25°C                   | 4.7                         | 4.85             |           | 4.7              |             | 4.85  |      |      |
|                   |                                                   |                                                                                | Full range             | 4.5                         |                  | 4.5       |                  |             |       |      |      |
| V <sub>OM–</sub>  |                                                   | V <sub>IC</sub> = 0, I <sub>O</sub> = 50 μA                                    | 25°C                   | –4.99                       |                  | –4.99     |                  | V           |       |      |      |
|                   |                                                   |                                                                                | 25°C                   | –4.85                       | –4.91            |           | –4.85            |             | –4.91 |      |      |
|                   |                                                   | Full range                                                                     | –4.85                  |                             | –4.85            |           |                  |             |       |      |      |
|                   |                                                   | V <sub>IC</sub> = 0, I <sub>O</sub> = 4 mA                                     | 25°C                   | –4                          | –4.3             |           | –4               |             | –4.3  |      |      |
|                   |                                                   |                                                                                | Full range             | –3.8                        |                  | –3.8      |                  |             |       |      |      |
| A <sub>VD</sub>   |                                                   | V <sub>O</sub> = ±4 V                                                          | R <sub>L</sub> = 50 kΩ | 25°C                        | 80               | 200       |                  | 80          | 200   | V/mV |      |
|                   |                                                   |                                                                                |                        | Full range                  | 50               |           | 50               |             |       |      |      |
|                   |                                                   |                                                                                | R <sub>L</sub> = 1 MΩ  | 25°C                        | 1000             |           | 1000             |             |       |      |      |
| r <sub>i(d)</sub> | Differential input resistance                     |                                                                                |                        | 25°C                        | 10 <sup>12</sup> |           | 10 <sup>12</sup> |             | Ω     |      |      |
| r <sub>i(c)</sub> | Common-mode input resistance                      |                                                                                |                        | 25°C                        | 10 <sup>12</sup> |           | 10 <sup>12</sup> |             | Ω     |      |      |
| c <sub>i(c)</sub> | Common-mode input capacitance                     | f = 10 kHz,                                                                    | P package              | 25°C                        | 8                |           | 8                |             | pF    |      |      |
| z <sub>o</sub>    | Closed-loop output impedance                      | f = 100 kHz,                                                                   | A <sub>V</sub> = 10    | 25°C                        | 220              |           | 220              |             | Ω     |      |      |
| CMRR              |                                                   | V <sub>IC</sub> = –5 V to 2.7 V, V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω     |                        | 25°C                        | 75               | 88        |                  | 75          | 88    | dB   |      |
|                   |                                                   |                                                                                |                        | Full range                  | 75               |           | 75               |             |       |      |      |
| k <sub>SVR</sub>  |                                                   | V <sub>DD</sub> = 4.4 V to 16 V, V <sub>IC</sub> = V <sub>DD</sub> /2, No load |                        | 25°C                        | 80               | 95        |                  | 80          | 95    | dB   |      |
|                   |                                                   |                                                                                |                        | Full range                  | 80               |           | 80               |             |       |      |      |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.





**TLC226x, TLC226xA**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**OPERATIONAL AMPLIFIERS**

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2262I operating characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5\text{ V}$**

| PARAMETER                                               | TEST CONDITIONS                                                                                         |                                   | $T_A^\dagger$ | TLC2262I |        |     | TLC2262AI |        |     | UNIT                   |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-----------------------------------|---------------|----------|--------|-----|-----------|--------|-----|------------------------|
|                                                         |                                                                                                         |                                   |               | MIN      | TYP    | MAX | MIN       | TYP    | MAX |                        |
| $I_{DD}$ Supply Current                                 | $V_O = 2.5\text{ V}$ , No load                                                                          |                                   | 25°C          |          | 425    | 500 |           | 425    | 500 |                        |
|                                                         |                                                                                                         |                                   | Full range    |          |        | 500 |           |        | 500 |                        |
| SR Slew rate at unity gain                              | $V_O = \pm 1.9\text{ V}$ , $R_L = 50\text{ k}\Omega$ , $C_L = 100\text{ pF}$                            |                                   | 25°C          | 0.35     | 0.55   |     | 0.35      | 0.55   |     | V/ $\mu\text{s}$       |
|                                                         |                                                                                                         |                                   | Full range    | 0.25     |        |     | 0.25      |        |     |                        |
| $V_n$ Equivalent input noise voltage                    | $f = 10\text{ Hz}$<br>$f = 1\text{ kHz}$                                                                |                                   | 25°C          |          | 43     |     |           | 43     |     | nV/ $\sqrt{\text{Hz}}$ |
|                                                         |                                                                                                         |                                   | 25°C          |          | 12     |     |           | 12     |     |                        |
| $V_{N(PP)}$ Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$<br>$f = 0.1\text{ Hz to }10\text{ Hz}$                               |                                   | 25°C          |          | 0.8    |     |           | 0.8    |     | $\mu\text{V}$          |
|                                                         |                                                                                                         |                                   | 25°C          |          | 1.3    |     |           | 1.3    |     |                        |
| $I_n$ Equivalent input noise current                    |                                                                                                         |                                   | 25°C          |          | 0.6    |     |           | 0.6    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD + N Total harmonic distortion plus noise            | $V_O = \pm 2.3\text{ V}$ , $R_L = 50\text{ k}\Omega$ , $f = 20\text{ kHz}$                              | $A_V = 1$                         | 25°C          |          | 0.014% |     |           | 0.014% |     |                        |
|                                                         |                                                                                                         | $A_V = 10$                        |               |          | 0.024% |     |           | 0.024% |     |                        |
| Gain-bandwidth product                                  | $f = 10\text{ kHz}$ , $C_L = 100\text{ pF}$                                                             | $R_L = 50\text{ k}\Omega$         | 25°C          |          | 0.73   |     |           | 0.73   |     | MHz                    |
| $B_{OM}$ Maximum output-swing bandwidth                 | $V_{O(PP)} = 4.6\text{ V}$ , $R_L = 50\text{ k}\Omega$                                                  | $A_V = 1$ , $C_L = 100\text{ pF}$ | 25°C          |          | 85     |     |           | 85     |     | kHz                    |
| $t_s$ Settling time                                     | $A_V = -1$ , Step = $-2.3\text{ V to }2.3\text{ V}$ , $R_L = 50\text{ k}\Omega$ , $C_L = 100\text{ pF}$ | To 0.1%                           | 25°C          |          | 7.1    |     |           | 7.1    |     | $\mu\text{s}$          |
|                                                         |                                                                                                         | To 0.01%                          |               |          | 16.5   |     |           | 16.5   |     |                        |
| $\phi_m$ Phase margin at unity gain                     | $R_L = 50\text{ k}\Omega$                                                                               | $C_L = 100\text{ pF}$             | 25°C          |          | 57°    |     |           | 57°    |     |                        |
| Gain margin                                             |                                                                                                         |                                   | 25°C          |          | 11     |     |           | 11     |     | dB                     |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2264I electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS                                                                        | $T_A^\dagger$                      | TLC2264I   |             |      | TLC2264AI |             |      | UNIT                         |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------|------------|-------------|------|-----------|-------------|------|------------------------------|
|                                                                            |                                                                                        |                                    | MIN        | TYP         | MAX  | MIN       | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                              | $V_{DD} \pm \pm 2.5\text{ V}$ ,<br>$V_O = 0$ ,<br>$V_{IC} = 0$ ,<br>$R_S = 50\ \Omega$ | 25°C                               | 300        | 2500        |      | 300       | 950         |      | $\mu\text{V}$                |
|                                                                            |                                                                                        | Full range                         |            | 3000        |      |           | 1500        |      |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage             |                                                                                        | 25°C to 125°C                      | 2          |             |      | 2         |             |      | $\mu\text{V}/^\circ\text{C}$ |
| Input offset voltage long-term drift (see Note 4)                          |                                                                                        | 25°C                               | 0.003      |             |      | 0.003     |             |      | $\mu\text{V}/\text{mo}$      |
| $I_{IO}$ Input offset current                                              |                                                                                        | 25°C                               | 0.5        |             |      | 0.5       |             |      | $\text{pA}$                  |
|                                                                            |                                                                                        | 85°C                               |            | 150         |      |           | 150         |      |                              |
|                                                                            |                                                                                        | Full range                         |            | 800         |      |           | 800         |      |                              |
| $I_{IB}$ Input bias current                                                |                                                                                        | 25°C                               | 1          |             |      | 1         |             |      | $\text{pA}$                  |
|                                                                            |                                                                                        | 85°C                               |            | 150         |      |           | 150         |      |                              |
|                                                                            |                                                                                        | Full range                         |            | 800         |      |           | 800         |      |                              |
| $V_{ICR}$ Common-mode input voltage range                                  | $R_S = 50\ \Omega$ ,<br>$ V_{IO}  \leq 5\text{ mV}$                                    | 25°C                               | 0 to 4     | -0.3 to 4.2 |      | 0 to 4    | -0.3 to 4.2 |      | $\text{V}$                   |
|                                                                            |                                                                                        | Full range                         | 0 to 3.5   |             |      | 0 to 3.5  |             |      |                              |
| $V_{OH}$ High-level output voltage                                         | $I_{OH} = -20\ \mu\text{A}$                                                            | 25°C                               |            | 4.99        |      |           | 4.99        |      | $\text{V}$                   |
|                                                                            | $I_{OH} = -100\ \mu\text{A}$                                                           | 25°C                               | 4.85       | 4.94        |      | 4.85      | 4.94        |      |                              |
|                                                                            |                                                                                        | Full range                         | 4.82       |             |      | 4.82      |             |      |                              |
|                                                                            | $I_{OH} = -400\ \mu\text{A}$                                                           | 25°C                               | 4.7        | 4.85        |      | 4.7       | 4.85        |      |                              |
|                                                                            |                                                                                        | Full range                         | 4.5        |             |      | 4.5       |             |      |                              |
| $V_{OL}$ Low-level output voltage                                          | $V_{IC} = 2.5\text{ V}$ ,<br>$I_{OL} = 50\ \mu\text{A}$                                | 25°C                               |            | 0.01        |      |           | 0.01        |      | $\text{V}$                   |
|                                                                            | $V_{IC} = 2.5\text{ V}$ ,<br>$I_{OL} = 500\ \mu\text{A}$                               | 25°C                               |            | 0.09        | 0.15 |           | 0.09        | 0.15 |                              |
|                                                                            |                                                                                        | Full range                         |            |             | 0.15 |           |             | 0.15 |                              |
|                                                                            | $V_{IC} = 2.5\text{ V}$ ,<br>$I_{OL} = 4\text{ mA}$                                    | 25°C                               |            | 0.8         | 1    |           | 0.7         | 1    |                              |
|                                                                            |                                                                                        | Full range                         |            |             | 1.2  |           |             | 1.2  |                              |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{IC} = 2.5\text{ V}$ ,<br>$V_O = 1\text{ V to } 4\text{ V}$                         | $R_L = 50\text{ k}\Omega^\ddagger$ | 25°C       | 80          | 100  | 80        | 170         |      | $\text{V/mV}$                |
|                                                                            |                                                                                        |                                    | Full range | 50          |      | 50        |             |      |                              |
|                                                                            |                                                                                        | $R_L = 1\text{ M}\Omega^\ddagger$  | 25°C       | 550         |      | 550       |             |      |                              |
| $r_{i(d)}$ Differential input resistance                                   |                                                                                        | 25°C                               |            | $10^{12}$   |      |           | $10^{12}$   |      | $\Omega$                     |
| $r_{i(c)}$ Common-mode input resistance                                    |                                                                                        | 25°C                               |            | $10^{12}$   |      |           | $10^{12}$   |      | $\Omega$                     |
| $c_{i(c)}$ Common-mode input capacitance                                   | $f = 10\text{ kHz}$ ,<br>N package                                                     | 25°C                               |            | 8           |      |           | 8           |      | $\text{pF}$                  |
| $z_o$ Closed-loop output impedance                                         | $f = 100\text{ kHz}$ ,<br>$A_V = 10$                                                   | 25°C                               |            | 240         |      |           | 240         |      | $\Omega$                     |
| $\text{CMRR}$ Common-mode rejection ratio                                  | $V_{IC} = 0\text{ to } 2.7\text{ V}$ ,<br>$V_O = 2.5\text{ V}$ ,<br>$R_S = 50\ \Omega$ | 25°C                               | 70         | 83          |      | 70        | 83          |      | $\text{dB}$                  |
|                                                                            |                                                                                        | Full range                         | 70         |             |      | 70        |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 4.4\text{ V to } 16\text{ V}$ ,<br>$V_{IC} = V_{DD}/2$ ,<br>No load          | 25°C                               | 80         | 95          |      | 80        | 95          |      | $\text{dB}$                  |
|                                                                            |                                                                                        | Full range                         | 80         |             |      | 80        |             |      |                              |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

$^\ddagger$  Referenced to  $2.5\text{ V}$

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of  $0.96\text{ eV}$ .



**TLC226x, TLC226xA**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**OPERATIONAL AMPLIFIERS**

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2264I operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                        |                                                 | T <sub>A</sub> † | TLC2264I |      |        | TLC2264AI |      |     | UNIT   |
|--------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------|-------------------------------------------------|------------------|----------|------|--------|-----------|------|-----|--------|
|                    |                                             |                                                                                                        |                                                 |                  | MIN      | TYP  | MAX    | MIN       | TYP  | MAX |        |
| I <sub>DD</sub>    | Supply current<br>(four amplifiers)         | V <sub>O</sub> = 2.5 V,                                                                                | No load                                         | 25°C             | 0.8      |      | 1      | 0.8       |      | 1   | V/μs   |
|                    |                                             |                                                                                                        |                                                 | Full range       |          |      | 1      | 1         |      |     |        |
| SR                 | Slew rate at unity gain                     | V <sub>O</sub> = 1.4 V to 2.6 V,<br>C <sub>L</sub> = 100 pF‡                                           | R <sub>L</sub> = 50 kΩ‡,                        | 25°C             | 0.35     | 0.55 |        | 0.35      | 0.55 |     | V/μs   |
|                    |                                             |                                                                                                        |                                                 | Full range       | 0.25     |      | 0.25   |           |      |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 10 Hz                                                                                              |                                                 | 25°C             | 40       |      | 40     |           |      |     | nV/√Hz |
|                    |                                             | f = 1 kHz                                                                                              |                                                 | 25°C             | 12       |      | 12     |           |      |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                     |                                                 | 25°C             | 0.7      |      | 0.7    |           |      |     | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                                    |                                                 | 25°C             | 1.3      |      | 1.3    |           |      |     |        |
| I <sub>n</sub>     | Equivalent input noise current              |                                                                                                        |                                                 | 25°C             | 0.6      |      | 0.6    |           |      |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O</sub> = 0.5 V to 2.5 V,<br>f = 20 kHz,<br>R <sub>L</sub> = 50 kΩ‡                             | A <sub>V</sub> = 1                              | 25°C             | 0.017%   |      | 0.017% |           |      |     |        |
|                    |                                             |                                                                                                        | A <sub>V</sub> = 10                             |                  | 0.03%    |      | 0.03%  |           |      |     |        |
|                    | Gain-bandwidth product                      | f = 50 kHz,<br>C <sub>L</sub> = 100 pF‡                                                                | R <sub>L</sub> = 50 kΩ‡,                        | 25°C             | 0.71     |      | 0.71   |           |      |     | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 2 V,<br>R <sub>L</sub> = 50 kΩ‡,                                                  | A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF‡ | 25°C             | 185      |      | 185    |           |      |     | kHz    |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1,<br>Step = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 50 kΩ‡,<br>C <sub>L</sub> = 100 pF‡ | To 0.1%                                         | 25°C             | 6.4      |      | 6.4    |           |      |     | μs     |
|                    |                                             |                                                                                                        | To 0.01%                                        |                  | 14.1     |      | 14.1   |           |      |     |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 50 kΩ‡, C <sub>L</sub> = 100 pF‡                                                      |                                                 | 25°C             | 56°      |      | 56°    |           |      |     |        |
|                    | Gain margin                                 |                                                                                                        |                                                 | 25°C             | 11       |      | 11     |           |      |     | dB     |

$^\dagger$  Full range is  $-40^\circ\text{C to } 125^\circ\text{C}$ .

$^\ddagger$  Referenced to  $2.5\text{ V}$

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2264I electrical characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5\text{ V}$  (unless otherwise noted)**

| PARAMETER         |                                                                       | TEST CONDITIONS                                                                        |                        | T <sub>A</sub> <sup>†</sup> | TLC2264I               |                        |                  | TLC2264AI |       |     | UNIT |
|-------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------|-----------------------------|------------------------|------------------------|------------------|-----------|-------|-----|------|
|                   |                                                                       |                                                                                        |                        |                             | MIN                    | TYP                    | MAX              | MIN       | TYP   | MAX |      |
| V <sub>IO</sub>   | Input offset voltage                                                  | V <sub>IC</sub> = 0,      V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω                 |                        | 25°C                        | 300    2500            |                        | 300    950       |           | μV    |     |      |
|                   | Full range                                                            |                                                                                        |                        | 3000                        |                        | 1500                   |                  |           |       |     |      |
| αV <sub>IO</sub>  | Temperature coefficient of input offset voltage                       |                                                                                        |                        | 25°C to 125°C               | 2                      |                        | 2                |           | μV/°C |     |      |
|                   | Input offset voltage long-term drift (see Note 4)                     |                                                                                        |                        | 25°C                        | 0.003                  |                        | 0.003            |           | μV/mo |     |      |
| I <sub>IO</sub>   | Input offset current                                                  |                                                                                        |                        | 25°C                        | 0.5                    |                        | 0.5              |           | pA    |     |      |
|                   |                                                                       |                                                                                        |                        | 85°C                        | 150                    |                        | 150              |           |       |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | 800                    |                        | 800              |           |       |     |      |
| I <sub>IB</sub>   | Input bias current                                                    |                                                                                        |                        | 25°C                        | 1                      |                        | 1                |           | pA    |     |      |
|                   |                                                                       |                                                                                        |                        | 85°C                        | 150                    |                        | 150              |           | pA    |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | 800                    |                        | 800              |           | pA    |     |      |
| V <sub>ICR</sub>  | Common-mode input voltage range                                       | R <sub>S</sub> = 50 Ω,     V <sub>IO</sub>   ≤ 5 mV                                    |                        | 25°C                        | -5 to 4<br>-5.3 to 4.2 | -5 to 4<br>-5.3 to 4.2 |                  | V         |       |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | -5 to 3.5              | -5 to 3.5              |                  |           |       |     |      |
| V <sub>OM+</sub>  | Maximum positive peak output voltage                                  | I <sub>O</sub> = -20 μA                                                                |                        | 25°C                        | 4.99                   |                        | 4.99             |           | V     |     |      |
|                   |                                                                       | I <sub>O</sub> = -100 μA                                                               |                        | 25°C                        | 4.85    4.94           | 4.85    4.94           |                  |           |       |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | 4.82                   |                        | 4.82             |           |       |     |      |
|                   |                                                                       | I <sub>O</sub> = -400 μA                                                               |                        | 25°C                        | 4.7    4.85            | 4.7    4.85            |                  |           |       |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | 4.5                    |                        | 4.5              |           |       |     |      |
| V <sub>OM-</sub>  | Maximum negative peak output voltage                                  | V <sub>IC</sub> = 0,    I <sub>O</sub> = 50 μA                                         |                        | 25°C                        | -4.99                  |                        | -4.99            |           | V     |     |      |
|                   |                                                                       | V <sub>IC</sub> = 0,    I <sub>O</sub> = 500 μA                                        |                        | 25°C                        | -4.85    -4.91         | -4.85    -4.91         |                  |           |       |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | -4.85                  |                        | -4.85            |           |       |     |      |
|                   |                                                                       | V <sub>IC</sub> = 0,    I <sub>O</sub> = 4 mA                                          |                        | 25°C                        | -4    -4.3             | -4    -4.3             |                  |           |       |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | -3.8                   |                        | -3.8             |           |       |     |      |
| A <sub>VD</sub>   | Large-signal differential voltage amplification                       | V <sub>O</sub> = ±4 V                                                                  | R <sub>L</sub> = 50 kΩ | 25°C                        | 80    200              | 80    200              |                  | V/mV      |       |     |      |
|                   |                                                                       |                                                                                        | R <sub>L</sub> = 1 MΩ  | Full range                  | 50                     |                        | 50               |           |       |     |      |
|                   |                                                                       |                                                                                        |                        | 25°C                        | 1000                   |                        | 1000             |           |       |     |      |
| r <sub>i(d)</sub> | Differential input resistance                                         |                                                                                        |                        | 25°C                        | 10 <sup>12</sup>       |                        | 10 <sup>12</sup> |           | Ω     |     |      |
| r <sub>i(c)</sub> | Common-mode input resistance                                          |                                                                                        |                        | 25°C                        | 10 <sup>12</sup>       |                        | 10 <sup>12</sup> |           | Ω     |     |      |
| c <sub>i(c)</sub> | Common-mode input capacitance                                         | f = 10 kHz,                                                                            | N package              | 25°C                        | 8                      |                        | 8                |           | pF    |     |      |
| z <sub>o</sub>    | Closed-loop output impedance                                          | f = 100 kHz,                                                                           | A <sub>V</sub> = 10    | 25°C                        | 220                    |                        | 220              |           | Ω     |     |      |
| CMRR              | Common-mode rejection ratio                                           | V <sub>IC</sub> = -5 V to 2.7 V,<br>V <sub>O</sub> = 0,      R <sub>S</sub> = 50 Ω     |                        | 25°C                        | 75    88               | 75    88               |                  | dB        |       |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | 75                     |                        | 75               |           |       |     |      |
| k <sub>SVR</sub>  | Supply-voltage rejection ratio (ΔV <sub>DD±</sub> /ΔV <sub>IO</sub> ) | V <sub>DD±</sub> = ±2.2 V to ±8 V,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,    No load |                        | 25°C                        | 80    95               | 80    95               |                  | dB        |       |     |      |
|                   |                                                                       |                                                                                        |                        | Full range                  | 80                     |                        | 80               |           |       |     |      |

$^\dagger$  Full range is -40°C to 125°C.

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLC2264I operating characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5\text{ V}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                       |                                                | T <sub>A</sub> <sup>†</sup> | TLC2264I |      |        | TLC2264AI |      |     | UNIT   |
|--------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------|-----------------------------|----------|------|--------|-----------|------|-----|--------|
|                    |                                             |                                                                                                       |                                                |                             | MIN      | TYP  | MAX    | MIN       | TYP  | MAX |        |
| I <sub>DD</sub>    | Supply current<br>(four amplifiers)         | V <sub>O</sub> = 0,                                                                                   | No load                                        | 25°C                        | 0.85     |      | 1      | 0.85      |      | 1   |        |
|                    |                                             |                                                                                                       |                                                | Full range                  | 1        |      | 1      |           |      |     |        |
| SR                 | Slew rate at unity gain                     | V <sub>O</sub> = ±1.9 V,<br>C <sub>L</sub> = 100 pF                                                   | R <sub>L</sub> = 50 kΩ,                        | 25°C                        | 0.35     | 0.55 |        | 0.35      | 0.55 |     | V/μs   |
|                    |                                             |                                                                                                       |                                                | Full range                  | 0.25     |      | 0.25   |           |      |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 10 Hz                                                                                             |                                                | 25°C                        | 43       |      |        | 43        |      |     | nV/√Hz |
|                    |                                             | f = 1 kHz                                                                                             |                                                | 25°C                        | 12       |      |        | 12        |      |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                    |                                                | 25°C                        | 0.8      |      |        | 0.8       |      |     | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                                   |                                                | 25°C                        | 1.3      |      |        | 1.3       |      |     |        |
| I <sub>n</sub>     | Equivalent input noise current              |                                                                                                       |                                                | 25°C                        | 0.6      |      |        | 0.6       |      |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O</sub> = ±2.3 V,<br>R <sub>L</sub> = 50 kΩ,<br>f = 20 kHz                                     | A <sub>V</sub> = 1                             | 25°C                        | 0.014%   |      |        | 0.014%    |      |     |        |
|                    |                                             |                                                                                                       | A <sub>V</sub> = 10                            |                             | 0.024%   |      | 0.024% |           |      |     |        |
|                    | Gain-bandwidth product                      | f = 10 kHz,<br>C <sub>L</sub> = 100 pF                                                                | R <sub>L</sub> = 50 kΩ,                        | 25°C                        | 0.73     |      |        | 0.73      |      |     | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4.6 V,<br>R <sub>L</sub> = 50 kΩ,                                                | A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF | 25°C                        | 70       |      |        | 70        |      |     | kHz    |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1,<br>Step = −2.3 V to 2.3 V,<br>R <sub>L</sub> = 50 kΩ,<br>C <sub>L</sub> = 100 pF | To 0.1%                                        | 25°C                        | 7.1      |      |        | 7.1       |      |     | μs     |
|                    |                                             |                                                                                                       | To 0.01%                                       |                             | 16.5     |      | 16.5   |           |      |     |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 50 kΩ, C <sub>L</sub> = 100 pF                                                       |                                                | 25°C                        | 57°      |      |        | 57°       |      |     |        |
|                    | Gain margin                                 |                                                                                                       |                                                | 25°C                        | 11       |      |        | 11        |      |     | dB     |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2262Q/M electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER         |                                                                      | TEST CONDITIONS                                                                              |                                     | T <sub>A</sub> <sup>†</sup> | TLC2262Q,<br>TLC2262M |             |      | TLC2262AQ,<br>TLC2262AM |             |      | UNIT  |
|-------------------|----------------------------------------------------------------------|----------------------------------------------------------------------------------------------|-------------------------------------|-----------------------------|-----------------------|-------------|------|-------------------------|-------------|------|-------|
|                   |                                                                      |                                                                                              |                                     |                             | MIN                   | TYP         | MAX  | MIN                     | TYP         | MAX  |       |
| V <sub>IO</sub>   | Input offset voltage                                                 | V <sub>DD±</sub> = ±2.5 V, V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω |                                     | 25°C                        | 300                   | 2500        |      | 300                     | 950         | μV   |       |
|                   | Full range                                                           |                                                                                              |                                     | 3000                        |                       |             | 1500 |                         |             |      |       |
| α <sub>VIO</sub>  | Temperature coefficient of input offset voltage                      |                                                                                              |                                     | Full range                  | 5                     |             |      | 5                       |             |      | μV/°C |
|                   | Input offset voltage long-term drift (see Note 4)                    |                                                                                              |                                     | 25°C                        | 0.003                 |             |      | 0.003                   |             |      | μV/mo |
| I <sub>IO</sub>   | Input offset current                                                 |                                                                                              |                                     | 25°C                        | 0.5                   |             |      | 0.5                     |             |      | pA    |
|                   |                                                                      |                                                                                              |                                     | 125°C                       | 800                   |             |      | 800                     |             |      |       |
| I <sub>IB</sub>   | Input bias current                                                   |                                                                                              |                                     | 25°C                        | 1                     |             |      | 1                       |             |      | pA    |
|                   |                                                                      |                                                                                              |                                     | 125°C                       | 800                   |             |      | 800                     |             |      |       |
| V <sub>ICR</sub>  | Common-mode input voltage range                                      | R <sub>S</sub> = 50 Ω,  V <sub>IO</sub>   ≤ 5 mV                                             |                                     | 25°C                        | 0 to 4                | −0.3 to 4.2 |      | 0 to 4                  | −0.3 to 4.2 | V    |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 0 to 3.5              |             |      | 0 to 3.5                |             |      |       |
| V <sub>OH</sub>   | High-level output voltage                                            | I <sub>OH</sub> = −20 μA                                                                     |                                     | 25°C                        | 4.99                  |             |      | 4.99                    |             |      | V     |
|                   |                                                                      | I <sub>OH</sub> = −100 μA                                                                    |                                     | 25°C                        | 4.85                  | 4.94        |      | 4.85                    | 4.94        |      |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 4.82                  |             |      | 4.82                    |             |      |       |
|                   |                                                                      | I <sub>OH</sub> = −400 μA                                                                    |                                     | 25°C                        | 4.7                   | 4.85        |      | 4.7                     | 4.85        |      |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 4.5                   |             |      | 4.5                     |             |      |       |
| V <sub>OL</sub>   | Low-level output voltage                                             | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 50 μA                                             |                                     | 25°C                        | 0.01                  |             |      | 0.01                    |             |      | V     |
|                   |                                                                      | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 500 μA                                            |                                     | 25°C                        | 0.09                  | 0.15        |      | 0.09                    | 0.15        |      |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 0.15                  |             |      | 0.15                    |             |      |       |
|                   |                                                                      | V <sub>IC</sub> = 2.5 V, I <sub>OL</sub> = 4 mA                                              |                                     | 25°C                        | 0.8                   | 1           |      | 0.7                     | 1           |      |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 1.2                   |             |      | 1.2                     |             |      |       |
| A <sub>VD</sub>   | Large-signal differential voltage amplification                      | V <sub>IC</sub> = 2.5 V, V <sub>O</sub> = 1 V to 4 V                                         | R <sub>L</sub> = 50 kΩ <sup>‡</sup> | 25°C                        | 80                    | 100         |      | 80                      | 170         | V/mV |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 50                    |             |      | 50                      |             |      |       |
|                   |                                                                      |                                                                                              | R <sub>L</sub> = 1 MΩ <sup>‡</sup>  | 25°C                        | 550                   |             |      | 550                     |             |      |       |
| r <sub>i(d)</sub> | Differential input resistance                                        |                                                                                              |                                     | 25°C                        | 10 <sup>12</sup>      |             |      | 10 <sup>12</sup>        |             |      | Ω     |
| r <sub>i(c)</sub> | Common-mode input resistance                                         |                                                                                              |                                     | 25°C                        | 10 <sup>12</sup>      |             |      | 10 <sup>12</sup>        |             |      | Ω     |
| c <sub>i(c)</sub> | Common-mode input capacitance                                        | f = 10 kHz,                                                                                  | P package                           | 25°C                        | 8                     |             |      | 8                       |             |      | pF    |
| z <sub>o</sub>    | Closed-loop output impedance                                         | f = 100 kHz,                                                                                 | A <sub>V</sub> = 10                 | 25°C                        | 240                   |             |      | 240                     |             |      | Ω     |
| CMRR              | Common-mode rejection ratio                                          | V <sub>IC</sub> = 0 to 2.7 V, V <sub>O</sub> = 2.5 V, R <sub>S</sub> = 50 Ω                  |                                     | 25°C                        | 70                    | 83          |      | 70                      | 83          | dB   |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 70                    |             |      | 70                      |             |      |       |
| k <sub>SVR</sub>  | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 4.4 V to 16 V, V <sub>IC</sub> = V <sub>DD</sub> /2, No load               |                                     | 25°C                        | 80                    | 95          |      | 80                      | 95          | dB   |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 80                    |             |      | 80                      |             |      |       |
| I <sub>DD</sub>   | Supply current                                                       | V <sub>O</sub> = 2.5 V, No load                                                              |                                     | 25°C                        | 400                   | 500         |      | 400                     | 500         | μA   |       |
|                   |                                                                      |                                                                                              |                                     | Full range                  | 500                   |             |      | 500                     |             |      |       |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q suffix,  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix.

$^\ddagger$  Referenced to 2.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLC226x, TLC226xA**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**OPERATIONAL AMPLIFIERS**

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2262Q/M operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER   |                                             | TEST CONDITIONS                                                                                                         |                                         | $T_A^\dagger$ | TLC2262Q,<br>TLC2262M |        |     | TLC2262AQ,<br>TLC2262AM |        |     | UNIT                   |
|-------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|---------------|-----------------------|--------|-----|-------------------------|--------|-----|------------------------|
|             |                                             |                                                                                                                         |                                         |               | MIN                   | TYP    | MAX | MIN                     | TYP    | MAX |                        |
| SR          | Slew rate at unity gain                     | $V_O = 0.5\text{ V to }3.5\text{ V}, R_L = 50\text{ k}\Omega^\ddagger, C_L = 100\text{ pF}^\ddagger$                    |                                         | 25°C          | 0.35                  | 0.55   |     | 0.35                    | 0.55   |     | V/ $\mu\text{s}$       |
|             |                                             |                                                                                                                         |                                         | Full range    | 0.25                  |        |     | 0.25                    |        |     |                        |
| $V_n$       | Equivalent input noise voltage              | $f = 10\text{ Hz}$                                                                                                      |                                         | 25°C          |                       | 40     |     |                         | 40     |     | nV/ $\sqrt{\text{Hz}}$ |
|             |                                             | $f = 1\text{ kHz}$                                                                                                      |                                         | 25°C          |                       | 12     |     |                         | 12     |     |                        |
| $V_{N(PP)}$ | Peak-to-peak equivalent input noise voltage | $f = 0.1\text{ Hz to }1\text{ Hz}$                                                                                      |                                         | 25°C          |                       | 0.7    |     |                         | 0.7    |     | $\mu\text{V}$          |
|             |                                             | $f = 0.1\text{ Hz to }10\text{ Hz}$                                                                                     |                                         | 25°C          |                       | 1.3    |     |                         | 1.3    |     |                        |
| $I_n$       | Equivalent input noise current              |                                                                                                                         |                                         | 25°C          |                       | 0.6    |     |                         | 0.6    |     | fA/ $\sqrt{\text{Hz}}$ |
| THD + N     | Total harmonic distortion plus noise        | $V_O = 0.5\text{ V to }2.5\text{ V}, f = 20\text{ kHz}, R_L = 50\text{ k}\Omega^\ddagger$                               | $A_V = 1$                               | 25°C          |                       | 0.017% |     |                         | 0.017% |     |                        |
|             |                                             |                                                                                                                         | $A_V = 10$                              |               |                       | 0.03%  |     |                         | 0.03%  |     |                        |
|             | Gain-bandwidth product                      | $f = 50\text{ kHz}, C_L = 100\text{ pF}^\ddagger$                                                                       | $R_L = 50\text{ k}\Omega^\ddagger$      | 25°C          |                       | 0.82   |     |                         | 0.82   |     | MHz                    |
| $B_{OM}$    | Maximum output-swing bandwidth              | $V_{O(PP)} = 2\text{ V}, R_L = 50\text{ k}\Omega^\ddagger$                                                              | $A_V = 1, C_L = 100\text{ pF}^\ddagger$ | 25°C          |                       | 185    |     |                         | 185    |     | kHz                    |
| $t_s$       | Settling time                               | $A_V = -1, \text{ Step} = 0.5\text{ V to }2.5\text{ V}, R_L = 50\text{ k}\Omega^\ddagger, C_L = 100\text{ pF}^\ddagger$ | To 0.1%                                 | 25°C          |                       | 6.4    |     |                         | 6.4    |     | $\mu\text{s}$          |
|             |                                             |                                                                                                                         | To 0.01%                                |               |                       | 14.1   |     |                         | 14.1   |     |                        |
| $\phi_m$    | Phase margin at unity gain                  | $R_L = 50\text{ k}\Omega^\ddagger, C_L = 100\text{ pF}^\ddagger$                                                        |                                         | 25°C          |                       | 56°    |     |                         | 56°    |     |                        |
|             | Gain margin                                 |                                                                                                                         |                                         | 25°C          |                       | 11     |     |                         | 11     |     | dB                     |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q suffix,  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix.

$^\ddagger$  Referenced to 2.5 V

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2262Q/M electrical characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5$  V (unless otherwise noted)**

| PARAMETER         |                                                                        | TEST CONDITIONS                                                                |                        | T <sub>A</sub> <sup>†</sup> | TLC2262Q,<br>TLC2262M |           |      | TLC2262AQ,<br>TLC2262AM |             |      | UNIT  |
|-------------------|------------------------------------------------------------------------|--------------------------------------------------------------------------------|------------------------|-----------------------------|-----------------------|-----------|------|-------------------------|-------------|------|-------|
|                   |                                                                        |                                                                                |                        |                             | MIN                   | TYP       | MAX  | MIN                     | TYP         | MAX  |       |
| V <sub>IO</sub>   | Input offset voltage                                                   | V <sub>IC</sub> = 0, V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω              |                        | 25°C                        | 300                   | 2500      |      | 300                     | 950         | μV   |       |
|                   | Full range                                                             |                                                                                |                        | 3000                        |                       |           | 1500 |                         |             |      |       |
| α <sub>VIO</sub>  | Temperature coefficient of input offset voltage                        |                                                                                |                        | Full range                  | 5                     |           |      | 5                       |             |      | μV/°C |
|                   | Input offset voltage long-term drift (see Note 4)                      |                                                                                |                        | 25°C                        | 0.003                 |           |      | 0.003                   |             |      | μV/mo |
| I <sub>IO</sub>   | Input offset current                                                   |                                                                                |                        | 25°C                        | 0.5                   |           |      | 0.5                     |             |      | pA    |
|                   |                                                                        |                                                                                |                        | 125°C                       | 800                   |           |      | 800                     |             |      |       |
| I <sub>IB</sub>   | Input bias current                                                     |                                                                                |                        | 25°C                        | 1                     |           |      | 1                       |             |      | pA    |
|                   |                                                                        |                                                                                |                        | 125°C                       | 800                   |           |      | 800                     |             |      |       |
| V <sub>ICR</sub>  | Common-mode input voltage range                                        | R <sub>S</sub> = 50 Ω,  V <sub>IO</sub>   ≤ 5 mV                               |                        | 25°C                        | −5 to 4               | −5.3 to 4 |      | −5 to 4                 | −5.3 to 4.2 | V    |       |
|                   |                                                                        |                                                                                |                        | Full range                  | −5 to 3.5             |           |      | −5 to 3.5               |             |      |       |
| V <sub>OM+</sub>  | Maximum positive peak output voltage                                   | I <sub>O</sub> = −20 μA                                                        |                        | 25°C                        | 4.99                  |           |      | 4.99                    |             |      | V     |
|                   |                                                                        | I <sub>O</sub> = −100 μA                                                       |                        | 25°C                        | 4.85                  | 4.94      |      | 4.85                    | 4.94        |      |       |
|                   |                                                                        |                                                                                |                        | Full range                  | 4.82                  |           |      | 4.82                    |             |      |       |
|                   |                                                                        | I <sub>O</sub> = −400 μA                                                       |                        | 25°C                        | 4.7                   | 4.85      |      | 4.7                     | 4.85        |      |       |
| Full range        | 4.5                                                                    |                                                                                |                        | 4.5                         |                       |           |      |                         |             |      |       |
| V <sub>OM−</sub>  | Maximum negative peak output voltage                                   | V <sub>IC</sub> = 0, I <sub>O</sub> = 50 μA                                    |                        | 25°C                        | −4.99                 |           |      | −4.99                   |             |      | V     |
|                   |                                                                        | V <sub>IC</sub> = 0, I <sub>O</sub> = 500 μA                                   |                        | 25°C                        | −4.85                 | −4.91     |      | −4.85                   | −4.91       |      |       |
|                   |                                                                        |                                                                                |                        | Full range                  | −4.85                 |           |      | −4.85                   |             |      |       |
|                   |                                                                        | V <sub>IC</sub> = 0, I <sub>O</sub> = 4 mA                                     |                        | 25°C                        | −4                    | −4.3      |      | −4                      | −4.3        |      |       |
| Full range        | −3.8                                                                   |                                                                                |                        | −3.8                        |                       |           |      |                         |             |      |       |
| A <sub>VD</sub>   | Large-signal differential voltage amplification                        | V <sub>O</sub> = ±4 V                                                          | R <sub>L</sub> = 50 kΩ | 25°C                        | 80                    | 200       |      | 80                      | 200         | V/mV |       |
|                   |                                                                        |                                                                                |                        | Full range                  | 50                    |           |      | 50                      |             |      |       |
|                   |                                                                        |                                                                                |                        | R <sub>L</sub> = 1 MΩ       | 25°C                  | 1000      |      |                         | 1000        |      |       |
| r <sub>i(d)</sub> | Differential input resistance                                          |                                                                                |                        | 25°C                        | 10 <sup>12</sup>      |           |      | 10 <sup>12</sup>        |             |      | Ω     |
| r <sub>i(c)</sub> | Common-mode input resistance                                           |                                                                                |                        | 25°C                        | 10 <sup>12</sup>      |           |      | 10 <sup>12</sup>        |             |      | Ω     |
| c <sub>i(c)</sub> | Common-mode input capacitance                                          | f = 10 kHz,                                                                    | P package              | 25°C                        | 8                     |           |      | 8                       |             |      | pF    |
| z <sub>o</sub>    | Closed-loop output impedance                                           | f = 100 kHz,                                                                   | A <sub>V</sub> = 10    | 25°C                        | 220                   |           |      | 220                     |             |      | Ω     |
| CMRR              | Common-mode rejection ratio                                            | V <sub>IC</sub> = −5 V to 2.7 V, V <sub>O</sub> = 0, R <sub>S</sub> = 50 Ω     |                        | 25°C                        | 75                    | 88        |      | 75                      | 88          | dB   |       |
|                   |                                                                        |                                                                                |                        | Full range                  | 75                    |           |      | 75                      |             |      |       |
| k <sub>SVR</sub>  | Supply-voltage rejection ratio (ΔV <sub>DD±</sub> / ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 4.4 V to 16 V, V <sub>IC</sub> = V <sub>DD</sub> /2, No load |                        | 25°C                        | 80                    | 95        |      | 80                      | 95          | dB   |       |
|                   |                                                                        |                                                                                |                        | Full range                  | 80                    |           |      | 80                      |             |      |       |
| I <sub>DD</sub>   | Supply current                                                         | V <sub>O</sub> = 0, No load                                                    |                        | 25°C                        | 425                   | 500       |      | 425                     | 500         | μA   |       |
|                   |                                                                        |                                                                                |                        | Full range                  | 500                   |           |      | 500                     |             |      |       |

$^\dagger$  Full range is –40°C to 125°C for Q suffix, –55°C to 125°C for M suffix.

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ C$  extrapolated to  $T_A = 25^\circ C$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.





**TLC2262Q/M operating characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5\text{ V}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                              |                     | T <sub>A</sub> <sup>†</sup>                 | TLC2262Q,<br>TLC2262M |      |     | TLC2262AQ,<br>TLC2262AM |      |     | UNIT   |     |
|--------------------|---------------------------------------------|----------------------------------------------------------------------------------------------|---------------------|---------------------------------------------|-----------------------|------|-----|-------------------------|------|-----|--------|-----|
|                    |                                             |                                                                                              |                     |                                             | MIN                   | TYP  | MAX | MIN                     | TYP  | MAX |        |     |
| SR                 | Slew rate at unity gain                     | V <sub>O</sub> = ±2 V, R <sub>L</sub> = 50 kΩ, C <sub>L</sub> = 100 pF                       |                     | 25°C                                        | 0.35                  | 0.55 |     | 0.35                    | 0.55 |     | V/μs   |     |
|                    |                                             |                                                                                              |                     | Full range                                  | 0.25                  |      |     | 0.25                    |      |     |        |     |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 10 Hz                                                                                    |                     | 25°C                                        | 43                    |      |     | 43                      |      |     | nV/√Hz |     |
|                    |                                             | f = 1 kHz                                                                                    |                     | 25°C                                        | 12                    |      |     | 12                      |      |     |        |     |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                           |                     | 25°C                                        | 0.8                   |      |     | 0.8                     |      |     | μV     |     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                          |                     | 25°C                                        | 1.3                   |      |     | 1.3                     |      |     |        |     |
| I <sub>n</sub>     | Equivalent input noise current              |                                                                                              |                     | 25°C                                        | 0.6                   |      |     | 0.6                     |      |     | fA√Hz  |     |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O</sub> = ±2.3 V, R <sub>L</sub> = 50 kΩ, f = 20 kHz                                  | A <sub>V</sub> = 1  | 25°C                                        | 0.014%                |      |     | 0.014%                  |      |     |        |     |
|                    |                                             |                                                                                              | A <sub>V</sub> = 10 |                                             | 0.024%                |      |     | 0.024%                  |      |     |        |     |
|                    | Gain-bandwidth product                      | f =10 kHz, R <sub>L</sub> = 50 kΩ, C <sub>L</sub> = 100 pF                                   |                     | 25°C                                        | 0.73                  |      |     | 0.73                    |      |     | MHz    |     |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4.6 V, R <sub>L</sub> = 50 kΩ,                                          |                     | A <sub>V</sub> = 1, C <sub>L</sub> = 100 pF | 25°C                  | 85   |     |                         | 85   |     |        | kHz |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1, Step = −2.3 V to 2.3 V, R <sub>L</sub> = 50 kΩ, C <sub>L</sub> = 100 pF | To 0.1%             | 25°C                                        | 7.1                   |      |     | 7.1                     |      |     | μs     |     |
|                    |                                             |                                                                                              | To 0.01%            |                                             | 16.5                  |      |     | 16.5                    |      |     |        |     |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 50 kΩ, C <sub>L</sub> = 100 pF                                              |                     | 25°C                                        | 57°                   |      |     | 57°                     |      |     |        |     |
|                    | Gain margin                                 |                                                                                              |                     | 25°C                                        | 11                    |      |     | 11                      |      |     | dB     |     |

<sup>†</sup> Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q suffix,  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix.

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2264Q/M electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS                                                           | $T_A^\dagger$                      | TLC2264Q,<br>TLC2264M |             |      | TLC2264AQ,<br>TLC2264AM |             |      | UNIT                         |
|----------------------------------------------------------------------------|---------------------------------------------------------------------------|------------------------------------|-----------------------|-------------|------|-------------------------|-------------|------|------------------------------|
|                                                                            |                                                                           |                                    | MIN                   | TYP         | MAX  | MIN                     | TYP         | MAX  |                              |
| $V_{IO}$ Input offset voltage                                              | $V_{DD} = \pm 2.5\text{ V}, V_{IC} = 0, R_S = 50\ \Omega$                 | 25°C                               | 300                   | 2500        |      | 300                     | 950         |      | $\mu\text{V}$                |
|                                                                            |                                                                           | Full range                         |                       | 3000        |      |                         | 1500        |      |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage             |                                                                           | Full range                         | 2                     |             |      | 2                       |             |      | $\mu\text{V}/^\circ\text{C}$ |
| Input offset voltage long-term drift (see Note 4)                          |                                                                           | 25°C                               | 0.003                 |             |      | 0.003                   |             |      | $\mu\text{V}/\text{mo}$      |
| $I_{IO}$ Input offset current                                              |                                                                           | 25°C                               | 0.5                   |             |      | 0.5                     |             |      | $\text{pA}$                  |
|                                                                            |                                                                           | 125°C                              |                       | 800         |      |                         | 800         |      |                              |
| $I_{IB}$ Input bias current                                                |                                                                           | 25°C                               | 1                     |             |      | 1                       |             |      | $\text{pA}$                  |
|                                                                            |                                                                           | 125°C                              |                       | 800         |      |                         | 800         |      |                              |
| $V_{ICR}$ Common-mode input voltage range                                  |                                                                           | 25°C                               | 0 to 4                | -0.3 to 4.2 |      | 0 to 4                  | -0.3 to 4.2 |      | $\text{V}$                   |
|                                                                            |                                                                           | Full range                         | 0 to 3.5              |             |      | 0 to 3.5                |             |      |                              |
| $V_{OH}$ High-level output voltage                                         | $I_{OH} = -20\ \mu\text{A}$                                               | 25°C                               |                       | 4.99        |      |                         | 4.99        |      | $\text{V}$                   |
|                                                                            | $I_{OH} = -100\ \mu\text{A}$                                              | 25°C                               | 4.85                  | 4.94        |      | 4.85                    | 4.94        |      |                              |
|                                                                            |                                                                           | Full range                         | 4.82                  |             |      | 4.82                    |             |      |                              |
|                                                                            | $I_{OH} = -400\ \mu\text{A}$                                              | 25°C                               | 4.7                   | 4.85        |      | 4.7                     | 4.85        |      |                              |
|                                                                            |                                                                           | Full range                         | 4.5                   |             |      | 4.5                     |             |      |                              |
| $V_{OL}$ Low-level output voltage                                          | $V_{IC} = 2.5\text{ V}, I_{OL} = 50\ \mu\text{A}$                         | 25°C                               |                       | 0.01        |      |                         | 0.01        |      | $\text{V}$                   |
|                                                                            | $V_{IC} = 2.5\text{ V}, I_{OL} = 500\ \mu\text{A}$                        | 25°C                               |                       | 0.09        | 0.15 |                         | 0.09        | 0.15 |                              |
|                                                                            |                                                                           | Full range                         |                       |             | 0.15 |                         |             | 0.15 |                              |
|                                                                            | $V_{IC} = 2.5\text{ V}, I_{OL} = 4\text{ mA}$                             | 25°C                               |                       | 0.8         | 1    |                         | 0.7         | 1    |                              |
|                                                                            |                                                                           | Full range                         |                       |             | 1.2  |                         |             | 1.2  |                              |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{IC} = 2.5\text{ V}, V_O = 1\text{ V to }4\text{ V}$                   | $R_L = 50\text{ k}\Omega^\ddagger$ | 25°C                  | 80          | 100  |                         | 80          | 170  | $\text{V/mV}$                |
|                                                                            |                                                                           |                                    | Full range            | 50          |      |                         | 50          |      |                              |
|                                                                            |                                                                           | $R_L = 1\text{ M}\Omega^\ddagger$  | 25°C                  |             | 550  |                         |             | 550  |                              |
| $r_{i(d)}$ Differential input resistance                                   |                                                                           | 25°C                               |                       | $10^{12}$   |      |                         | $10^{12}$   |      | $\Omega$                     |
| $r_{i(c)}$ Common-mode input resistance                                    |                                                                           | 25°C                               |                       | $10^{12}$   |      |                         | $10^{12}$   |      | $\Omega$                     |
| $C_{i(c)}$ Common-mode input capacitance                                   | $f = 10\text{ kHz}, \text{ N package}$                                    | 25°C                               |                       | 8           |      |                         | 8           |      | $\text{pF}$                  |
| $z_o$ Closed-loop output impedance                                         | $f = 100\text{ kHz}, A_V = 10$                                            | 25°C                               |                       | 240         |      |                         | 240         |      | $\Omega$                     |
| $\text{CMRR}$ Common-mode rejection ratio                                  | $V_{IC} = 0\text{ to }2.7\text{ V}, V_O = 2.5\text{ V}, R_S = 50\ \Omega$ | 25°C                               | 70                    | 83          |      | 70                      | 83          |      | $\text{dB}$                  |
|                                                                            |                                                                           | Full range                         | 70                    |             |      | 70                      |             |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 4.4\text{ V to }16\text{ V}$                                    | 25°C                               | 80                    | 95          |      | 80                      | 95          |      | $\text{dB}$                  |
| $I_{DD}$ Supply current (four amplifiers)                                  | $V_O = 2.5\text{ V}, \text{ No load}$                                     | 25°C                               |                       | 0.8         | 1    |                         | 0.8         | 1    | $\text{mA}$                  |
|                                                                            |                                                                           | Full range                         |                       |             | 1    |                         |             | 1    |                              |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q suffix,  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix.

$^\ddagger$  Referenced to 2.5 V

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLC2264Q/M operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                        |  | T <sub>A</sub> <sup>†</sup> | TLC2264Q,<br>TLC2264M |      |     | TLC2264AQ,<br>TLC2264AM |      |     | UNIT   |
|--------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------|--|-----------------------------|-----------------------|------|-----|-------------------------|------|-----|--------|
|                    |                                             |                                                                                                                        |  |                             | MIN                   | TYP  | MAX | MIN                     | TYP  | MAX |        |
| SR                 | Slew rate at unity gain                     | V <sub>O</sub> = 0.5 V to 3.5 V, R <sub>L</sub> = 50 kΩ <sup>‡</sup> ,<br>C <sub>L</sub> = 100 pF <sup>‡</sup>         |  | 25°C                        | 0.35                  | 0.55 |     | 0.35                    | 0.55 |     | V/μs   |
|                    |                                             |                                                                                                                        |  | Full range                  | 0.25                  |      |     | 0.25                    |      |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 10 Hz                                                                                                              |  | 25°C                        | 40                    |      |     | 40                      |      |     | nV/√Hz |
|                    |                                             | f = 1 kHz                                                                                                              |  | 25°C                        | 12                    |      |     | 12                      |      |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                                     |  | 25°C                        | 0.7                   |      |     | 0.7                     |      |     | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                                                    |  | 25°C                        | 1.3                   |      |     | 1.3                     |      |     |        |
| I <sub>n</sub>     | Equivalent input noise current              |                                                                                                                        |  | 25°C                        | 0.6                   |      |     | 0.6                     |      |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O</sub> = 0.5 V to 2.5 V, f = 20 kHz, R <sub>L</sub> = 50 kΩ <sup>‡</sup>                                       |  | 25°C                        | 0.017%                |      |     | 0.017%                  |      |     |        |
|                    |                                             | A <sub>V</sub> = 10                                                                                                    |  |                             | 0.03%                 |      |     | 0.03%                   |      |     |        |
|                    | Gain-bandwidth product                      | f = 50 kHz, C <sub>L</sub> = 100 pF <sup>‡</sup>                                                                       |  | 25°C                        | 0.71                  |      |     | 0.71                    |      |     | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 2 V, R <sub>L</sub> = 50 kΩ <sup>‡</sup>                                                          |  | 25°C                        | 185                   |      |     | 185                     |      |     | kHz    |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1, Step = 0.5 V to 2.5 V, R <sub>L</sub> = 50 kΩ <sup>‡</sup> , C <sub>L</sub> = 100 pF <sup>‡</sup> |  | 25°C                        | 6.4                   |      |     | 6.4                     |      |     | μs     |
|                    |                                             |                                                                                                                        |  |                             | 14.1                  |      |     | 14.1                    |      |     |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 50 kΩ <sup>‡</sup> , C <sub>L</sub> = 100 pF <sup>‡</sup>                                             |  | 25°C                        | 56°                   |      |     | 56°                     |      |     |        |
|                    | Gain margin                                 |                                                                                                                        |  | 25°C                        | 11                    |      |     | 11                      |      |     | dB     |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q suffix,  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix.

$^\ddagger$  Referenced to 2.5 V

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TLC2264Q/M electrical characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5$  V (unless otherwise noted)**

| PARAMETER                                                                     | TEST CONDITIONS                                                     | $T_A^\dagger$         | TLC2264Q,<br>TLC2264M |             |     | TLC2264AQ,<br>TLC2264AM |             |     | UNIT             |
|-------------------------------------------------------------------------------|---------------------------------------------------------------------|-----------------------|-----------------------|-------------|-----|-------------------------|-------------|-----|------------------|
|                                                                               |                                                                     |                       | MIN                   | TYP         | MAX | MIN                     | TYP         | MAX |                  |
| $V_{IO}$ Input offset voltage                                                 | $V_{IC} = 0, V_O = 0, R_S = 50 \Omega$                              | 25°C                  | 300                   | 2500        |     | 300                     | 950         |     | $\mu V$          |
|                                                                               |                                                                     | Full range            |                       | 3000        |     | 1500                    |             |     |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage                |                                                                     | Full range            |                       | 2           |     | 2                       |             |     | $\mu V/^\circ C$ |
| Input offset voltage long-term drift (see Note 4)                             |                                                                     | 25°C                  |                       | 0.003       |     | 0.003                   |             |     | $\mu V/mo$       |
| $I_{IO}$ Input offset current                                                 |                                                                     | 25°C                  |                       | 0.5         |     | 0.5                     |             |     | pA               |
|                                                                               |                                                                     | 125°C                 |                       | 800         |     | 800                     |             |     |                  |
| $I_{IB}$ Input bias current                                                   |                                                                     | 25°C                  |                       | 1           |     | 1                       |             |     | pA               |
|                                                                               |                                                                     | 125°C                 |                       | 800         |     | 800                     |             |     |                  |
| $V_{ICR}$ Common-mode input voltage range                                     | $R_S = 50 \Omega,  V_{IO}  \leq 5$ mV                               | 25°C                  | –5 to 4               | –5.3 to 4.2 |     | –5 to 4                 | –5.3 to 4.2 |     | V                |
|                                                                               |                                                                     | Full range            | –5 to 3.5             |             |     | –5 to 3.5               |             |     |                  |
| $V_{OM+}$ Maximum positive peak output voltage                                | $I_O = -20 \mu A$                                                   | 25°C                  |                       | 4.99        |     | 4.99                    |             |     | V                |
|                                                                               | $I_O = -100 \mu A$                                                  | 25°C                  | 4.85                  | 4.94        |     | 4.85                    | 4.94        |     |                  |
|                                                                               |                                                                     | Full range            | 4.82                  |             |     | 4.82                    |             |     |                  |
|                                                                               | $I_O = -400 \mu A$                                                  | 25°C                  | 4.7                   | 4.85        |     | 4.7                     | 4.85        |     |                  |
|                                                                               |                                                                     | Full range            | 4.5                   |             |     | 4.5                     |             |     |                  |
| $V_{OM-}$ Maximum negative peak output voltage                                | $V_{IC} = 0, I_O = 50 \mu A$                                        | 25°C                  |                       | –4.99       |     | –4.99                   |             |     | V                |
|                                                                               | $V_{IC} = 0, I_O = 500 \mu A$                                       | 25°C                  | –4.85                 | –4.91       |     | –4.85                   | –4.91       |     |                  |
|                                                                               |                                                                     | Full range            | –4.85                 |             |     | –4.85                   |             |     |                  |
|                                                                               | $V_{IC} = 0, I_O = 4$ mA                                            | 25°C                  | –4                    | –4.3        |     | –4                      | –4.3        |     |                  |
|                                                                               |                                                                     | Full range            | –3.8                  |             |     | –3.8                    |             |     |                  |
| $A_{VD}$ Large-signal differential voltage amplification                      | $V_O = \pm 4$ V                                                     | $R_L = 50$ k $\Omega$ | 25°C                  | 80          | 200 | 80                      | 200         |     | V/mV             |
|                                                                               |                                                                     |                       | Full range            | 50          |     | 50                      |             |     |                  |
|                                                                               |                                                                     | $R_L = 1$ M $\Omega$  | 25°C                  | 1000        |     | 1000                    |             |     |                  |
| $r_{i(d)}$ Differential input resistance                                      |                                                                     | 25°C                  |                       | $10^{12}$   |     | $10^{12}$               |             |     | $\Omega$         |
| $r_{i(c)}$ Common-mode input resistance                                       |                                                                     | 25°C                  |                       | $10^{12}$   |     | $10^{12}$               |             |     | $\Omega$         |
| $C_{i(c)}$ Common-mode input capacitance                                      | $f = 10$ kHz, N package                                             | 25°C                  |                       | 8           |     | 8                       |             |     | pF               |
| $z_o$ Closed-loop output impedance                                            | $f = 100$ kHz, $A_V = 10$                                           | 25°C                  |                       | 220         |     | 220                     |             |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                              | $V_{IC} = -5$ V to 2.7 V, $V_O = 0, R_S = 50 \Omega$                | 25°C                  | 75                    | 88          |     | 75                      | 88          |     | dB               |
|                                                                               |                                                                     | Full range            | 75                    |             |     | 75                      |             |     |                  |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD\pm}/\Delta V_{IO}$ ) | $V_{DD\pm} = \pm 2.2$ V to $\pm 8$ V, $V_{IC} = V_{DD}/2$ , No load | 25°C                  | 80                    | 95          |     | 80                      | 95          |     | dB               |
|                                                                               |                                                                     | Full range            | 80                    |             |     | 80                      |             |     |                  |
| $I_{DD}$ Supply current (four amplifiers)                                     | $V_O = 0$ , No load                                                 | 25°C                  |                       | 0.85        | 1   |                         | 0.85        | 1   | mA               |
|                                                                               |                                                                     | Full range            |                       | 1           |     | 1                       |             |     |                  |

$^\dagger$  Full range is  $-40^\circ C$  to  $125^\circ C$  for Q suffix,  $-55^\circ C$  to  $125^\circ C$  for M suffix.

NOTE 4: Typical values are based on the input offset voltage shift observed through 500 hours of operating life test at  $T_A = 150^\circ C$  extrapolated to  $T_A = 25^\circ C$  using the Arrhenius equation and assuming an activation energy of 0.96 eV.



**TLC2264Q/M operating characteristics at specified free-air temperature,  $V_{DD\pm} = \pm 5\text{ V}$**

| PARAMETER          |                                             | TEST CONDITIONS                                                                                       |                                                | T <sub>A</sub> <sup>†</sup> | TLC2264Q,<br>TLC2264M |      |     | TLC2264AQ,<br>TLC2264AM |      |     | UNIT   |
|--------------------|---------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------------------------------|-----------------------------|-----------------------|------|-----|-------------------------|------|-----|--------|
|                    |                                             |                                                                                                       |                                                |                             | MIN                   | TYP  | MAX | MIN                     | TYP  | MAX |        |
| SR                 | Slew rate at unity gain                     | V <sub>O</sub> = ±2 V,<br>C <sub>L</sub> = 100 pF                                                     | R <sub>L</sub> = 50 kΩ,                        | 25°C                        | 0.35                  | 0.55 |     | 0.35                    | 0.55 |     | V/μs   |
|                    |                                             |                                                                                                       |                                                | Full range                  | 0.25                  |      |     | 0.25                    |      |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 10 Hz                                                                                             |                                                | 25°C                        |                       | 43   |     |                         | 43   |     | nV/√Hz |
|                    |                                             | f = 1 kHz                                                                                             |                                                | 25°C                        |                       | 12   |     |                         | 12   |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                    |                                                | 25°C                        |                       | 0.8  |     |                         | 0.8  |     | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                                   |                                                | 25°C                        |                       | 1.3  |     |                         | 1.3  |     |        |
| I <sub>n</sub>     | Equivalent input noise current              |                                                                                                       |                                                | 25°C                        |                       | 0.6  |     |                         | 0.6  |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | V <sub>O</sub> = ±2.3 V,<br>R <sub>L</sub> = 50 kΩ,<br>f = 20 kHz                                     | A <sub>V</sub> = 1                             | 25°C                        | 0.014%                |      |     | 0.014%                  |      |     |        |
|                    |                                             |                                                                                                       | A <sub>V</sub> = 10                            |                             | 0.024%                |      |     | 0.024%                  |      |     |        |
|                    | Gain-bandwidth product                      | f =10 kHz,<br>C <sub>L</sub> = 100 pF                                                                 | R <sub>L</sub> = 50 kΩ,                        | 25°C                        | 0.73                  |      |     | 0.73                    |      |     | MHz    |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 4.6 V,<br>R <sub>L</sub> = 50 kΩ,                                                | A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF | 25°C                        | 70                    |      |     | 70                      |      |     | kHz    |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1,<br>Step = −2.3 V to 2.3 V,<br>R <sub>L</sub> = 50 kΩ,<br>C <sub>L</sub> = 100 pF | To 0.1%                                        | 25°C                        | 7.1                   |      |     | 7.1                     |      |     | μs     |
|                    |                                             |                                                                                                       | To 0.01%                                       |                             | 16.5                  |      |     | 16.5                    |      |     |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 50 kΩ,<br>C <sub>L</sub> = 100 pF                                                    |                                                | 25°C                        | 57°                   |      |     | 57°                     |      |     |        |
|                    | Gain margin                                 |                                                                                                       |                                                | 25°C                        | 11                    |      |     | 11                      |      |     | dB     |

<sup>†</sup> Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  for Q suffix,  $-55^\circ\text{C}$  to  $125^\circ\text{C}$  for M suffix.

**TLC2226x, TLC2226xA**  
**Advanced LinCMOS™ RAIL-TO-RAIL**  
**OPERATIONAL AMPLIFIERS**

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

**TYPICAL CHARACTERISTICS**

**Table of Graphs**

|                 |                                                 |                                                | <b>FIGURE</b>    |
|-----------------|-------------------------------------------------|------------------------------------------------|------------------|
| $V_{IO}$        | Input offset voltage                            | Distribution<br>vs Common-mode input voltage   | 2 – 5<br>6, 7    |
| $\alpha_{VIO}$  | Input offset voltage temperature coefficient    | Distribution                                   | 8 – 11           |
| $I_{IB}/I_{IO}$ | Input bias and input offset currents            | vs Free-air temperature                        | 12               |
| $V_I$           | Input voltage range                             | vs Supply voltage<br>vs Free-air temperature   | 13<br>14         |
| $V_{OH}$        | High-level output voltage                       | vs High-level output current                   | 15               |
| $V_{OL}$        | Low-level output voltage                        | vs Low-level output current                    | 16, 17           |
| $V_{OM+}$       | Maximum positive output voltage                 | vs Output current                              | 18               |
| $V_{OM-}$       | Maximum negative output voltage                 | vs Output current                              | 19               |
| $V_{O(PP)}$     | Maximum peak-to-peak output voltage             | vs Frequency                                   | 20               |
| $I_{OS}$        | Short-circuit output current                    | vs Supply voltage<br>vs Free-air temperature   | 21<br>22         |
| $V_O$           | Output voltage                                  | vs Differential input voltage                  | 23, 24           |
|                 | Differential gain                               | vs Load resistance                             | 25               |
| $A_{VD}$        | Large-signal differential voltage amplification | vs Frequency<br>vs Free-air temperature        | 26, 27<br>28, 29 |
| $z_o$           | Output impedance                                | vs Frequency                                   | 30, 31           |
| CMRR            | Common-mode rejection ratio                     | vs Frequency<br>vs Free-air temperature        | 32<br>33         |
| kSVR            | Supply-voltage rejection ratio                  | vs Frequency<br>vs Free-air temperature        | 34, 35<br>36     |
| $I_{DD}$        | Supply current                                  | vs Supply voltage<br>vs Free-air temperature   | 37, 38<br>39, 40 |
| SR              | Slew rate                                       | vs Load capacitance<br>vs Free-air temperature | 41<br>42         |
| $V_O$           | Inverting large-signal pulse response           |                                                | 43, 44           |
|                 | Voltage-follower large-signal pulse response    |                                                | 45, 46           |
|                 | Inverting small-signal pulse response           |                                                | 47, 48           |
|                 | Voltage-follower small-signal pulse response    |                                                | 49, 50           |
| $V_n$           | Equivalent input noise voltage                  | vs Frequency                                   | 51, 52           |
|                 | Noise voltage (referred to input)               | Over a 10-second period                        | 53               |
|                 | Integrated noise voltage                        | vs Frequency                                   | 54               |
| THD + N         | Total harmonic distortion plus noise            | vs Frequency                                   | 55               |
|                 | Gain-bandwidth product                          | vs Supply voltage<br>vs Free-air temperature   | 56<br>57         |
| $\phi_m$        | Phase margin                                    | vs Frequency<br>vs Load capacitance            | 26, 27<br>58     |
|                 | Gain margin                                     | vs Load capacitance                            | 59               |
| $B_1$           | Unity-gain bandwidth                            | vs Load capacitance                            | 60               |
|                 | Overestimation of phase margin                  | vs Load capacitance                            | 61               |

## TYPICAL CHARACTERISTICS

**DISTRIBUTION OF TLC2262  
INPUT OFFSET VOLTAGE**

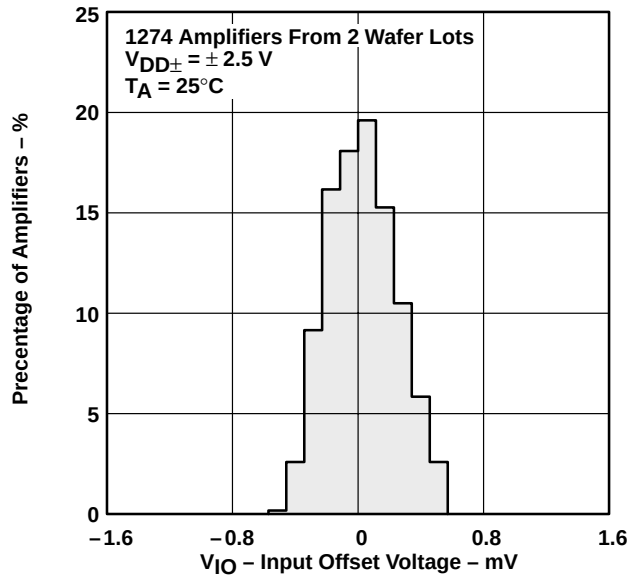


Figure 2

**DISTRIBUTION OF TLC2262  
INPUT OFFSET VOLTAGE**

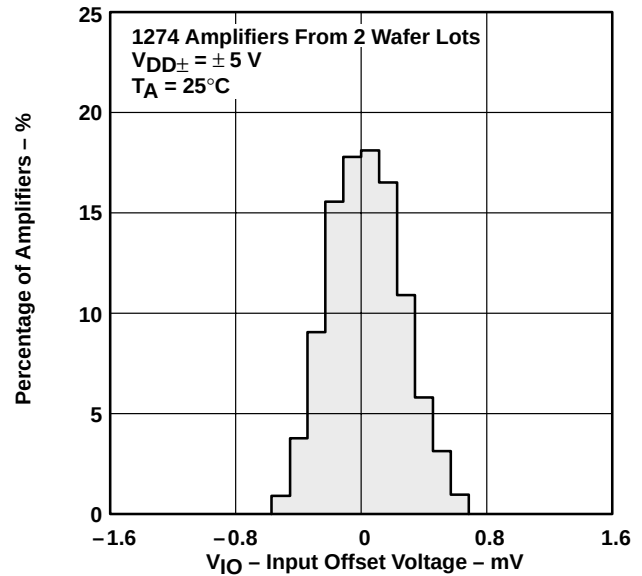


Figure 3

**DISTRIBUTION OF TLC2264  
INPUT OFFSET VOLTAGE**

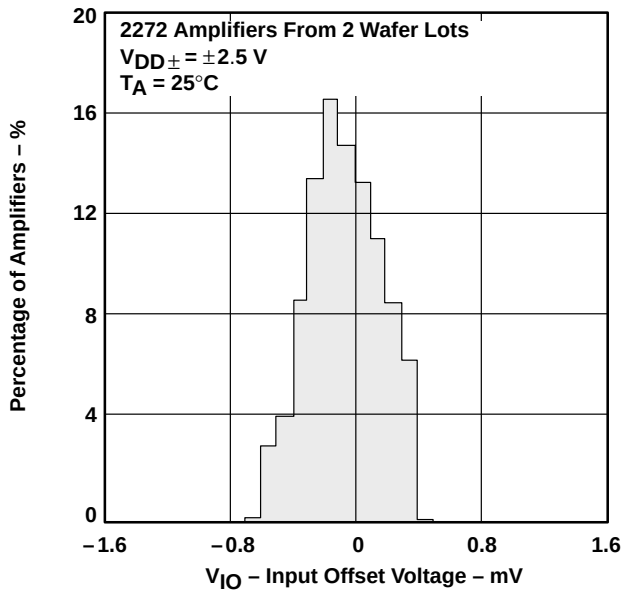


Figure 4

**DISTRIBUTION OF TLC2264  
INPUT OFFSET VOLTAGE**


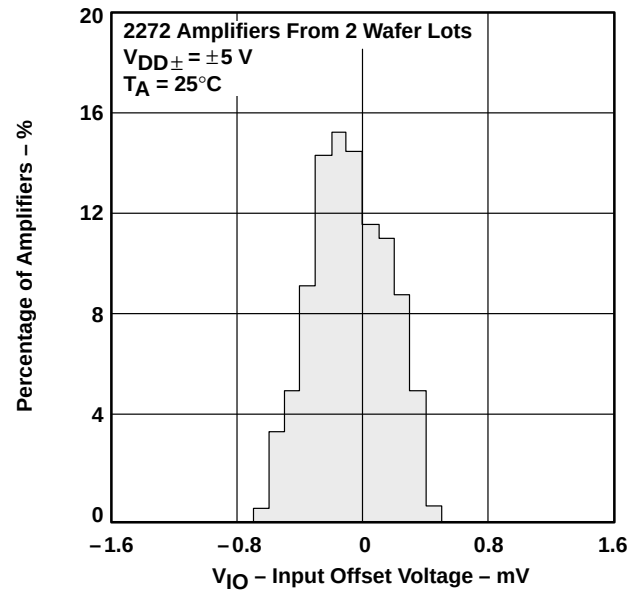


Figure 5

# TLC226x, TLC226xA Advanced LinCMOS™ RAIL-TO-RAIL OPERATIONAL AMPLIFIERS


SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

## TYPICAL CHARACTERISTICS

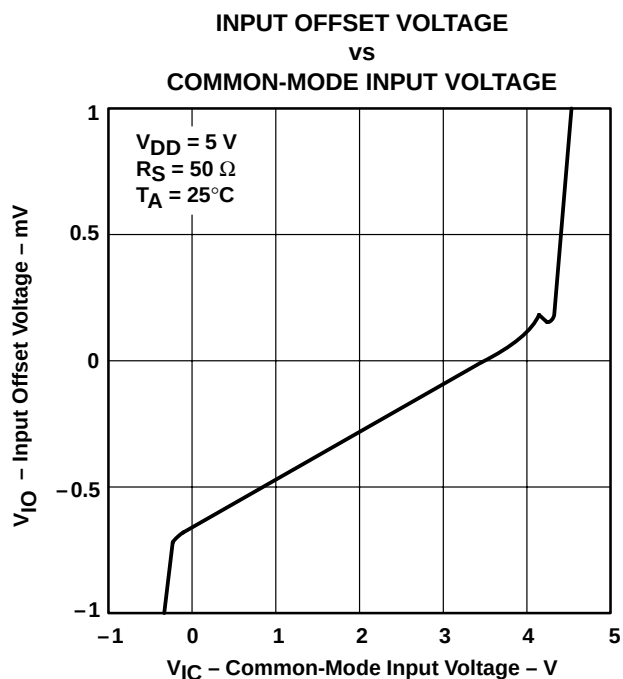


† For curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V.


**Figure 6**

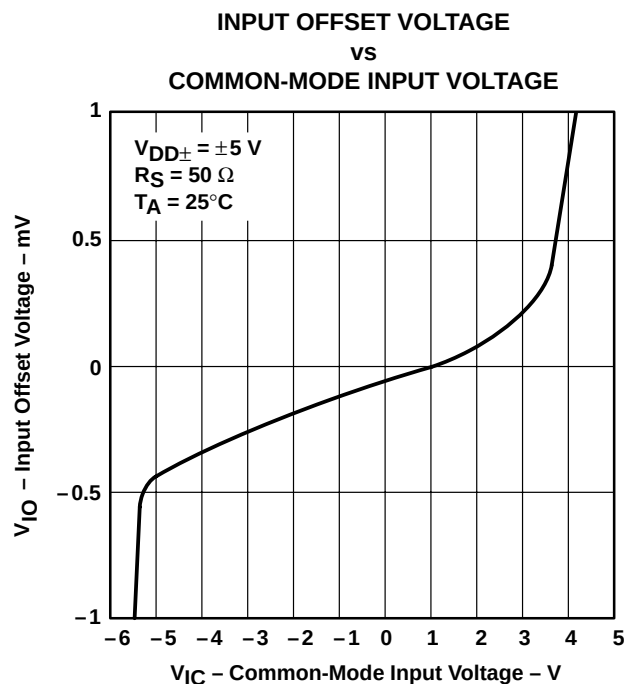

**Figure 7**

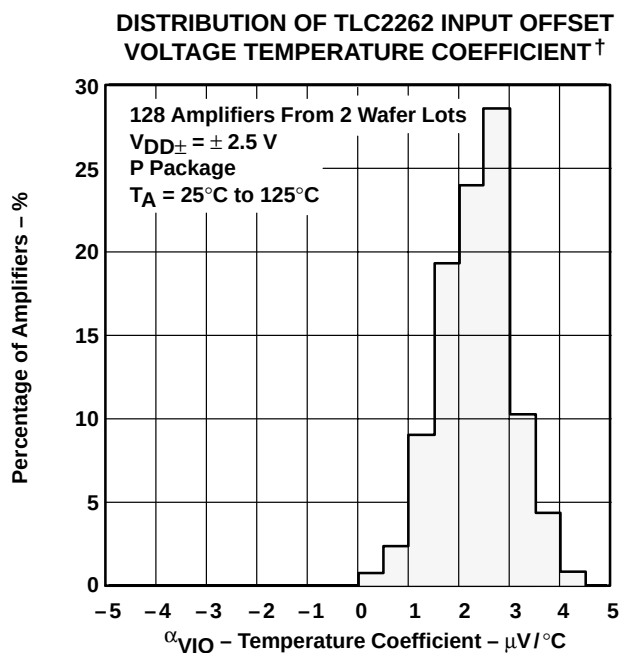

**Figure 8**

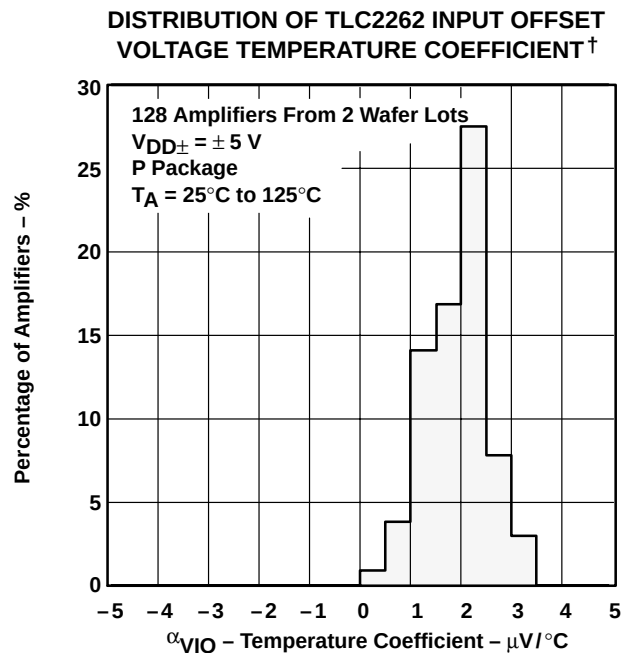


**Figure 9**


† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.




## TYPICAL CHARACTERISTICS

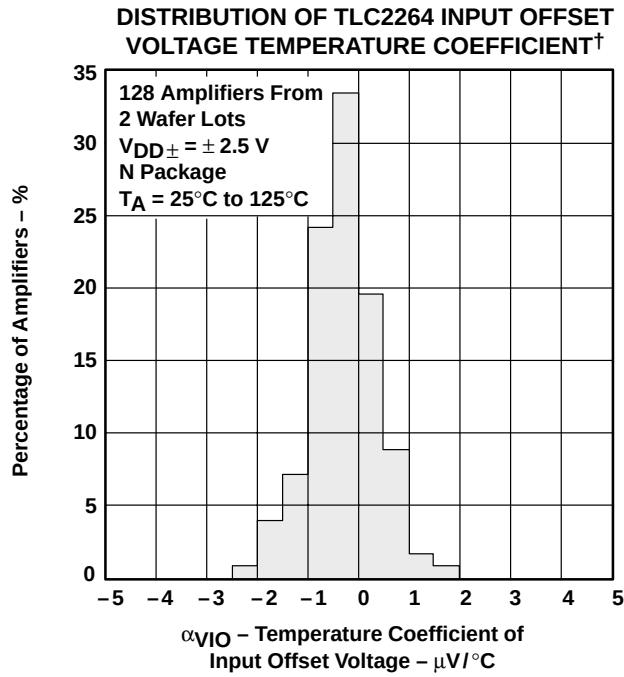


**Figure 10**

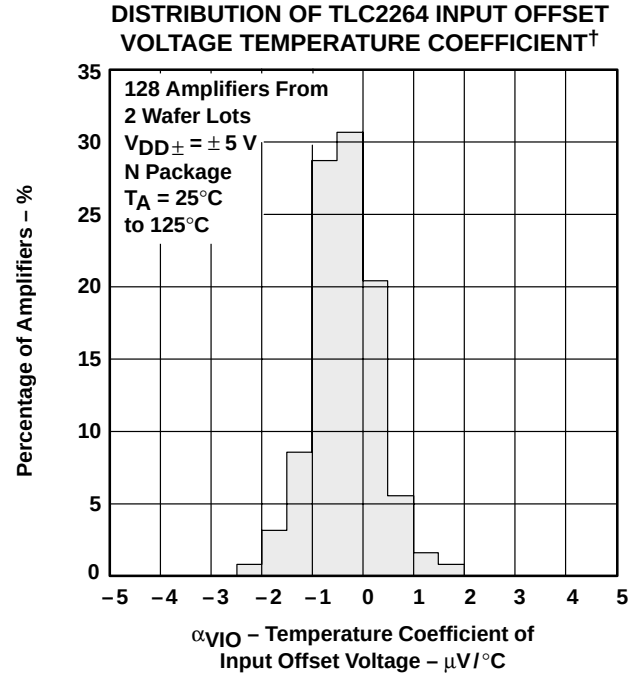

**Figure 11**

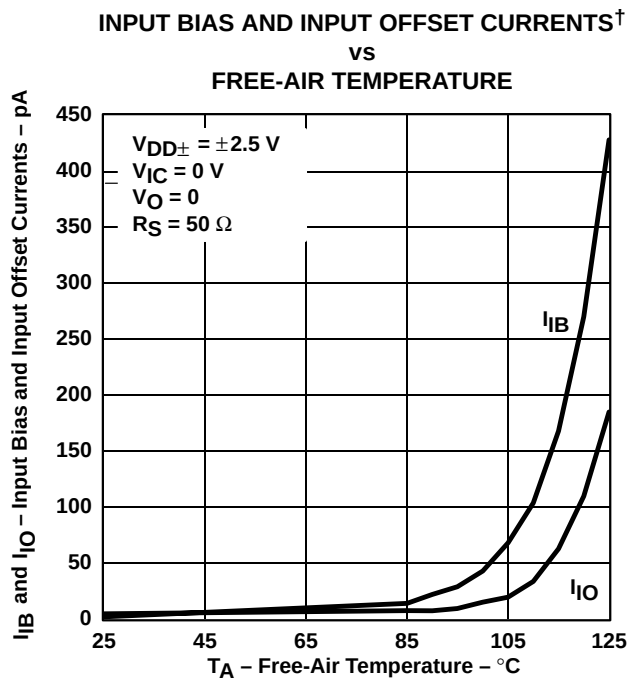

**Figure 12**

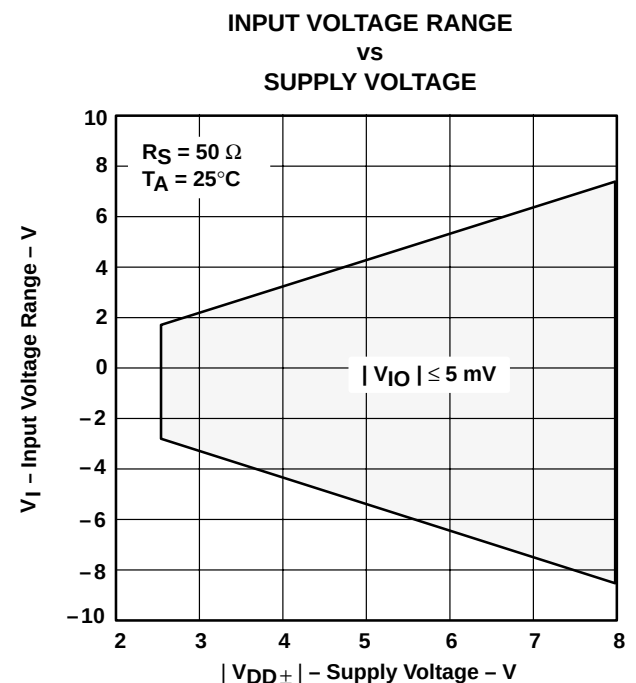

**Figure 13**

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

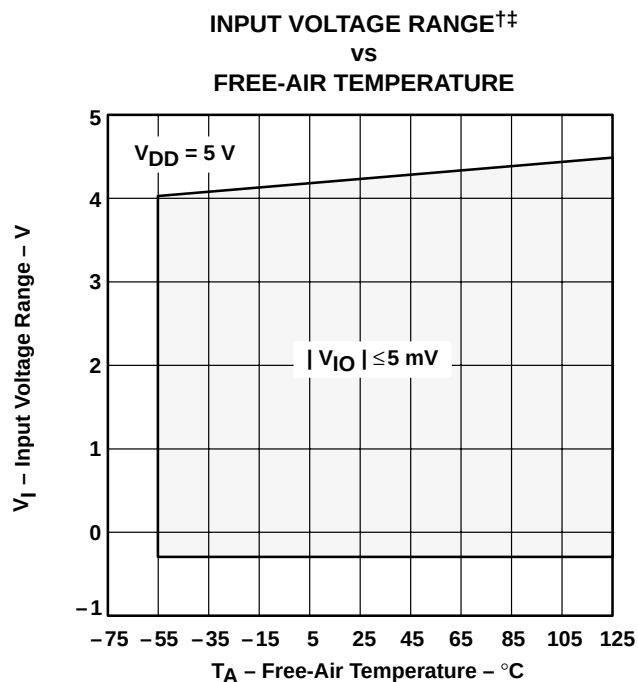


Figure 14

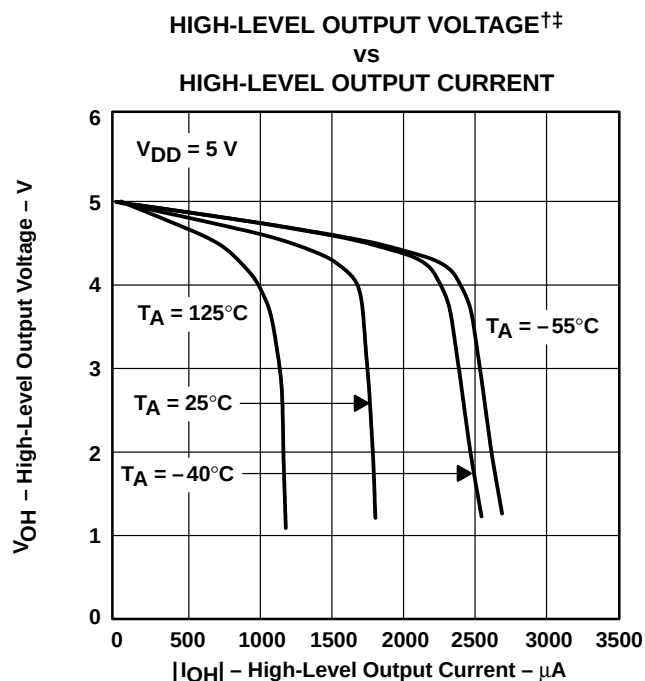


Figure 15

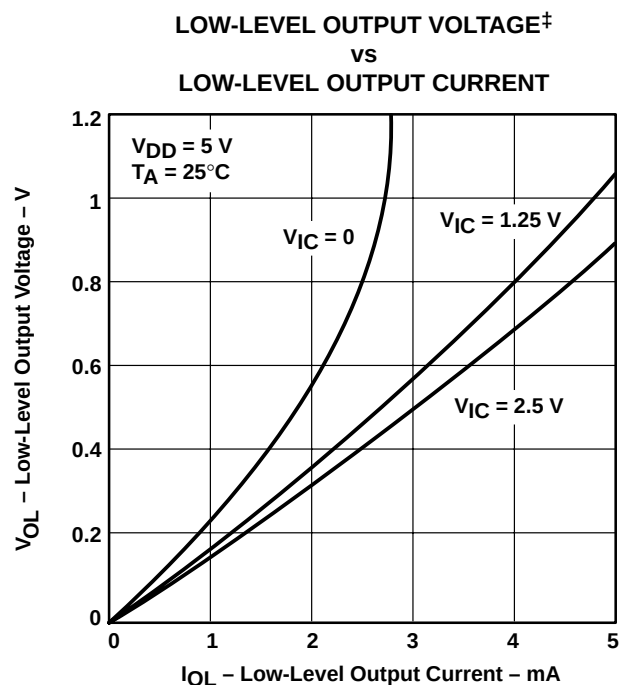


Figure 16





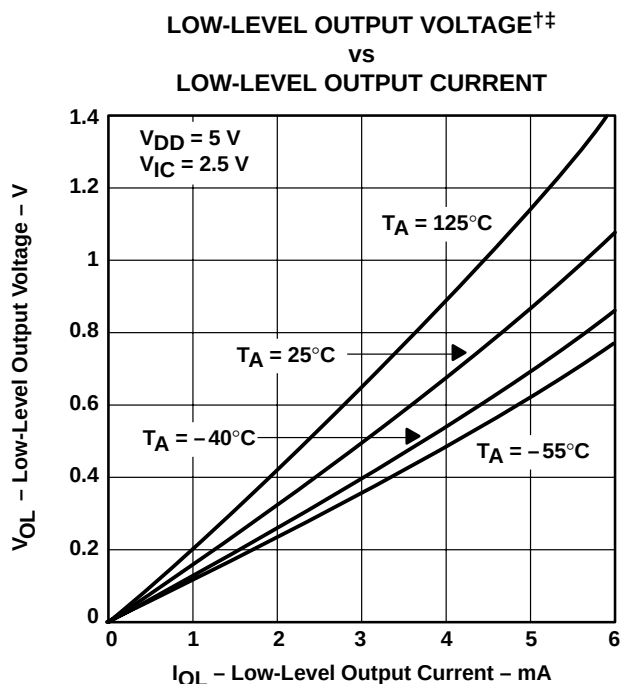


Figure 17

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

<sup>‡</sup> For curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V.

## TYPICAL CHARACTERISTICS

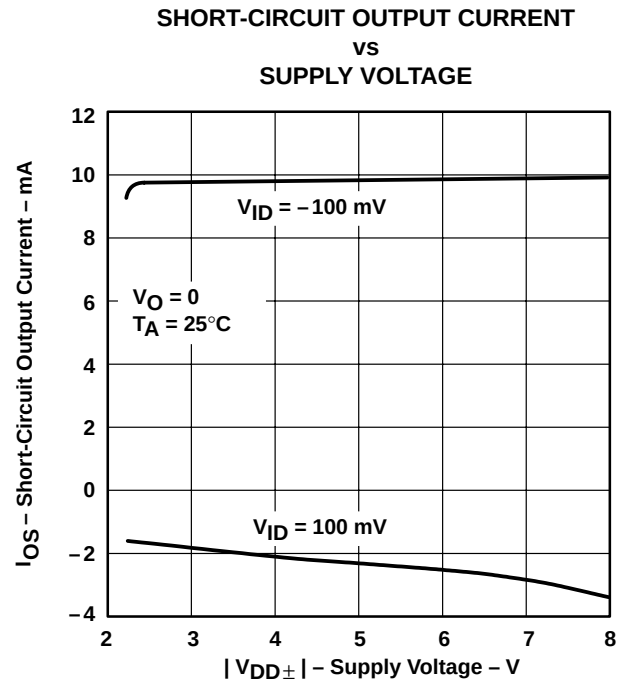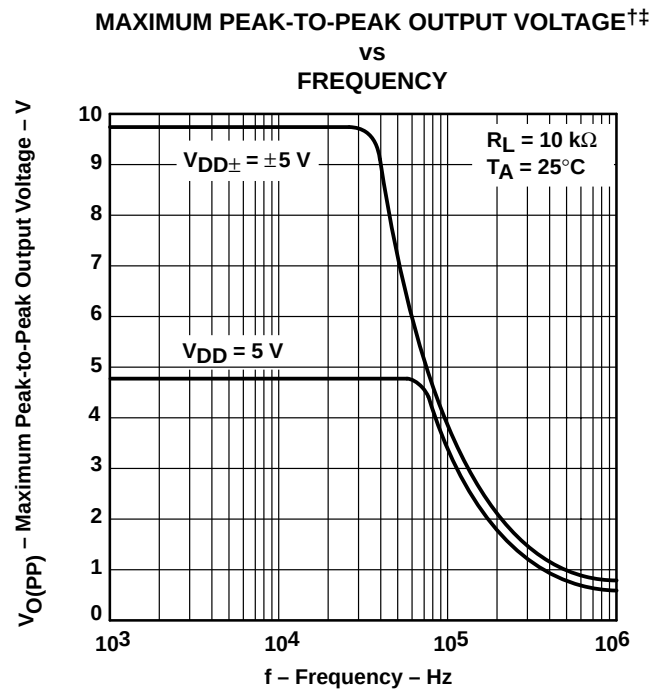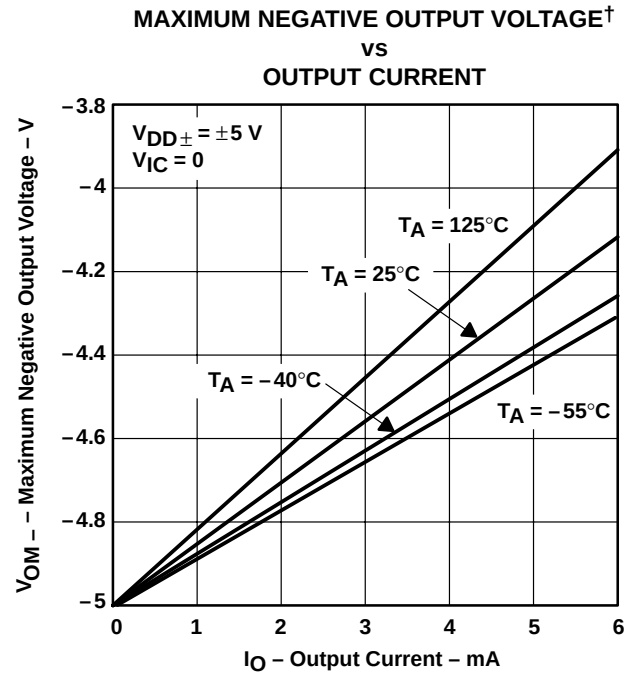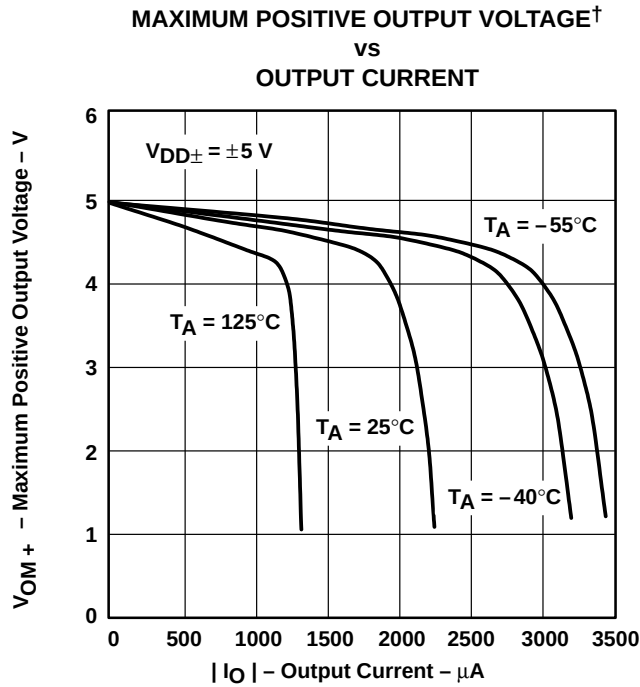

<sup>‡</sup> For curves where  $V_{DD} = 5$  V, all loads are referenced to 2.5 V.

<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

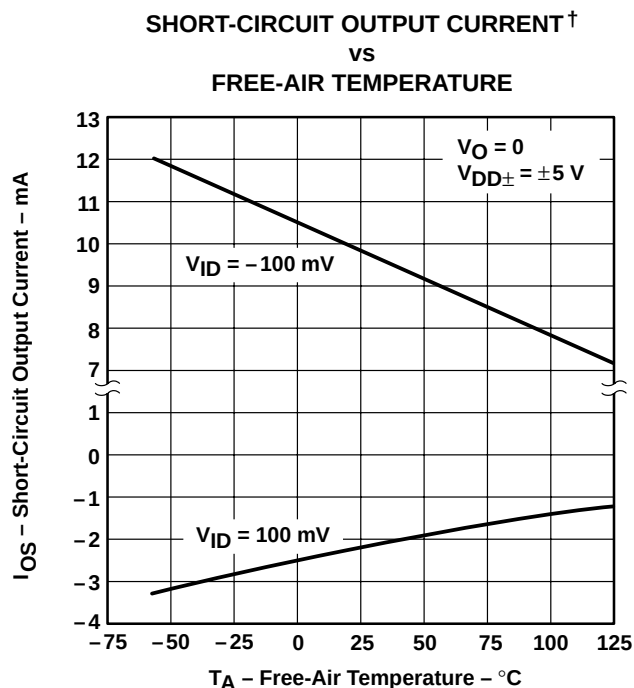


Figure 22

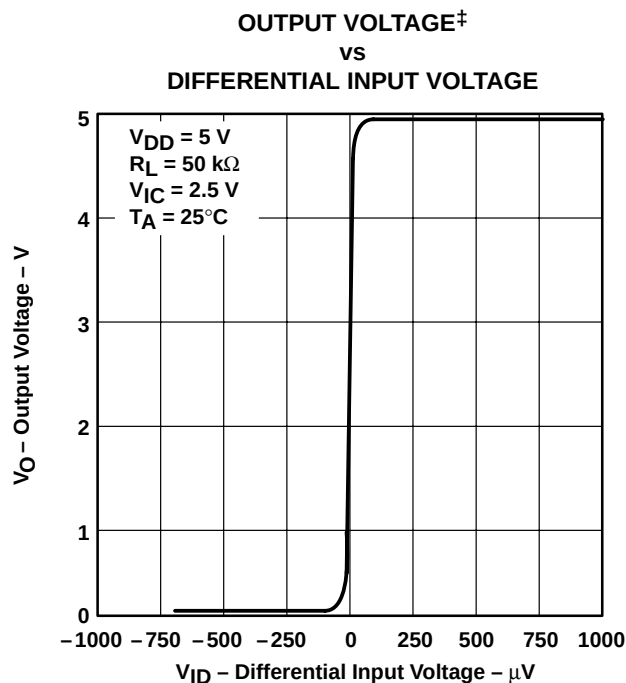


Figure 23

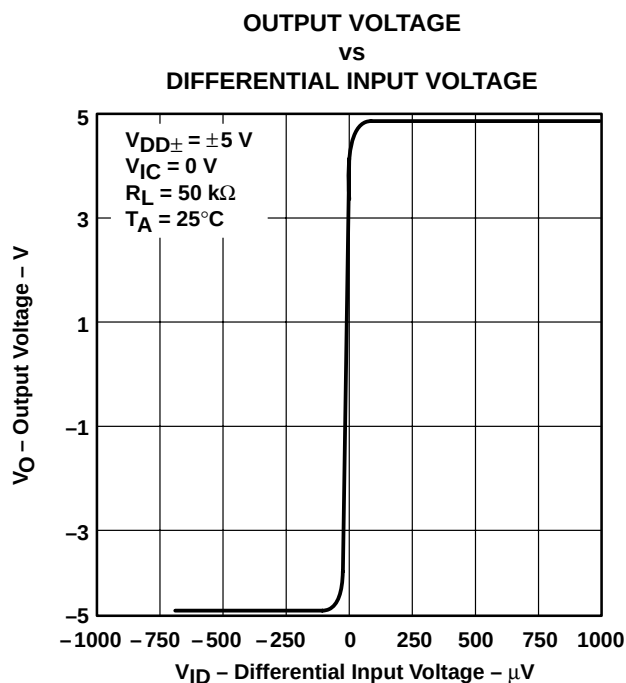


Figure 24

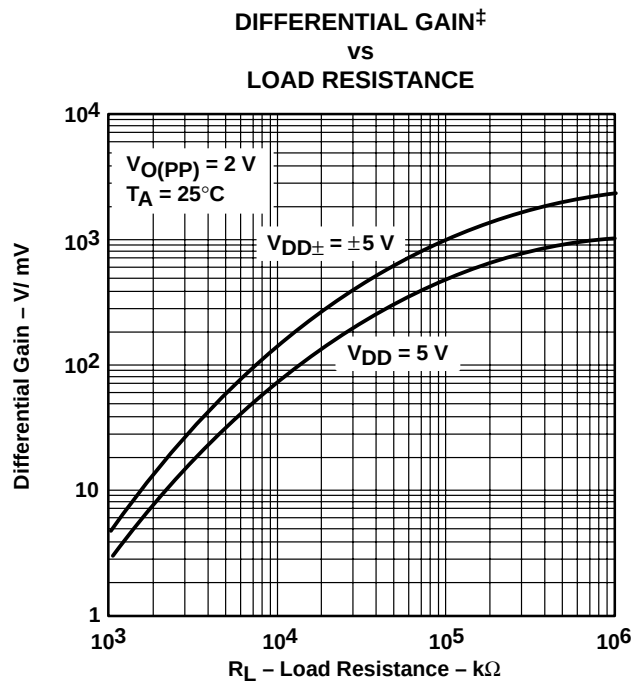


Figure 25


<sup>†</sup> Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

<sup>‡</sup> For curves where  $V_{DD} = 5 \text{ V}$ , all loads are referenced to 2.5 V.

## TYPICAL CHARACTERISTICS

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE<sup>†</sup> AMPLIFICATION AND PHASE MARGIN

VS  
FREQUENCY

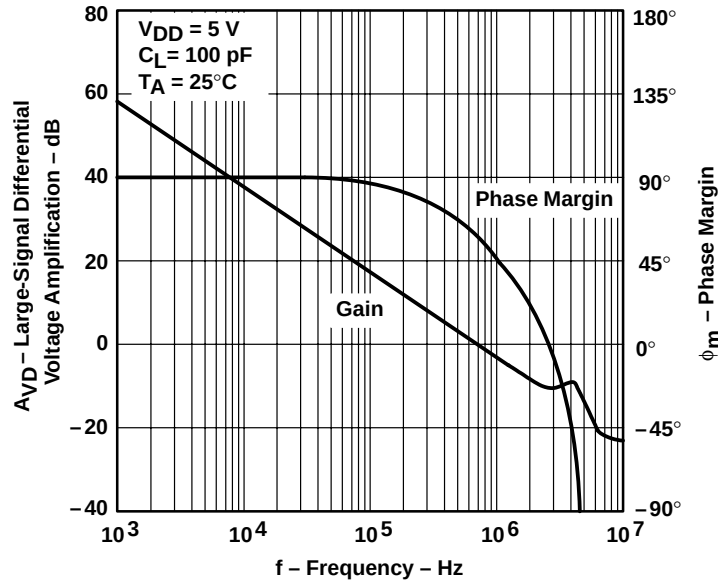

<sup>†</sup> For curves where  $V_{DD} = 5$  V, all loads are referenced to 2.5 V.

Figure 26

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION AND PHASE MARGIN

VS  
FREQUENCY

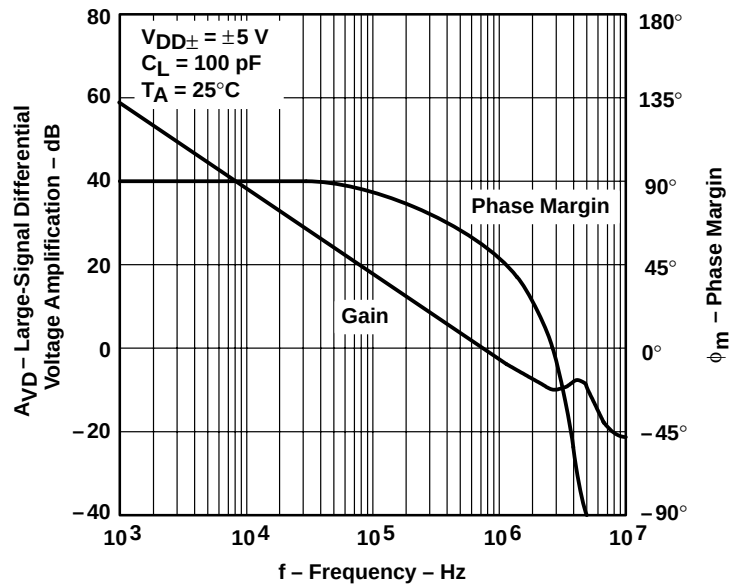


Figure 27

# TLC226x, TLC226xA Advanced LinCMOS™ RAIL-TO-RAIL OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

## TYPICAL CHARACTERISTICS

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION†‡

VS  
FREE-AIR TEMPERATURE

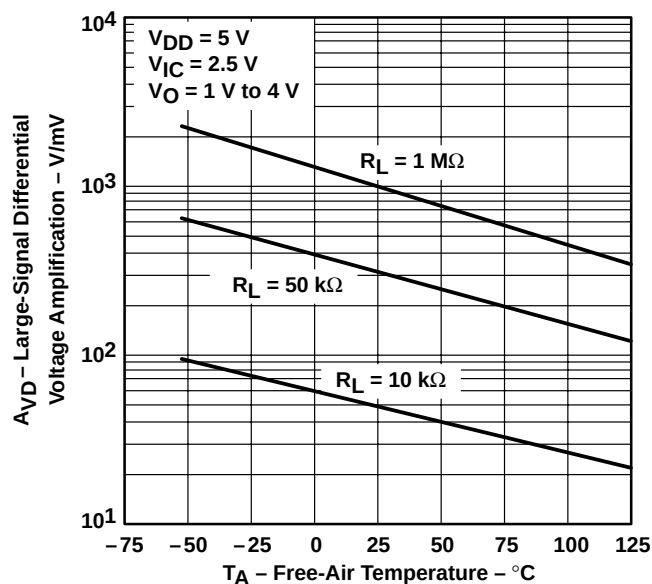


Figure 28

### LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION†

VS  
FREE-AIR TEMPERATURE

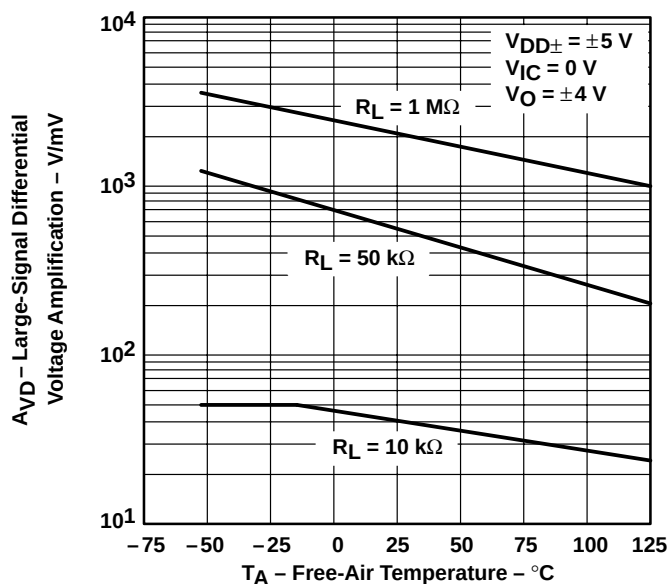


Figure 29

### OUTPUT IMPEDANCE‡

VS  
FREQUENCY

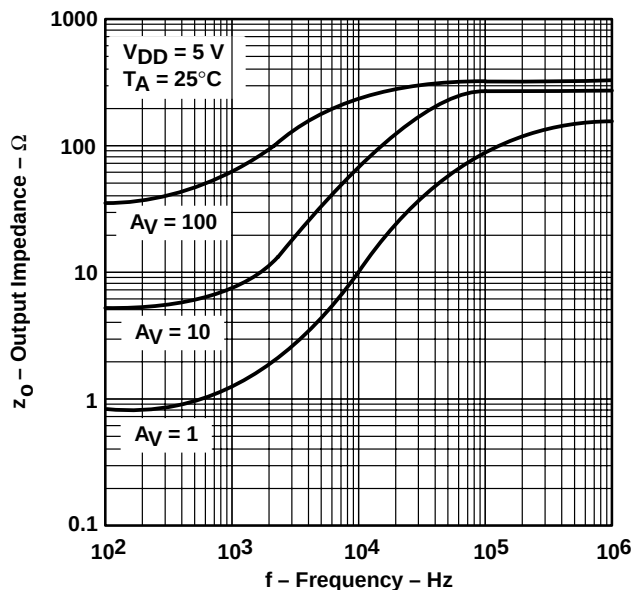


Figure 30

### OUTPUT IMPEDANCE

VS  
FREQUENCY





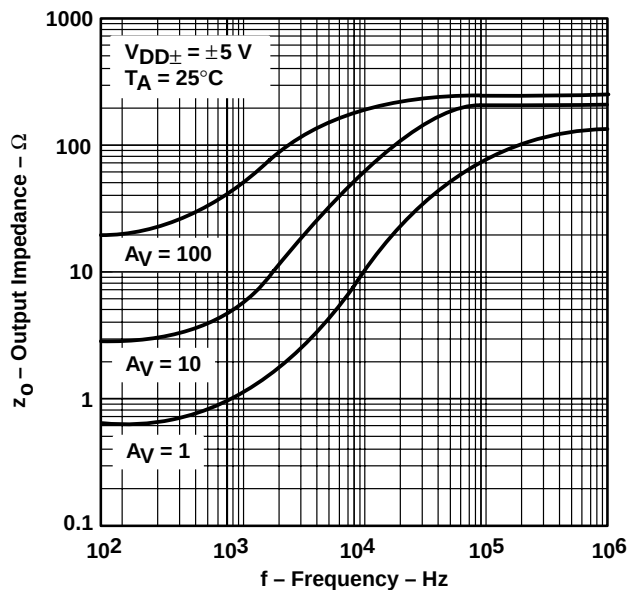


Figure 31

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

‡ For curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V.

## TYPICAL CHARACTERISTICS

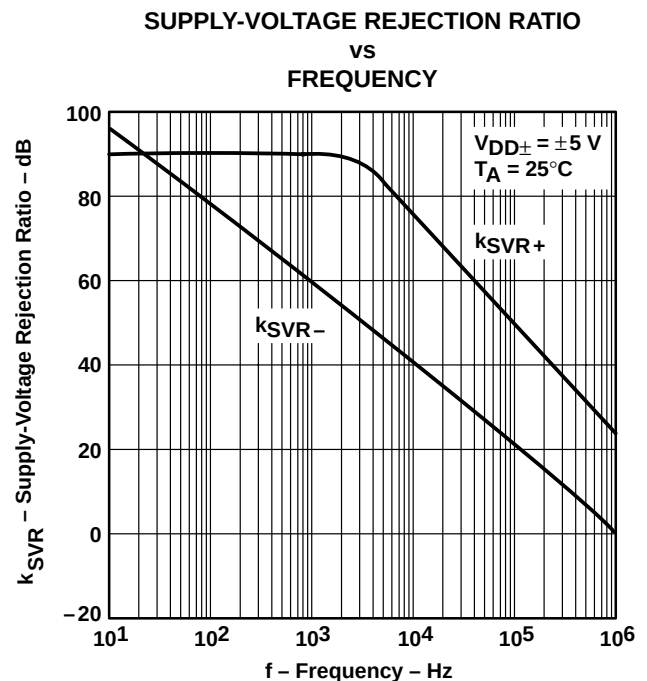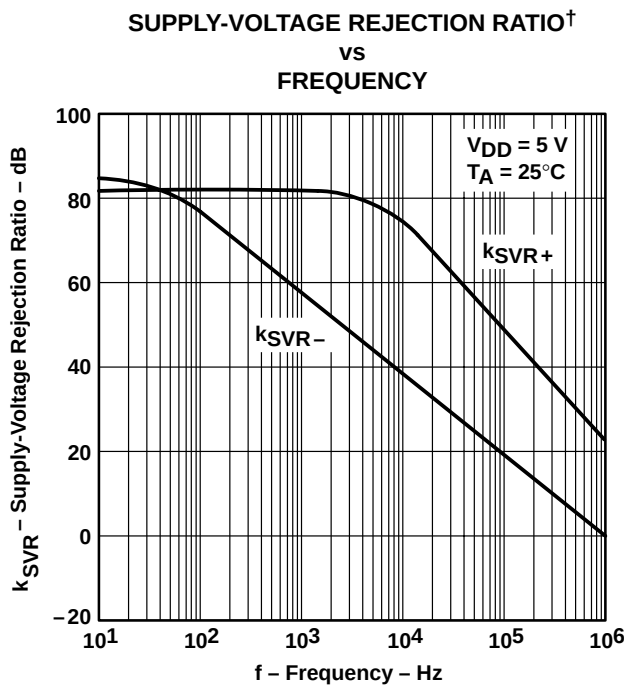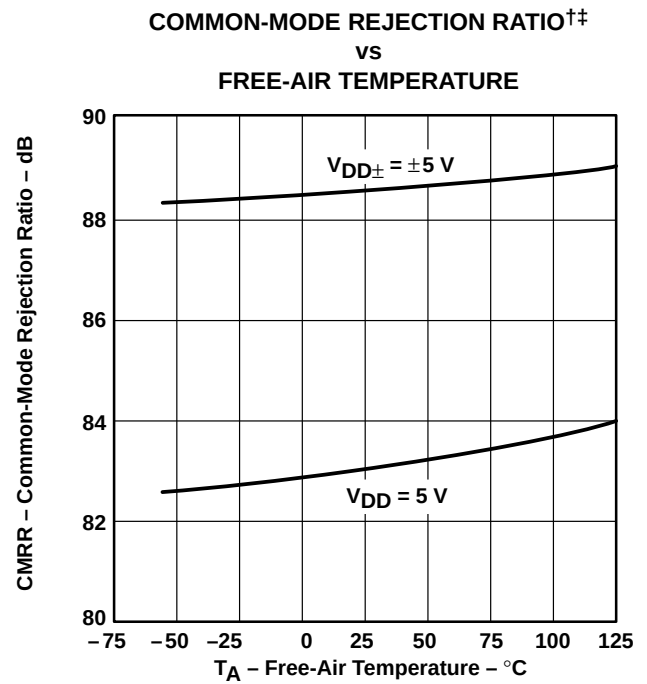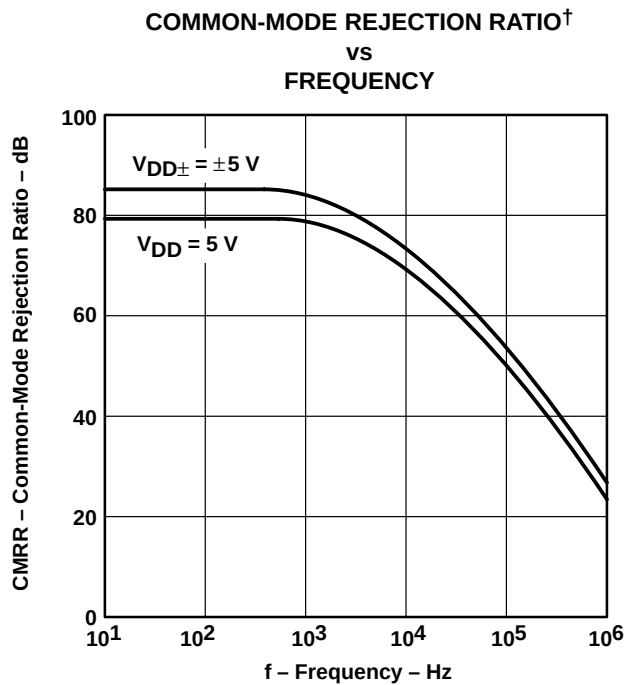

† For curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to  $2.5\text{ V}$ .

‡ Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

# TLC226x, TLC226xA Advanced LinCMOS™ RAIL-TO-RAIL OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

## TYPICAL CHARACTERISTICS

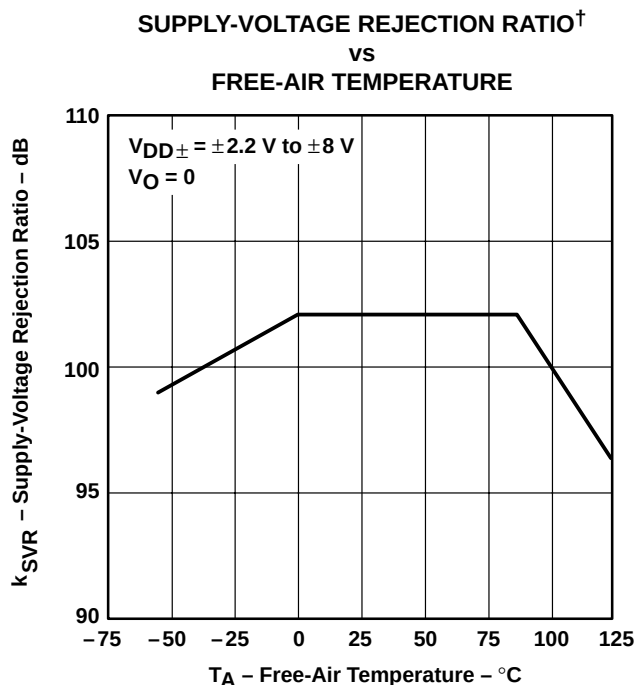


Figure 36

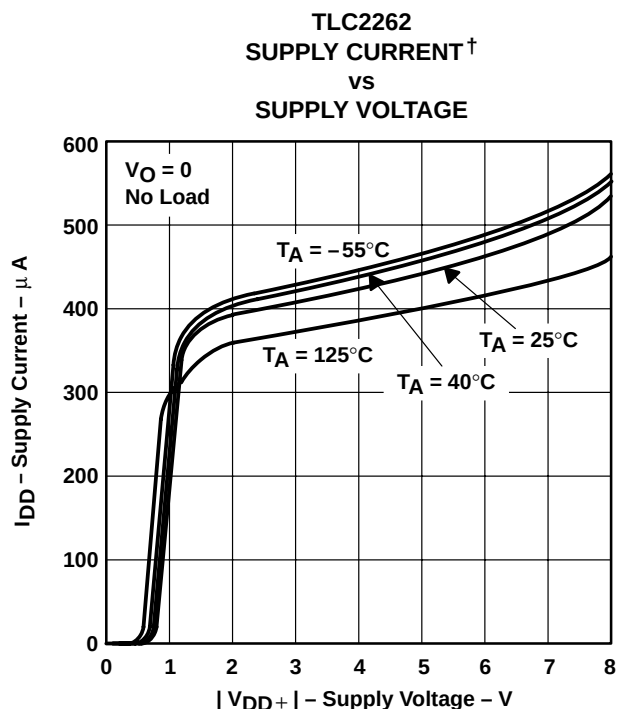


Figure 37

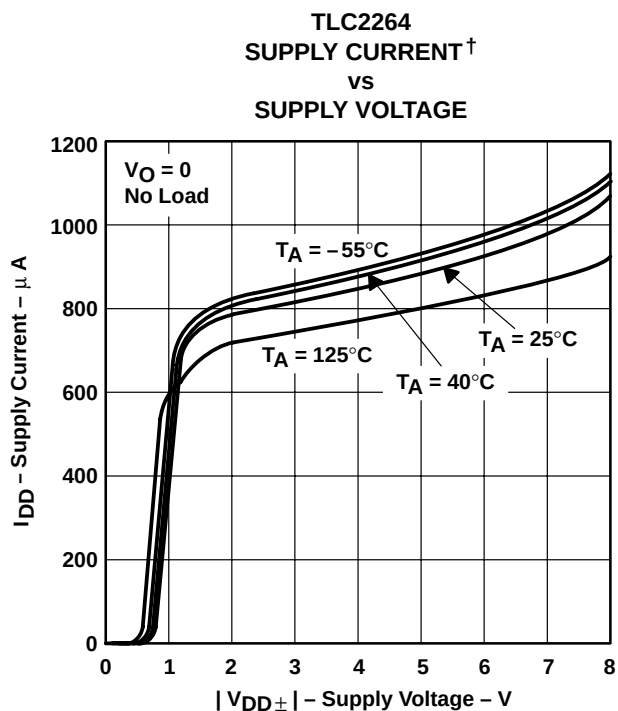


Figure 38

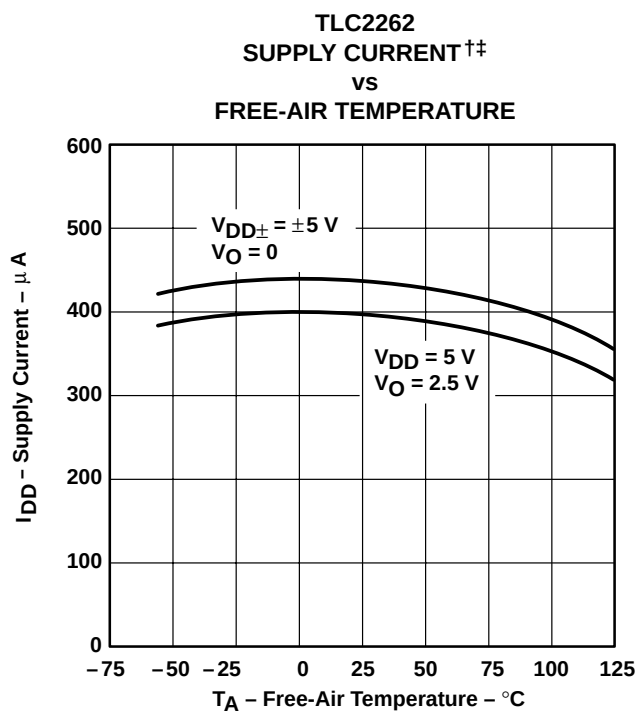


Figure 39

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

‡ For curves where  $V_{DD} = 5 \text{ V}$ , all loads are referenced to 2.5 V.



## TYPICAL CHARACTERISTICS

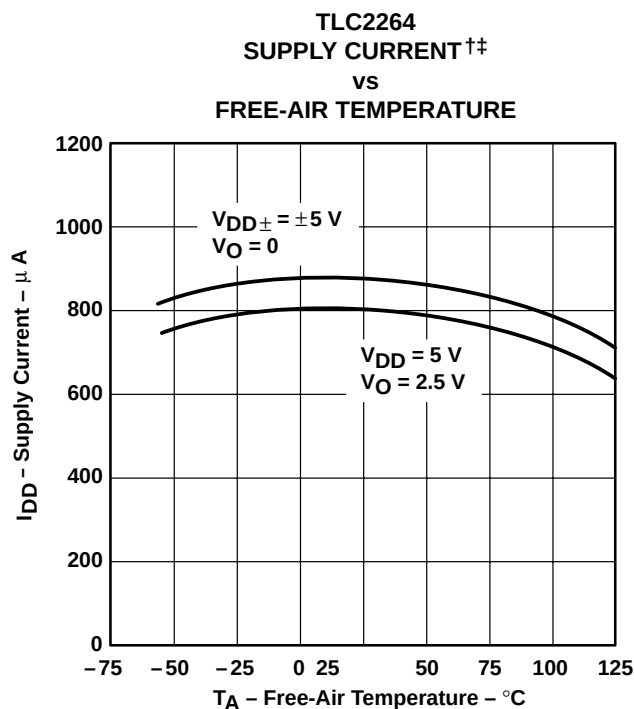


Figure 40

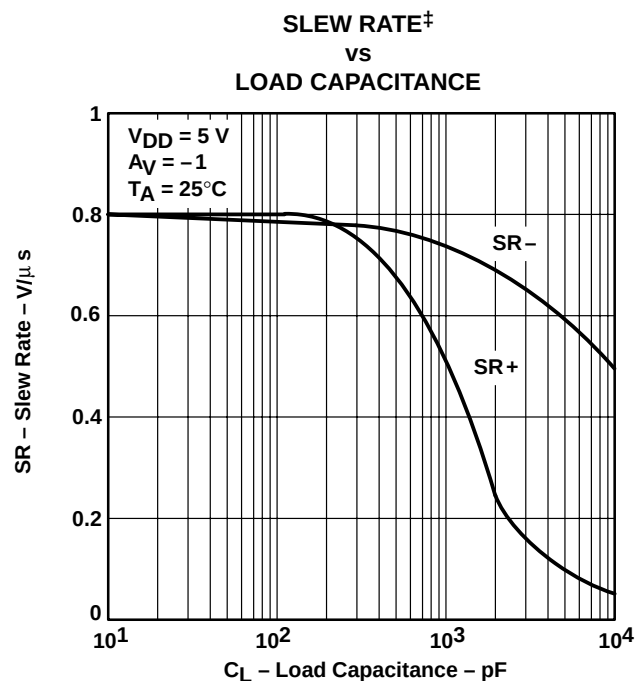


Figure 41

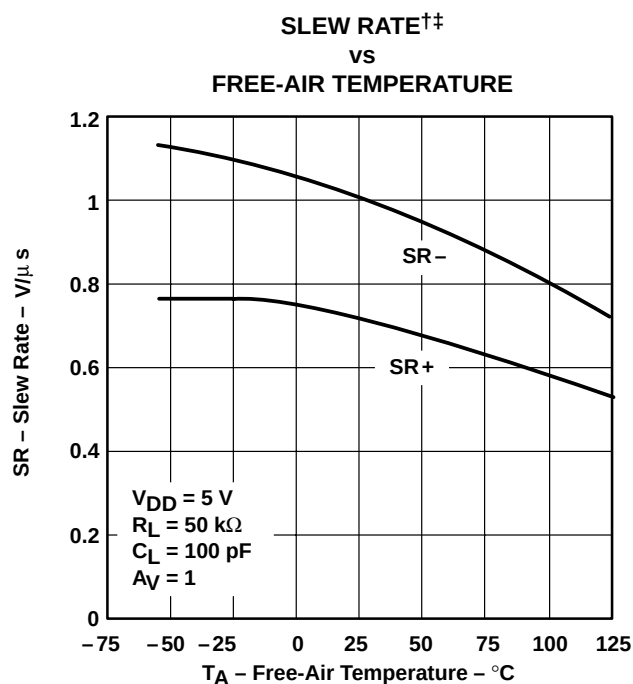


Figure 42

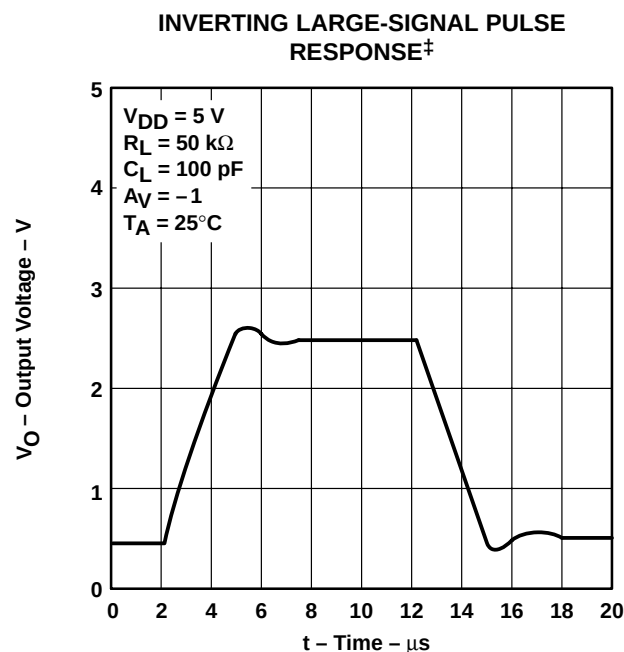


Figure 43

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

‡ For curves where  $V_{DD} = 5 V$ , all loads are referenced to 2.5 V.

# TLC226x, TLC226xA


## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001


#### TYPICAL CHARACTERISTICS

**INVERTING LARGE-SIGNAL PULSE RESPONSE**

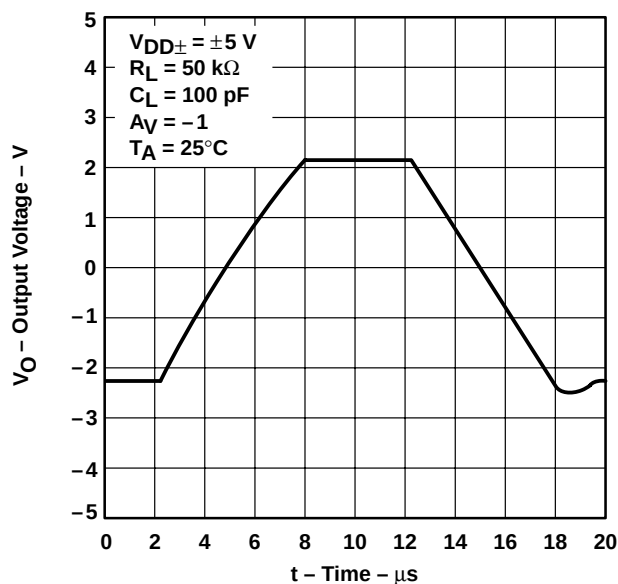


**Figure 44**

**VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE†**

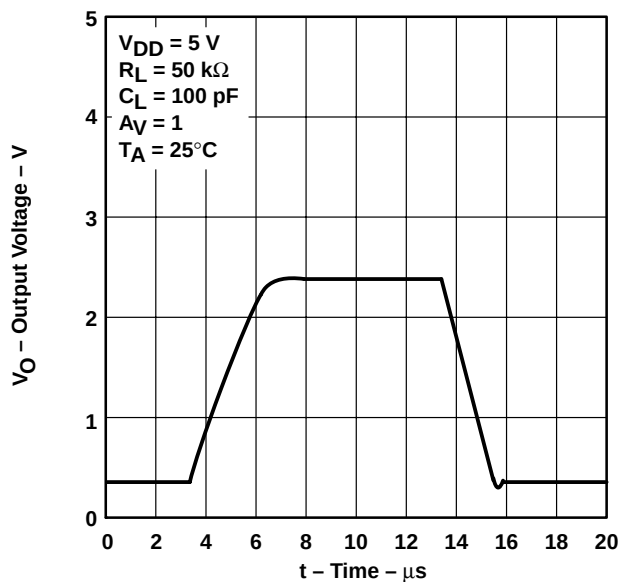


**Figure 45**

**VOLTAGE-FOLLOWER LARGE-SIGNAL PULSE RESPONSE**

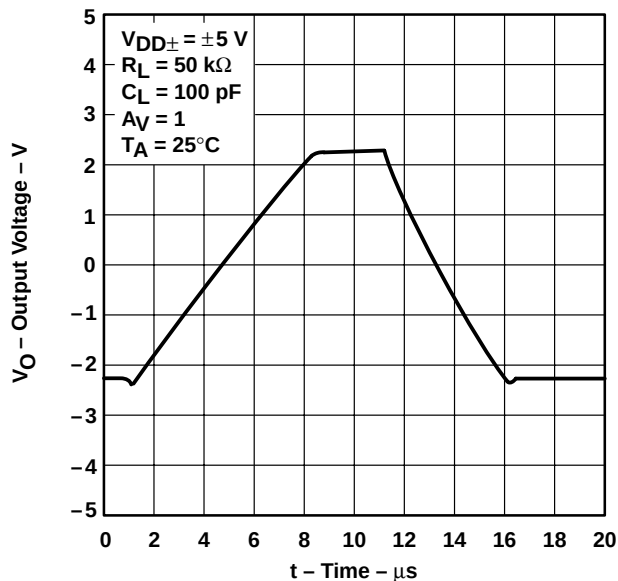

**Figure 46**

**INVERTING SMALL-SIGNAL PULSE RESPONSE†**

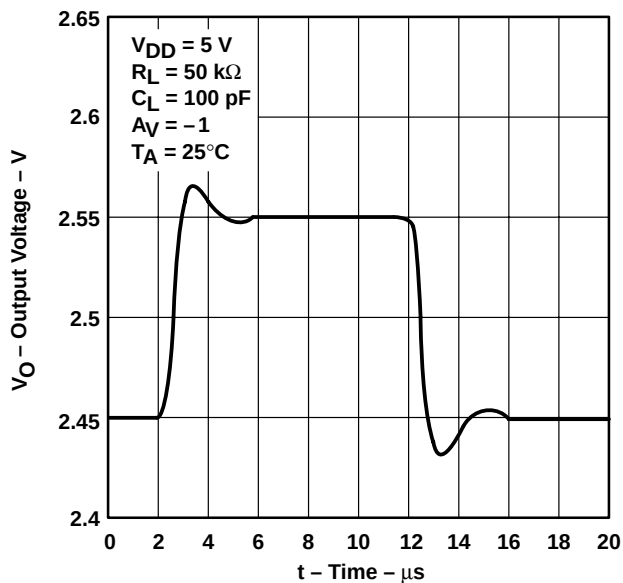

**Figure 47**

† For curves where  $V_{DD} = 5$  V, all loads are referenced to 2.5 V.

## TYPICAL CHARACTERISTICS

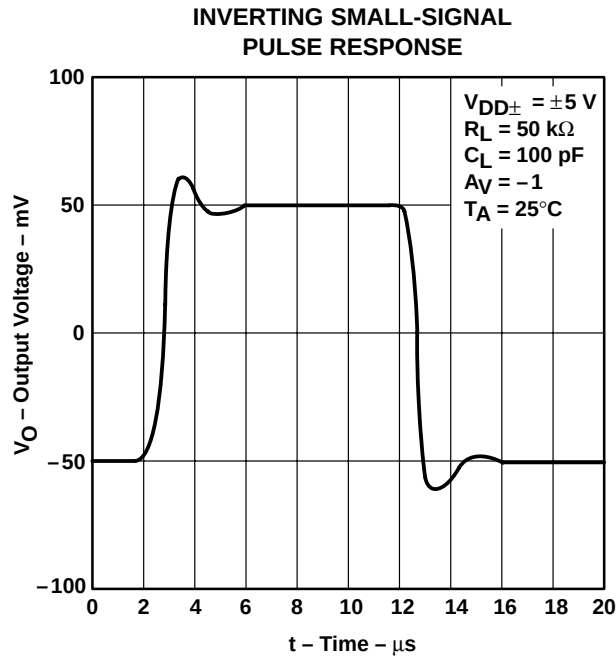


Figure 48

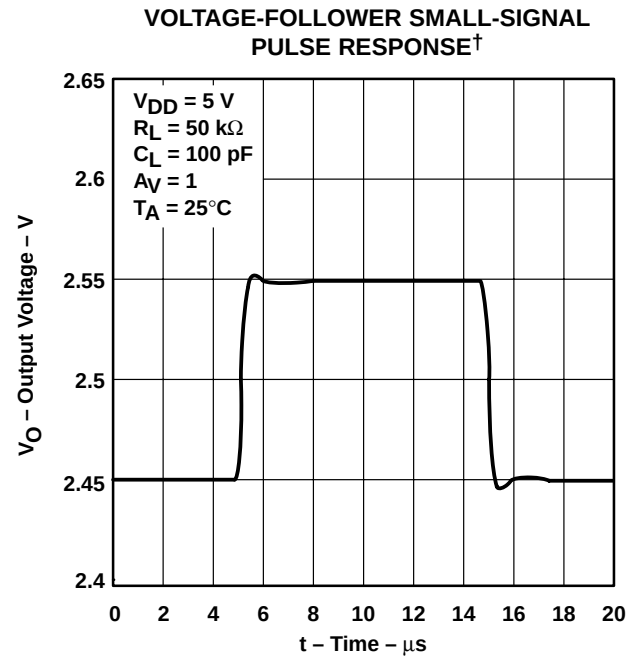


Figure 49

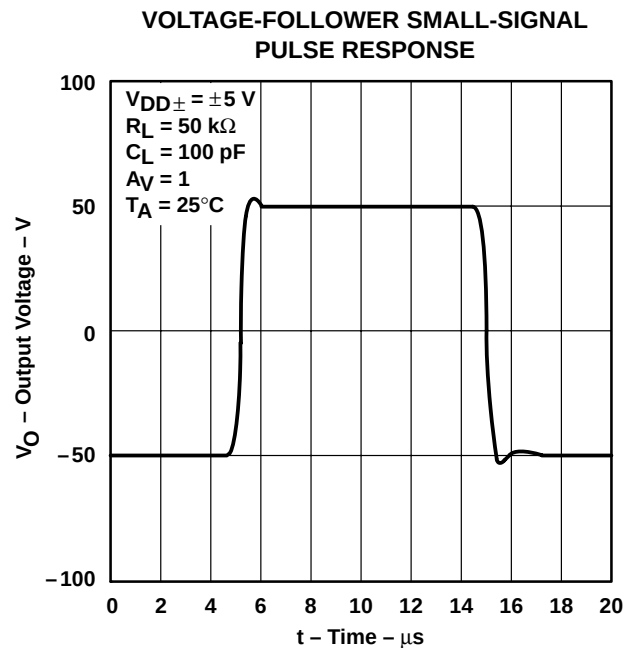


Figure 50

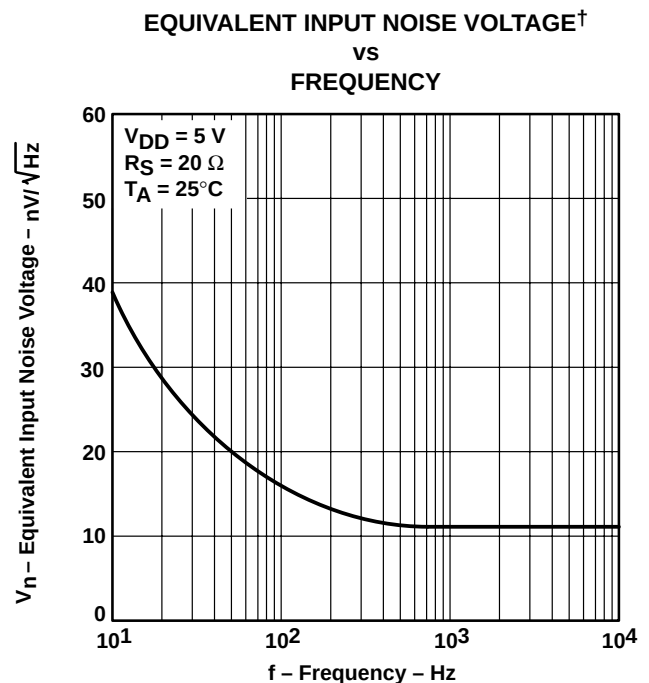


Figure 51

† For curves where  $V_{DD} = 5 \text{ V}$ , all loads are referenced to 2.5 V.

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

**EQUIVALENT INPUT NOISE VOLTAGE  
VS  
FREQUENCY**

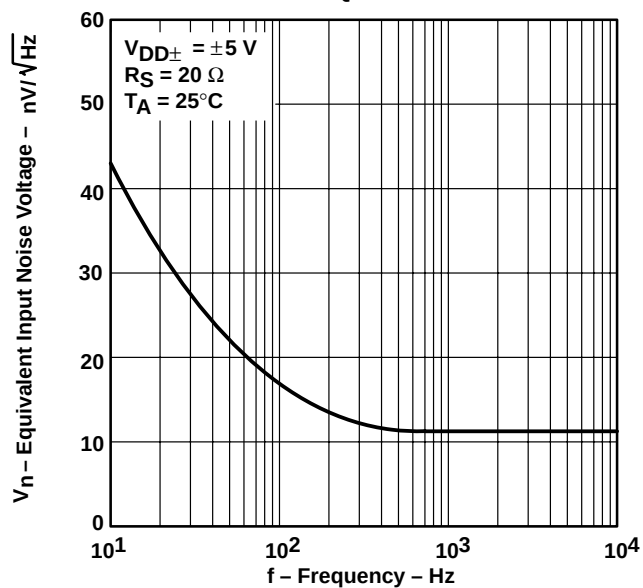


Figure 52

**EQUIVALENT INPUT NOISE VOLTAGE OVER  
A 10-SECOND PERIOD†**

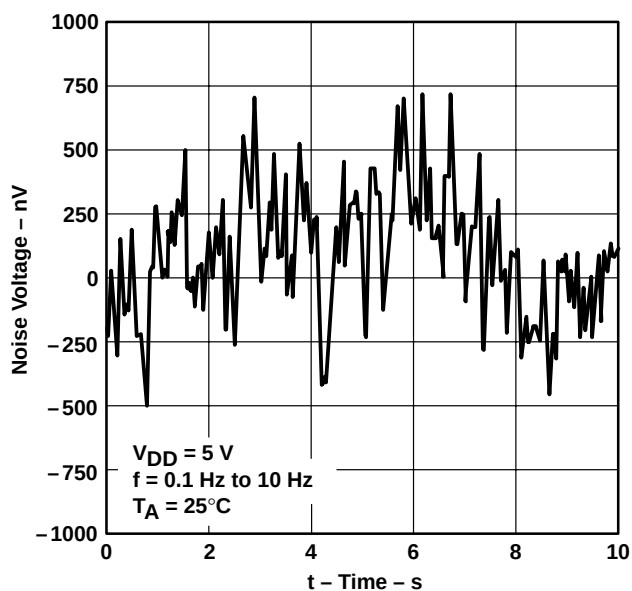


Figure 53

**INTEGRATED NOISE VOLTAGE  
VS  
FREQUENCY**

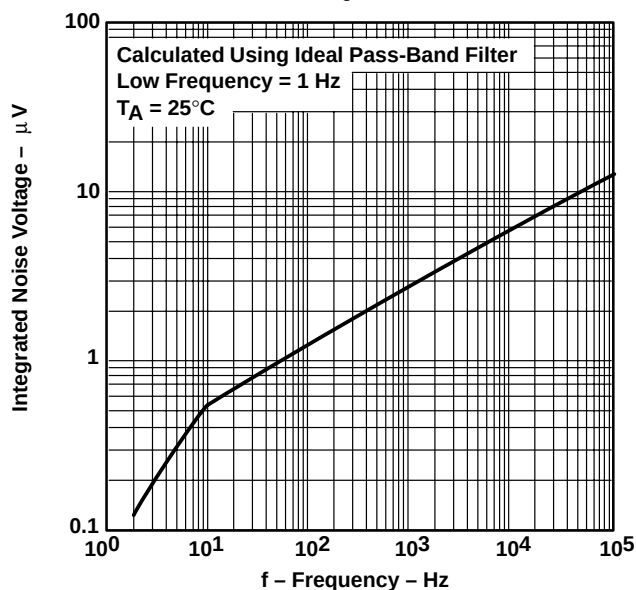


Figure 54

**TOTAL HARMONIC DISTORTION PLUS NOISE†  
VS  
FREQUENCY**

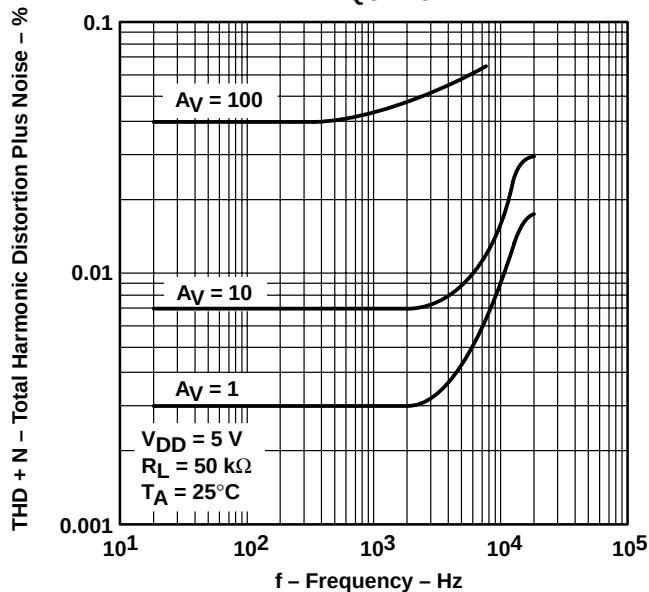


Figure 55

† For curves where  $V_{DD} = 5\text{ V}$ , all loads are referenced to 2.5 V.

## TYPICAL CHARACTERISTICS

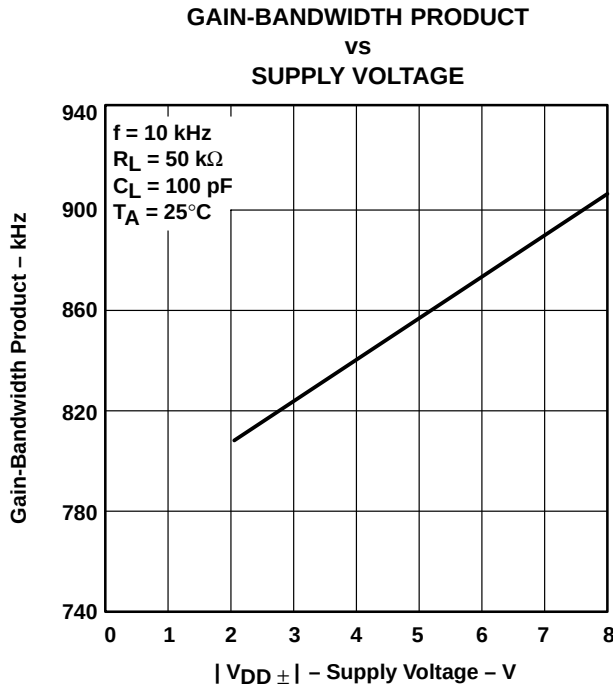


Figure 56

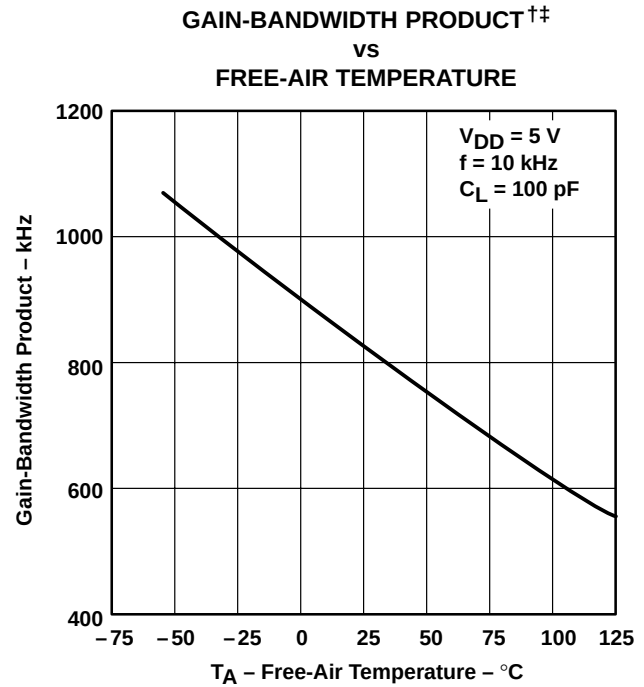


Figure 57

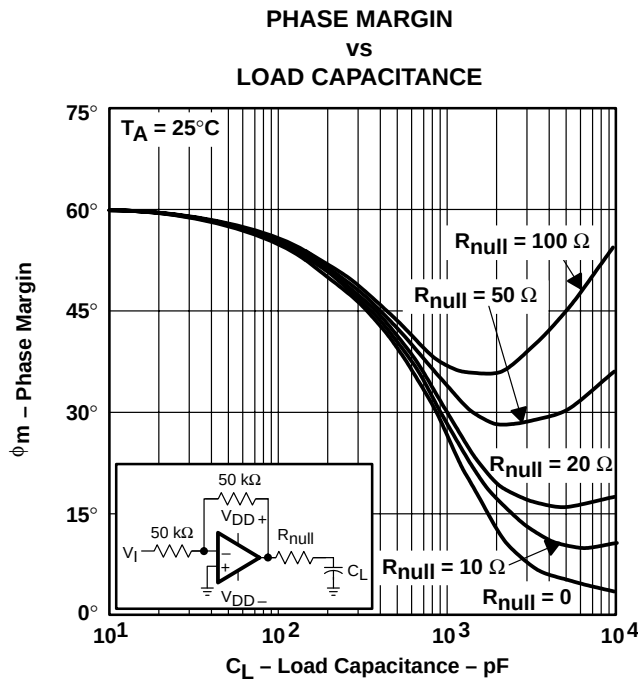


Figure 58

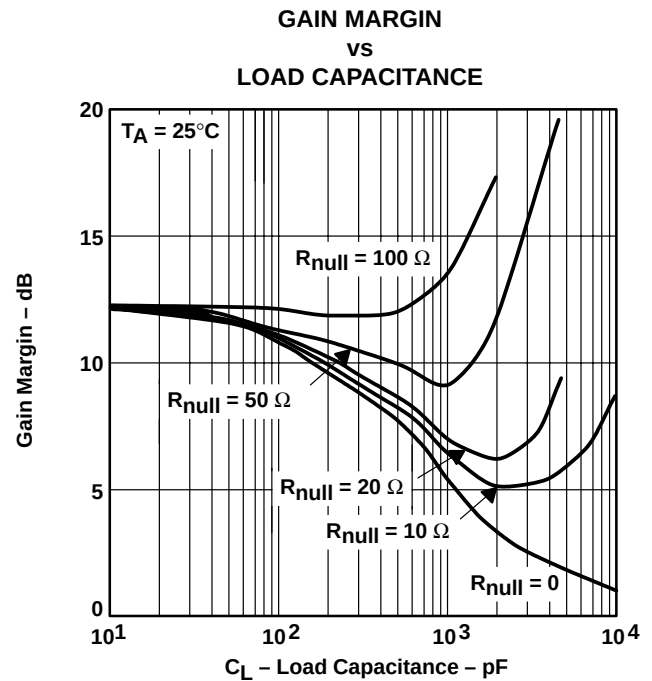


Figure 59

† Data at high and low temperatures are applicable only within the rated operating free-air temperature ranges of the various devices.

‡ For curves where  $V_{DD} = 5 \text{ V}$ , all loads are referenced to 2.5 V.

# TLC226x, TLC226xA

## Advanced LinCMOS™ RAIL-TO-RAIL

### OPERATIONAL AMPLIFIERS

SLOS177D – FEBRUARY 1997 – REVISED MARCH 2001

#### TYPICAL CHARACTERISTICS

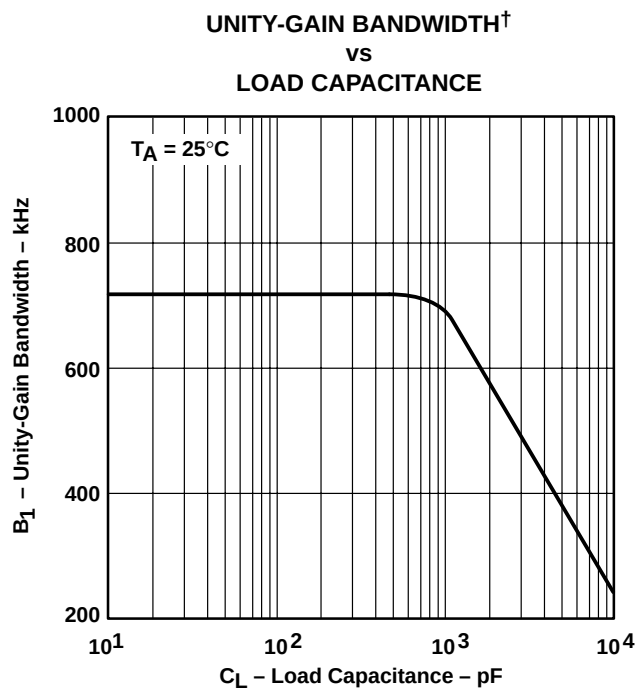


Figure 60

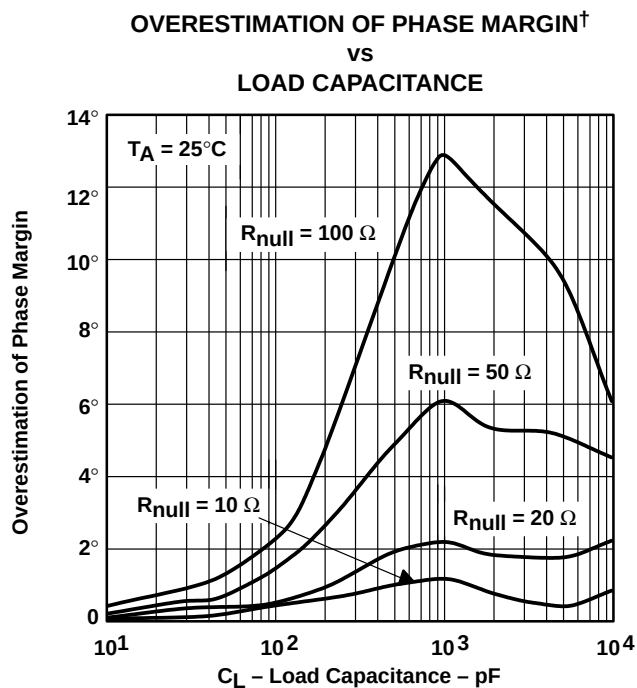


Figure 61

<sup>†</sup> See application information

## APPLICATION INFORMATION

### driving large capacitive loads

The TLC226x is designed to drive larger capacitive loads than most CMOS operational amplifiers. Figure 58 and Figure 59 illustrate its ability to drive loads greater than 400 pF while maintaining good gain and phase margins ( $R_{null} = 0$ ).

A smaller series resistor ( $R_{null}$ ) at the output of the device (see Figure 62) improves the gain and phase margins when driving large capacitive loads. Figure 58 and Figure 59 show the effects of adding series resistances of 10  $\Omega$ , 20  $\Omega$ , 50  $\Omega$ , and 100  $\Omega$ . The addition of this series resistor has two effects: the first is that it adds a zero to the transfer function and the second is that it reduces the frequency of the pole associated with the output load in the transfer function.

The zero introduced to the transfer function is equal to the series resistance times the load capacitance. To calculate the improvement in phase margin, equation 1 can be used.

$$\Delta\Theta_{m1} = \tan^{-1} \left( 2 \times \pi \times \text{UGBW} \times R_{null} \times C_L \right) \quad (1)$$

Where :

$\Delta\Theta_{m1}$  = improvement in phase margin  
 UGBW = unity-gain bandwidth frequency  
 $R_{null}$  = output series resistance  
 $C_L$  = load capacitance

The unity-gain bandwidth (UGBW) frequency decreases as the capacitive load increases (see Figure 60). To use equation 1, UGBW must be approximated from Figure 60.

Using equation 1 alone overestimates the improvement in phase margin, as illustrated in Figure 61. The overestimation is caused by the decrease in the frequency of the pole associated with the load, thus providing additional phase shift and reducing the overall improvement in phase margin. The pole associated with the load is reduced by the factor calculated in equation 2.

$$F = \frac{1}{1 + g_m \times R_{null}} \quad (2)$$

Where :

$F$  = factor reducing frequency of pole  
 $g_m$  = small-signal output transconductance (typically  $4.83 \times 10^{-3}$  mhos)  
 $R_{null}$  = output series resistance

For the TLC226x, the pole associated with the load is typically 7 MHz with 100-pF load capacitance. This value varies inversely with  $C_L$ : at  $C_L = 10$  pF, use 70 MHz, at  $C_L = 1000$  pF, use 700 kHz, and so on.

Reducing the pole associated with the load introduces phase shift, thereby reducing phase margin. This results in an error in the increase in phase margin expected by considering the zero alone (equation 1). Equation 3 approximates the reduction in phase margin due to the movement of the pole associated with the load. The result of this equation can be subtracted from the result of the equation in equation 1 to better approximate the improvement in phase margin.

## APPLICATION INFORMATION

### driving large capacitive loads (continued)

$$\Delta\theta_{m2} = \tan^{-1} \left[ \frac{UGBW}{(F \times P_2)} \right] - \tan^{-1} \left( \frac{UGBW}{P_2} \right) \quad (3)$$

Where :


$\Delta\theta_{m2}$  = reduction in phase margin

UGBW = unity-gain bandwidth frequency

F = factor from equation 2

$P_2$  = unadjusted pole (70 MHz@10 pF, 7 MHz@100 pF, etc.)

Using these equations with Figure 60 and Figure 61 enables the designer to choose the appropriate output series resistance to optimize the design of circuits driving large capacitive loads.

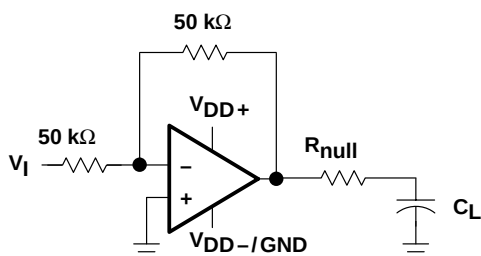

**Figure 62. Series-Resistance Circuit**




## APPLICATION INFORMATION

### macromodel information

Macromodel information provided was derived using Microsim *Parts*™, the model generation software used with Microsim *PSpice*™. The Boyle macromodel (see Note 5) and subcircuit in Figure 63 are generated using the TLC226x typical electrical and operating characteristics at  $T_A = 25^\circ\text{C}$ . Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 5: G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers," *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

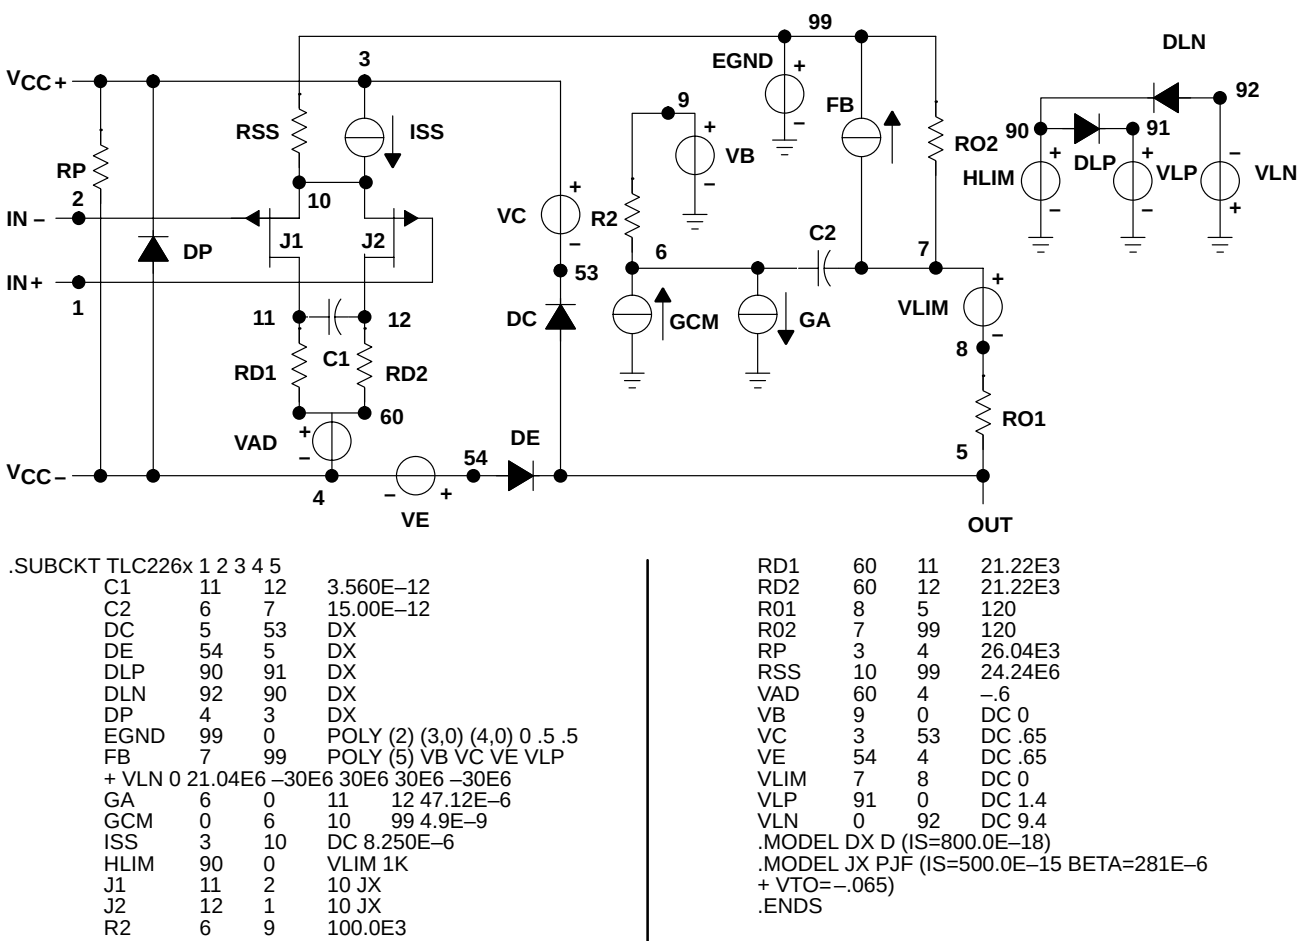

**Figure 63. Boyle Macromodel and Subcircuit**

*PSpice* and *Parts* are trademarks of MicroSim Corporation.

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|-----------------------------|
| 5962-9469201Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469201QHA  | ACTIVE        | CFP          | U                  | 10   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469201QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469202Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469202QCA  | ACTIVE        | CDIP         | J                  | 14   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469202QDA  | ACTIVE        | CFP          | W                  | 14   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469203Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469203QHA  | ACTIVE        | CFP          | U                  | 10   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469203QPA  | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469204Q2A  | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469204QCA  | ACTIVE        | CDIP         | J                  | 14   | 1           | TBD                        | Call TI          | Call TI              |                             |
| 5962-9469204QDA  | ACTIVE        | CFP          | W                  | 14   | 1           | TBD                        | Call TI          | Call TI              |                             |
| TLC2262AID       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AIDG4     | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AIDR      | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AIDRG4    | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AIP       | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2262AIPE4     | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2262AIPW      | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AIPWG4    | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AIPWLE    | OBSOLETE      | TSSOP        | PW                 | 8    |             | TBD                        | Call TI          | Call TI              |                             |
| TLC2262AIPWR     | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|-----------------------------|
| TLC2262AIPWRG4   | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AMFKB     | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | POST-PLATE       | N / A for Pkg Type   |                             |
| TLC2262AMJG      | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2262AMJGB     | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2262AMUB      | ACTIVE        | CFP          | U                  | 10   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2262AQD       | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AQDG4     | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262AQDR      | OBSOLETE      | SOIC         | D                  | 8    |             | TBD                        | Call TI          | Call TI              |                             |
| TLC2262AQDRG4    | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262CD        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262CDG4      | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262CDR       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262CDRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262CP        | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2262CPE4      | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2262CPW       | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262CPWG4     | ACTIVE        | TSSOP        | PW                 | 8    | 150         | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262CPWLE     | OBSOLETE      | TSSOP        | PW                 | 8    |             | TBD                        | Call TI          | Call TI              |                             |
| TLC2262CPWR      | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262CPWRG4    | ACTIVE        | TSSOP        | PW                 | 8    | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|-----------------------------|
| TLC2262ID        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262IDG4      | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262IDR       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262IDRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262IP        | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2262IPE4      | ACTIVE        | PDIP         | P                  | 8    | 50          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2262MFKB      | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | POST-PLATE       | N / A for Pkg Type   |                             |
| TLC2262MJGB      | ACTIVE        | CDIP         | JG                 | 8    | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2262MUB       | ACTIVE        | CFP          | U                  | 10   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2262QD        | ACTIVE        | SOIC         | D                  | 8    | 75          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262QDG4      | ACTIVE        | SOIC         | D                  | 8    | 1500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262QDR       | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2262QDRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AID       | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AIDG4     | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AIDR      | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AIDRG4    | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AIN       | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2264AINE4     | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|-----------------------------|
| TLC2264AIPW      | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AIPWG4    | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AIPWLE    | OBSOLETE      | TSSOP        | PW                 | 14   |             | TBD                        | Call TI          | Call TI              |                             |
| TLC2264AIPWR     | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AIPWRG4   | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AMFKB     | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | POST-PLATE       | N / A for Pkg Type   |                             |
| TLC2264AMJ       | ACTIVE        | CDIP         | J                  | 14   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2264AMJB      | ACTIVE        | CDIP         | J                  | 14   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2264AMWB      | ACTIVE        | CFP          | W                  | 14   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2264AQD       | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AQDG4     | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264AQDR      | OBSOLETE      | SOIC         | D                  | 14   |             | TBD                        | Call TI          | Call TI              |                             |
| TLC2264AQDRG4    | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264CD        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264CDG4      | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264CDR       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264CDRG4     | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264CN        | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2264CNE4      | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2264CPW       | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Samples<br>(Requires Login) |
|------------------|---------------|--------------|--------------------|------|-------------|----------------------------|------------------|----------------------|-----------------------------|
| TLC2264CPWG4     | ACTIVE        | TSSOP        | PW                 | 14   | 90          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264CPWLE     | OBSOLETE      | TSSOP        | PW                 | 14   |             | TBD                        | Call TI          | Call TI              |                             |
| TLC2264CPWR      | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264CPWRG4    | ACTIVE        | TSSOP        | PW                 | 14   | 2000        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264ID        | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264IDG4      | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264IDR       | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264IDRG4     | ACTIVE        | SOIC         | D                  | 14   | 2500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264IN        | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2264INE4      | ACTIVE        | PDIP         | N                  | 14   | 25          | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   |                             |
| TLC2264MFKB      | ACTIVE        | LCCC         | FK                 | 20   | 1           | TBD                        | POST-PLATE       | N / A for Pkg Type   |                             |
| TLC2264MJB       | ACTIVE        | CDIP         | J                  | 14   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2264MWB       | ACTIVE        | CFP          | W                  | 14   | 1           | TBD                        | A42              | N / A for Pkg Type   |                             |
| TLC2264QD        | OBSOLETE      | SOIC         | D                  | 14   |             | TBD                        | Call TI          | Call TI              |                             |
| TLC2264QDG4      | ACTIVE        | SOIC         | D                  | 14   | 50          | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |
| TLC2264QDR       | OBSOLETE      | SOIC         | D                  | 14   |             | TBD                        | Call TI          | Call TI              |                             |
| TLC2264QDRG4     | ACTIVE        | SOIC         | D                  | 14   | 1500        | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   |                             |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TLC2262, TLC2262A, TLC2262AM, TLC2262M, TLC2264, TLC2264A, TLC2264AM, TLC2264M :**

- Catalog: [TLC2262A](#), [TLC2262](#), [TLC2264A](#), [TLC2264](#)
- Automotive: [TLC2264A-Q1](#), [TLC2264A-Q1](#)
- Military: [TLC2262M](#), [TLC2262AM](#), [TLC2264M](#), [TLC2264AM](#)

**NOTE: Qualified Version Definitions:**

- Catalog - TI's standard catalog product
- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Military - QML certified for Military and Defense Applications

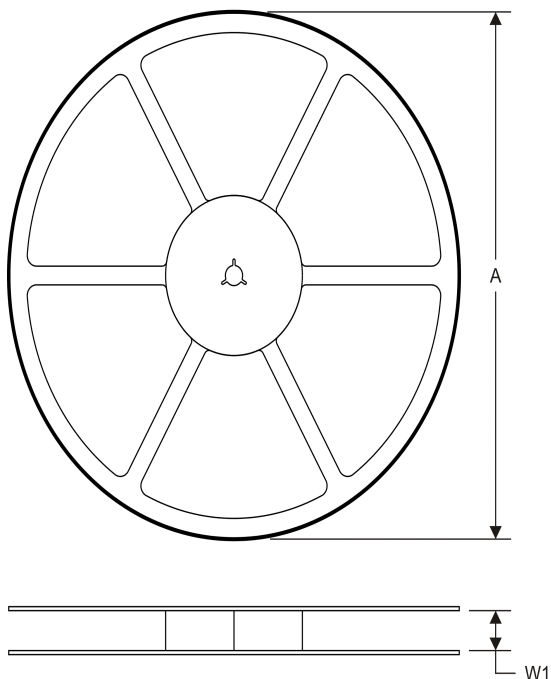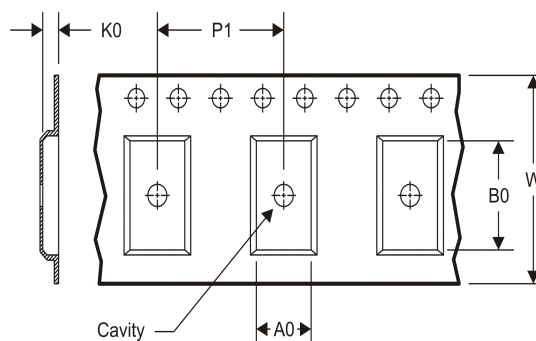**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


|    |                                                           |
|----|-----------------------------------------------------------|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |


**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLC2262AIDR  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC2262AIPWR | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLC2262CDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC2262CPWR  | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLC2262IDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| TLC2264AIDR  | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TLC2264AIPWR | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLC2264CDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| TLC2264CPWR  | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLC2264IDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |



## TAPE AND REEL BOX DIMENSIONS

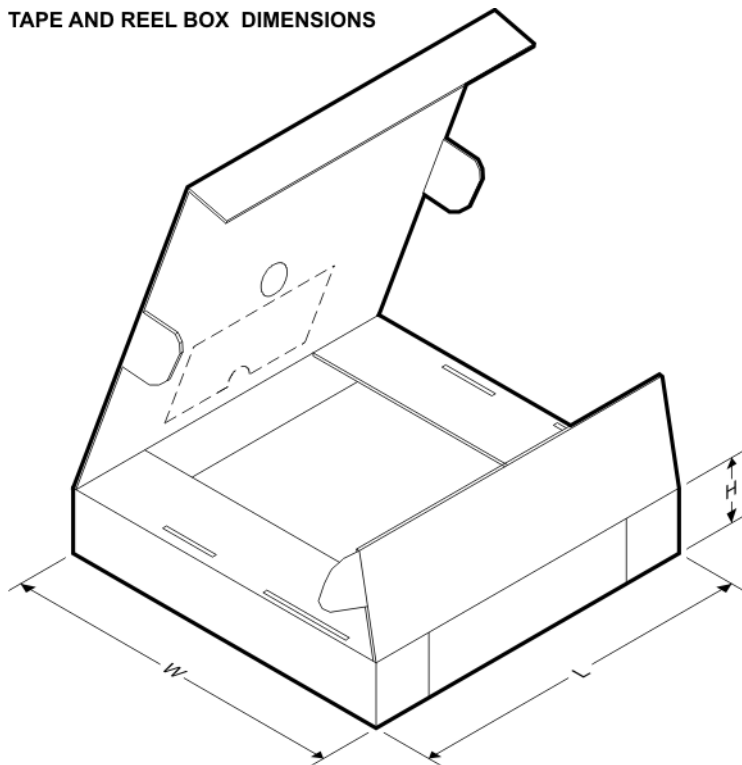


\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLC2262AIDR  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TLC2262AIPWR | TSSOP        | PW              | 8    | 2000 | 367.0       | 367.0      | 35.0        |
| TLC2262CDR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TLC2262CPWR  | TSSOP        | PW              | 8    | 2000 | 367.0       | 367.0      | 35.0        |
| TLC2262IDR   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| TLC2264AIDR  | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| TLC2264AIPWR | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| TLC2264CDR   | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |
| TLC2264CPWR  | TSSOP        | PW              | 14   | 2000 | 367.0       | 367.0      | 35.0        |
| TLC2264IDR   | SOIC         | D               | 14   | 2500 | 333.2       | 345.9      | 28.6        |

## JG (R-GDIP-T8)

## CERAMIC DUAL-IN-LINE

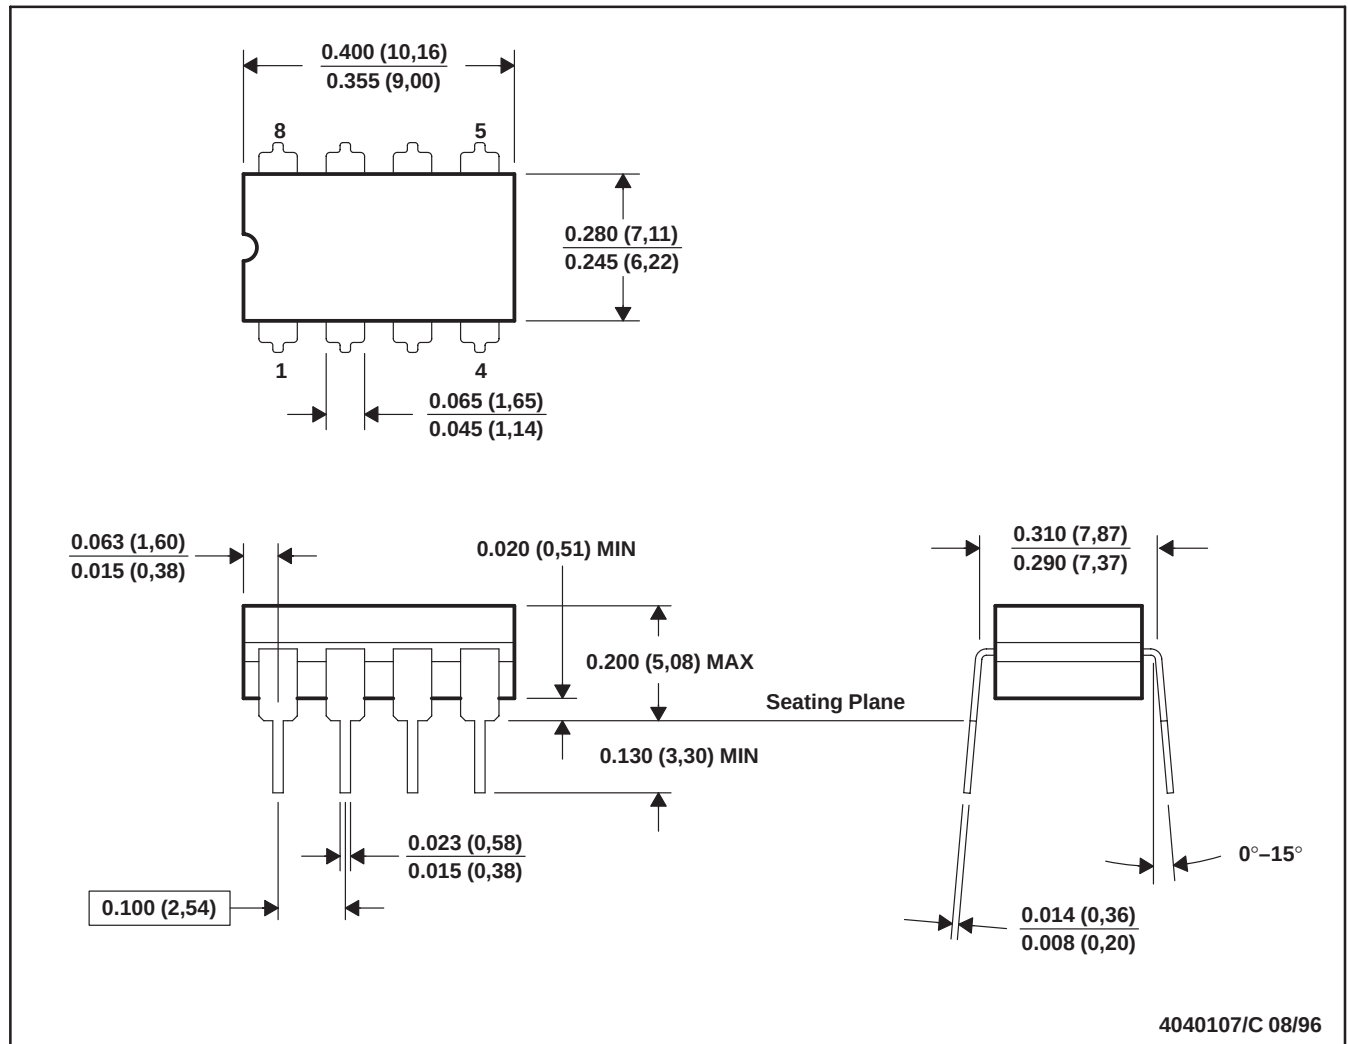


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification.
  - E. Falls within MIL STD 1835 GDIP1-T8


J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE

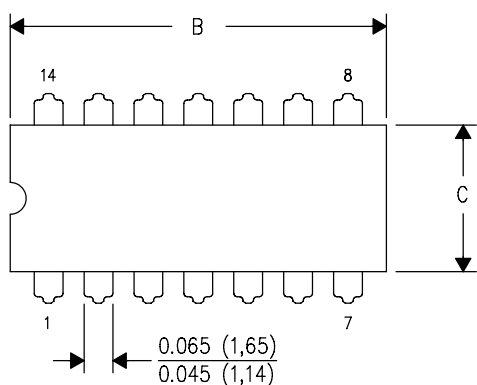

| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |

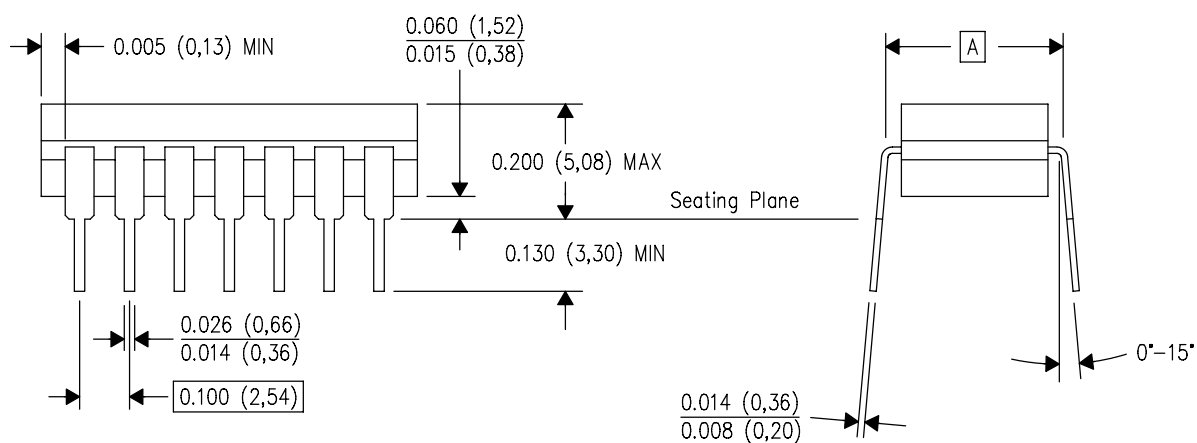


4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

U (S-GDFP-F10)


CERAMIC DUAL FLATPACK

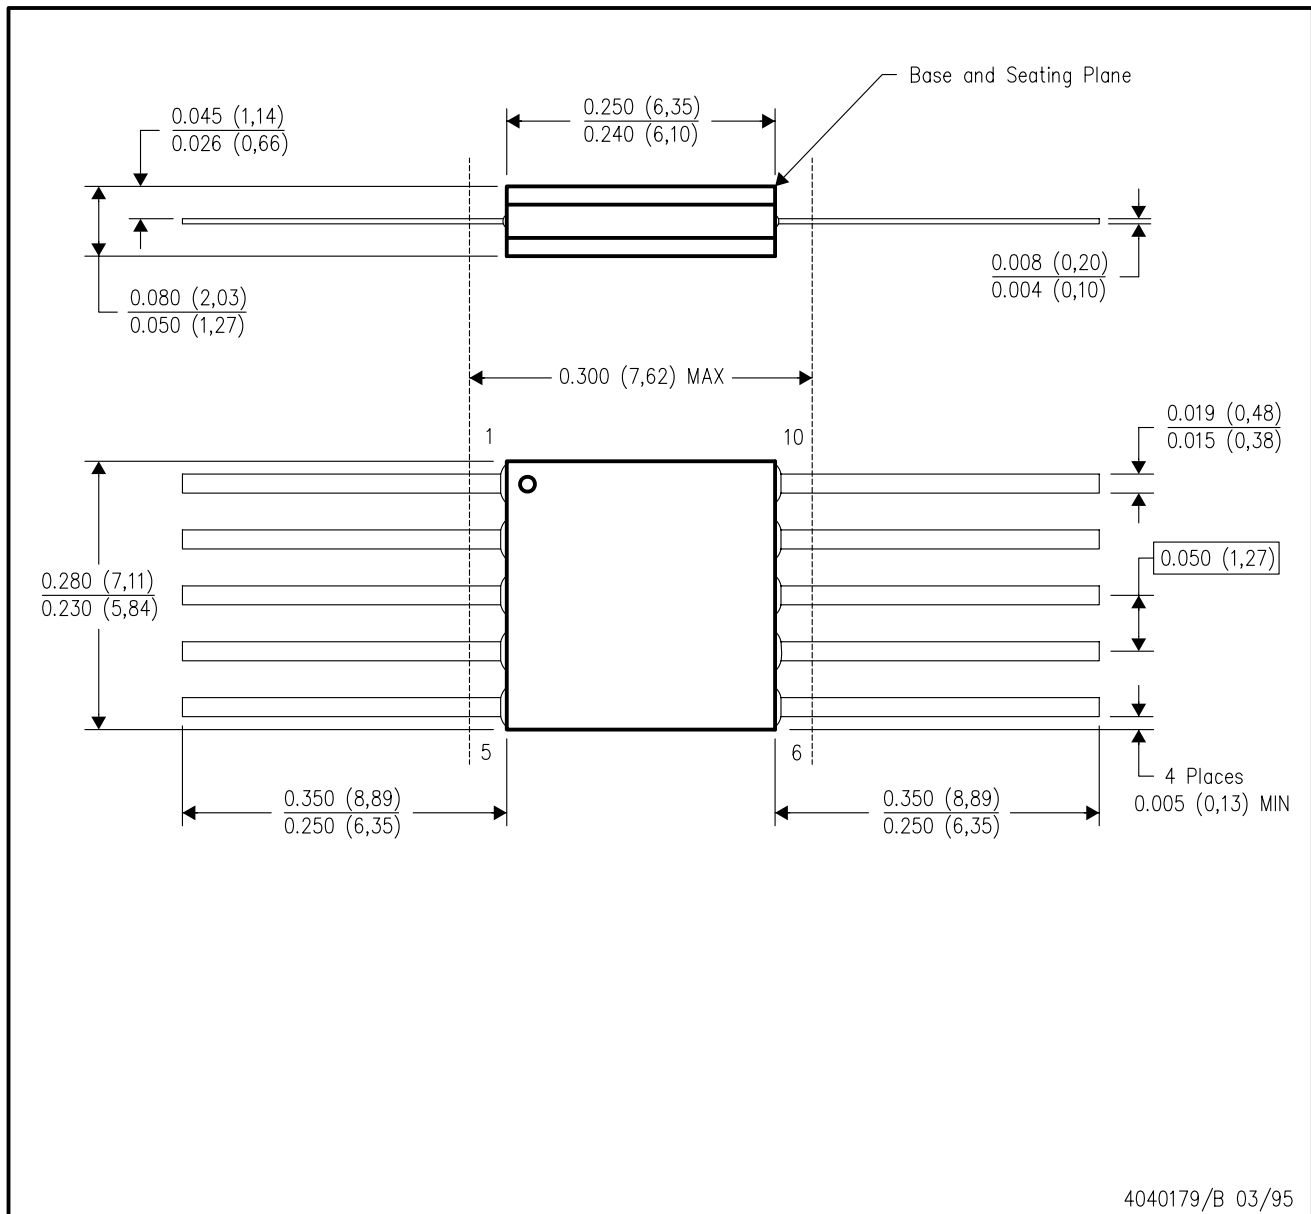

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only.
  - E. Falls within MIL STD 1835 GDFP1-F10 and JEDEC MO-092AA

W (R-GDFP-F14)

CERAMIC DUAL FLATPACK

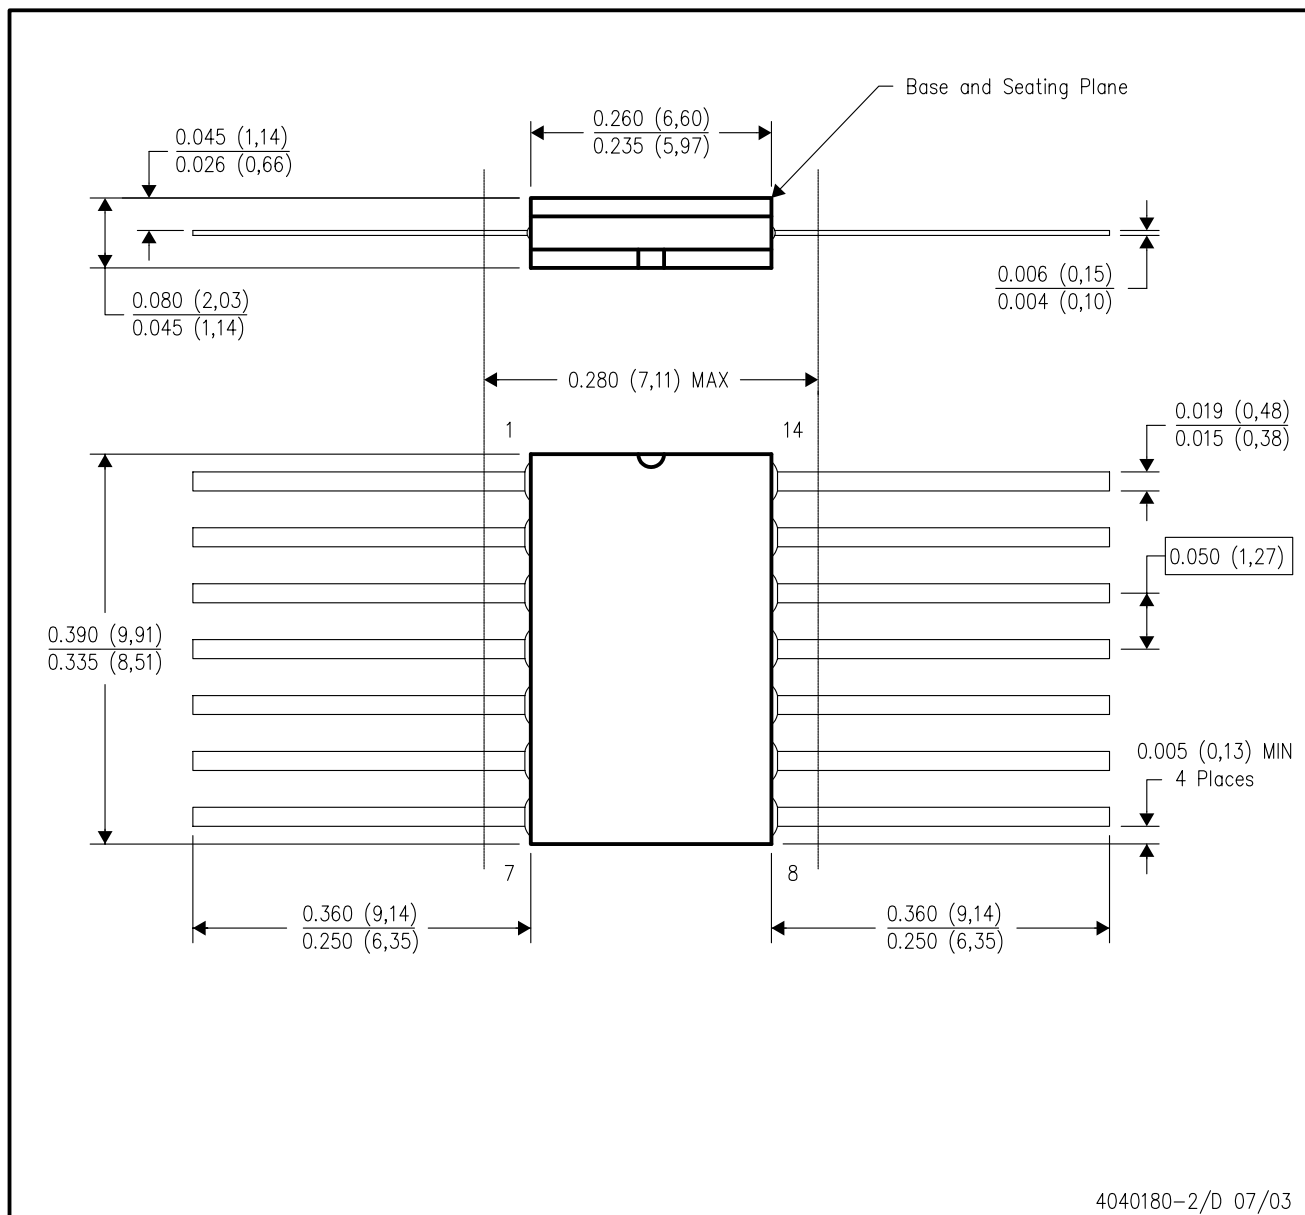


- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a ceramic lid using glass frit.
  - Index point is provided on cap for terminal identification only.
  - Falls within MIL STD 1835 GDFP1-F14 and JEDEC MO-092AB



FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

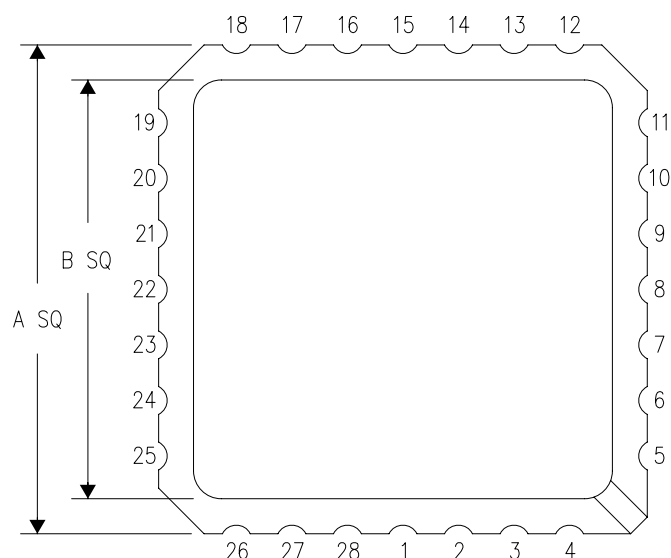

| NO. OF<br>TERMINALS<br>** | A                |                  | B                |                  |
|---------------------------|------------------|------------------|------------------|------------------|
|                           | MIN              | MAX              | MIN              | MAX              |
| 20                        | 0.342<br>(8,69)  | 0.358<br>(9,09)  | 0.307<br>(7,80)  | 0.358<br>(9,09)  |
| 28                        | 0.442<br>(11,23) | 0.458<br>(11,63) | 0.406<br>(10,31) | 0.458<br>(11,63) |
| 44                        | 0.640<br>(16,26) | 0.660<br>(16,76) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 52                        | 0.740<br>(18,78) | 0.761<br>(19,32) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 68                        | 0.938<br>(23,83) | 0.962<br>(24,43) | 0.850<br>(21,6)  | 0.858<br>(21,8)  |
| 84                        | 1.141<br>(28,99) | 1.165<br>(29,59) | 1.047<br>(26,6)  | 1.063<br>(27,0)  |

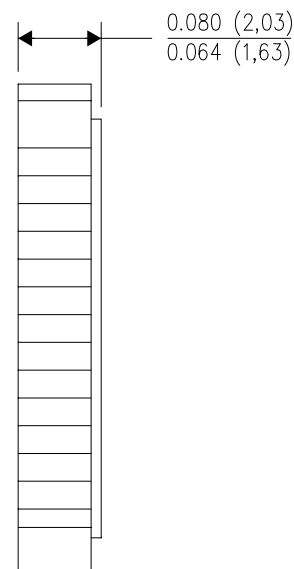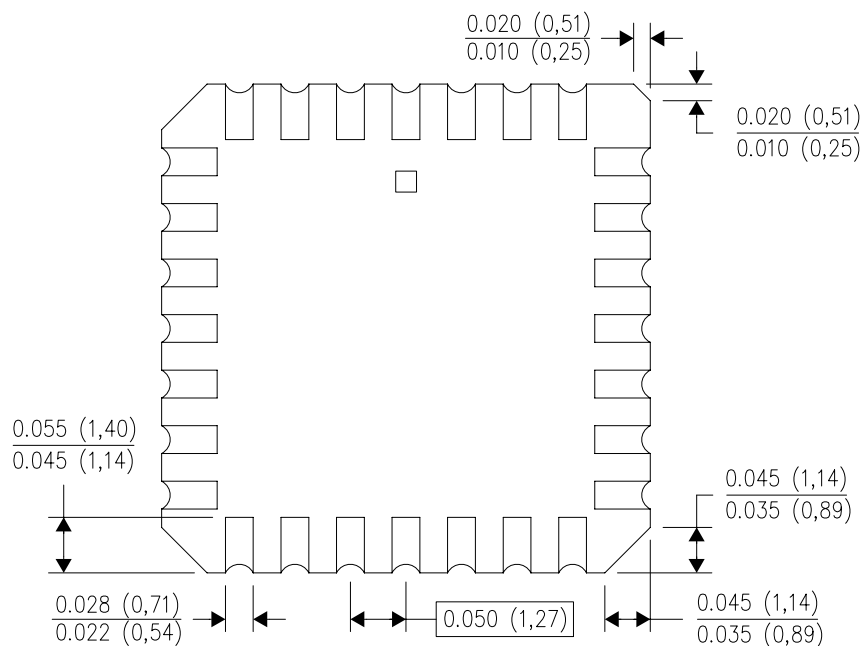


4040140/D 01/11

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - Falls within JEDEC MS-004

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE PACKAGE

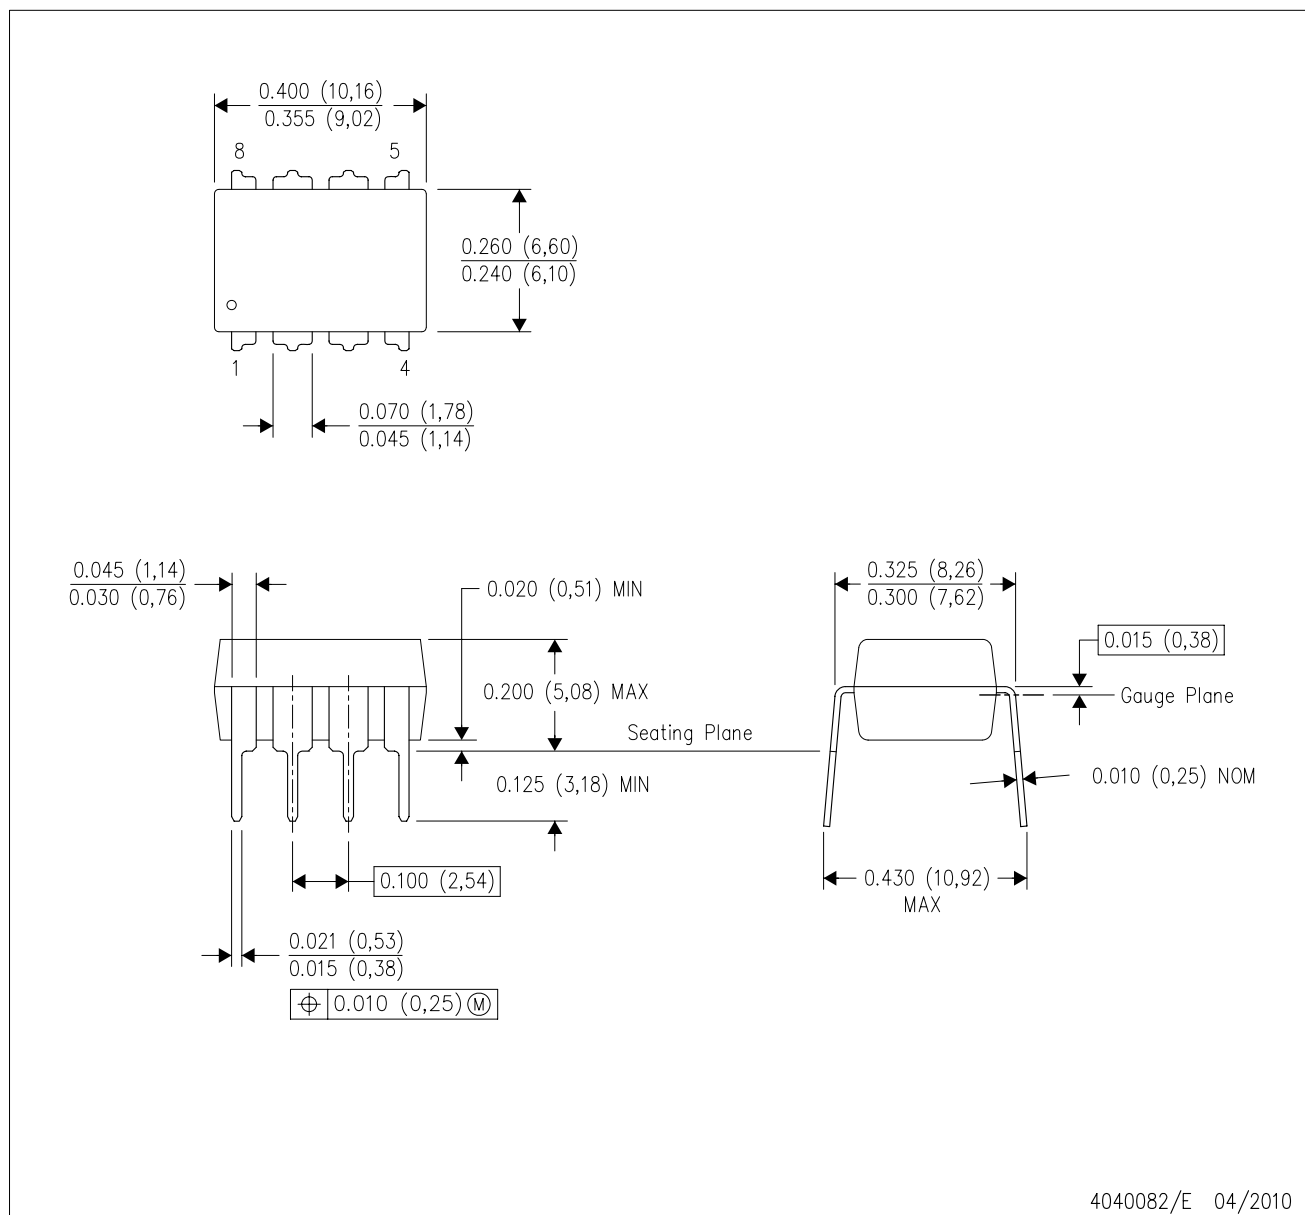


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.


N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

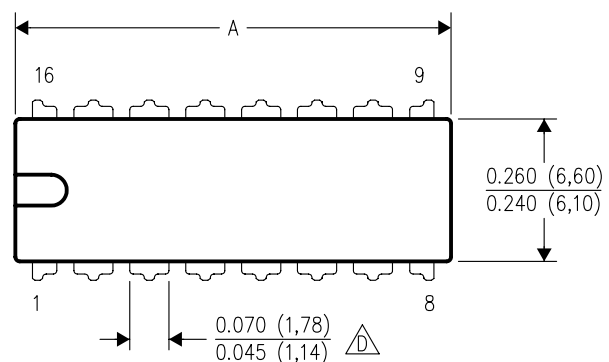

| PINS **<br>DIM      | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

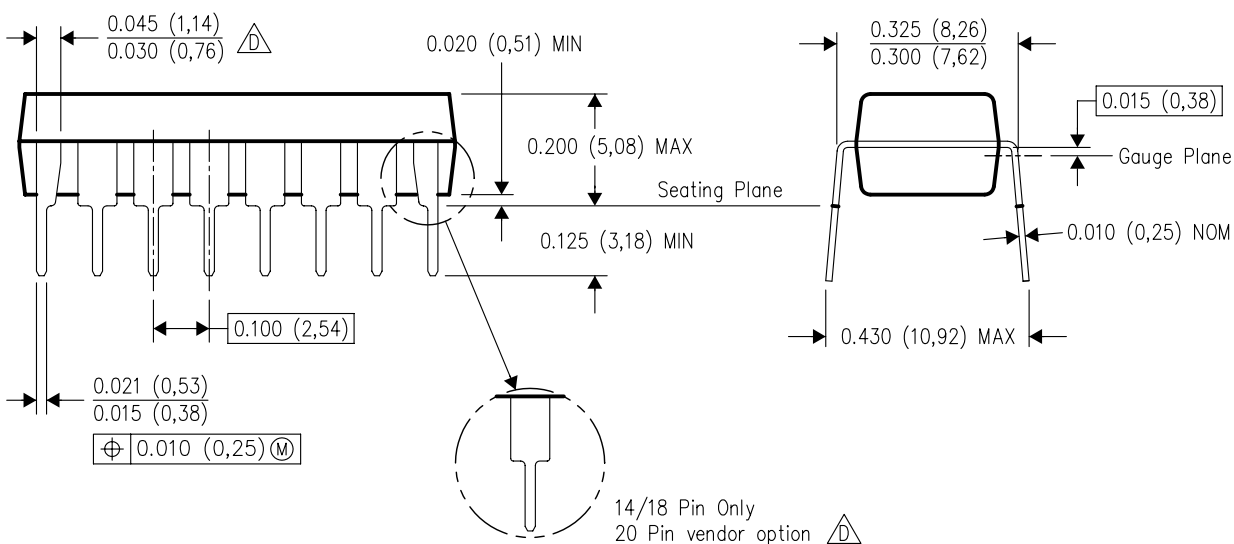

4040049/E 12/2002


NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).  
 The 20 pin end lead shoulder width is a vendor option, either half or full width.



D (R-PDSO-G14)

PLASTIC SMALL OUTLINE

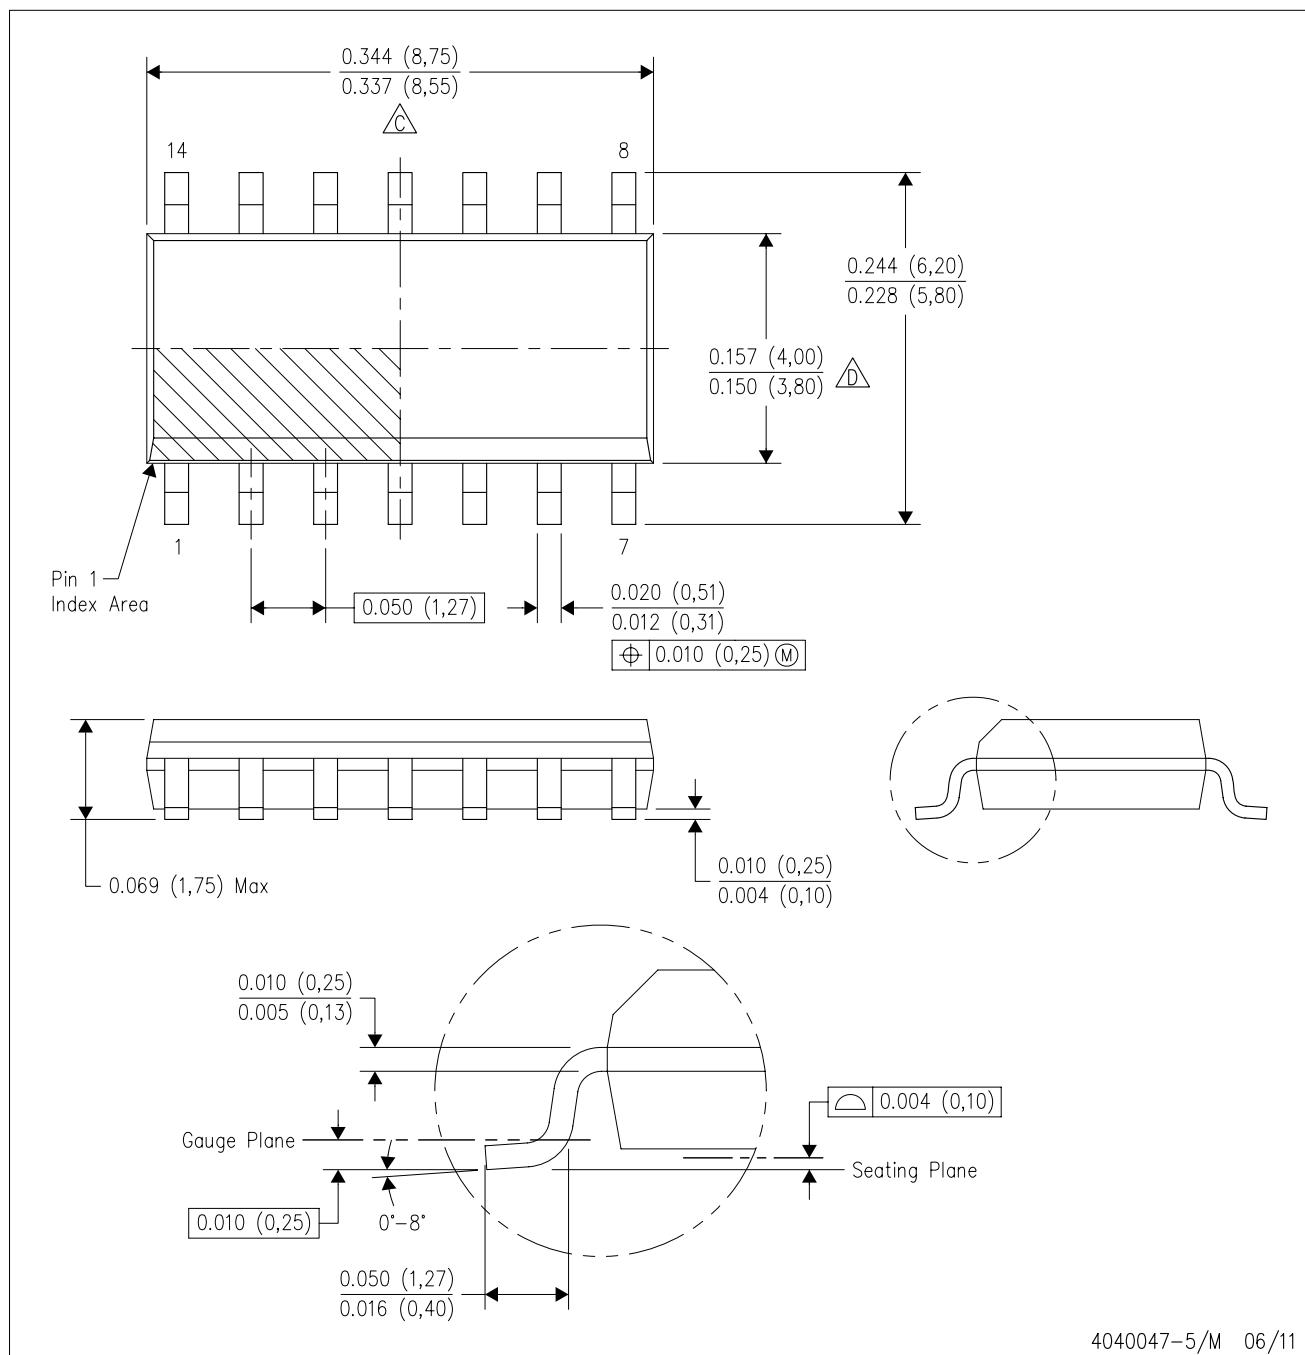


NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)


PLASTIC SMALL OUTLINE

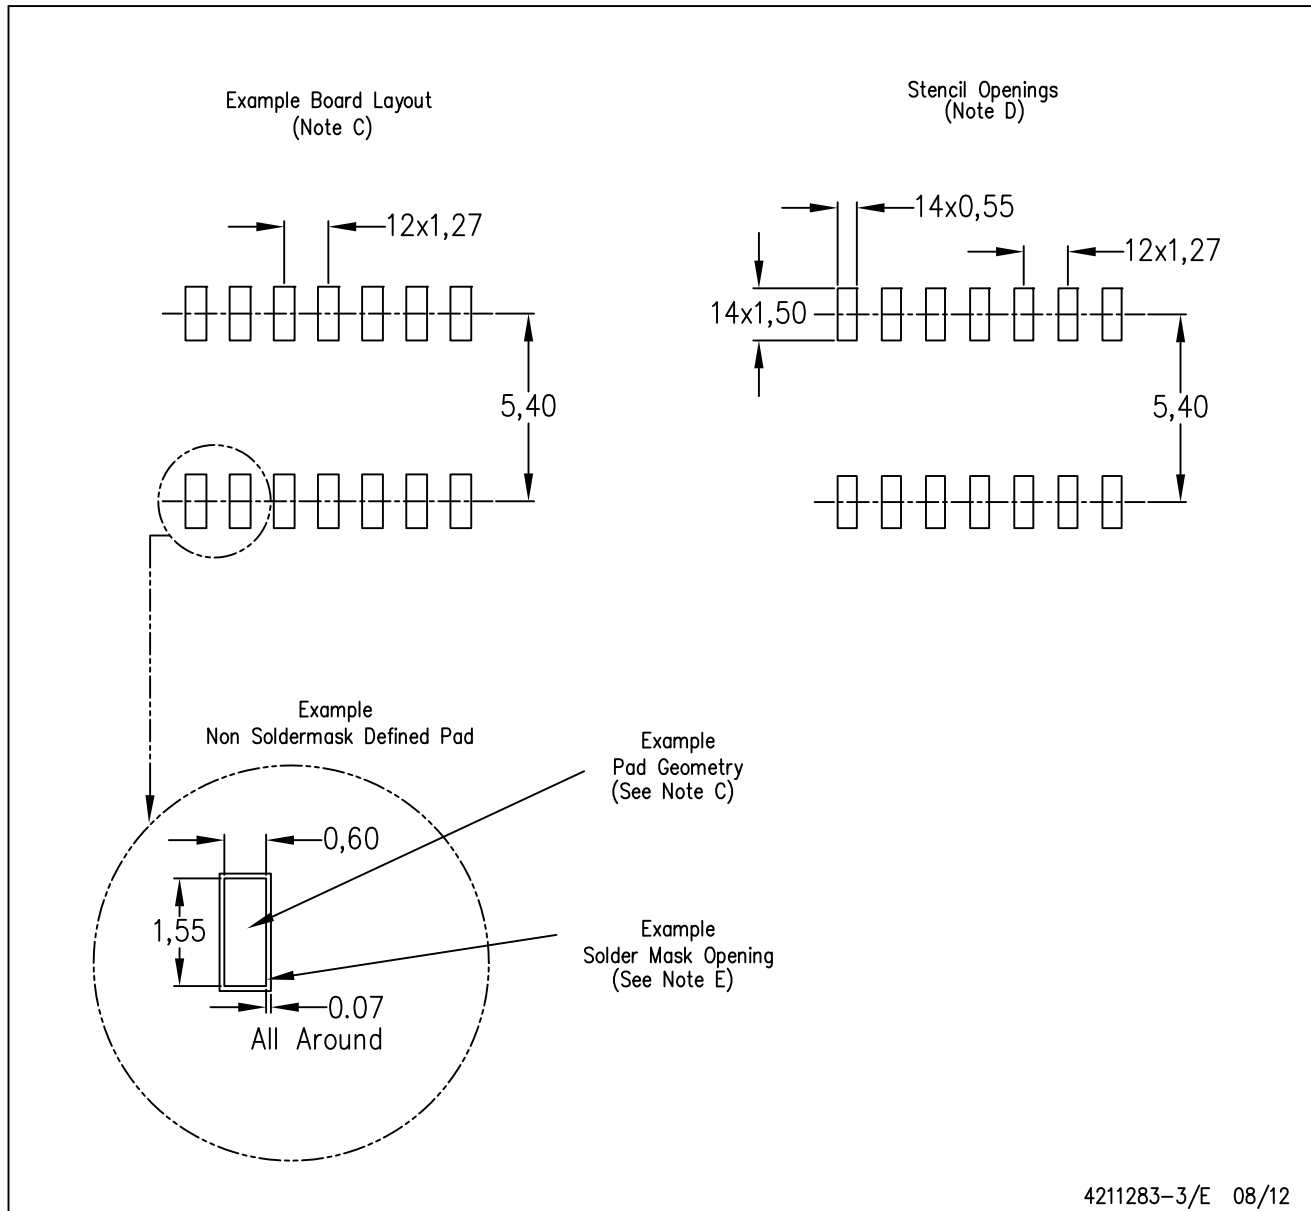

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

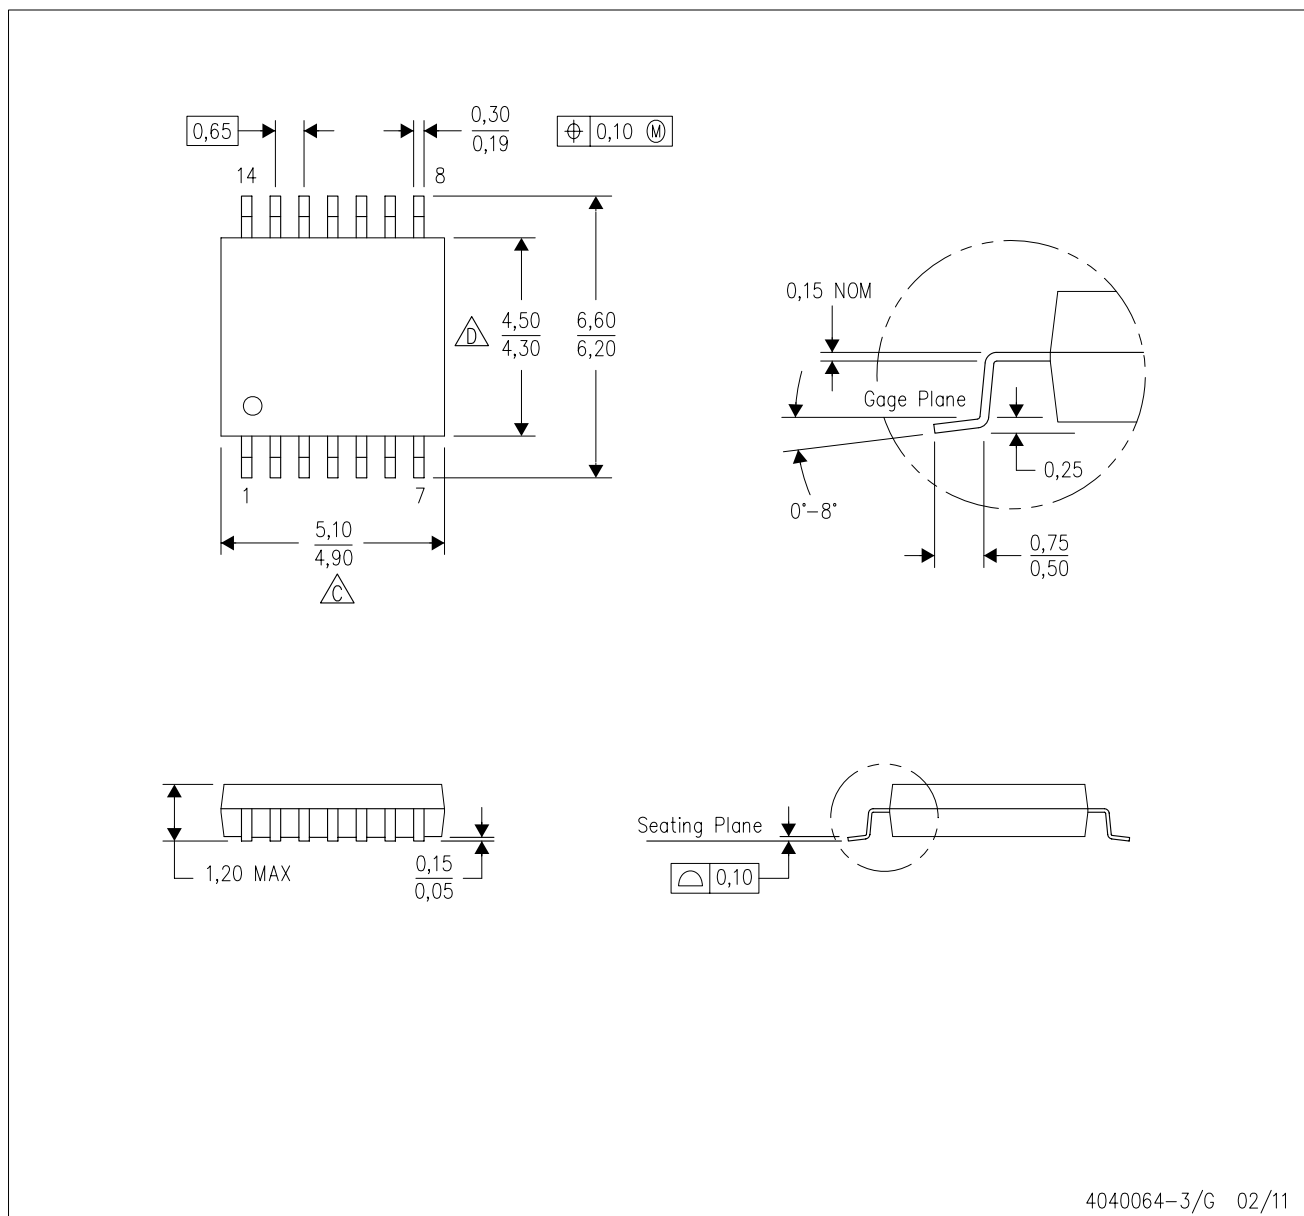


4040064-3/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

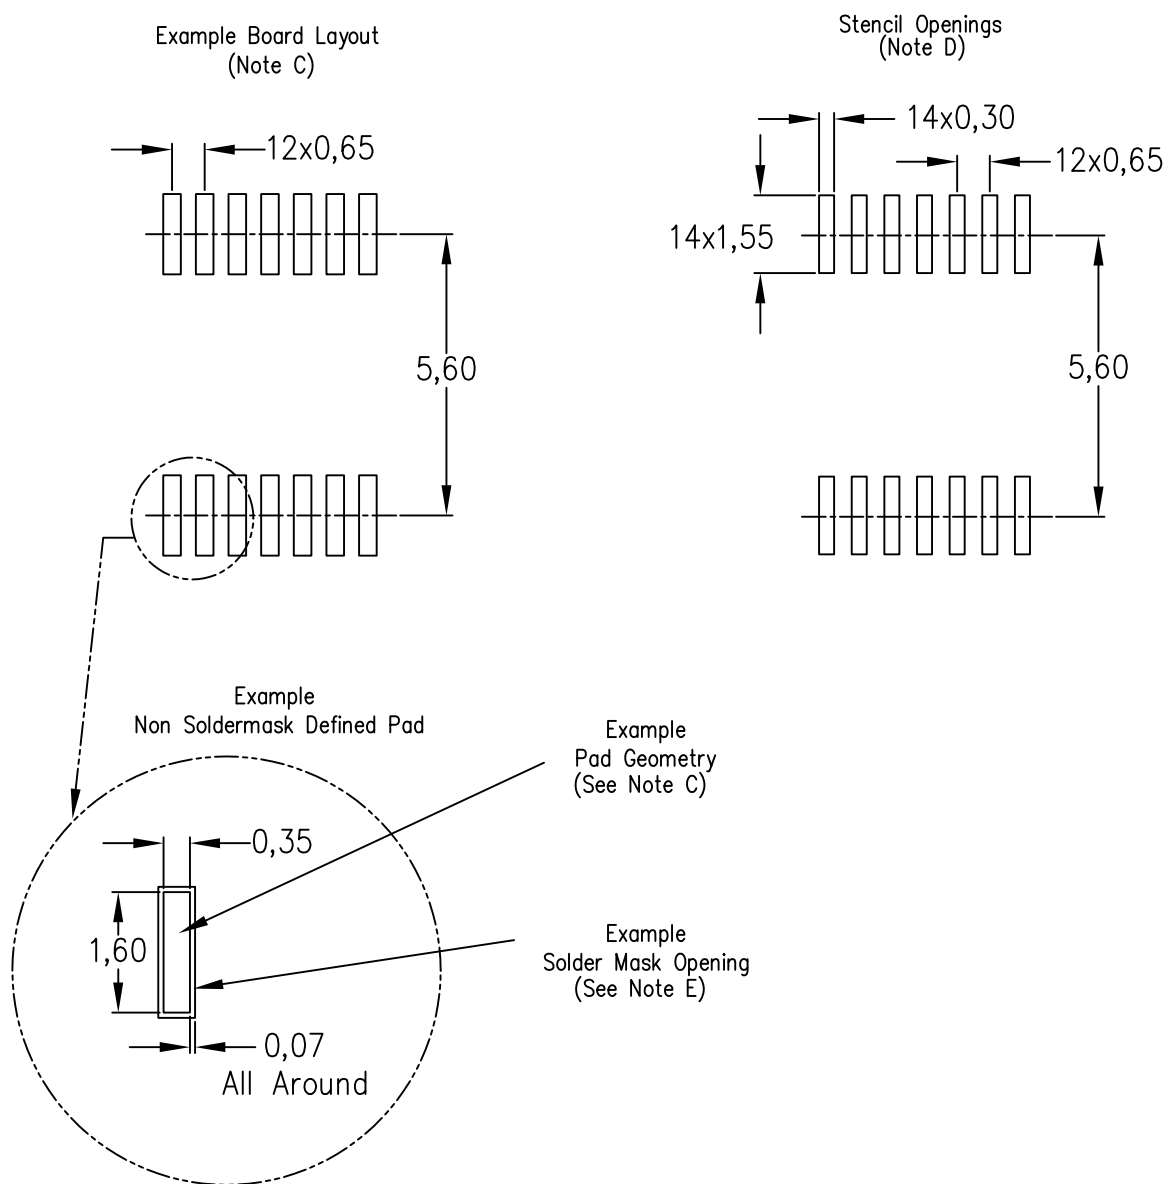


4211284-2/F 12/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

D (R-PDSO-G8)


PLASTIC SMALL OUTLINE

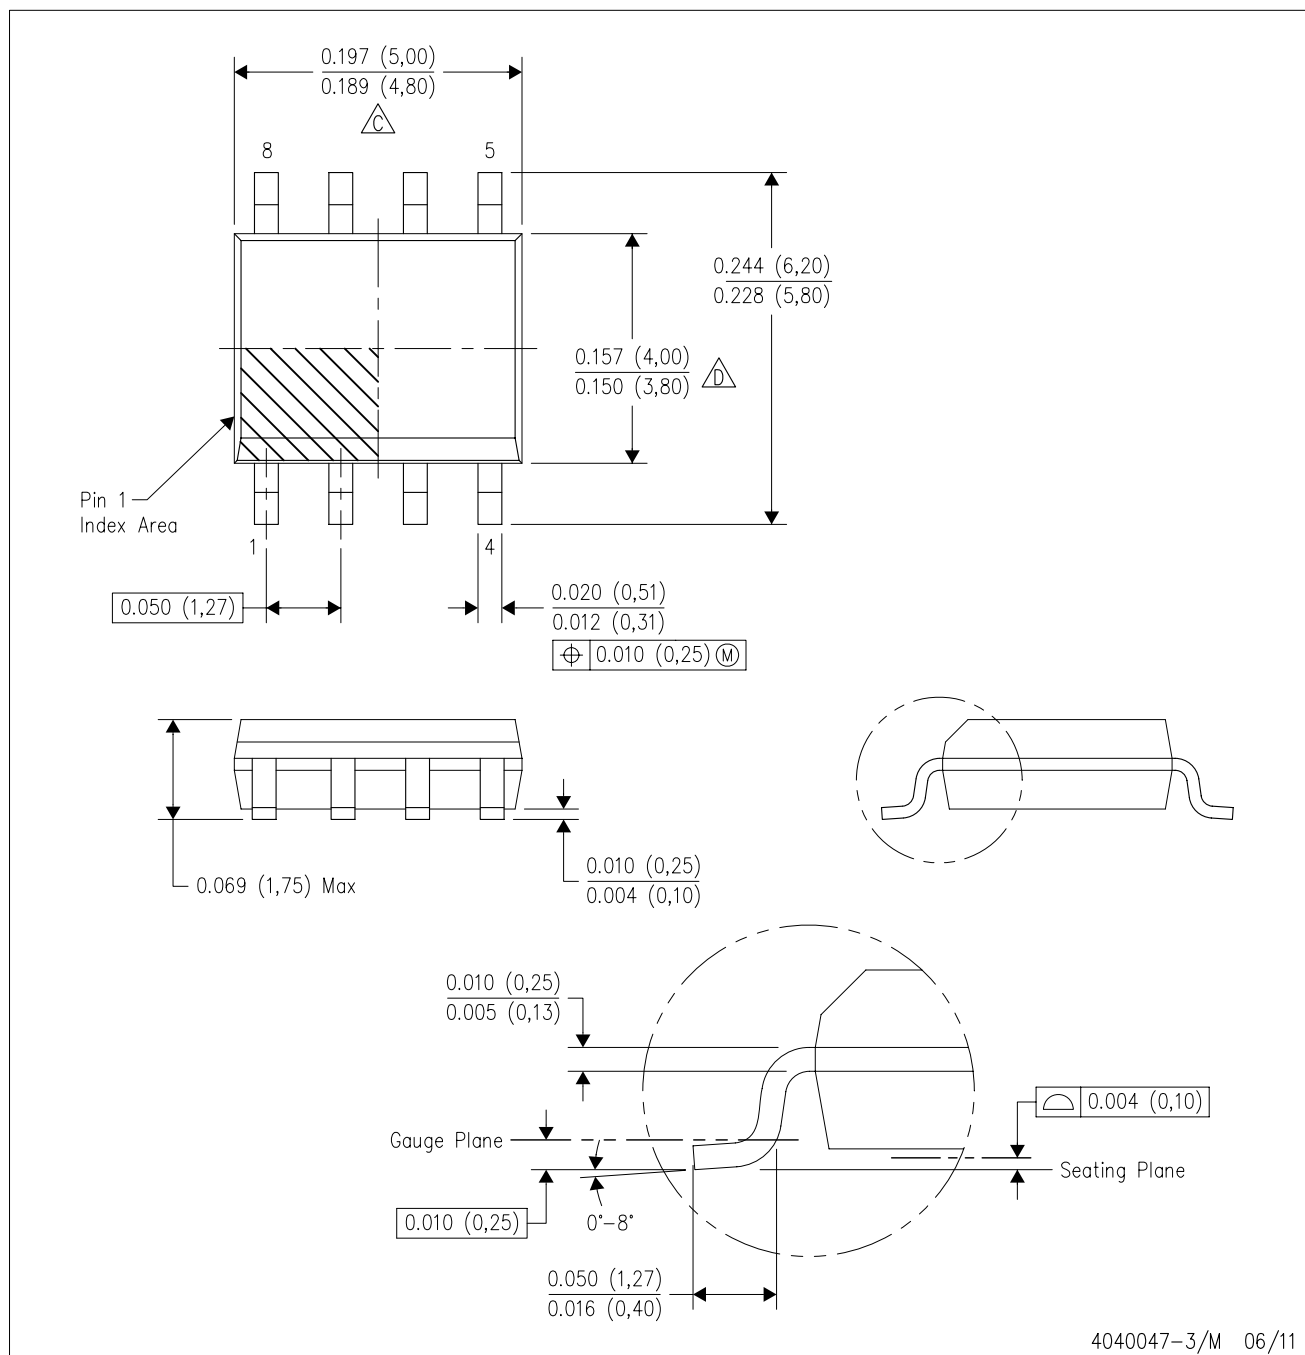

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
  - $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
  - E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

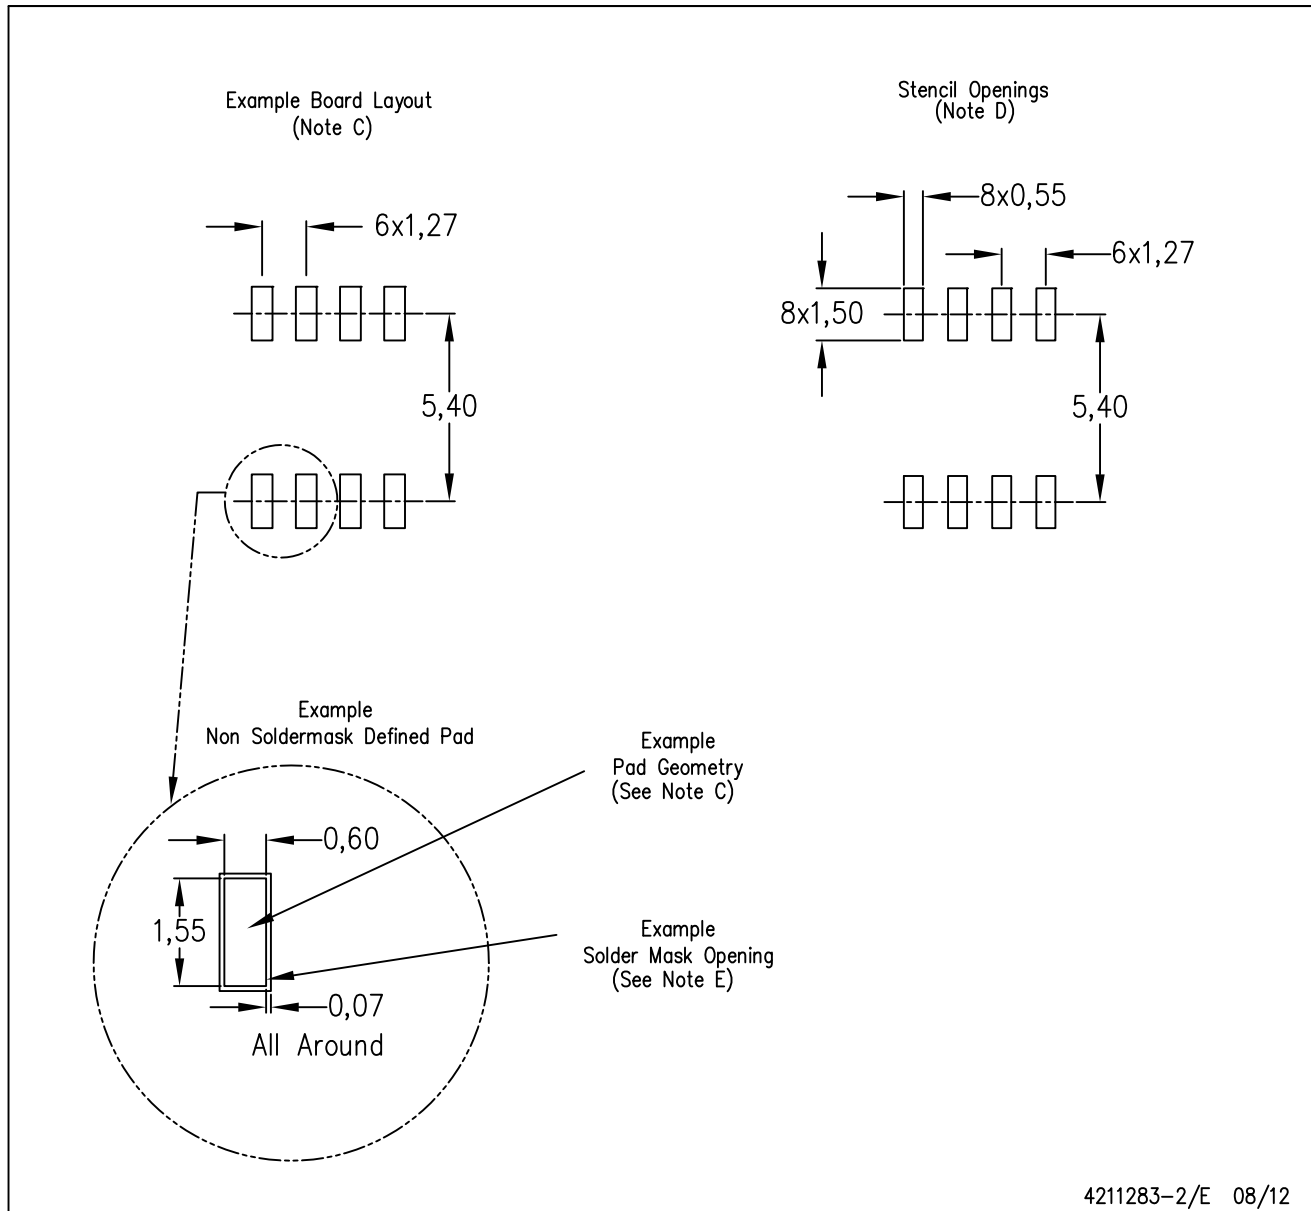


4211283-2/E 08/12

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G8)

PLASTIC SMALL OUTLINE

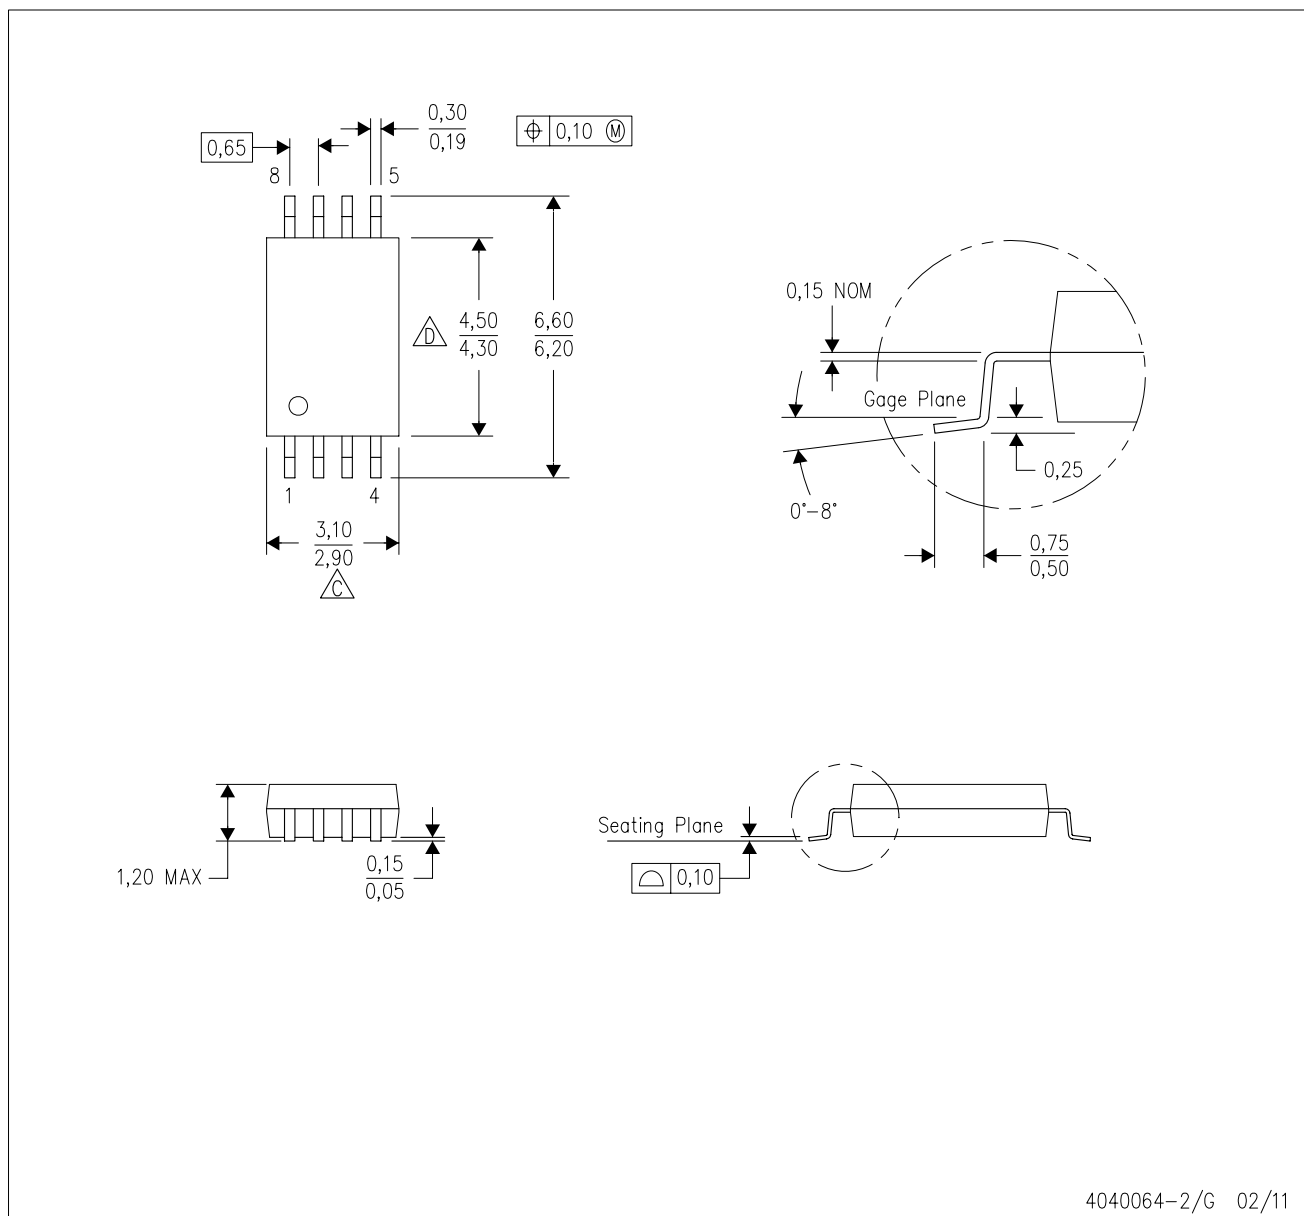

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.