

## Features


- 85°C, 2,000 hours assured
- For general purpose application
- RoHS Compliance



## SPECIFICATIONS

Items	Performance																
Operating Temperature Range	-40°C ~ +85°C																
Capacitance Tolerance	±20% (at 120Hz, 20°C)																
Leakage Current (at 20°C)	Rated voltage		≤ 100V					> 100V									
	Time		after 2 minutes					after 5 minutes									
	Leakage Current		I = 0.02CV or 3 (μA) whichever is greater					CV ≤ 1,000 I = 0.03CV+15(μA)			CV > 1,000 I = 0.02CV+25(μA)						
	Where, C= rated capacitance in μF. V = rated DC working voltage in V.																
Dissipation Factor (Tan δ at 120 Hz, 20°C)	Rated Voltage		6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	
	Tan δ (max)		0.23	0.20	0.17	0.15	0.12	0.10	0.09	0.08	0.12	0.14	0.17	0.20	0.24	0.24	
When the capacitance exceeds 1,000 μF, 0.02 shall be added every 1,000 μF increase.																	
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.																
	Rated Voltage		6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	
	Impedance Ratio	Z(-25°C)	φD < 16	6	4	3	3	2	2	2	2	3	6	8	12	14	16
		/Z(+20°C)	φD ≥ 16	8	6	4	4	3	3	3	3	4	8	10	-	-	-
* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied for 2,000 hours at 85°C																	
Load Life Test	Test Time		2,000 Hrs														
	Capacitance Change		Within ±20% of initial value														
	Dissipation Factor		Less than 200% of specified value														
	Leakage Current		Within specified value														
* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1).																	
Shelf Life Test	Test Time		1,000 Hrs														
	Capacitance Change		Within ±20% of initial value														
	Dissipation Factor		Less than 200% of specified value														
	Leakage Current		Within specified value														
* The above specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1).																	
Ripple Current & Frequency Multipliers	Freq.(Hz)		60 (50)	120	500	1K	10K up										
	Cap.(μF)		Under 100	0.70	1.00	1.30	1.40	1.50									
			100 < C ≤ 1,000	0.75	1.00	1.20	1.30	1.35									
			1,000 up above	0.80	1.00	1.10	1.12	1.15									

## DIAGRAM OF DIMENSIONS

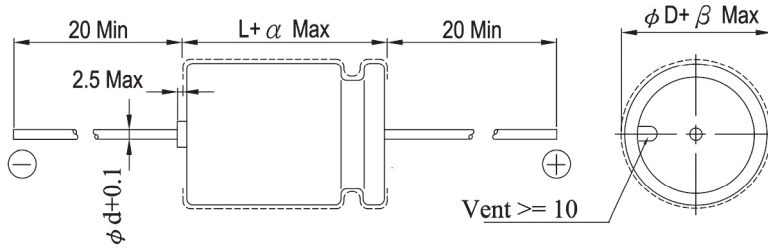

LEAD SPACING AND DIAMETER Unit: mm

$\phi D$	5	6.3	8	10	12.5	16	18	22	25
$\phi d$	0.6				0.8				
$\alpha$	1.5			2.0					
$\beta$	0.5								

Dimension:  $\phi D \times L$ (mm)

Ripple Current: mA/rms at 120 Hz, 85°C

## DIMENSION & PERMISSIBLE RIPPLE CURRENT

$\mu F$	V. DC Contents	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)		100V (2A)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
0.10	0R1											5×12	1.5	5×12	3	5×12	3
0.22	R22											5×12	3.5	5×12	4.5	5×12	5
0.33	R33											5×12	5	5×12	7.5	5×12	8
0.47	R47											5×12	6	5×12	9	5×12	9
1.0	010											5×12	10	5×12	15	5×12	15
2.2	2R2											5×12	20	5×12	30	5×12	30
3.3	3R3											5×12	30	5×12	36	5×12	40
4.7	4R7											5×12	42	5×12	44	6.3×13	41
10	100							5×12	40	5×12	55	5×12	50	6.3×13	55	6.3×13	72
22	220					5×12	71	5×12	76	6.3×13	70	6.3×13	85	6.3×13	109	8×16	133
33	330					5×12	85	5×12	80	6.3×13	115	6.3×13	126	8×13	154	10×17	190
47	470	5×12	87	5×12	94	6.3×13	88	6.3×13	100	6.3×13	138	8×13	174	8×16	214	10×21	237
100	101	6.3×13	121	6.3×13	145	6.3×13	160	8×13	215	8×16	232	10×17	296	10×17	326	13×22	377
220	221	6.3×13	215	8×13	231	8×13	298	8×16	319	10×17	401	10×21	459	13×22	527	16×28	625
330	331	8×16	305	8×16	327	8×16	365	10×17	454	10×21	514	13×22	613	13×22	675	16×33	793
470	471	8×16	364	8×16	390	8×16	460	10×21	524	13×22	613	13×22	731	13×27	780	16×36	942
1,000	102	10×17	662	10×17	671	10×21	775	13×22	873	13×27	955	16×33	1,111	16×36	1,249	18×42	1,359
2,200	222	13×22	929	13×22	1,051	13×24	1,125	16×28	1,344	16×33	1,421	18×36	1,699	22×43	1,744	25×52	2,430
3,300	332	13×27	1,150	13×27	1,288	16×28	1,454	16×33	1,611	18×36	1,640	22×43	2,027	25×52	2,309		
4,700	472	13×27	1,354	16×28	1,552	16×33	1,650	18×36	1,881	22×43	2,280	25×43	2,347	25×52	2,710		
6,800	682	16×28	1,762	16×33	1,930	18×36	2,040	18×42	2,170	22×43	2,470	25×52	2,650				
10,000	103	16×36	2,062	18×36	2,122	18×42	2,503	22×43	2,893	25×52	3,180						

$\mu F$	V. DC Contents	160V (2C)		200V (2D)		250V (2E)		350V (2V)		400V (2G)		450V (2W)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
1.0	010	6.3 × 13	7	6.3 × 13	9	6.3 × 13	12	8 × 16	13	8 × 16	14	8 × 16	15
2.2	2R2	6.3 × 13	15	8 × 13	16	8 × 16	17	8 × 20	19	10 × 17	21	10 × 21	23
3.3	3R3	8 × 13	21	8 × 16	26	8 × 21	31	8 × 21	33	10 × 17	34	10 × 21	36
4.7	4R7	8 × 16	31	10 × 17	33	10 × 17	38	10 × 21	44	10 × 26	45	10 × 26	46
10	100	10 × 17	60	10 × 21	66	10 × 21	72	13 × 22	72	13 × 22	80	13 × 27	82
22	220	10 × 21	121	13 × 22	121	13 × 27	126	13 × 27	132	16 × 33	137	16 × 36	143
33	330	13 × 22	154	13 × 27	167	16 × 28	178	16 × 33	186	16 × 36	192	16 × 42	201
47	470	13 × 27	198	16 × 33	214	16 × 33	241	16 × 42	253	18 × 42	339	18 × 42	339
100	101	16 × 33	345	16 × 36	368	16 × 42	391	22 × 43	402	25 × 43	424	25 × 52	448
220	221	18 × 42	586	22 × 43	609	22 × 43	632						
330	331	22 × 43	632										

Axial



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.