

Cellular Routers 3G UMTS/HSPA+

UR5i v2 Series

B+B SMARTWORX

Powered by

ADVANTECH



PRODUCT FEATURES

- Designed for M2M applications
- WiFi, M-BUS and Modbus TCP / Modbus RTU
- Modular design to fit application requirements
- Single or dual SIM cards for redundant backhaul
- Up to 5.7 Mbps upload to 14.4 Mbps download
- LINUX platform & advanced networking functions
- Advanced security features

3G UMTS/HSPA routers, UR5i v2 series, are used to wirelessly connect various equipment and devices via Ethernet 10/100 to the Internet or intranet. High data transfer speed of up to 14.4 Mbit/s (download) and upload speed up to 5.76 Mbit/s, make it an ideal wireless solution for traffic and security camera systems, individual computers, LAN networks, automatic teller machines (ATM) and other self-service terminals, etc.

Key features

This exceptionally fast 3G UR5i v2 wireless router is equipped with one Ethernet 10/100, one USB Host port, one binary Input/Output (I/O) port and one SIM card. To save and backup communication data, a version with 2 x SIM cards is available. A wide range of user-defined interface options further expands optional Port1 and Port2. (EX: Ethernet port 10/100, serial interface ports RS232/RS485/RS422/M-Bus/WiFi or I/O - CNT). Port2 may be equipped with serial interfaces RS232/RS485/RS422/M-Bus or I/O - CNT). Routers are available in either plastic or metal casings. FULL version of the router is equipped with GPS.

Configuration is done via protected password web interface. The 3G UMTS/HSPA+ router supports VPN tunnel creation using IPsec, OpenVPN and L2TP to ensure safe communication. Web interface provides statistics about router activities, signal strength, detailed log, etc. Cellular router supports functions: DHCP, NAT, NAT-T, DynDNS, NTP, VRRP, control by SMS and many other functions.

Other diagnostic functions ensuring continuous communication include automatic inspection of PPP connection offering an automatic restart feature in case of connection losses, and hardware watchdog which monitors the status of the router. With the help of a start up script window you may insert Linux scripts for various actions and, for some applications the option to create several different configurations for one 3G wireless router, profiles (maximum of 4), and the option to switch between them (for example via SMS, binary input status, etc.). Cellular wireless routers can automatically upgrade configuration and firmware from server. This allows mass reconfiguration of multiple routers at one time.

SELECTED APPLICATIONS

Transportation and security
IT and communication
Self-service terminals
Energy and power industry
Metrology, alarm and warning systems

ORDERING INFORMATION

Note: Check with your local distributor for availability and options. Contact Advantech B+B SmartWorx distributors.

Europe, Middle East, Africa, Asia, South America, Latin America.

BB - UR2X61XXXX

Accessories

0	No Accessories (DIN holder included)
1 (set)	Accessories with EU power supply
2 (set)	Accessories with UK power supply
3 (set)	Accessories with Australia power supply
4 (set)	Accessories with US power supply

Enclosure

1	Plastic enclosure
2	Metal enclosure

PORT2 (Full version only)

0	No expansion port
1	ETH
2	RS232
3	RS485
4	RS422
5	M-BUS
6	CNT (4x BI, 2x, 1xBO) - I/O port
7	WiFi
8	WMBUS (Wireless M-BUS)

PORT1

0	No expansion port
1	ETH
2	RS232
3	RS485
4	RS422
5	M-BUS
6	CNT (4x BI, 2x, 1xBO) - I/O port
9	Switch

Router version

B	Basic
F	Full

Please note: Isn't possible to have in the router all combinations of the ports. Please check your chosen variant with your a local distributor.

Cellular Routers 3G UMTS/HSPA+

UR5i v2 Series



SPECIFICATIONS

FIXED INTERFACES - BASIC VERSION

1× Ethernet	10/100 Mbps, independent or bridged
1× SIM	SIM Card
1× I/O	Binary input/output
1× USB	USB 2.0 Host, Type A

OPTIONAL INTERFACES

1× PORT 1	Ethernet (10/100Mbps), RS232, RS422/485, M-BUS I/O Input/Output, Ethernet Switch (with PORT 2)
-----------	--

ANTENNA CONNECTORS

2x SMA – 50 Ohm

FIXED INTERFACES - FULL VERSION

1× Ethernet	10/100 Mbps, independent or bridged
2× SIM	SIM Card
1× I/O	Binary input/output
1× USB	USB 2.0 Host, Type A

OPTIONAL INTERFACES

1× PORT 1	Ethernet (10/100Mbps), RS232, RS422/485, M-BUS I/O Input/Output, Ethernet Switch (with PORT 2)
-----------	--

1× PORT 2	RS232, RS422/485, M-BUS, WMBUS, WiFi Ethernet Switch (with PORT 1)
-----------	--

1× Optional	2nd SIM card holder ("F" router versions)
-------------	---

ANTENNA CONNECTORS

3× SMA – 50 Ohm

POWER

Source	9 - 36 VDC
	Idle - 2.6 W
Consumption	GPRS - to 3.5 W (GPRS transmission) UMTS - to 5.5 W (LTE transmission)

MECHANICAL

Dimension Plastic Version	51 x 87 x 116mm
Dimension Metallic Version	42 x 87 x 113mm
Protection	IP30
Weight Plastic Version	150g
Weight Metallic Version	280g

ENVIRONMENTAL

Operating Temperature	-40 to +75°C
Storage Temperature	-40° to +85°C
Humidity	Operating - 0 to 95% relative humidity non condensing Storage - 0 to 95% relative humidity non condensing

WiFi *optional ("F" router versions)

Antenna connector	R-SMA – 50 Ohms
Supported WiFi band	2.4 GHz
Standards	802.11b, 802.11g, 802.11n
2.4 GHz supported channels	1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13
RX Sensitivity	11b, 11 Mbps: typ. -85 dBm 11g, 54 Mbps: typ. -70 dBm (HT20) 11n, MSC7: typ. -66 dBm (HT40) 11n, MSC7: typ. -62 dBm
TX Output Power	11b, 11 Mbps: min. 18, typ. 19, max. 20 dBm 11g, 54 Mbps: min. 14.5, typ. 16, max. 17.5 dBm 802.11n (HT20): min. 13.5, typ. 15, max. 16.5 dBm 802.11n (HT40): min. 13.5, typ. 15, max. 16.5 dBm
Type of device	Access point, station

GPS SPECIFICATIONS *GPS is not available when the router is equipped with the LTE module 450 MHz!

Antenna	50 Ohms – active
Protocols	NMEA 0183 v3.0
Frequency	1575.42MHz
Sensitivity	Tracking: -161dBm Acquisition (Assisted): -158dBm Acquisition (Standalone): -145dBm Hot start: 1 s Warm start: 29 s Cold start: 32 s
Acquisition time	Horizontal: < 2m (50 %); < 5m (90 %) Altitude: < 4m (50 %); < 8m (90 %)
Accuracy	Velocity: < 0.2 m/s

32B ARM MICROPROCESSOR

Memory	512 Mb DDR SDRAM 128 Mb FLASH 1 Mb MRAM
--------	---

I/O PORT (CNT)

Binary input	Reed contact with trigger level 1.3 up to 1.4 V
Binary output	100 mA/ max. 30 V

PARAMETERS - HSPA+ module

HSPA+	Bit rate 14,4 Mbps (DL) / 5,76 Mbps (UL) 3GPP rel. 6/7 standard Data compress 3GPP
UMTS	Bit rate 384 kbps (DL) / 384 kbps (UL) 3GPP rel. 4 standard
GPRS/EDGE	EDGE bit rate 237 kbps (DL) / 237 kbps (UL) GPRS bit rate 85,6 kbps (DL) / 85,6 kbps (UL) Multislot class 12, CS 1 to 4, 3GPP rel. 99/4 standard
Support channels	GSM/GPRS/EDGE: Quad band, 850/900/1800/1900 MHz UMTS/HSDPA/HSUPA/HSPA+: Five band, 800/850/900/1900/2100 MHz

STANDARDS/REGULATION

Telecom and Emission	ETSI EN 301 511 V12.5.1, ETSI EN 300 440 V2.1.1, ETSI EN 301 908-1 V11.1.1, ETSI EN 301 908-2 V11.1.1, ETSI EN 300 328 V2.1.1, ETSI EN 300 220-2 V3.1.1
EMC	ETSI EN 301 489-1 V2.1.1, ETSI EN 301 489-3 V2.1.1, Draft ETSI EN 301 489-52 V1.1.0, ETSI EN 301 489-17 V3.1.1
Safety	EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013 + AC:2011, EN 62311:2008
E-Mark – EMC for devices in transportation	E-Mark homologation number: 10R – 04 7054

Cellular Routers 3G UMTS/HSPA+

UR5i v2 Series



SOFTWARE FEATURES

Linux based, possibility to program your own application

NTP client, NTP Server – time synchronization

SMS communication – AT commands on RS232, Ethernet and I/O

M-RAM memory inside – router statistic's saving into memory

NETWORKING

DHCP – automatic IP addressing in LAN network

NAT/PAT – IP address and ports translation between inside/outside network

VRRP – virtual backup router function

DynDNS client – access to the router with a dynamic IP address

Dial-in – the ability to communicate over dial CSD call

PPPoE Bridge – PPP frames encapsulation inside ETH frames

DMZ - via iptables

VPN TUNNELING

IPsec, OpenVPN, L2TP – secure encrypted tunnels

CONFIGURATION AND DIAGNOSTIC

HTTP server – configuration via web server

Telnet – configuration and access to the file system

SNMP – router diagnostics, communication with I/O and M-Bus

GPRS state signalization by LED

On-line info on GSM signal status (level, cell, neighbors)

SMS info – power on, GPRS connection or disconnection

SMS control – on/off GPRS connection, switch SIM, I/O etc.

Transferred data counting, one more APN as backup

Remote router group configuration change, switching among configuration profiles

SSH – encrypted configuration and access to the file system

BASIC VERSION

1× SIM card holder, 1× optional port (PORT1)

FULL VERSION


2× SIM card holder, 2× optional port (PORT1,2)



PLASTIC VERSION



METALLIC VERSION

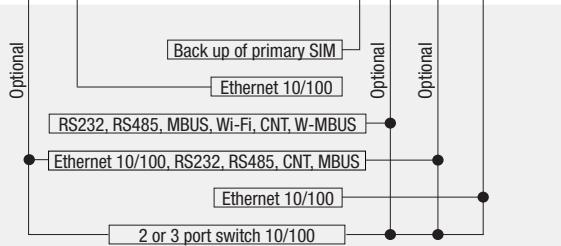

Cellular Routers

3G UMTS/HSPA+

UR5i v2 Series



ACCESSORIES

ORDER CODE	DESCRIPTION	Variant of router without accessories	Accessories included in set	Accessories sold separately
BB-SBD40	Metal DIN holder for Metal versions of routers v2	✓	✓	✓
BB-CPD2-G	Plastic DIN holder for Plastic versions of routers v2	✓	✓	✓
BB-TG.09.0113	Antenna GSM/UMTS stick 2dB - Penta-band, SMA-M connector		✓	✓
BB-AO-AUMTS-M3S	Antenna GSM/UMTS magnetic 3dB - Quad-band, 3m cable, SMA-M connector		✓	✓
BB-AO-AGSM-MG9S	Antenna GSM/UMTS magnetic 9dB - Quad-band, 3,5m cable, SMA-M connector			✓
BB-AW-A24G-M5SRP	Antenna WiFi stick 5dB, SMA-RP connector		✓	✓
BB-AP-AGNSS-SMA	Antenna GPS/GLONASS, active (3V), magnetic, 33 - 34dB, 3m cable + SMA connector			✓
BB-KD-ETH	Ethernet cross cable 1,5m		✓	✓
BB-CON-WR3	3-pin terminal block for IO		✓	✓
BB-CON-WR2	2-pin Terminal block for Power Supply	✓		✓
BB-RPS-v2-WR2-EU	Power supply with WR connector (2 pins) - 12V/1A - EU plug		✓	✓
BB-RPS-v2-WR2-US	Power supply with WR connector (2 pins) - 12V/1A - US plug		✓	✓
BB-RPS-v2-WR2-UK	Power supply with WR connector (2 pins) - 12V/1A - UK plug		✓	✓
BB-RPS-v2-WR2-AUS	Power supply with WR connector (2 pins) - 12V/1A - AUS plug		✓	✓
Quick Start Guide		✓	✓	✓

R-SEENET™

Router Management Software consisting of two parts:

R-SeeNet Server application can be programmed to automatically send SNMP queries (Simple Network Management Protocol) to each router defined in the network. The application retrieves status information from the routers and records it in the SQL database.

R-SeeNet PHP is a web-based application that accesses the SQL database and provides the network administrator detailed information on individual routers and network health.

SMARTWORX HUB™

SmartWorx HUB takes management of your devices to new levels of flexibility and efficiency. Giving you a complete view of your installed device population, SmartWorx Hub delivers invaluable configuration, diagnostic and management facilities directly to your desktop, wherever you are.

Manage a single device or your entire device population at the same time. Whether you need to modify configuration parameters, download or upgrade installed firmware and applications or view detailed information regarding network statistics, you can do it all from any location.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.