


LDN80 Series

80W DIN Rail Switching Power Supply

LDN80 Series are single phase DIN Rail Switching Power Supplies, ideal for home automation, simple automation in machines, survey systems, telecom, but also the renewable energy field.

Its compact size, high efficiency, excellent reliability and excellent power/volume ratio, together with easy installation makes it ideal for various industrial and renewable applications.

LDN80 Series are Class II isolation devices suitable for SELV and PELV circuitry and are designed to be mounted on DIN rail and installed inside a protective enclosure.

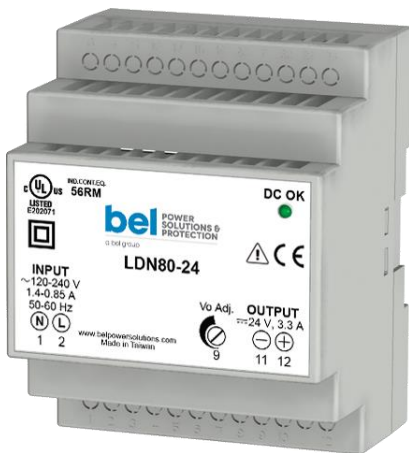

Key Features & Benefits

- Single phase AC input 90 - 264 VAC (110 - 345 VDC)
- High efficiency and compact size
- Class II, simplified wiring (no PE connection)
- Overload 150%
- High operating temperature with no derating
- Plastic enclosure, circuit breaker shape
- RoHS Compliant

Applications

- Automation
- Telecom
- Survey Systems
- Renewable



bel POWER SOLUTIONS & PROTECTION

a bel group

belpowersolutions.com

1. MODEL SELECTION

| MODEL | INPUT VOLTAGE | # of PHASES | OUTPUT VOLTAGE | OUTPUT CURRENT |
|----------|-------------------------------|-------------|----------------|----------------|
| LDN80-12 | 120 - 240 VAC (110 - 345 VDC) | 1 | 12 - 15 VDC | 6 - 5 A |
| LDN80-24 | 120 - 240 VAC (110 - 345 VDC) | 1 | 24 VDC | 3.3 A |

2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 240 VAC / 50 Hz, at nominal values, after minimum 5 minutes of operation.

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|---------------------------------|---|--|
| Input AC Voltage Range | Rated, UL certified Operating | 120 - 240 VAC 90 - 264 VAC |
| Input DC Voltage Range | Rated | 110 - 345 VDC |
| Input Frequency Range | | 47 - 63 Hz |
| Input AC Current | LDN80-12 | Vin = 120 VAC 1.50 A Vin = 240 VAC 0.85 A |
| | LDN80-24 | Vin = 120 VAC 1.40 A Vin = 240 VAC 0.85 A |
| Input DC Current | | Vin = 110 VDC 1.0 A Vin = 345 VDC 0.4 A |
| Inrush Peak Current | | ≤ 85 A |
| Touch (Leakage) Current | | ≤ 0.25 mA |
| Internal Protection Fuse | Not user replaceable | Fuse 2 AT |
| Recommended External Protection | It is strongly recommended to provide external surge arresters (SPD) according to local regulations | MCB 6A C curve |

3. OUTPUT SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|---|---|----------------------------------|
| Output Power | | 80 W |
| Rated Voltage (Adjustable Voltage Range) | LDN80-12 | 12 - 15 VDC (12 - 15 VDC) |
| | LDN80-24 | 24 VDC (23 - 28 VDC) |
| Continuous Current | LDN80-12 | 6 - 5 A |
| | LDN80-24 | 3.3 A |
| Overload Limit | LDN80-12 | 7.5 A @ 12 VDC 6.5 A @ 15 VDC |
| | LDN80-24 | 4.0 A |
| Short Circuit Peak Current | LDN80-12 | 20 A |
| | LDN80-24 | 25 A |
| Load Regulation | | ≤ 0.5% |
| | | ≤ 1.0% |
| Ripple & Noise ¹ | LDN80-12 | ≤ 100 mVpp |
| | LDN80-24 | ≤ 50 mVpp |
| Hold up Time | | Vin = 120 VAC ≥ 10 ms |
| | | Vin = 240 VAC ≥ 30 ms |
| Protections | Overload/short circuit: Hiccup mode Thermal protection Output overvoltage | |
| Status Signals | Green LED = DC OK | |
| Parallel Connection | Possible for redundancy (with external ORing module) | |
| Efficiency | LDN80-12 | > 86% |
| | LDN80-24 | > 87% |
| Dissipated Power | LDN80-12 | < 12.5 W |
| | LDN80-24 | < 12 W |

¹ Ripple and Noise are measured with 20MHz bandwidth, probe terminated with a 0.1µF MKP parallel capacitor.

NOTE: Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.

4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|------------------------------|--|--|
| Operating Temperature | UL certified up to 50°C for LDN80-12 and up to 55°C for LDN80-24 (Start-up type tested: - 40°C) ² | - 40 to + 70°C |
| Storage Temperature | | - 40 to + 80°C |
| Derating | LDN80-12 LDN80-24 | - 1.2 W / °C over 50°C - 0.9 W / °C over 55°C |
| Humidity | Non-condensing | 5 - 95% RH |
| Life Time Expectancy | At 25°C ambient, full load | 51136 h (5.8 years) |
| Overvoltage Category | | III (EN50178) |
| Pollution Degree | | 2 (IEC60664-1) |
| Protection Class | | Class II |
| Isolation Voltage | Input to Output | 4.2 kVDC |
| Safety Standards & Approvals | UL508 (certified) EN60950 (reference) EN50178 (reference) | |
| EMC Emission | EN55011 (CISPR11) EN55022 (CISPR22) | Class A Class A |
| EMC Immunity | EN61000-4-2 | Level 3 |
| | EN61000-4-3 | Level 3 |
| | EN61000-4-4 | Level 3 |
| | EN61000-4-5 | Level 3 |
| | EN61000-4-11 | Level 2 |
| Protection Degree | EN60529 | IP20 |
| Vibration sinusoidal | IEC 60068-2-6 | 5 - 17.8 Hz: ±1.6 mm; 17.8 - 500 Hz: 2 g 2 Hours / axis (X, Y, Z) |
| Shock | IEC 60068-2-27 | 30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total |

² Possible with load derating

5. PIN LAYOUT & DESCRIPTION



| PIN | DESCRIPTION |
|-----|---------------------------|
| 1 | AC/DC input |
| 2 | DC output (load) |
| 3 | Green LED: Output OK |
| 4 | Output voltage adjustment |

| INPUT CONNECTION | OUTPUT CONNECTION |
|--|--|
| Single phase: L = Line (2) N = Neutral (1) | + = Positive DC (12) - = Negative DC (11) |
| DC: L = +/- (2) N = -/+ (1) | |

6. MECHANICAL SPECIFICATIONS

| PARAMETER | DESCRIPTION / CONDITION | SPECIFICATION |
|------------------------|---------------------------------|-----------------------------|
| Weight | | 230 g |
| Dimensions (W x H x D) | | 72 x 90 x 61.5 mm |
| Mounting Rail | | IEC 60715/H15/TH35-7.5(-15) |
| Connection Terminals | Screw type Header (24 - 12 AWG) | 2.5 mm ² |
| Case Material | ABS, Flame retardant UL94 V-0 | |

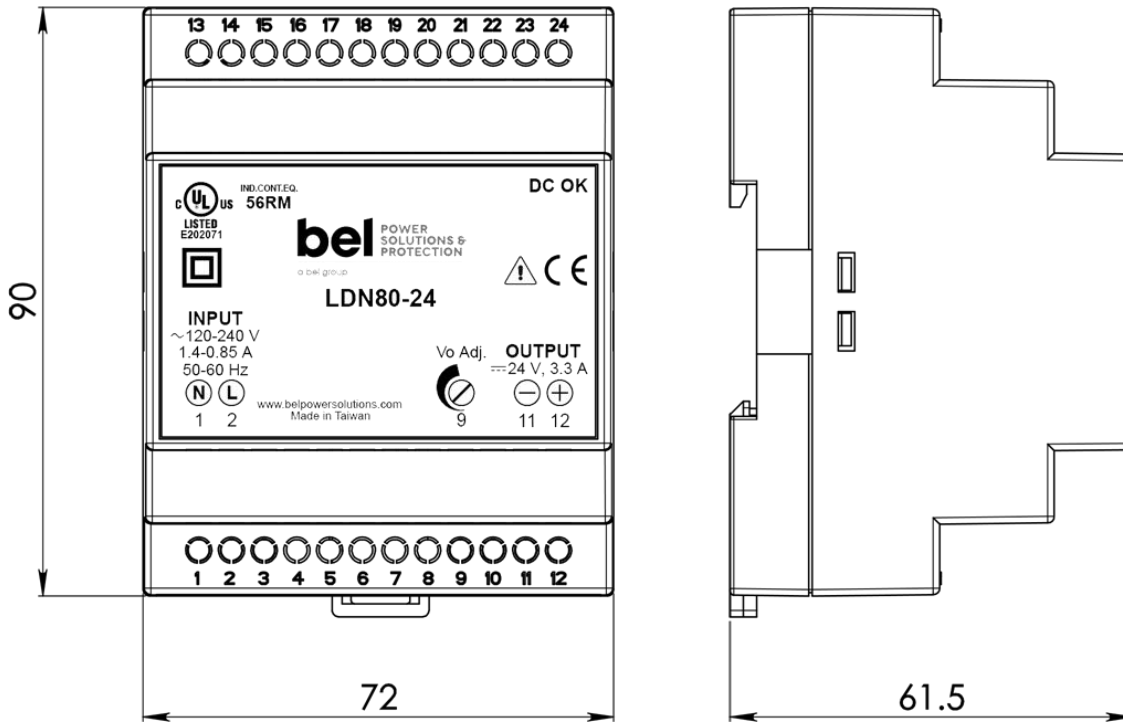


Figure 1. Mechanical Drawing

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.