



ICS556-04

LOW SKEW 1 TO 4 CLOCK BUFFER

Description

The ICS556-04 is a low-skew, crystal input compatible clock buffer with oscillator. This device offers the lowest skew.


See the ICS552-02 for a 1-to-8 low skew buffer. For more than eight outputs see the MK74CBxxx Buffalo™ series of clock drivers.

ICS makes many non-PLL and PLL-based low-skew output devices. Contact ICS for all of your clocking needs.

Features


- Extremely low-skew outputs (50 ps maximum)
- Packaged in 8-pin SOIC
- Operating voltages of 2.5 to 5.0 V
- Low-power CMOS technology
- Industrial temperature range
- Available in Pb (lead) free package

Block Diagram

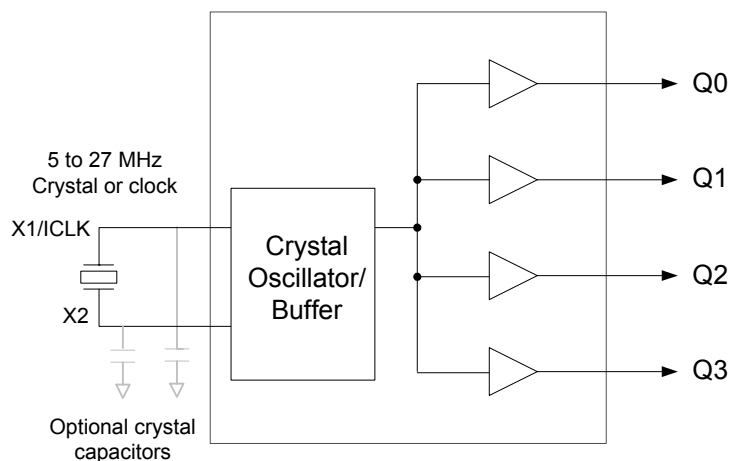



Pin Assignment

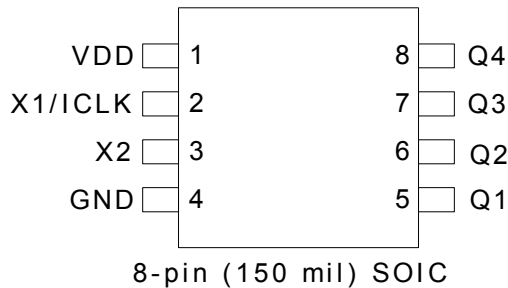

Pin Descriptions

Pin Number	Pin Name	Pin Type	Pin Description
1	VDD	Power	Connect to +2.5 V, +3.3 V or +5.0 V.
2	X1/ICLK	Input	Crystal or clock input (5 V tolerant input). Connect to 5 to 27 MHz input.
3	X2	Input	Connect to a fundamental mode crystal. Leave open for clock input.
4	GND	Power	Connect to ground.
5	Q1	Output	Clock Output 1.
6	Q2	Output	Clock Output 2.
7	Q3	Output	Clock Output 3.
8	Q4	Output	Clock Output 3.

External Components

A minimum number of external components are required for proper operation. A decoupling capacitor of 0.01 μ F should be connected between VDD on pin 1 and GND on pin 4, as close to the device as possible. A 33 Ω series terminating resistor may be used on each clock output if the trace is longer than 1 inch.

To achieve the low output skew that the ICS556-04 is capable of, careful attention must be paid to board layout. Essentially, all four outputs must have identical terminations, identical loads, and identical trace geometries. If not, the output skew will be degraded. For example, using a 30 Ω series termination on one output (with 33 Ω on the others) will cause at least 15 ps of skew.

Crystal Information

The crystal used should be a fundamental mode (do not use third overtone), parallel resonant. Crystal capacitors should be connected from pins X1 to ground and X2 to ground to optimize the initial accuracy. The value of these capacitors is given by the following equation:

$$\text{Crystal caps (pF)} = (\text{CL} - 6) \times 2$$

In the equation, CL is the crystal load capacitance. So, for a crystal with a 16 pF load capacitance, two 20 pF [(16-6) x 2] capacitors should be used.



Absolute Maximum Ratings

Stresses above the ratings listed below can cause permanent damage to the ICS556-04. These ratings, which are standard values for ICS commercially rated parts, are stress ratings only. Functional operation of the device at these or any other conditions above those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods can affect product reliability. Electrical parameters are guaranteed only over the recommended operating temperature range.

Item	Rating
Supply Voltage, VDD	7 V
Output Enable and All Outputs	-0.5 V to VDD+0.5 V
ICLK	-0.5 V to 5.5 V
Ambient Operating Temperature	-40 to +85 °C
Storage Temperature	-65 to +150°C
Junction Temperature	125°C
Soldering Temperature	260°C

Recommended Operation Conditions

Parameter	Min.	Typ.	Max.	Units
Ambient Operating Temperature	-40		+85	°C
Power Supply Voltage (measured in respect to GND)	+2.375		+5.25	V

DC Electrical Characteristics

VDD=2.5 V $\pm$ 5%, Ambient temperature -40 to +85 °C, unless stated otherwise

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Operating Voltage	VDD		2.375		2.625	V
Input High Voltage	V _{IH}		2.0			V
Input Low Voltage	V _{IL}				0.8	V
Output High Voltage	V _{OH}	I _{OH} = -12 mA	2			V
Output Low Voltage	V _{OL}	I _{OL} = 12 mA			0.4	V
Operating Supply Current	IDD	No load, 27MHz		25		mA
Nominal Output Impedance	Z _O			20		Ω
Short Circuit Current	I _{OS}			$\pm$ 28		mA



DC Electrical Characteristics (continued)

VDD=3.3 V $\pm$ 5% , Ambient temperature -40 to +85 °C, unless stated otherwise

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Operating Voltage	VDD		3.15		3.45	V
Input High Voltage	V _{IH}		2.0			V
Input Low Voltage	V _{IL}				0.8	V
Output High Voltage	V _{OH}	I _{OH} = -25 mA	2.4			V
Output Low Voltage	V _{OL}	I _{OL} = 25 mA			0.4	V
Output High Voltage (CMOS Level)	V _{OH}	I _{OH} = -12 mA	VDD-0.4			V
Operating Supply Current	IDD	No load, 27 MHz		35		mA
Nominal Output Impedance	Z _O			20		Ω
Short Circuit Current	I _{OS}			$\pm$ 50		mA

VDD=5 V $\pm$ 5% , Ambient temperature -40 to +85 °C, unless stated otherwise

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Operating Voltage	VDD		4.75		5.25	V
Input High Voltage	V _{IH}		2.0			V
Input Low Voltage	V _{IL}				0.8	V
Output High Voltage	V _{OH}	I _{OH} = -35 mA	2.4			V
Output Low Voltage	V _{OL}	I _{OL} = 35 mA			0.4	V
Output High Voltage (CMOS Level)	V _{OH}	I _{OH} = -12 mA	VDD-0.4			V
Operating Supply Current	IDD	No load, 27 MHz		45		mA
Nominal Output Impedance	Z _O			20		Ω
Short Circuit Current	I _{OS}			$\pm$ 80		mA

Notes:

1. Nominal switching threshold is VDD/2



AC Electrical Characteristics

VDD = 2.5 V $\pm$ 5%, Ambient Temperature -40 to +85 °C, unless stated otherwise

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input Frequency			5		27	MHz
Output Rise Time	t _{OR}	0.8 to 2.0 V, C _L =15 pF		1.8	2.5	ns
Output Fall Time	t _{OF}	2.0 to 0.8 V, C _L =15 pF		1.8	2.5	ns
Output to output skew	Note 1	Rising edges at VDD/2		0	50	ps
Duty Cycle		Measured at VDD/2	45	50	55	%

VDD = 3.3 V $\pm$ 5%, Ambient Temperature -40 to +85 °C, unless stated otherwise

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input Frequency			5		27	MHz
Output Rise Time	t _{OR}	0.8 to 2.0 V, C _L =15 pF		0.6	1.0	ns
Output Fall Time	t _{OF}	2.0 to 0.8 V, C _L =15 pF		0.6	1.0	ns
Output to output skew	Note 1	Rising edges at VDD/2		0	50	ps
Duty Cycle		Measured at VDD/2	45	50	55	%
Phase Noise at 1MHz from carrier				-125		dBc/Hz
Clock Jitter RMS 1KHz to 1MHz					6	ps

VDD = 5 V $\pm$ 5%, Ambient Temperature -40 to +85 °C, unless stated otherwise

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Input Frequency			5		27	MHz
Output Rise Time	t _{OR}	0.8 to 2.0 V, C _L =15 pF		0.3	0.7	ns
Output Fall Time	t _{OF}	2.0 to 0.8 V, C _L =15 pF		0.3	0.7	ns
Output to output skew	Note 1	Rising edges at VDD/2		0	50	ps
Duty Cycle		Measured at VDD/2	45	50	55	%

Notes: 1. Between any two outputs with equal loading.


Thermal Characteristics

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Thermal Resistance Junction to Ambient	θ_{JA}	Still air		150		°C/W
	θ_{JA}	1 m/s air flow		140		°C/W
	θ_{JA}	3 m/s air flow		120		°C/W
Thermal Resistance Junction to Case	θ_{JC}			40		°C/W



Package Outline and Package Dimensions (8-pin SOIC, 150 Mil. Narrow Body)

Package dimensions are kept current with JEDEC Publication No. 95

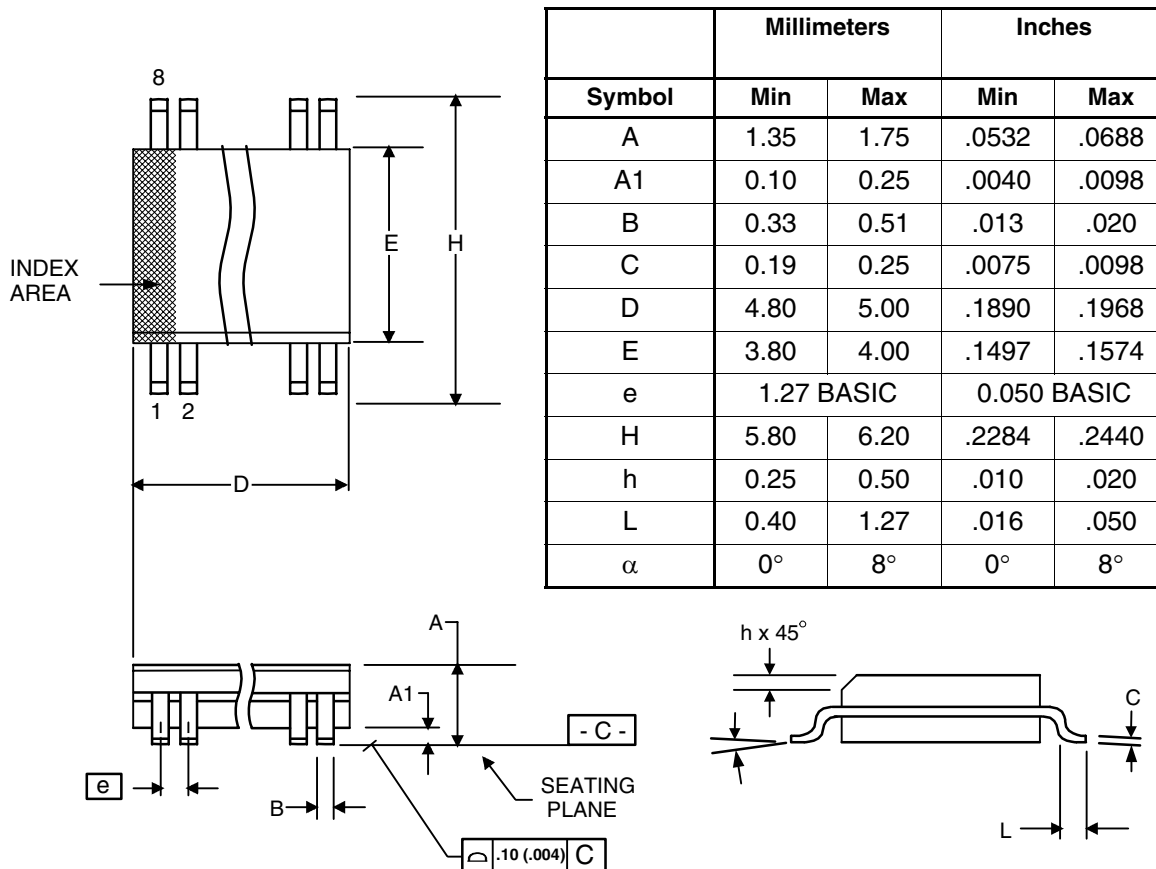

Ordering Information

Part / Order Number	Marking	Shipping Packaging	Package	Temperature
ICS556M-04I	556M-04I	Tubes	8-pin SOIC	-40 to +85°C
ICS556M-04IT	556M-04I	Tape and Reel	8-pin SOIC	-40 to +85°C
ICS556M-04ILF	556M04IL	Tubes	8-pin SOIC	-40 to +85°C
ICS556M-04ILFT	556M04IL	Tape and Reel	8-pin SOIC	-40 to +85°C

“LF” denotes Pb free package.

While the information presented herein has been checked for both accuracy and reliability, Integrated Circuit Systems (ICS) result from its use. No other circuits, patents, or licenses are implied. This product is intended for use in normal commercial applications. Any other applications such as those requiring extended temperature range, high reliability, or other extraordinary environmental requirements are not recommended without additional processing by ICS. ICS reserves the right to change any circuitry or specifications without notice. ICS does not authorize or warrant any ICS product for use in life support devices or critical medical instruments.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.