


PulseLARSEN

Description: LTE Stealth Blade Antenna

Series: SB Antenna

PART NUMBER: W1991



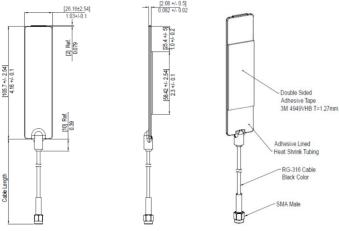

Features:

- Cost-effective, high-performance solution for LTE 698-2700MHz
- Slim, low- profile without sacrificing mechanical performance
- Multiple cable lengths and connector options
- Adhesive mount
- Flexible board
- IP-67 rating when installed to compliant surface
- RoHS Compliant Product
- Multiple and dual frequency products available

Applications:

- WLAN, LTE and 3G/4G applications
- Public Safety
- IoT Vending/Smart Metering
- Access Points
- Vehicular (window, dashboard, visor)
- Data transmission

Projects	Connector	Cable Type	Cable Length	Weight
W1991	SMA Male	RG-316 Black	10' / 3048mm	44g
W1991AV			2' / 609.6mm	23g

All dimensions are in mm / inches

Issue: 1618

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998



Description: LTE Stealth Blade Antenna

Series: SB Antenna

PART NUMBER: W1991

ELECTRICAL SPECIFICATIONS

Antenna Type Dipole (Measured with 315mm RG-174 Cable, in free space)

Frequency 698-960/1710-2170/2300-2700MHz

Nominal Impedance 50 Ω

VSWR 2.5:1 Max

Peak Gain (698-960) 2 dBi

Peak Gain (1710-2700) 2 dBi

Efficiency (698-960) 50 %

Efficiency (1710-2700) 60 %

HPBW Horizontal Plane Omni

HPBW Vertical Plane (698-960) 40°

HPBW Vertical Plane (1710-2170) 70°

HPBW Vertical Plane (2300-2700) 55°

Polarization Vertical

Power withstanding 3 W

Connector type Refer to table on Page 1

Cable type Black RG-316

Length Refer to table on Page 1



Description: LTE Stealth Blade Antenna

Series: SB Antenna

PART NUMBER: W1991

MECHANICAL SPECIFICATIONS

Radome Adhesive lined polyolefin tubing

Color Black

Ingress Protection IP67

Weight Refer to table on Page 1

Overall Length 4.16 INCHES

Cable retention: Pull off 30 N mini

Fixing system Adhesive Tape (3M VHB 4949)

ENVIRONMENTAL SPECIFICATIONS

Operating temperature

-40 ~ +85° C








Series: SB Antenna

PART NUMBER: W1991

MECHANICAL DRAWING

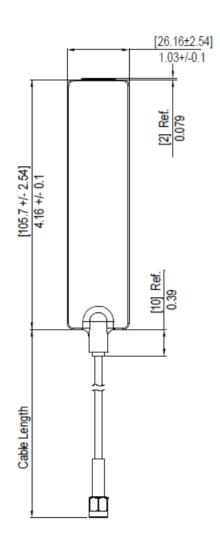

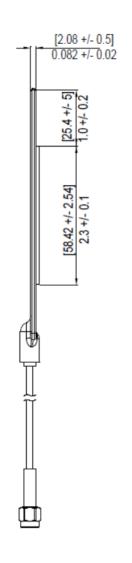

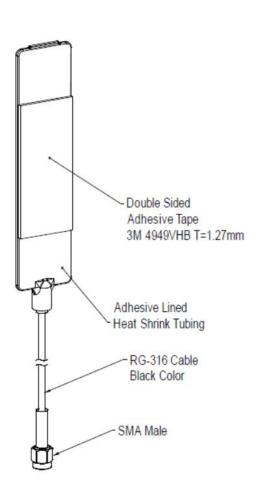






Series: SB Antenna

PART NUMBER: W1991

CHARTS

S11 Parameter Measured with 315mm RG-174 cable

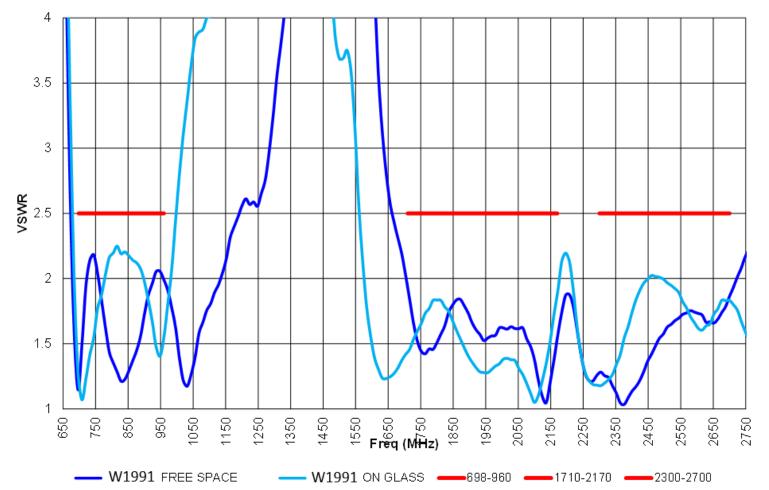








Series: SB Antenna


PART NUMBER: W1991

CHARTS

Peak Gain vs Frequency Free space Measured at Pulse, USA - June 01, 2016

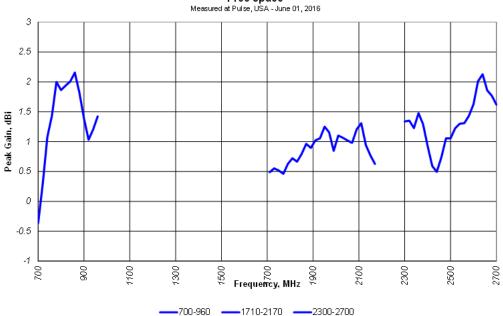

Efficiency vs Frequency Free space

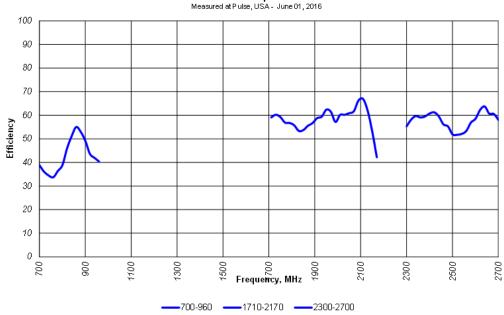

Issue: 1618

ROHS






Series: SB Antenna

Description: LTE Stealth Blade Antenna

PART NUMBER: W1991

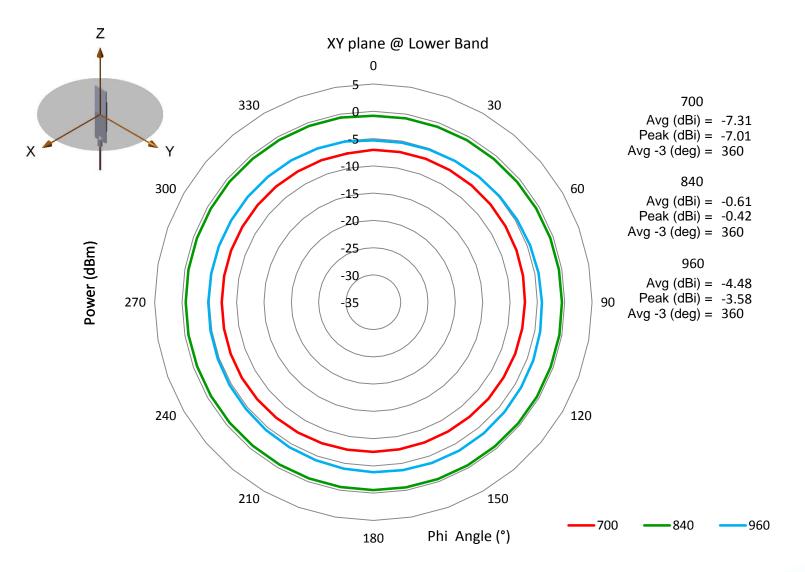






Series: SB Antenna

Description: LTE Stealth Blade Antenna

PART NUMBER: W1991

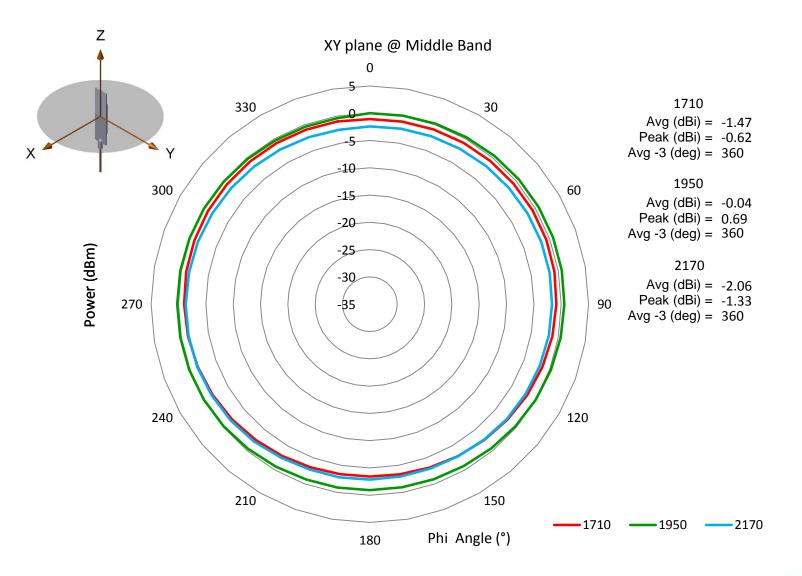






Series: SB Antenna

Description: LTE Stealth Blade Antenna

PART NUMBER: W1991

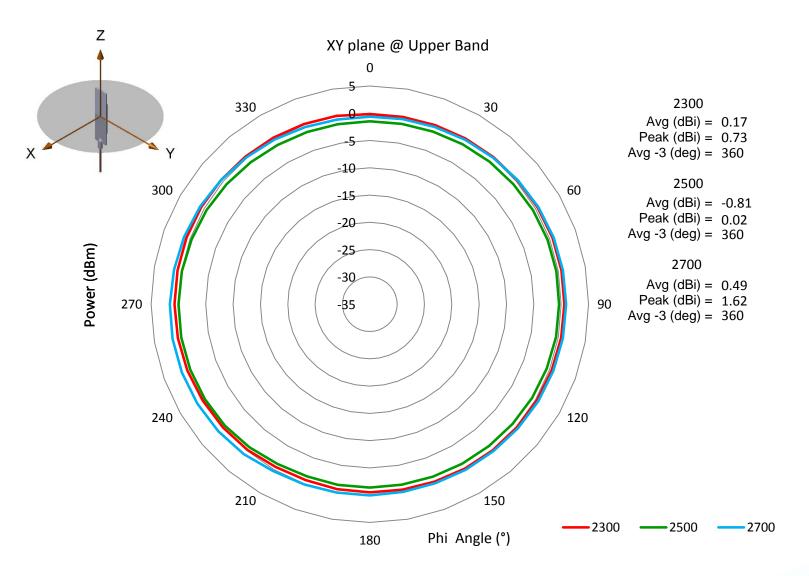






Series: SB Antenna

PART NUMBER: W1991

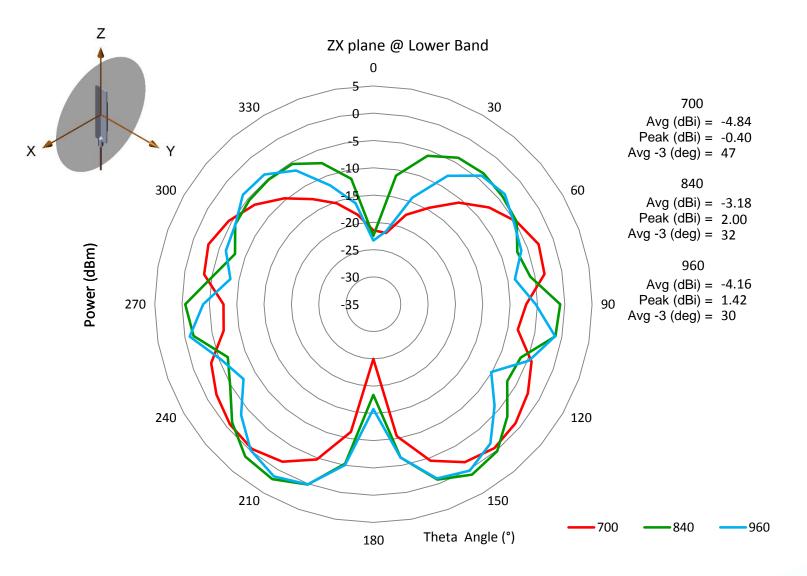






Series: SB Antenna

PART NUMBER: W1991

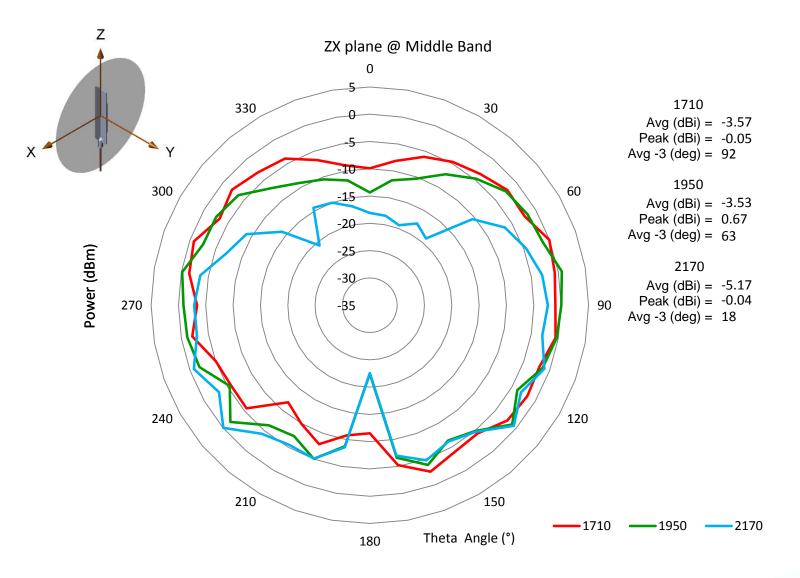






Series: SB Antenna

PART NUMBER: W1991

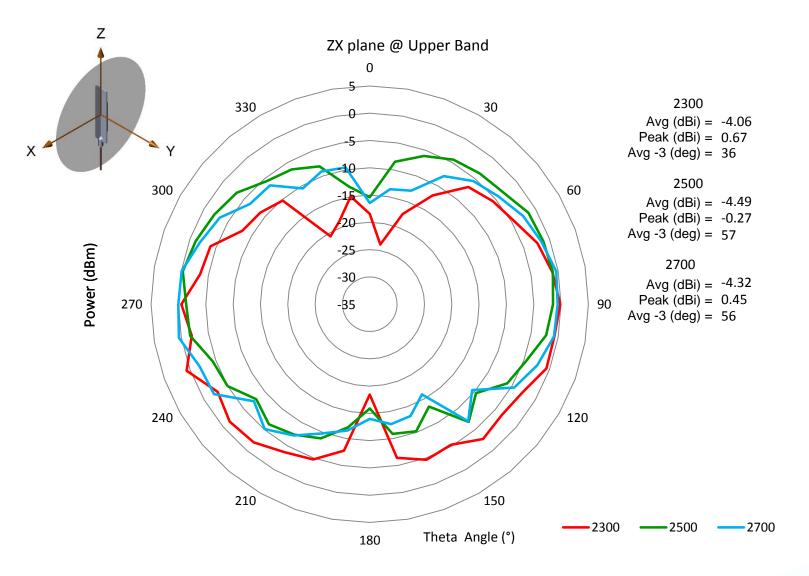



Description: LTE Stealth Blade Antenna

PART NUMBER: W1991

Series: SB Antenna

Packaging

1 antennas packed in one plastic bag

1 label on each plastic bag with part number, date code.

200 plastic bags of antennas (total 200pcs) packed in a cardboard box

1 label on each box with qty, part number, date code.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов:
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001:
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина,

дом 2, корпус 4, литера А.