

# NB7V72M

## 1.8V / 2.5V Differential 2 x 2 Crosspoint Switch with CML Outputs Clock/Data Buffer/Translator

### Multi-Level Inputs w/ Internal Termination

#### Description

The NB7V72M is a high bandwidth, low voltage, fully differential 2 x 2 crosspoint switch with CML outputs. The NB7V72M design is optimized for low skew and minimal jitter as it produces two identical copies of Clock or Data operating up to 5 GHz or 6.5 Gb/s, respectively. As such, the NB7V72M is ideal for SONET, GigE, Fiber Channel, Backplane and other clock/data distribution applications. The differential  $\overline{IN}/\overline{IN}$  inputs incorporate internal 50  $\Omega$  termination resistors and will accept LVPECL, CML, or LVDS logic levels (see Figure 10). The 16 mA differential CML outputs provide matching internal 50  $\Omega$  terminations and produce 400 mV output swings when externally terminated with a 50  $\Omega$  resistor to  $V_{CC}$  (see Figure 11). The NB7V72M is the 1.8 V/2.5 V CML version of the NB7L72M and is offered in a low profile 3x3 mm 16-pin QFN package. Application notes, models, and support documentation are available at [www.onsemi.com](http://www.onsemi.com).

The NB7V72M is a member of the GigaComm™ family of high performance clock products.

#### Features


- Maximum Input Data Rate > 6.5 Gb/s
- Data Dependent Jitter < 15 ps pk-pk
- Maximum Input Clock Frequency > 5 GHz
- Random Clock Jitter < 0.8 ps RMS, Max
- 150 ps Typical Propagation Delay
- 30ps Typical Rise and Fall Times
- Differential CML Outputs, 400 mV peak-to-peak, typical
- Operating Range:  $V_{CC} = 1.71$  V to 2.625 V with  $GND = 0$  V
- Internal 50  $\Omega$  Input Termination Resistors
- QFN-16 Package, 3mm x 3mm
- -40°C to +85°C Ambient Operating Temperature
- These are Pb-Free Devices



ON Semiconductor®

<http://onsemi.com>

#### MARKING DIAGRAM\*

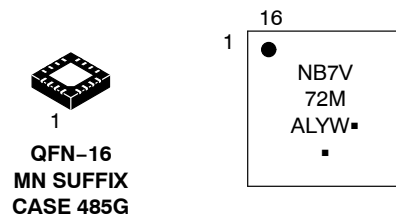

A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
■ = Pb-Free Package  
(Note: Microdot may be in either location)

\*For additional marking information, refer to Application Note AND8002/D.

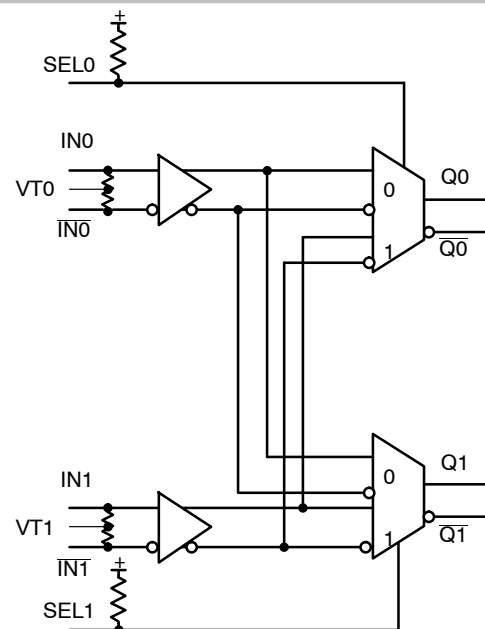


Figure 1. Logic Diagram

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 7 of this data sheet.

# NB7V72M

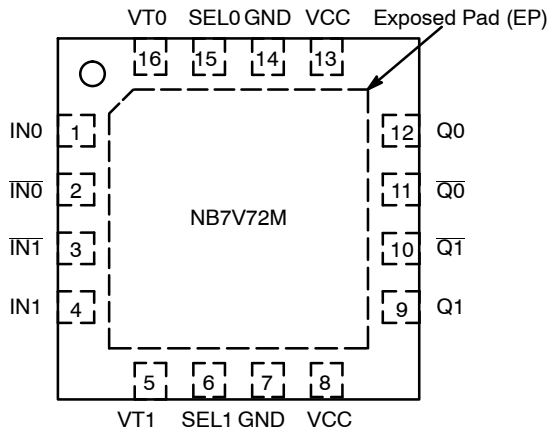


Figure 2. Pin Configuration (Top View)

Table 1. INPUT/OUTPUT SELECT TRUTH TABLE

| SEL0* | SEL1* | Q0  | Q1  |
|-------|-------|-----|-----|
| L     | L     | IN0 | IN0 |
| L     | H     | IN0 | IN1 |
| H     | L     | IN1 | IN0 |
| H     | H     | IN1 | IN1 |

\*Defaults HIGH when left open

Table 2. PIN DESCRIPTION

| Pin | Name    | I/O                     | Description  |
|-----|---------|-------------------------|--|
| 1   | IN0     | LVPECL, CML, LVDS Input | Noninverted Differential Input. (Note 1)   |
| 2   | IN0-bar | LVPECL, CML, LVDS Input | Inverted Differential Input. (Note 1)  |
| 3   | IN1-bar | LVPECL, CML, LVDS Input | Inverted Differential Input. (Note 1)  |
| 4   | IN1     | LVPECL, CML, LVDS Input | Noninverted Differential Input. (Note 1)   |
| 5   | VT1     | -                       | Internal 50 Ω Termination Pin for IN1 and IN1-bar  |
| 6   | SEL1    | LVC MOS Input           | Input Select logic pin for IN0 or IN1 Inputs to Q1 output. See Table 1, Input/Output Select Truth Table; pin defaults HIGH when left open.   |
| 7   | GND     | -                       | Negative Supply Voltage  |
| 8   | VCC     | -                       | Positive Supply Voltage  |
| 9   | Q1      | CML Output              | Noninverted Differential Output. (Note 1)  |
| 10  | Q1-bar  | CML Output              | Inverted Differential Output. (Note 1)   |
| 11  | Q0-bar  | CML Output              | Inverted Differential Output. (Note 1)   |
| 12  | Q0      | CML Output              | Noninverted Differential Output. (Note 1)  |
| 13  | VCC     | -                       | Positive Supply Voltage  |
| 14  | GND     | -                       | Negative Supply Voltage  |
| 15  | SEL0    | LVC MOS Input           | Input Select logic pin for IN0 or IN1 Inputs to Q0 output. See Table 1, Input/Output Select Truth Table; pin defaults HIGH when left open.   |
| 16  | VT0     | -                       | Internal 50 Ω Termination Pin for IN0 and IN0-bar  |
| -   | EP      | -                       | The Exposed Pad (EP) on the QFN-16 package bottom is thermally connected to the die for improved heat transfer out of package. The exposed pad must be attached to a heat-sinking conduit. The pad is electrically connected to the die, and is recommended to be electrically and thermally connected to GND on the PC board. |

1. In the differential configuration when the input termination pins (VT0, VT1) are connected to a common termination voltage or left open, and if no signal is applied on INx/INx-bar input, then the device will be susceptible to self-oscillation.
2. All VCC and GND pins must be externally connected to a power supply for proper operation.

# NB7V72M

**Table 3. ATTRIBUTES**

| Characteristics  |                                   | Value                |
|--|-----------------------------------|----------------------|
| ESD Protection   | Human Body Model<br>Machine Model | > 4 kV<br>> 200 V    |
| R <sub>PU</sub> – Input Pullup Resistor                |                                   | 75kΩ                 |
| Moisture Sensitivity                                   | 16-QFN                            | Level 1              |
| Flammability Rating                                    | Oxygen Index: 28 to 34            | UL 94 V-0 @ 0.125 in |
| Transistor Count                                       |                                   | 210                  |
| Meets or exceeds JEDEC Spec EIA/JESD78 IC Latchup Test |                                   |                      |

For additional information, see Application Note AND8003/D.

**Table 4. MAXIMUM RATINGS**

| Symbol            | Parameter   | Condition 1      | Condition 2      | Rating                       | Unit         |
|-------------------|---|------------------|------------------|------------------------------|--------------|
| V <sub>CC</sub>   | Positive Power Supply                                       | GND = 0 V        |                  | 3.0                          | V            |
| V <sub>IN</sub>   | Positive Input Voltage                                      | GND = 0 V        |                  | -0.5 to V <sub>CC</sub> +0.5 | V            |
| V <sub>INPP</sub> | Differential Input Voltage  I <sub>N</sub> - I <sub>N</sub> |                  |                  | 1.89                         | V            |
| I <sub>IN</sub>   | Input Current Through R <sub>T</sub> (50 Ω Resistor)        |                  |                  | ± 40                         | mA           |
| T <sub>A</sub>    | Operating Temperature Range                                 |                  |                  | -40 to +85                   | °C           |
| T <sub>stg</sub>  | Storage Temperature Range                                   |                  |                  | -65 to +150                  | °C           |
| θ <sub>JA</sub>   | Thermal Resistance (Junction-to-Ambient) (Note 3)           | 0 lfp<br>500 lfp | QFN-16<br>QFN-16 | 42<br>35                     | °C/W<br>°C/W |
| θ <sub>JC</sub>   | Thermal Resistance (Junction-to-Case) (Note 3)              |                  | QFN-16           | 4                            | °C/W         |
| T <sub>sol</sub>  | Wave Solder<br>Pb-Free                                      |                  |                  | 265                          | °C           |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

3. JEDEC standard multilayer board – 2S2P (2 signal, 2 power) with 8 filled thermal vias under exposed pad.

# NB7V72M

**Table 5. DC CHARACTERISTICS, Multi-Level Inputs**  $V_{CC} = 1.71\text{ V to }2.625\text{ V}$ ,  $GND = 0\text{ V}$ ,  $T_A = -40^\circ\text{C to }+85^\circ\text{C}$  (Note 4)

| Symbol | Characteristic | Min | Typ | Max | Unit |
|--------|----------------|-----|-----|-----|------|
|--------|----------------|-----|-----|-----|------|

## POWER SUPPLY CURRENT

|          |  |  |           |            |            |    |
|----------|--|--|-----------|------------|------------|----|
| $I_{CC}$ | Power Supply Current (Inputs and Outputs Open) | $V_{CC} = 2.5\text{ V}$<br>$V_{CC} = 1.8\text{ V}$ | 120<br>80 | 145<br>110 | 170<br>140 | mA |
|----------|--|--|-----------|------------|------------|----|

## CML OUTPUTS

|          |                              |  |                                |                                |                                |    |
|----------|------------------------------|--|--------------------------------|--------------------------------|--------------------------------|----|
| $V_{OH}$ | Output HIGH Voltage (Note 5) | $V_{CC} = 2.5\text{ V}$<br>$V_{CC} = 1.8\text{ V}$ | $V_{CC} - 40$<br>2460<br>1760  | $V_{CC} - 20$<br>2480<br>1780  | $V_{CC}$<br>2500<br>1800       | mV |
| $V_{OL}$ | Output LOW Voltage (Note 5)  | $V_{CC} = 2.5\text{ V}$<br>$V_{CC} = 1.8\text{ V}$ | $V_{CC} - 650$<br>1850<br>1150 | $V_{CC} - 400$<br>2100<br>1400 | $V_{CC} - 300$<br>2200<br>1500 | mV |

## DIFFERENTIAL CLOCK INPUTS DRIVEN SINGLE-ENDED (Note 6) (Figures 5 and 7)

|           |  |  |                |  |                |    |
|-----------|--|--|----------------|--|----------------|----|
| $V_{th}$  | Input Threshold Reference Voltage Range (Note 7) |  | 1050           |  | $V_{CC} - 100$ | mV |
| $V_{IH}$  | Single-Ended Input HIGH Voltage                  |  | $V_{th} + 100$ |  | $V_{CC}$       | mV |
| $V_{IL}$  | Single-Ended Input LOW Voltage                   |  | GND            |  | $V_{th} - 100$ | mV |
| $V_{ISE}$ | Single-Ended Input Voltage ( $V_{IH} - V_{IL}$ ) |  | 200            |  | $V_{CC} - GND$ | mV |

## DIFFERENTIAL DATA/CLOCK INPUTS DRIVEN DIFFERENTIALLY (Figures 6 and 8) (Note 8)

|           |  |  |      |  |                |               |
|-----------|--|--|------|--|----------------|---------------|
| $V_{IHD}$ | Differential Input HIGH Voltage ( $IN_n, \overline{IN}_n$ )                    |  | 1100 |  | $V_{CC}$       | mV            |
| $V_{ILD}$ | Differential Input LOW Voltage ( $IN_n, \overline{IN}_n$ )                     |  | GND  |  | $V_{CC} - 100$ | mV            |
| $V_{ID}$  | Differential Input Voltage ( $IN_n, \overline{IN}_n$ ) ( $V_{IHD} - V_{ILD}$ ) |  | 100  |  | 1200           | mV            |
| $V_{CMR}$ | Input Common Mode Range (Differential Configuration, Note 9) (Figure 9)        |  | 1050 |  | $V_{CC} - 50$  | mV            |
| $I_{IH}$  | Input HIGH Current $IN_n, \overline{IN}_n$ ( $V_{TIN}/V_{TIN}$ Open)           |  | -150 |  | 150            | $\mu\text{A}$ |
| $I_{IL}$  | Input LOW Current $IN_n, \overline{IN}_n$ ( $V_{TIN}/V_{TIN}$ Open)            |  | -150 |  | 150            | $\mu\text{A}$ |

## CONTROL INPUTS (SEL0, SEL1)

|          |                                     |  |                      |    |                      |               |
|----------|-------------------------------------|--|----------------------|----|----------------------|---------------|
| $V_{IH}$ | Input HIGH Voltage for Control Pins |  | $V_{CC} \times 0.65$ |    | $V_{CC}$             | mV            |
| $V_{IL}$ | Input LOW Voltage for Control Pins  |  | GND                  |    | $V_{CC} \times 0.35$ | mV            |
| $I_{IH}$ | Input HIGH Current                  |  | -150                 | 20 | 150                  | $\mu\text{A}$ |
| $I_{IL}$ | Input LOW Current                   |  | -150                 | 5  | 150                  | $\mu\text{A}$ |

## TERMINATION RESISTORS

|            |                                      |  |    |    |    |          |
|------------|--------------------------------------|--|----|----|----|----------|
| $R_{TIN}$  | Internal Input Termination Resistor  |  | 40 | 50 | 60 | $\Omega$ |
| $R_{TOUT}$ | Internal Output Termination Resistor |  | 40 | 50 | 60 | $\Omega$ |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lpm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

- Input and output parameters vary 1:1 with  $V_{CC}$ .
- CML outputs loaded with  $50\ \Omega$  to  $V_{CC}$  for proper operation.
- $V_{th}$ ,  $V_{IH}$ ,  $V_{IL}$ , and  $V_{ISE}$  parameters must be complied with simultaneously.
- $V_{th}$  is applied to the complementary input when operating in single-ended mode.
- $V_{IHD}$ ,  $V_{ILD}$ ,  $V_{ID}$  and  $V_{CMR}$  parameters must be complied with simultaneously.
- $V_{CMR}$  min varies 1:1 with GND,  $V_{CMR}$  max varies 1:1 with  $V_{CC}$ . The  $V_{CMR}$  range is referenced to the most positive side of the differential input signal.


# NB7V72M

**Table 6. AC CHARACTERISTICS**  $V_{CC} = 1.71\text{ V to }2.625\text{ V}$ ;  $GND = 0\text{ V}$ ;  $T_A = -40^\circ\text{C to }85^\circ\text{C}$  (Note 10)


| Symbol                   | Characteristic   | Min   | Typ | Max       | Unit                             |    |
|--------------------------|--|---|-----|-----------|----------------------------------|----|
| $f_{MAX}$                | Maximum Input Clock Frequency<br>$V_{CC} = 2.5\text{ V}$<br>$V_{CC} = 1.8\text{ V}$  | 5<br>4.5  |     |           | GHz                              |    |
| $f_{DATAMAX}$            | Maximum Operating Data Rate (PRBS23)   | 6.5   |     |           | Gbps                             |    |
| $V_{OUTPP}$              | Output Voltage Amplitude (@ $V_{INPPmin}$ ) $f_{in} \leq 5\text{ GHz}$<br>(See Figures 3 and 10, Note 11)                  | 200   | 400 |           | mV                               |    |
| $t_{PLH}$ ,<br>$t_{PHL}$ | Propagation Delay to Differential Outputs,<br>@ 1GHz, Measured at Differential Cross-point                                 | $I_{Nn}/I_{\overline{Nn}}$ to<br>$Q_n/\overline{Q_n}$ | 110 | 150       | 200                              | ps |
| $t_{PLH\ TC}$            | Propagation Delay Temperature Coefficient  |   | 50  |           | $\Delta\text{fs}/^\circ\text{C}$ |    |
| $t_{SKEW}$               | Output-to-Output Skew (within device) (Note 12)<br>Device-to-Device Skew ( $t_{pdmax} - t_{pdmin}$ )                       |   |     | 30<br>50  | ps                               |    |
| $t_{DC}$                 | Output Clock Duty Cycle (Reference Duty Cycle = 50%) $f_{in} \leq 5\text{GHz}$   | 45  | 50  | 55        | %                                |    |
| $t_{jitter}$             | RJ – Output Random Jitter (Note 13) $f_{in} \leq 5\text{ GHz}$<br>DJ – Deterministic Jitter (Note 14) $\leq 9\text{ Gbps}$ |   | 0.5 | 0.8<br>10 | ps RMS<br>ps pk-pk               |    |
| $V_{INPP}$               | Input Voltage Swing (Differential Configuration) (Note 15)   | 100   |     | 1200      | mV                               |    |
| $t_r, t_f$               | Output Rise/Fall Times @ 1 GHz (20% – 80%), $Q_n, \overline{Q_n}$  | 20  | 30  | 50        | ps                               |    |

NOTE: Device will meet the specifications after thermal equilibrium has been established when mounted in a test socket or printed circuit board with maintained transverse airflow greater than 500 lpm. Electrical parameters are guaranteed only over the declared operating temperature range. Functional operation of the device exceeding these conditions is not implied. Device specification limit values are applied individually under normal operating conditions and not valid simultaneously.

10. Measured using a 400 mV source, 50% duty cycle clock source. All output loading with external  $50\ \Omega$  to  $V_{CC}$ . Input edge rates  $\geq 40\text{ ps}$  (20% – 80%).
11. Output voltage swing is a single-ended measurement operating in differential mode.
12. Skew is measured between outputs under identical transitions and conditions. Duty cycle skew is defined only for differential operation when the delays are measured from cross-point of the inputs to the cross-point of the outputs.
13. Additive RMS jitter with 50% duty cycle clock signal.
14. Additive Peak-to-Peak data dependent jitter with input NRZ data at PRBS23.
15. Input voltage swing is a single-ended measurement operating in differential mode.

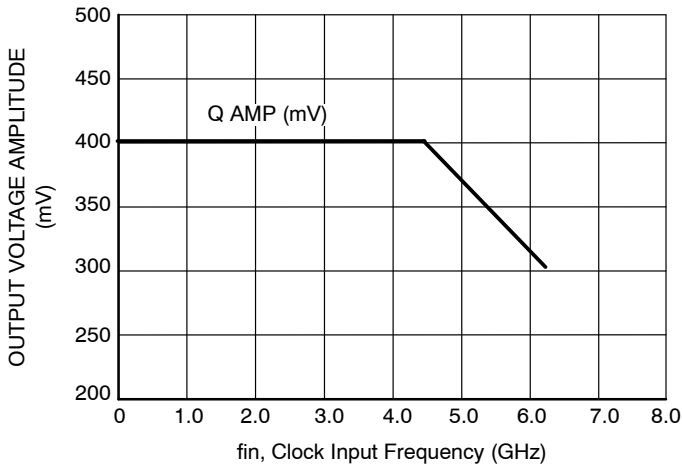

**Figure 3. CLOCK Output Voltage Amplitude ( $V_{OUTPP}$ ) vs. Input Frequency ( $f_{in}$ ) at Ambient Temperature (Typ)**

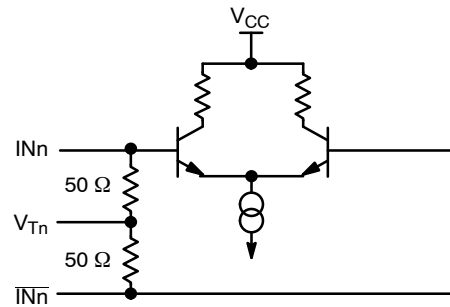

**Figure 4. Input Structure**

# NB7V72M

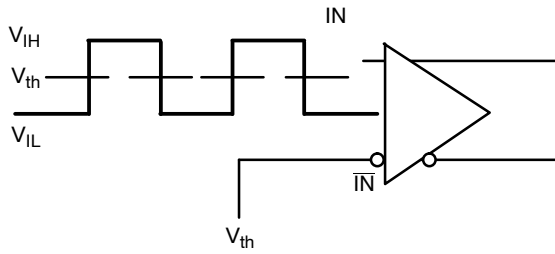


Figure 5. Differential Input Driven Single-Ended

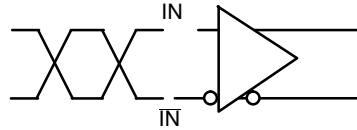


Figure 6. Differential Inputs Driven Differentially

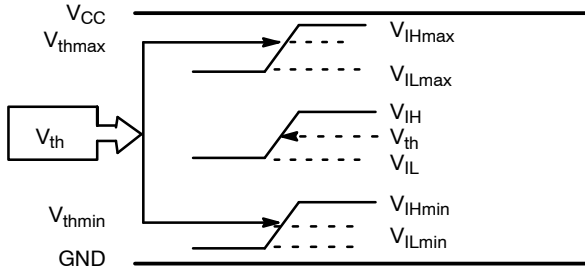


Figure 7.  $V_{th}$  Diagram




Figure 8. Differential Inputs Driven Differentially

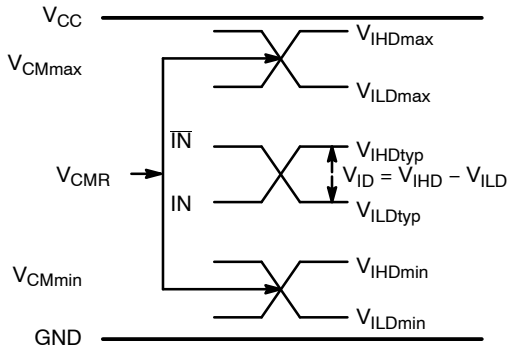


Figure 9.  $V_{CMR}$  Diagram

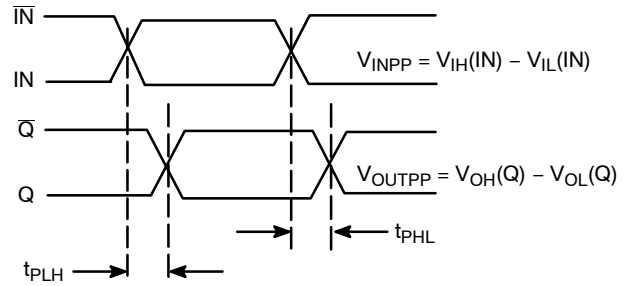


Figure 10. AC Reference Measurement

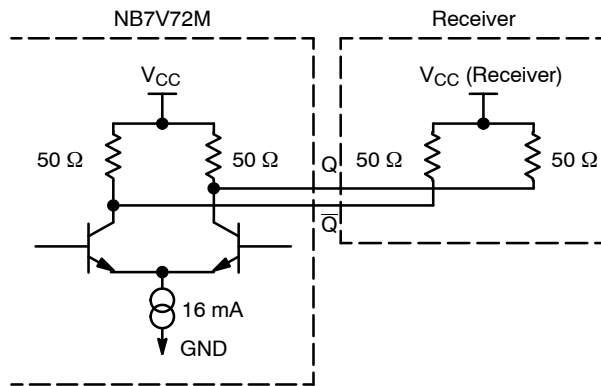


Figure 11. Typical CML Output Structure and Termination

# NB7V72M

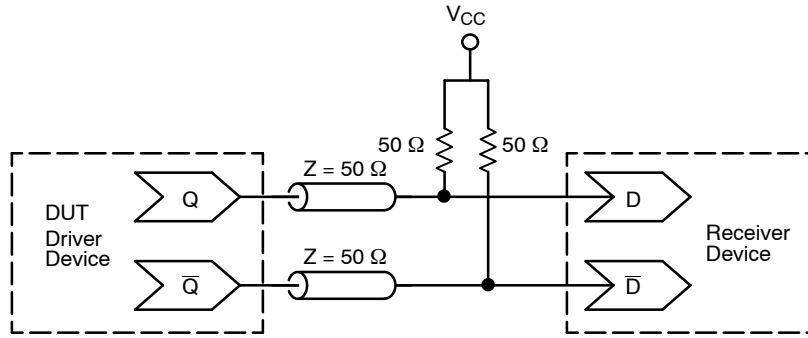


Figure 12. Typical Termination for CML Output Driver and Device Evaluation

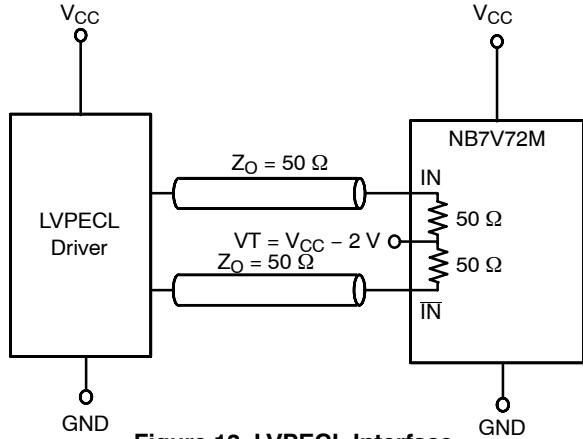


Figure 13. LVPECL Interface

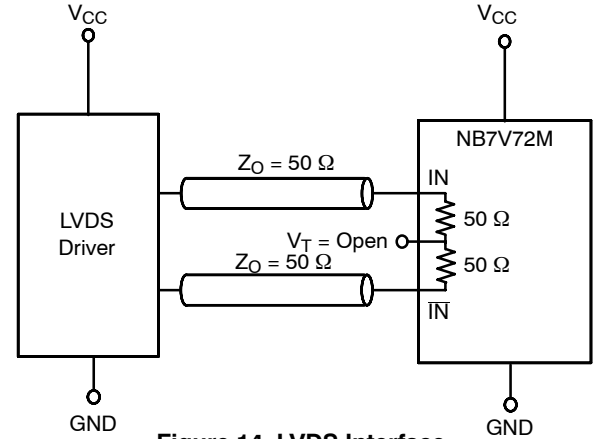


Figure 14. LVDS Interface

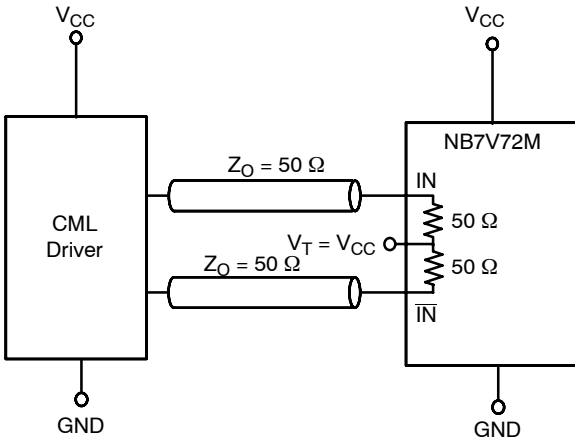


Figure 15. Standard 50  $\Omega$  Load CML Interface

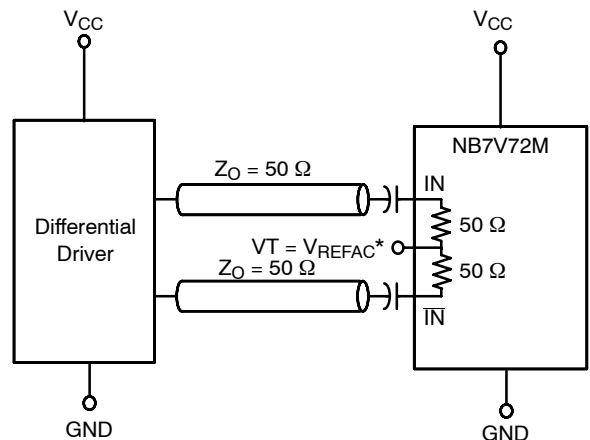


Figure 16. Capacitor-Coupled Differential Interface

( $V_T$  Connected to External  $V_{REFAC}$ )

\* $V_{REFAC}$  bypassed to ground with a 0.01  $\mu F$  capacitor

## ORDERING INFORMATION


| Device        | Package             | Shipping <sup>†</sup> |
|---------------|---------------------|-----------------------|
| NB7V72MMNG    | QFN-16<br>(Pb-free) | 123 Units / Rail      |
| NB7V72MMNHTBG | QFN-16<br>(Pb-free) | 100 / Tape & Reel     |
| NB7V72MMNTXG  | QFN-16<br>(Pb-free) | 3000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NB7V72M

## PACKAGE DIMENSIONS



16 PIN QFN  
CASE 485G-01  
ISSUE D

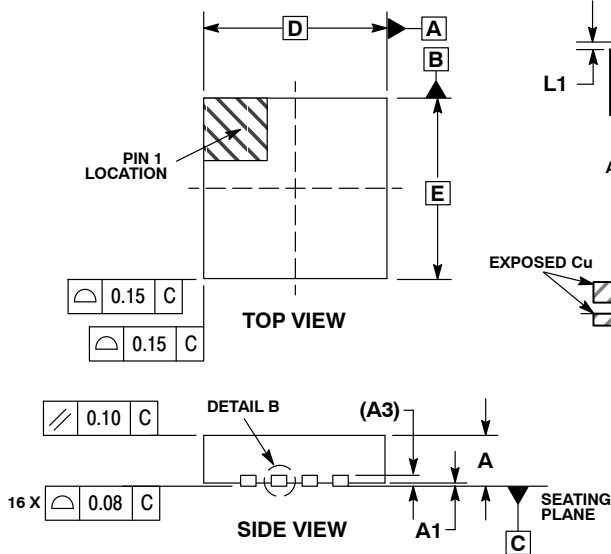

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.25 AND 0.30 MM FROM TERMINAL.
  4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
  5.  $L_{max}$  CONDITION CAN NOT VIOLATE 0.2 MM MINIMUM SPACING BETWEEN LEAD TIP AND FLAG

| MILLIMETERS |      |      |
|-------------|------|------|
| DIM         | MIN  | MAX  |
| A           | 0.80 | 1.00 |
| A1          | 0.00 | 0.05 |
| A3          | 0.20 | REF  |
| b           | 0.18 | 0.30 |
| D           | 3.00 | BSC  |
| D2          | 1.65 | 1.85 |
| E           | 3.00 | BSC  |
| E2          | 1.65 | 1.85 |
| e           | 0.50 | BSC  |
| K           | 0.18 | TYP  |
| L           | 0.30 | 0.50 |
| L1          | 0.00 | 0.15 |

### SOLDERING FOOTPRINT\*

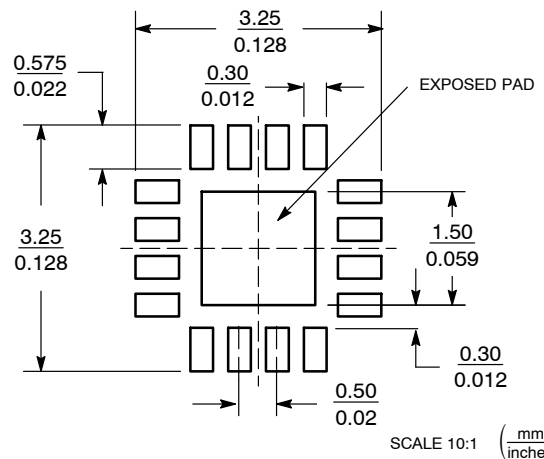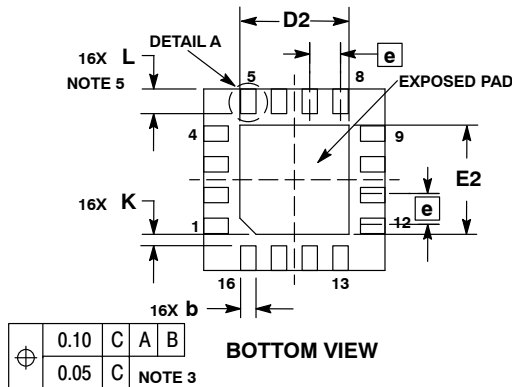

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GigaComm is a trademark of Semiconductor Components Industries, LLC (SCILLC).

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

**LITERATURE FULFILLMENT:**  
Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** orderlit@onsemi.com

**N. American Technical Support:** 800-282-9855 Toll Free USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.