


## SMCJ-HRA Series

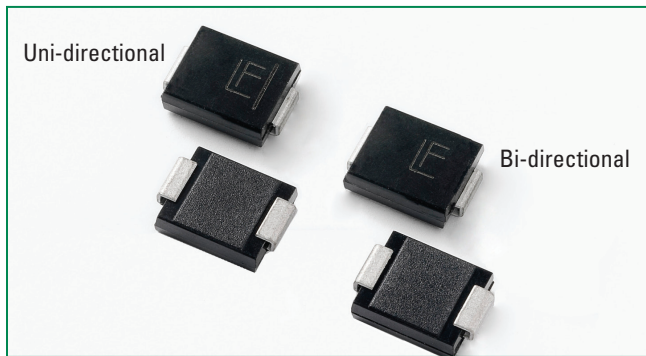

### Description

The SMCJ-HRA High Reliability series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. These are available with a variety of up-screening options for enhanced reliability.

### Agency Approvals

| AGENCY | AGENCY FILE NUMBER |
|--------|--------------------|
|        | E230531            |


### Maximum Ratings and Thermal Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

| Parameter                                                                                                          | Symbol          | Value      | Unit               |
|--------------------------------------------------------------------------------------------------------------------|-----------------|------------|--------------------|
| Peak Pulse Power Dissipation at $T_A=25^\circ\text{C}$ by 10/1000 $\mu\text{s}$ waveform (Fig.1)(Note 1), (Note 2) | $P_{PPM}$       | 1500       | W                  |
| Power Dissipation on infinite heat sink at $T_A=50^\circ\text{C}$                                                  | $P_{MAV}$       | 6.5        | W                  |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)                                                   | $I_{FSM}$       | 200        | A                  |
| Maximum Instantaneous Forward Voltage at 100A for Unidirectional only (Note 4)                                     | $V_F$           | 3.5/5.0    | V                  |
| Operating Junction and Storage Temperature Range                                                                   | $T_J, T_{STG}$  | -55 to 150 | $^\circ\text{C}$   |
| Typical Thermal Resistance Junction to Lead                                                                        | $R_{\theta JL}$ | 15         | $^\circ\text{C/W}$ |
| Typical Thermal Resistance Junction to Ambient                                                                     | $R_{\theta JA}$ | 75         | $^\circ\text{C/W}$ |

#### Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above  $T_A = 25^\circ\text{C}$  per Fig. 2.
2. Mounted on copper pad area of 0.31x0.31" (8.0 x 8.0mm) to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.
4.  $V_F < 3.5\text{V}$  for  $V_{BR} \leq 200\text{V}$  and  $V_F < 5.0\text{V}$  for  $V_{BR} \geq 201\text{V}$ .

### Functional Diagram

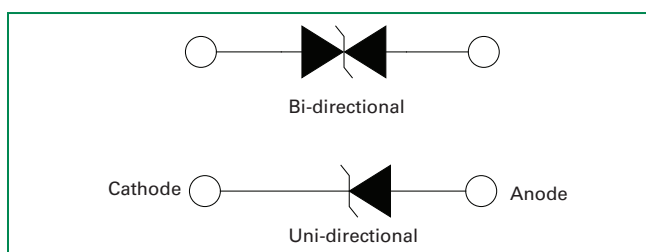

### Features

- High reliability devices with fabrication and assembly lots traceability
- Enhanced reliability screening options are available in reference to MIL-PRF-19500. Refer to screen process table for more detail on screening options
- For surface mounted applications to optimize board space
- Low profile package
- Built-in strain relief
- $V_{BR} @ T_J = V_{BR} @ 25^\circ\text{C} \times (1 + \alpha T \times (T_J - 25))$  ( $\alpha$  T: Temperature Coefficient)
- Glass passivated chip junction
- 1500W peak pulse power capability at 10/1000 $\mu\text{s}$  waveform, repetition rate (duty cycles): 0.01 %
- Fast response time: typically less than 1.0ps from 0V to BV min
- Excellent clamping capability
- Low incremental surge resistance
- Typical  $I_R$  less than 1 $\mu\text{A}$  above 12V
- High Temperature soldering guaranteed: 260 $^\circ\text{C}$ /40 seconds at terminals
- Plastic package has Underwriters laboratory flammability 94V-0
- Meet MSL level1, per J-STD-020, LF maximum peak of 260 $^\circ\text{C}$
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- 2nd level interconnect is Pb-free per IPC/JEDEC J-STD-609A.01

### Applications

SMCJ-HRA devices are ideal for the high reliability protection of I/O Interfaces,  $V_{CC}$  bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

### Electrical Characteristics

| Part Number (Uni) | Part Number (Bi) | Marking |      | Reverse Stand off Voltage $V_R$ (Volts) | Breakdown Voltage $V_{BR}$ (Volts) @ $I_T$ |        | Test Current $I_T$ (mA) | Maximum Clamping Voltage $V_C$ @ $I_{PP}^{PP}$ (V) | Maximum Peak Pulse Current $I_{PP}$ (A) | Maximum Reverse Leakage $I_R$ @ $V_R$ ( $\mu A$ ) | Agency Approval  |
|-------------------|------------------|---------|------|-----------------------------------------|--------------------------------------------|--------|-------------------------|----------------------------------------------------|-----------------------------------------|---------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|                   |                  | UNI     | BI   |                                         | MIN                                        | MAX    |                         |                                                    |                                         |                                                   |                                                                                                     |
| SMCJ5.0A-HRA      | SMCJ5.0CA-HRA    | GDEH    | BDEH | 5.0                                     | 6.40                                       | 7.00   | 10                      | 9.2                                                | 163.0                                   | 800                                               | X                                                                                                   |
| SMCJ6.0A-HRA      | SMCJ6.0CA-HRA    | GDGH    | BDGH | 6.0                                     | 6.67                                       | 7.37   | 10                      | 10.3                                               | 145.7                                   | 800                                               | X                                                                                                   |
| SMCJ6.5A-HRA      | SMCJ6.5CA-HRA    | GDKH    | BDKH | 6.5                                     | 7.22                                       | 7.98   | 10                      | 11.2                                               | 134.0                                   | 500                                               | X                                                                                                   |
| SMCJ7.0A-HRA      | SMCJ7.0CA-HRA    | GDMH    | BDMH | 7.0                                     | 7.78                                       | 8.60   | 10                      | 12.0                                               | 125.0                                   | 200                                               | X                                                                                                   |
| SMCJ7.5A-HRA      | SMCJ7.5CA-HRA    | GDPH    | BDPH | 7.5                                     | 8.33                                       | 9.21   | 1                       | 12.9                                               | 116.3                                   | 100                                               | X                                                                                                   |
| SMCJ8.0A-HRA      | SMCJ8.0CA-HRA    | GDRH    | BDRH | 8.0                                     | 8.89                                       | 9.83   | 1                       | 13.6                                               | 110.3                                   | 50                                                | X                                                                                                   |
| SMCJ8.5A-HRA      | SMCJ8.5CA-HRA    | GDTH    | BDTH | 8.5                                     | 9.44                                       | 10.40  | 1                       | 14.4                                               | 104.2                                   | 20                                                | X                                                                                                   |
| SMCJ9.0A-HRA      | SMCJ9.0CA-HRA    | GDVH    | BDVH | 9.0                                     | 10.00                                      | 11.10  | 1                       | 15.4                                               | 97.4                                    | 10                                                | X                                                                                                   |
| SMCJ10A-HRA       | SMCJ10CA-HRA     | GDXH    | BDXH | 10.0                                    | 11.10                                      | 12.30  | 1                       | 17.0                                               | 88.3                                    | 5                                                 | X                                                                                                   |
| SMCJ11A-HRA       | SMCJ11CA-HRA     | GDZH    | BDZH | 11.0                                    | 12.20                                      | 13.50  | 1                       | 18.2                                               | 82.5                                    | 1                                                 | X                                                                                                   |
| SMCJ12A-HRA       | SMCJ12CA-HRA     | GEEH    | BEEH | 12.0                                    | 13.30                                      | 14.70  | 1                       | 19.9                                               | 75.4                                    | 1                                                 | X                                                                                                   |
| SMCJ13A-HRA       | SMCJ13CA-HRA     | GEGH    | BEGH | 13.0                                    | 14.40                                      | 15.90  | 1                       | 21.5                                               | 69.8                                    | 1                                                 | X                                                                                                   |
| SMCJ14A-HRA       | SMCJ14CA-HRA     | GEKH    | BEKH | 14.0                                    | 15.60                                      | 17.20  | 1                       | 23.2                                               | 64.7                                    | 1                                                 | X                                                                                                   |
| SMCJ15A-HRA       | SMCJ15CA-HRA     | GEMH    | BEMH | 15.0                                    | 16.70                                      | 18.50  | 1                       | 24.4                                               | 61.5                                    | 1                                                 | X                                                                                                   |
| SMCJ16A-HRA       | SMCJ16CA-HRA     | GEPH    | BEPH | 16.0                                    | 17.80                                      | 19.70  | 1                       | 26.0                                               | 57.7                                    | 1                                                 | X                                                                                                   |
| SMCJ17A-HRA       | SMCJ17CA-HRA     | GERH    | BERH | 17.0                                    | 18.90                                      | 20.90  | 1                       | 27.6                                               | 54.4                                    | 1                                                 | X                                                                                                   |
| SMCJ18A-HRA       | SMCJ18CA-HRA     | GETH    | BETH | 18.0                                    | 20.00                                      | 22.10  | 1                       | 29.2                                               | 51.4                                    | 1                                                 | X                                                                                                   |
| SMCJ20A-HRA       | SMCJ20CA-HRA     | GEVH    | BEVH | 20.0                                    | 22.20                                      | 24.50  | 1                       | 32.4                                               | 46.3                                    | 1                                                 | X                                                                                                   |
| SMCJ22A-HRA       | SMCJ22CA-HRA     | GEXH    | BEXH | 22.0                                    | 24.40                                      | 26.90  | 1                       | 35.5                                               | 42.3                                    | 1                                                 | X                                                                                                   |
| SMCJ24A-HRA       | SMCJ24CA-HRA     | GEZH    | BEZH | 24.0                                    | 26.70                                      | 29.50  | 1                       | 38.9                                               | 38.6                                    | 1                                                 | X                                                                                                   |
| SMCJ26A-HRA       | SMCJ26CA-HRA     | GFEH    | BFEH | 26.0                                    | 28.90                                      | 31.90  | 1                       | 42.1                                               | 35.7                                    | 1                                                 | X                                                                                                   |
| SMCJ28A-HRA       | SMCJ28CA-HRA     | GFGH    | BFGH | 28.0                                    | 31.10                                      | 34.40  | 1                       | 45.4                                               | 33.1                                    | 1                                                 | X                                                                                                   |
| SMCJ30A-HRA       | SMCJ30CA-HRA     | GFKH    | BFKH | 30.0                                    | 33.30                                      | 36.80  | 1                       | 48.4                                               | 31.0                                    | 1                                                 | X                                                                                                   |
| SMCJ33A-HRA       | SMCJ33CA-HRA     | GFMH    | BFMH | 33.0                                    | 36.70                                      | 40.60  | 1                       | 53.3                                               | 28.2                                    | 1                                                 | X                                                                                                   |
| SMCJ36A-HRA       | SMCJ36CA-HRA     | GFPH    | BFPH | 36.0                                    | 40.00                                      | 44.20  | 1                       | 58.1                                               | 25.9                                    | 1                                                 | X                                                                                                   |
| SMCJ40A-HRA       | SMCJ40CA-HRA     | GFRH    | BFRH | 40.0                                    | 44.40                                      | 49.10  | 1                       | 64.5                                               | 23.3                                    | 1                                                 | X                                                                                                   |
| SMCJ43A-HRA       | SMCJ43CA-HRA     | GFTH    | BFTH | 43.0                                    | 47.80                                      | 52.80  | 1                       | 69.4                                               | 21.7                                    | 1                                                 | X                                                                                                   |
| SMCJ45A-HRA       | SMCJ45CA-HRA     | GFVH    | BFVH | 45.0                                    | 50.00                                      | 55.30  | 1                       | 72.7                                               | 20.6                                    | 1                                                 | X                                                                                                   |
| SMCJ48A-HRA       | SMCJ48CA-HRA     | GFXH    | BFXH | 48.0                                    | 53.30                                      | 58.90  | 1                       | 77.4                                               | 19.4                                    | 1                                                 | X                                                                                                   |
| SMCJ51A-HRA       | SMCJ51CA-HRA     | GFZH    | BFZH | 51.0                                    | 56.70                                      | 62.70  | 1                       | 82.4                                               | 18.2                                    | 1                                                 | X                                                                                                   |
| SMCJ54A-HRA       | SMCJ54CA-HRA     | GGEH    | BGEH | 54.0                                    | 60.00                                      | 66.30  | 1                       | 87.1                                               | 17.3                                    | 1                                                 | X                                                                                                   |
| SMCJ58A-HRA       | SMCJ58CA-HRA     | GGGH    | BGGH | 58.0                                    | 64.40                                      | 71.20  | 1                       | 93.6                                               | 16.1                                    | 1                                                 | X                                                                                                   |
| SMCJ60A-HRA       | SMCJ60CA-HRA     | GGKH    | BGKH | 60.0                                    | 66.70                                      | 73.70  | 1                       | 96.8                                               | 15.5                                    | 1                                                 | X                                                                                                   |
| SMCJ64A-HRA       | SMCJ64CA-HRA     | GGMH    | BGMH | 64.0                                    | 71.10                                      | 78.60  | 1                       | 103.0                                              | 14.6                                    | 1                                                 | X                                                                                                   |
| SMCJ70A-HRA       | SMCJ70CA-HRA     | GGPH    | BGPH | 70.0                                    | 77.80                                      | 86.00  | 1                       | 113.0                                              | 13.3                                    | 1                                                 | X                                                                                                   |
| SMCJ75A-HRA       | SMCJ75CA-HRA     | GGRH    | BGRH | 75.0                                    | 83.30                                      | 92.10  | 1                       | 121.0                                              | 12.4                                    | 1                                                 | X                                                                                                   |
| SMCJ78A-HRA       | SMCJ78CA-HRA     | GGTH    | BGTH | 78.0                                    | 86.70                                      | 95.80  | 1                       | 126.0                                              | 11.9                                    | 1                                                 | X                                                                                                   |
| SMCJ85A-HRA       | SMCJ85CA-HRA     | GGVH    | BGVH | 85.0                                    | 94.40                                      | 104.00 | 1                       | 137.0                                              | 11.0                                    | 1                                                 | X                                                                                                   |
| SMCJ90A-HRA       | SMCJ90CA-HRA     | GGXH    | BGXH | 90.0                                    | 100.00                                     | 111.00 | 1                       | 146.0                                              | 10.3                                    | 1                                                 | X                                                                                                   |
| SMCJ100A-HRA      | SMCJ100CA-HRA    | GGZH    | BGZH | 100.0                                   | 111.00                                     | 123.00 | 1                       | 162.0                                              | 9.3                                     | 1                                                 | X                                                                                                   |
| SMCJ110A-HRA      | SMCJ110CA-HRA    | GHEH    | BHEH | 110.0                                   | 122.00                                     | 135.00 | 1                       | 177.0                                              | 8.5                                     | 1                                                 | X                                                                                                   |
| SMCJ120A-HRA      | SMCJ120CA-HRA    | GHGH    | BHGH | 120.0                                   | 133.00                                     | 147.00 | 1                       | 193.0                                              | 7.8                                     | 1                                                 | X                                                                                                   |
| SMCJ130A-HRA      | SMCJ130CA-HRA    | GHHH    | BHHH | 130.0                                   | 144.00                                     | 159.00 | 1                       | 209.0                                              | 7.2                                     | 1                                                 | X                                                                                                   |
| SMCJ150A-HRA      | SMCJ150CA-HRA    | GHHH    | BHHH | 150.0                                   | 167.00                                     | 185.00 | 1                       | 243.0                                              | 6.2                                     | 1                                                 | X                                                                                                   |
| SMCJ160A-HRA      | SMCJ160CA-HRA    | GHPH    | BHPH | 160.0                                   | 178.00                                     | 197.00 | 1                       | 259.0                                              | 5.8                                     | 1                                                 | X                                                                                                   |
| SMCJ170A-HRA      | SMCJ170CA-HRA    | GHRH    | BHRH | 170.0                                   | 189.00                                     | 209.00 | 1                       | 275.0                                              | 5.5                                     | 1                                                 | X                                                                                                   |

Note:



1. For bidirectional type having  $V_R$  of 10 volts and less, the  $I_R$  limit is double.
2. SMCJ-HRA voltage binning can be specified by customer's request via contacting Littelfuse service

### Screen Process

|                                                                                                            |                                   |
|------------------------------------------------------------------------------------------------------------|-----------------------------------|
| 100% vision inspection                                                                                     | MIL-STD-750 method 2074           |
| 100%High Temperature Storage Life (168hrs,150C)                                                            | MIL-STD-750 method 1031           |
| 100% X-RAY inspection                                                                                      | MIL-STD-750 method 2076           |
| 100% Temperature cycle test (-55-150C, 20 cycles, dwell time 15 min)                                       | MIL-STD-750 method 1051           |
| 100% Reflow (2x)                                                                                           | JEDEC J-STD-020                   |
| 100% surge test (2x)                                                                                       | MIL-STD-750 method 4066           |
| 100% HTRB(150C, Bias=VR(80% breakdown voltage), 96hrs),for Bi-direction products, 96hrs for each direction | MIL-STD-750 method 1038           |
| Final electrical test( 100% 3 sigma limit, 100% dynamic test and PAT limit)                                | MIL-STD-750 method 4016.4021.4011 |

Note: Up-screen program can be specified by customer's request via contacting Littelfuse service

### I-V Curve Characteristics

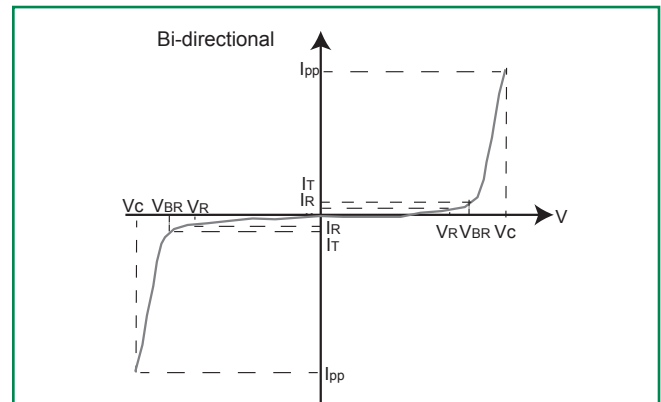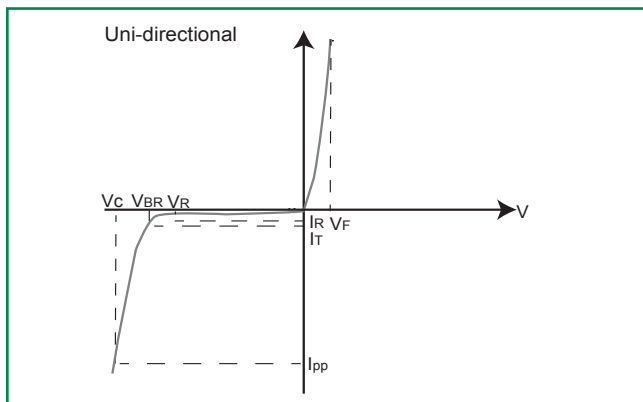

**P<sub>PPM</sub> Peak Pulse Power Dissipation** – Max power dissipation

**V<sub>R</sub> Stand-off Voltage** – Maximum voltage that can be applied to the TVS without operation

**V<sub>BR</sub> Breakdown Voltage** – Maximum voltage that flows through the TVS at a specified test current (I<sub>T</sub>)


**V<sub>C</sub> Clamping Voltage** – Peak voltage measured across the suppressor at a specified I<sub>ppm</sub> (peak impulse current)

**I<sub>R</sub> Reverse Leakage Current** – Current measured at V<sub>R</sub>


**V<sub>F</sub> Forward Voltage Drop for Uni-directional**

### Ratings and Characteristic Curves (T<sub>A</sub>=25°C unless otherwise noted)

**Figure 1 - TVS Transients Clamping Waveform**

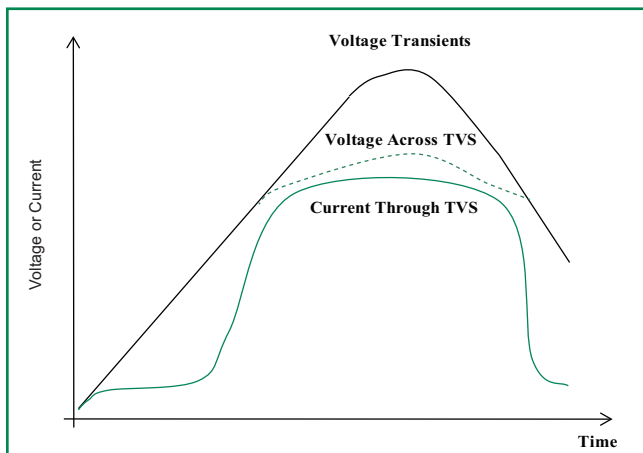


**Figure 2 - Peak Pulse Power Rating**

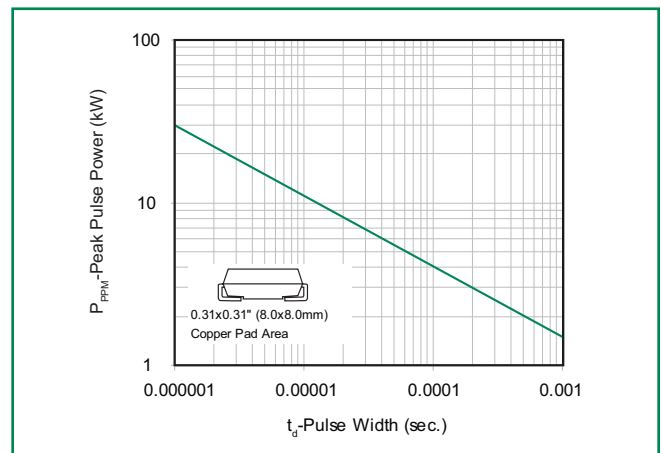


### Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)


**Figure 3 - Pulse Derating Curve**

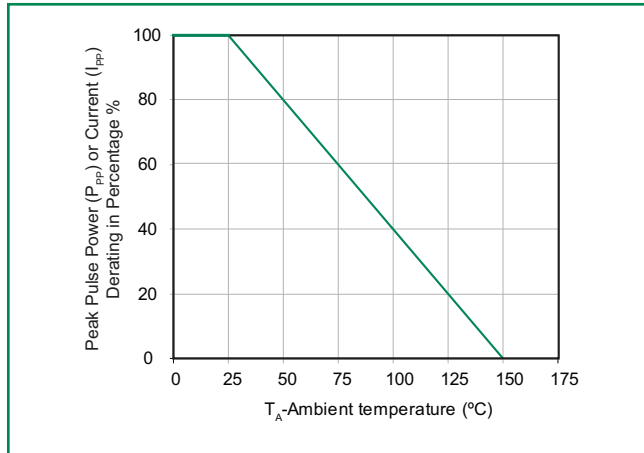


**Figure 4 - Pulse Waveform**

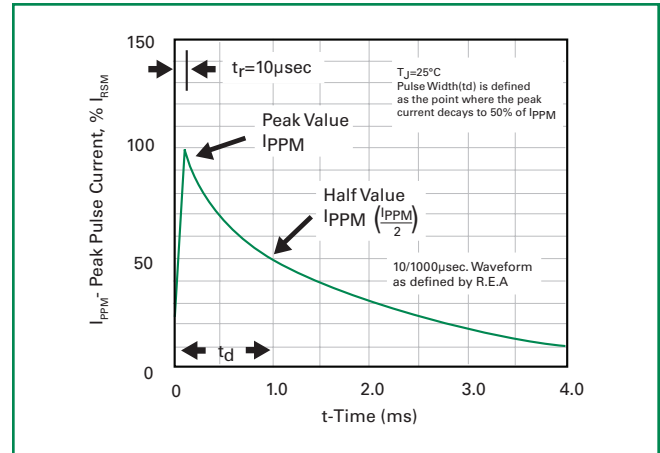


**Figure 5 - Typical Junction Capacitance**

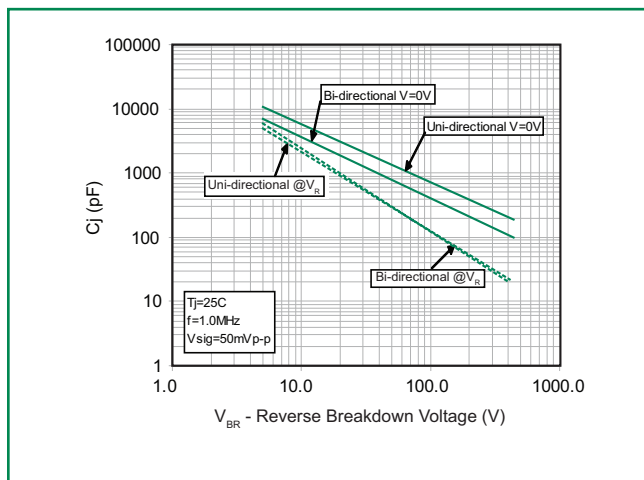

**Figure 6 - Steady State Power Dissipation Derating Curve**

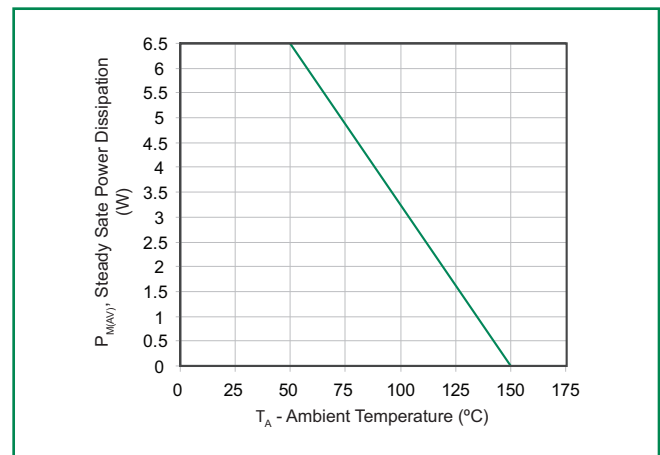


**Figure 7 - Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only**

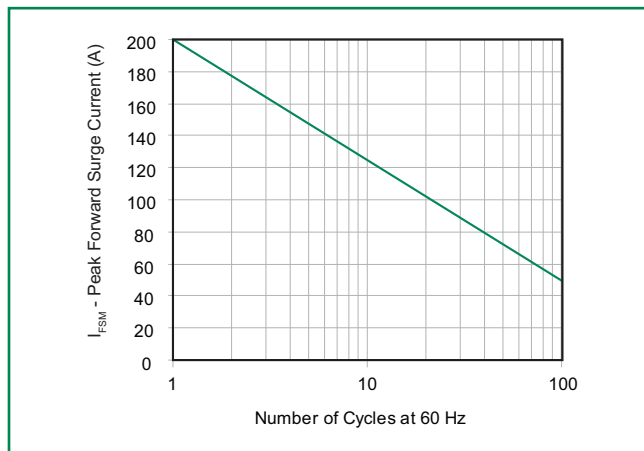

### Soldering Parameters

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Lead-free assembly      |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate                                         |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed                                          |                                    | 280°C                   |

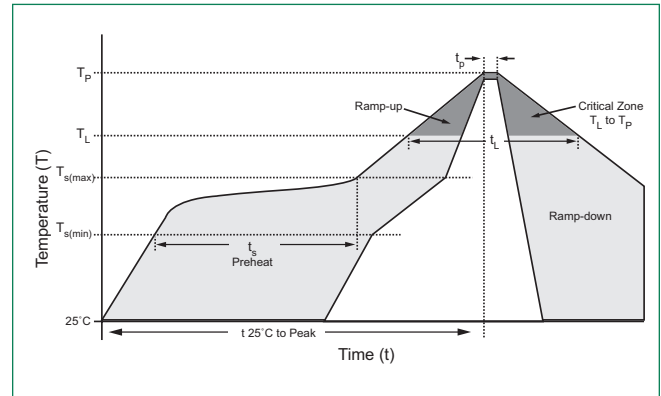


### Physical Specifications

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| <b>Weight</b>   | 0.007 ounce, 0.21 grams                                           |
| <b>Case</b>     | JEDEC DO214AB. Molded plastic body over glass passivated junction |
| <b>Polarity</b> | Color band denotes positive end (cathode) except Bidirectional.   |
| <b>Terminal</b> | Matte Tin-plated leads, Solderable per JESD22-B102                |

### Environmental Specifications


|                           |                          |
|---------------------------|--------------------------|
| <b>High Temp. Storage</b> | JESD22-A103              |
| <b>HTRB</b>               | JESD22-A108              |
| <b>Thermal Shock</b>      | JESD22-A106              |
| <b>MSL</b>                | JEDEC-J-STD-020, Level 1 |
| <b>H3TRB</b>              | JESD22-A101              |
| <b>RSH</b>                | JESD22-B106              |

### Dimensions

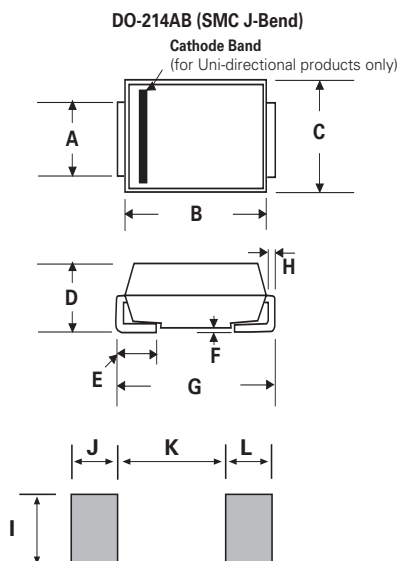


| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| A          | 0.114  | 0.126 | 2.900       | 3.200 |
| B          | 0.260  | 0.280 | 6.600       | 7.110 |
| C          | 0.220  | 0.245 | 5.590       | 6.220 |
| D          | 0.079  | 0.103 | 2.060       | 2.620 |
| E          | 0.030  | 0.060 | 0.760       | 1.520 |
| F          | 0.002  | 0.008 | 0.051       | 0.203 |
| G          | 0.305  | 0.320 | 7.750       | 8.130 |
| H          | 0.006  | 0.012 | 0.152       | 0.305 |
| I          | 0.129  | -     | 3.300       | -     |
| J          | 0.094  | -     | 2.400       | -     |
| K          | -      | 0.165 | -           | 4.200 |
| L          | 0.094  | -     | 2.400       | -     |

### Part Numbering System

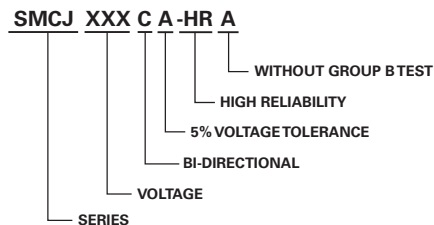


### Part Marking System

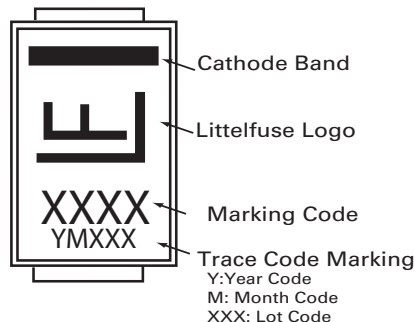

### Packaging

| Part number     | Component Package | Quantity | Packaging Option                  | Packaging Specification |
|-----------------|-------------------|----------|-----------------------------------|-------------------------|
| SMCJxxxXX-HRA   | DO-214AB          | 3000     | Tape & Reel – 16mm tape /13" reel | EIA STD RS-481          |
| SMCJxxxXX-HRAT7 | DO-214AB          | 500      | Tape & Reel – 16mm tape /7" reel  | EIA STD RS-481          |

### Tape and Reel Specification

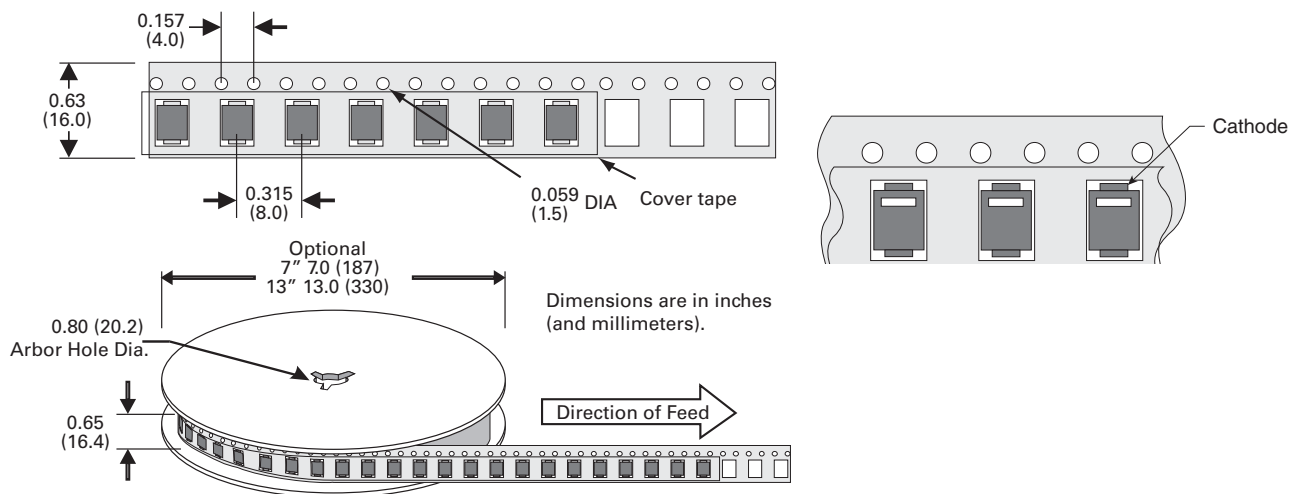



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.