


# ALUMINUM ELECTROLYTIC CAPACITORS

**MA** series 5mmL, Standard, For General Purposes



Anti-Solvent Feature  
**MT**  
High Temperature

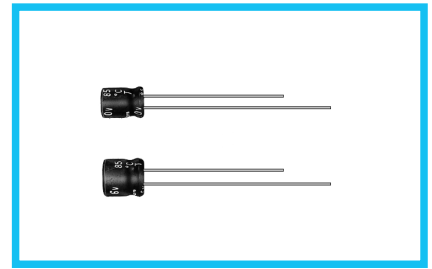


- Standard series with 5mm height.
- Compliant to the RoHS directive (2011/65/EU).



## Specifications

| Item                            | Performance Characteristics   |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
|---------------------------------|---|--------------------|---|-------------|---|-----------------|---|----|----|---------------------------------|------|-------------|-------------|-------------|-------------|-------------|-------------|-----------------|-----------------|----|---|---|---|---|
| Category Temperature Range      | -40 to +85°C  |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Rated Voltage Range             | 4 to 50V  |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Rated Capacitance Range         | 0.1 to 470μF  |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Rated Capacitance Tolerance     | ±20% at 120Hz, 20°C   |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Leakage Current                 | After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3(μA), whichever is greater.  |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Tangent of loss angle (tan δ)   | Measurement frequency : 120Hz at 20°C   |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
|                                 | <table border="1"> <tr> <td>Rated voltage (V)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.35</td> <td>0.24 (0.30)</td> <td>0.20 (0.24)</td> <td>0.16 (0.20)</td> <td>0.14 (0.18)</td> <td>0.12 (0.16)</td> <td>0.10 (0.13)</td> </tr> </table> Figures in ( ) are for MR series.  | Rated voltage (V)  | 4   | 6.3         | 10  | 16              | 25  | 35 | 50 | tan δ (MAX.)                    | 0.35 | 0.24 (0.30) | 0.20 (0.24) | 0.16 (0.20) | 0.14 (0.18) | 0.12 (0.16) | 0.10 (0.13) |                 |                 |    |   |   |   |   |
| Rated voltage (V)               | 4   | 6.3                | 10  | 16          | 25  | 35              | 50  |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| tan δ (MAX.)                    | 0.35  | 0.24 (0.30)        | 0.20 (0.24)   | 0.16 (0.20) | 0.14 (0.18)                                   | 0.12 (0.16)     | 0.10 (0.13)                                       |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Stability at Low Temperature    | Measurement frequency : 120Hz   |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
|                                 | <table border="1"> <tr> <td>Rated voltage (V)</td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>Impedance ratio Z-25°C / Z+20°C</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>ZT / Z20 (MAX.)</td> <td>Z-40°C / Z+20°C</td> <td>15</td> <td>8</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> </tr> </table>  | Rated voltage (V)  | 4   | 6.3         | 10  | 16              | 25  | 35 | 50 | Impedance ratio Z-25°C / Z+20°C | 7    | 4           | 3           | 2           | 2           | 2           | 2           | ZT / Z20 (MAX.) | Z-40°C / Z+20°C | 15 | 8 | 6 | 4 | 4 |
| Rated voltage (V)               | 4   | 6.3                | 10  | 16          | 25  | 35              | 50  |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Impedance ratio Z-25°C / Z+20°C | 7   | 4                  | 3   | 2           | 2   | 2               | 2   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| ZT / Z20 (MAX.)                 | Z-40°C / Z+20°C   | 15                 | 8   | 6           | 4   | 4               | 3   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Endurance                       | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C. <table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value (MR series &amp; φ3 product : Within ±25%)</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table> | Capacitance change | Within ±20% of the initial capacitance value (MR series & φ3 product : Within ±25%) | tan δ       | 200% or less than the initial specified value | Leakage current | Less than or equal to the initial specified value |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Capacitance change              | Within ±20% of the initial capacitance value (MR series & φ3 product : Within ±25%)   |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| tan δ                           | 200% or less than the initial specified value   |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Leakage current                 | Less than or equal to the initial specified value   |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Shelf Life                      | After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.  |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |
| Marking                         | Printed with white color letter on black sleeve.  |                    |   |             |   |                 |   |    |    |                                 |      |             |             |             |             |             |             |                 |                 |    |   |   |   |   |

## Radial Lead Type

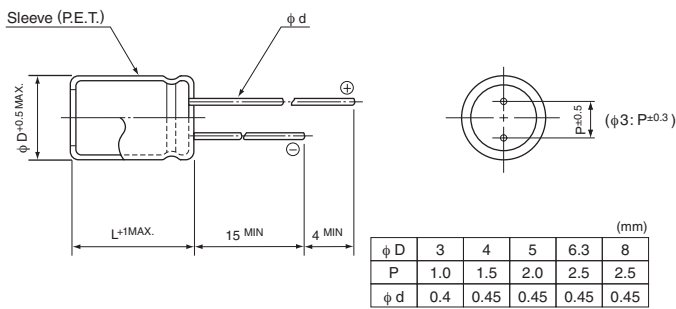

• Please refer to page 20 about the end seal configuration.

## Type numbering system (Example : 25V 10μF)



## Dimensions

| Cap.(μF) | Code | 4     |     | 6.3     |         | 10      |        | 16      |        | 25    |        | 35    |        | 50    |                        |
|----------|------|-------|-----|---------|---------|---------|--------|---------|--------|-------|--------|-------|--------|-------|------------------------|
|          |      | OG    |     | OJ      |         | 1A      |        | 1C      |        | 1E    |        | 1V    |        | 1H    |                        |
| 0.1      | 0R1  |       |     |         |         |         |        |         |        |       |        |       |        |       | 4×5(3×5) 1.0(1.0)      |
| 0.22     | R22  |       |     |         |         |         |        |         |        |       |        |       |        |       | 4×5(3×5) 2.0(2.0)      |
| 0.33     | R33  |       |     |         |         |         |        |         |        |       |        |       |        |       | 4×5(3×5) 2.8(2.8)      |
| 0.47     | R47  |       |     |         |         |         |        |         |        |       |        |       |        |       | 4×5(3×5) 4.0(4.0)      |
| 1        | 010  |       |     |         |         |         |        |         |        |       |        |       |        |       | 4×5(3×5) 8.4(8.0)      |
| 2.2      | 2R2  |       |     |         |         |         |        |         |        |       |        | 3×5   | 8.4    | • 4×5 | 13(10)                 |
| 3.3      | 3R3  |       |     |         |         |         |        |         |        | 3×5   | 10     | • 4×5 | 15(10) | 4×5   | 17                     |
| 4.7      | 4R7  |       |     |         |         |         |        |         |        | • 4×5 | 16(12) | 4×5   | 18     | 5×5   | 20                     |
| 10       | 100  |       |     | 3×5     | 15      |         |        | • 4×5   | 23(18) | 5×5   | 27     | 5×5   | 29     | 6.3×5 | 33                     |
| 22       | 220  | 3×5   | 19  | • 4×5   | 28(21)  | 5×5     | 33     | 5×5     | 37     | 6.3×5 | 42     | 6.3×5 | 46     | □ 8×5 | 52(48)                 |
| 33       | 330  | 4×5   | 28  | 5×5     | 37      | 5×5     | 41     | ○ 6.3×5 | 49(43) | 6.3×5 | 52     | □ 8×5 | 62(52) | 8×5   | 71                     |
| 47       | 470  | 4×5   | 33  | 5×5     | 45      | ○ 6.3×5 | 52(43) | 6.3×5   | 58     | □ 8×5 | 70(62) | 8×5   | 80     |       |                        |
| 100      | 101  | 5×5   | 56  | ○ 6.3×5 | 70(68)  | □ 8×5   | 80(76) | □ 8×5   | 92(86) | 8×5   | 110    |       |        |       |                        |
| 220      | 221  | 6.3×5 | 96  | □ 8×5   | 110(90) | 8×5     | 135    |         |        |       |        |       |        |       |                        |
| 330      | 331  | 8×5   | 145 | 8×5     | 170     |         |        |         |        |       |        |       |        |       |                        |
| 470      | 471  | 8×5   | 185 |         |         |         |        |         |        |       |        |       |        |       |                        |
|          |      |       |     |         |         |         |        |         |        |       |        |       |        |       | Case size<br>φD×L (mm) |
|          |      |       |     |         |         |         |        |         |        |       |        |       |        |       | Rated ripple           |

Size φ3×5 is available for capacitors marked. "•"/ Size φ5×5 is available for capacitors marked. "○"  
Size φ6.3×5 is available for capacitors marked. "□" In such a case, [M][R] will be put at 2nd and 3rd digit of type numbering system.

Rated ripple current (mArms) at 85°C 120Hz  
( ) = φ3 units and MR series.

## Frequency coefficient of rated ripple current

| Frequency   | 50 Hz | 120 Hz | 300 Hz | 1 kHz | 10kHz or more |
|-------------|-------|--------|--------|-------|---------------|
| Coefficient | 0.70  | 1.00   | 1.17   | 1.36  | 1.50          |

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.