SOURIAU

# The full plastic circular connector

## UTP provides the complete answer to the need for economical lightweight and robust circular connector

| | |
|---|---|
| **Flammability rating** | UL94-V0 compliant |
| **Rapid and secure locking** | Locks with audible positive «click» |
| **Interconnectivité & intermariable** | Intermateable and interchangeable with UTO, UTG and UTS Series |
| **Complete range of contacts** | Trim Trio contacts #16 |

Esterline
Connection Technologies

## Layout

| Shell size | Contact # 16 (Ø 1,6) | Mixed power / signal versions |
|---|---|---|
| **10** |  10-4 |  10-3<br>3 x #16 (Ø 1,6)<br>Group C 250V |
| **12** |  12-8 |  12-2G1 |
| **14** |  14-12 | |
| **16** |  16-19 | |
| **18** |  18-23 |  18-7<br>Group C 380V<br>7 x # 16 (Ø 1,6) |

| Shell size | Contact # 16 (Ø 1,6) | Mixed power / signal versions |
|---|---|---|
| **20** |  20-28 | |
| **22** |  22-35 | |
| **24** |  24-48 | |

Contact identification positions shown are for mating face of pin contact connectors and wire face of socket contact connectors.

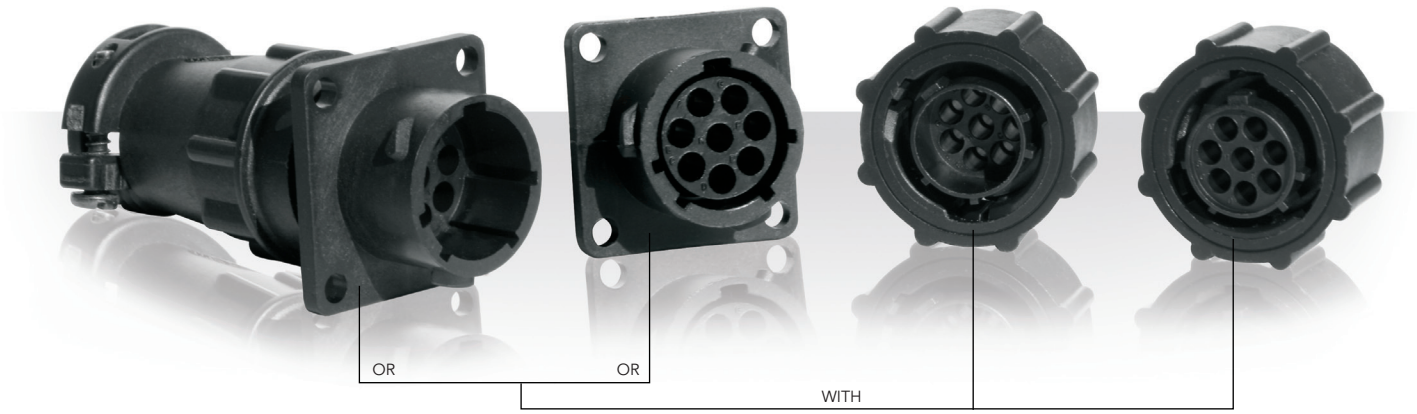


## Specifications

| Connector type | Shell size | Contacts number* | Part number | |
|---|---|---|---|---|
| | | | Male insert | Female insert |
| Cable plug | 10 | 4 | UTP6104P | UTP6104S |
| | | | UTP6103P | UTP6103S |
| | 12 | 8 | UTP6128P | UTP6128S |
| | | 2 + ground | UTP6122G1P | UTP6122G1S |
| | 14 | 12 | UTP61412P | UTP61412S |
| | 16 | 19 | UTP61619P | UTP61619S |
| | 18 | 23 | UTP61823P | UTP61823S |
| | | 6 + ground | UTP6187P | UTP6187S |
| | 20 | 28 | UTP62028P | UTP62028S |
| | 22 | 35 | UTP62235P | UTP62235S |
| | 24 | 48 | UTP62448P | UTP62448S |
| Panel mounting receptacle | 10 | 4 | UTP0104P | UTP0104S |
| | | | UTP0103P | UTP0103S |
| | 12 | 8 | UTP0128P | UTP0128S |
| | | 2 + ground | UTP0122G1P | UTP0122G1S |
| | 14 | 12 | UTP01412P | UTP01412S |
| | 16 | 19 | UTP01619P | UTP01619S |
| | 18 | 23 | UTP01823P | UTP01823S |
| | | 6 + ground | UTP0187P | UTP0187S |
| | 20 | 28 | UTP02028P | UTP02028S |
| | 22 | 35 | UTP02235P | UTP02235S |
| | 24 | 48 | UTP02448P | UTP02448S |

*Contacts supply separately

# Dimensions

## Cable Plug - UTP6

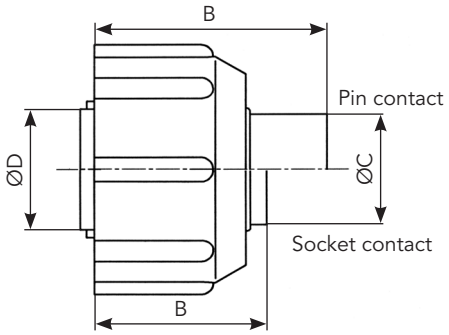





| Shell size | ØA±0.2 | B max | | ØC±0.15 | ØD±0.15 | ØE±0.2 |
|---|---|---|---|---|---|---|
| | | Pin contact | Socket contact | | | |
| 10 | 26.7 | 31.8 | 23.9 / 26.75 | 10.9 | 12.2 | 19.1 |
| 12 | 31.4 | | 23.9 | 13.8 | 15.1 | |
| 14 | 34.5 | | | 17.0 | 18.3 | |
| 16 | 37.8 | | | 19.9 | 21.5 | |
| 18 | 40.8 | 31.8 / 33.0 | 23.9 / 29.0 | 22.4 | 24.0 | |
| 20 | 43.9 | 31.8 | 24.9 | 25.6 | 27.2 | |
| 22 | 47.0 | | | 28.5 | 30.4 | |
| 24 | 50.1 | | 26.2 | 31.7 | 33.5 | |

## Panel Mounting - UTP0

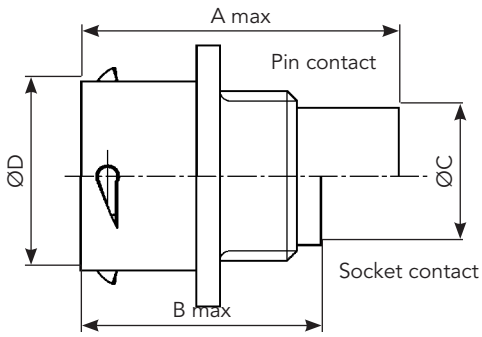








| Shell size | A max | | B±0.15 | C±0.2 | ØD±0.15 | ØE±0.2 | F±0.25 | ØG±0.1 | ØJ±0.1 |
|---|---|---|---|---|---|---|---|---|---|
| | Pin contact | Socket contact | | | | | | | |
| 10 | 31.7 | 24.3 / 27.6 | 2.3 | 11.3 | 15.0 | 18.3 | 23.8 | 3.2 | 15.1 |
| 12 | | 24.3 | | | 19.0 | 20.6 | 26.2 | | 18.2 |
| 14 | | | | | 22.2 | 23.0 | 28.6 | | 21.4 |
| 16 | | | | | 25.3 | 24.6 | 31.0 | | 24.6 |
| 18 | 31.7 / 34.0 | 24.3 / 30.4 | 2.5 | 11.3 / 17.9 | 28.5 | 27.0 | 33.3 | | 27.7 |
| 20 | 33.3 | 27.0 | | 14.5 | 31.7 | 29.4 | 36.5 | | 30.9 |
| 22 | | 28.0 | 3.5 | | 34.9 | 31.8 | 39.7 | | 34.1 |
| 24 | | 30.4 | | 15.3 | 38.0 | 34.9 | 42.9 | 3.9 | 37.3 |

Note: all dimensions are in mm

# Accessories and tooling

## Cable Clamp

| Part number | Shell size |
|---|---|
| UTG10AC | 10 |
| UTG12AC | 12 |
| UTG14AC | 14 |
| UTG16AC | 16 |
| UTG18AC | 18 |
| UTG20AC | 20 |
| UTG22AC | 22 |
| UTG24AC | 24 |

## Cable Clamp for Waterprotected (IP65) Applications

| Part number | Shell size |
|---|---|
| UTG10PG | 10 |
| UTG12PG | 12 |
| UTG14PG | 14 |
| UTG16PG | 16 |
| UTG18PG | 18 |
| UTG20PG | 20 |
| UTG22PG | 22 |
| UTG24PG | 24 |

## Cable Gland for Waterprotected (IP65) Applications

| Part number | Shell size |
|---|---|
| UTG10ST | 10 |
| UTG12ST | 12 |
| UTG14ST | 14 |
| UTG16ST | 16 |
| UTG18ST | 18 |
| UTG20ST | 20 |
| UTG22ST | 22 |
| UTG24ST | 24 |

## Metal Shrink Boot

| Part number | Shell size |
|---|---|
| UTG10AD | 10 |
| UTG12AD | 12 |
| UTG14AD | 14 |
| UTG16AD | 16 |
| UTG18AD | 18 |
| UTG20AD | 20 |
| UTG22AD | 22 |
| UTG24AD | 24 |

## Dustcap (Receptacle)

| Part number | Shell size |
|---|---|
| UTP10DC | 10 |
| UTP12DC | 12 |
| UTP14DC | 14 |
| UTP16DC | 16 |
| UTP18DC | 18 |
| UTP20DC | 20 |
| UTP22DC | 22 |
| UTP24DC | 24 |

## Dustcap with Chain (Receptacle)

| Part number | Shell size |
|---|---|
| UTP10DCG | 10 |
| UTP12DCG | 12 |
| UTP14DCG | 14 |
| UTP16DCG | 16 |
| UTP18DCG | 18 |
| UTP20DCG | 20 |
| UTP22DCG | 22 |
| UTP24DCG | 24 |

## Plastic Protective Cap for Receptacle

| Part number | Shell size |
|---|---|
| 8500-5586A | 10 |
| 8500-5587A | 12 |
| 8500-5588A | 14 |
| 8500-5589A | 16 |
| 8500-5590A | 18 |
| 8500-5591A | 20 |
| 8500-5592A | 22 |
| 8500-5593A | 24 |

## Gasket

| Part number | Shell size |
|---|---|
| UTFD12B | 10 |
| UTFD13B | 12 |
| UTFD14B | 14 |
| UTFD15B | 16 |
| UTFD16B | 18 |
| UTFD17B | 20 |
| UTFD18B | 22 |
| UTFD19B | 24 |

## Handle

| Part number |
|---|
| SHANDLES |

## Tool Kit

| Part number |
|---|
| TOOLKIT |

## Crimp Tooling

| Contacts | Contact size | Part number of head |
|---|---|---|
| RM/RC 28M1K(1) | Standard contacts<br>#16<br>Ø 1.6mm | S16RCM20* |
| RM/RC 24M9K(1) | | S16RCM20* |
| RM/RC 20M13K(1) | | S16RCM20* |
| RM/RC 20M12K(1) | | S16RCM20* |
| RM/RC 16M23K(1) | | S16RCM16* |
| RM/RC 14M30K(1) | | S16RCM14* |
| SM/SC 24ML1TK6(1) | | S16SCM20* |
| SM/SC 20ML1TK6(1) | | S16SCM20* |
| SM/SC 16ML1TK6(1) | | S16SCML1* |
| SM/SC 14ML1TK6(1) | | S16SCML1* |
| SM/SC 16ML11TK6(1) | | S16SCML11* |
| RMDXK10D28K | Coaxial contacts | M10S-1J with die set & stop bushing |
| RCDXK1D28K | | |
| RM/RC DX60xxD28K | | |
| RM/RC DXK10D28 + york090 | | |
| RM/RC DX60xxD28 | | |

(1): example of plating, for other plating contact us

* Heads to be used with Handle PN: SHANDLES

SOURIAU

souriau-industrial.com

contactindustry@souriau.com

Esterline
Connection Technologies

WPNUTPEUSEN01 © Copyright SOURIAU 2014 - All information in this document presents only general particulars and shall not form part of any contract. All rights reserved to SOURIAU for changes without prior notification or public announcement. Any duplication is prohibited, unless approved in writing.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.




**Как с нами связаться**

**Телефон:** 8 (812) 309 58 32 (многоканальный)
**Факс:** 8 (812) 320-02-42
**Электронная почта:** org@eplast1.ru
**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.